



User Guide

Browser Policy Manager 0.9.3

Contents

Plan profile work

- Browser Policy Manager overview
- Product version reference
- Profile status reference
- Change the interface language
- Language detection and fallback
- Change the interface theme
- Accessible product operation
- Navigate and search product documentation
- Use the local BPM documentation assistant
- Work across editor tabs
- Profile model and lifecycle
- Choose the right BPM surface

Create and set up a profile

- Choose a Firefox schema channel
- Firefox schema channels and validation
- Starter presets and CIS layers
- Set the profile identity and schema channel
- Choose a Guided scenario
- Apply a starter preset
- Apply a CIS layer
- Create a first profile from the Library
- Import Firefox policies.json into BPM
- Open a saved profile in an editor

Configure profiles in Guided editor

- Navigate the six Guided editor steps
- Search Guided settings
- Configure browser access and defaults
- Configure home, search, and navigation
- Configure security and privacy
- Configure users, add-ons, and sites
- Configure Firefox AI and smart-feature policies
- Find schema-dependent Guided editor controls
- Use Guided fine-tuning controls
- Review the Guided profile

- Save and download a Guided profile

Review and complete profile changes

- Save profile changes
- Validate a profile
- Switch editor mode
- Review profile context
- Policies and managed preferences
- Export a profile as Firefox policies.json

Review and edit All settings

- Use All settings
- Review All settings attention items
- Inspect configured settings
- Filter settings by source
- Browse the settings catalog
- Search All settings
- Filter the All settings list
- Inspect setting details
- Edit a setting detail
- Remove or reset a setting
- Add a managed preference
- Navigate settings categories
- Use advanced schema controls
- Handle raw and unknown settings
- Follow setting and documentation links
- Trace a setting source
- Resolve CIS manual-review items
- All settings review states
- Large settings inventories

Work with JSON and data exchange

- Use JSON editor
- Edit raw policies JSON
- Format the JSON document
- Validate the JSON document
- Save the JSON document
- When to use JSON editor

Find, manage, and compare profiles

- Review an archived profile
- Use the Library
- Find a profile by name
- Filter the Library
- Sort Library rows
- Refresh the Library
- Library row fields
- Duplicate a profile
- Archive an active profile
- Restore an archived profile
- Permanently delete a profile
- Archived profile behavior
- Open Compare from the Library
- Profile comparison workflow
- Select profiles to compare
- Interpret the comparison table
- Comparison states and row types

Resolve problems safely

- Resolve a save conflict
- Troubleshoot a Library operation
- Recover from malformed JSON
- Recover from a failed import
- Interpret policy validation errors
- Resolve a schema mismatch
- Resolve profile name errors
- Recover from a missing profile route
- Recover from product connection failure
- Manage destructive actions safely
- Recover from unsaved changes

Plan profile work

Browser Policy Manager overview

Browser Policy Manager helps you create, review, validate, save, and export Firefox enterprise policy profiles.

What BPM does

Use BPM to configure Firefox policies and managed preferences, choose a supported Firefox schema, apply CIS layers, inspect validation results, and exchange policy JSON. The guide covers the Guided, All settings, JSON, library, comparison, and review workflows.

Use the documentation

The portal is available in English, Russian, German, Simplified Chinese, French, and Spanish. Its deterministic local search and filters find published topics, stable policy identifiers, CIS recommendations, and API operations. Search remains available independently of the assistant.

Documentation assistant training notice

In BPM 0.9.3, the local model is being trained for a later version. For every submitted chat question, BPM shows a localized training notice rather than a generated answer, source list or external-search result.

The chat and deterministic documentation search are separate: the supported search, filters, navigation and result order remain available for all current product information.

Open the assistant

The collapsed BPM AI Assistant entry is in the lower-right corner of every documentation page. Open it to use a floating panel rather than a sidebar. On a desktop it is about half of the viewport wide and 90 percent of the visible viewport high. The panel keeps the title, question field, and bottom status row visible while the chat transcript scrolls.

Ask and manage a conversation

Enter any question and send it to view the localized training notice. Use Clear conversation to remove the current chat. It is not a BPM answer and must not be used to configure or validate a policy.

Within one browser tab and documentation language, the open or collapsed state and completed notice messages remain available after reload or documentation navigation.

Current release boundary

Model installation, retrieval indexing, generated answers, citations and external sources are outside BPM
0.9.3. Use deterministic documentation search for current information.

Product version reference

Use the shared BPM header to identify the running product version; documentation has no separate visible version.

Version location

The same header on Library, Guided editor, All settings, JSON editor, Compare, and documentation displays the running BPM version. In Library, the workspace count and its “Profiles in library” label are separate concise lines.

Version scope

The product version identifies BPM behavior, not the Firefox browser version installed on an endpoint.

Schema version

The current release supports Firefox Release 153, Firefox ESR 153.0, and Firefox ESR 140.13. The schema channel is a separate choice that affects validation and available controls.

Recovery

If product behavior does not match the guide, record the BPM version, schema channel, route, locale, and visible status before reporting the mismatch.

Profile status reference

Read profile name, ID, schema, lifecycle, dirty/saved state, and validation context before acting.

Identity

Profile name and ID confirm that the current editor, Library row, or Compare selection refers to the intended saved profile or draft.

Lifecycle

Lifecycle state distinguishes active, archived, draft, restored, and deletion-sensitive profile work.

Validation

Validation context shows whether the current policy and managed-preference values are ready for save, comparison, or export.

Dirty state

Dirty/saved state tells you whether visible editor changes still need to be saved before navigation, export, or another tab is trusted.

Change the interface language

Select English, Russian, German, Simplified Chinese, French, Spanish, or the system language for BPM.

Open BPM in the browser and keep a profile, Library, All settings, Guided, JSON, or Compare surface available.

Use the language selector when screenshots, labels, validation messages, and documentation examples must match the operator locale.

1. Open the language selector in the page header.

Expected result: BPM keeps the selected profile, editor surface, locale, and theme clear while you work.

2. Choose English, Russian, German, Simplified Chinese, French, Spanish, or System.

Expected result: BPM keeps the selected profile, editor surface, locale, and theme clear while you work.

3. Confirm that navigation labels, validation messages, status text, and editor controls switch to the selected locale.

Expected result: BPM keeps the selected profile, editor surface, locale, and theme clear while you work.

4. Continue editing only after confirming that the profile and schema channel are still the same.

Warning:

Save or deliberately discard changes before leaving an editor, closing a tab, or confirming an irreversible action.

BPM displays the interface in the selected locale without changing profile data.

Recovery: if the visible state is unclear, stop editing, read the current status message, refresh once, and reopen the profile from the Library.

Language detection and fallback

Understand how BPM chooses a supported locale and what happens when the browser language is not supported.

Supported locales

BPM supports en, ru, de, zh-CN, fr, and es-ES as first-class interface locales.

System language

System language follows the browser language when it matches a supported BPM locale.

Fallback

If the browser language is unsupported, BPM falls back to a supported locale rather than showing partial strings.

Content parity

Product documentation and screenshots must remain content-equivalent across all six locales, even when UI labels differ by language.

Change the interface theme

Select system, light, or dark theme without changing profile content.

Open BPM or the product documentation portal in the browser.

Theme selection affects only presentation. BPM and the documentation portal support System, Light, and Dark modes without changing profile or help content.

1. Open the theme selector in the current page header.

Expected result: the selector shows System, Light, and Dark without changing the current route, locale, or selected profile.

2. Choose System, Light, or Dark.

Expected result: System follows the operating-system preference; Light and Dark apply the explicit mode on supported BPM and documentation surfaces.

3. Check editor panels, tables, notes, code blocks, focus indicators, and validation states.

Expected result: content remains readable; the documentation Light mode uses comfortable light-gray primary surfaces rather than a pure-white page.

4. Continue editing after confirming that unsaved profile data is still present.

Warning:

Save or deliberately discard changes before leaving an editor, closing a tab, or confirming an irreversible action.

BPM and the product documentation use the selected visual theme across supported surfaces.

Recovery: if the visible state is unclear, stop editing, read the current status message, refresh once, and reopen the profile from the Library.

Accessible product operation

Use BPM with localized status, error, focus, keyboard feedback, and responsive layouts.

Keyboard

Keyboard behavior must keep primary actions, navigation, filters, editor controls, confirmations, and links reachable without a pointer.

Focus

Focus indicators show where the next action applies after navigation, mode switching, validation, and dialogs.

Status feedback

Localized status and error feedback explain save, validation, import, export, archive, restore, and deletion outcomes.

Responsive layouts

Responsive layouts preserve the same tasks on narrow screens; theme and locale changes must not hide warnings or destructive confirmations.

Navigate and search product documentation

Use the independently scrolling hierarchy and compact deterministic search to find published help without an external search service.

Documentation tree

The sidebar opens at the Documents root and lists guides, sections where needed, and topics. The tree scrolls independently from the article. A root link reveals the guide list; a contextual topic link expands every ancestor, brings the topic into view, and marks it active.

Compact search and filters

Search starts as one line for the query and primary actions. Expand the additional panel to read search guidance, choose localized guide, content-type, and audience filters, and review status or results. Collapsing the panel does not clear the current query or selected filters.

Local and offline

The documentation portal searches the static index packaged with the same help artifact. It does not call an external search service, require internet access, send queries for telemetry, or learn from user behavior.

Deterministic results

Search matches localized DITA topic titles, short descriptions, headings, body text, reviewed aliases, and stable technical identifiers such as policy IDs, CIS recommendation IDs, and API operation IDs. Ranking uses fixed weights, facets, filters, and bounded typo tolerance so the same artifact and query produce the same result order.

Ordinary search is not a chat

The deterministic search itself does not provide conversational answers, semantic embeddings, vector retrieval, RAG, generative summaries, or automatic recommendations. Use the separate BPM AI Assistant for an in-scope free-form question. If search returns no result, use the documentation tree, exact identifiers, or filters rather than expecting the search panel to infer an answer.

Product AI policies are still documented

Some Firefox Release policies control browser AI and smart-feature behavior. Those policies are ordinary BPM product settings and remain documented. They are separate from both deterministic documentation search and the documentation assistant.

Use the local BPM documentation assistant

Use the documentation-assistant chat while local-model training is scheduled for a later BPM version.

Open a BPM documentation page in the language in which you want to ask the question. The assistant entry is in the lower-right corner; the ordinary documentation search remains available whether or not the assistant is ready.

In BPM 0.9.3, local-model training is not delivered. For every submitted question the chat displays: “The local model is currently being trained. This functionality will be available in one of the following versions.” It does not generate an answer, search an index, use external sources, or replace ordinary documentation search.

1. Select BPM AI Assistant to open the floating chat.

On a desktop, the expanded panel is about half of the viewport width and 90 percent of its visible height. The transcript scrolls while the question field and status row remain visible.

2. Enter any question in the current documentation language and send it.

The chat accepts the turn and returns the localized training notice. It does not start a model, a retrieval worker, an index request, or an external request.

3. Read the training notice in the transcript.

This is a product-state message, not a BPM answer and it has no documentation sources. Do not rely on it to configure or validate a policy.

4. Use deterministic documentation search for current product information.

Search, filters, navigation and their result order remain independent of the assistant and are the supported way to find published BPM topics in 0.9.3.

5. Use Clear if you want to remove the visible conversation.

The panel state and completed messages remain in the current browser tab and documentation language after navigation or reload. Clearing a conversation does not remove local artifacts.

The chat shows the localized training notice for the submitted question. Deterministic search remains available for every current BPM-information need.

Local-model training, generated answers, citations and external sources are outside BPM 0.9.3. Do not treat the notice as a substitute for testing a policy or administrator approval.

Work across editor tabs

Use separate browser tabs for saved-profile modes without confusing drafts or losing unsaved changes.

Open BPM in the browser and keep a profile, Library, All settings, Guided, JSON, or Compare surface available.

BPM opens saved profile modes and comparison surfaces in separate tabs so users can inspect Guided, All settings, JSON, and Compare side by side.

1. Open a saved profile from the Library in the required editor mode.

Expected result: BPM keeps the selected profile, editor surface, locale, and theme clear while you work.

2. Keep the profile name, schema channel, and lifecycle badge visible in each tab.

Expected result: BPM keeps the selected profile, editor surface, locale, and theme clear while you work.

3. Save changes in one tab before relying on another tab for export, comparison, or validation.

Expected result: BPM keeps the selected profile, editor surface, locale, and theme clear while you work.

4. Close or refresh tabs only after checking the unsaved-change warning and visible save status.

Warning:

Save or deliberately discard changes before leaving an editor, closing a tab, or confirming an irreversible action.

You can review multiple surfaces while keeping the authoritative saved state clear.

Recovery: if the visible state is unclear, stop editing, read the current status message, refresh once, and reopen the profile from the Library.

Profile model and lifecycle

A BPM profile is one saved Firefox policy workspace shared by the Library, Guided editor, All settings, JSON editor, and Compare.

Use a profile to collect Firefox policies, managed preferences, validation state, source attribution, and lifecycle state in one place. The same profile can be opened through different BPM surfaces without changing its identity.

Lifecycle states

An unsaved draft exists only until its first save. A saved active profile can be edited, validated, exported, archived, duplicated, or compared. An archived profile is retained for review and restore workflows but is not the normal export target.

Status context

Profile name, ID, Firefox schema channel, lifecycle, saved/dirty state, validation result, and source summaries tell you whether the profile is ready to review, edit, export, or recover.

Choose the right BPM surface

BPM has five user surfaces: Library, Guided editor, All settings, JSON editor, and Compare.

The shared compact header and profile context keep the current product, profile, schema, locale, and theme visible across these surfaces. Choose a surface by the outcome you want, not by an internal module.

Library

Find, create, import, duplicate, archive, restore, delete, export, and open profiles.

Guided editor

Create or update common policy configurations through task-first steps and starter choices.

All settings

Review attention items, browse the full supported policy and preference catalog, and edit detailed values.

JSON editor

Inspect or edit the exact Firefox policies document when precise raw control is needed.

Compare

Compare two saved profiles and understand equal, different, or missing settings.

Create and set up a profile

Choose a Firefox schema channel

Choose Firefox Release 153, Firefox ESR 153.0, or Firefox ESR 140.13 before importing, validating, or editing a profile.

Start this task before creating a profile, importing policies.json, or validating a raw JSON document.

The schema channel decides which Firefox policies BPM can validate and which controls are shown as supported. Release 153 and ESR 153.0 include current policy controls such as AIControls and VisualSearchEnabled; ESR 140.13 remains a separately supported long-support channel. BPM does not migrate profiles automatically between ESR channels.

1. Compare the target browser fleet with the supported channels: Release 153, ESR 153.0, and ESR 140.13.

Expected result: the selected schema channel remains visible and intentional.

2. Choose ESR 140.13 or ESR 153.0 for the matching supported Extended Support Release deployment.

Expected result: the selected schema channel remains visible and intentional.

3. Choose Release 153 or ESR 153.0 when the profile needs current controls, including supported AI and visual search policies.

Expected result: the selected schema channel remains visible and intentional.

4. Validate after choosing the channel and before saving, export, or handoff.

Warning:

Validation can change from valid to invalid when the schema channel changes. Confirm the channel before saving or exporting.

The profile uses the schema channel that matches the intended Firefox deployment.

Recovery: if validation reports unsupported, unavailable, deprecated, or unknown settings, confirm the schema channel before editing policy values. Moving a profile from ESR 140.13 to ESR 153.0 requires an explicit target-channel decision and review.

Firefox schema channels and validation

The Firefox schema channel controls which policies and values BPM can validate and show as supported.

Choose the channel that matches the browser fleet: Firefox ESR 140.13, Firefox ESR 153.0, or Firefox Release 153. Schema choice changes available controls, validation messages, and whether a setting is supported, unavailable, deprecated, unknown, imported, or preserved as raw data.

Choose a channel

The supported schema channels are ESR 140.13, ESR 153.0, and Release 153. Select the channel before you import, validate, edit detailed settings, or export a profile.

Validation

Validation checks the profile against the selected schema and BPM normalized model. Run validation before export, after JSON edits, after import, and before comparing important profiles.

Understand Release and ESR differences

Common policies such as `DisableTelemetry` validate in all three supported channels. Release 153 and ESR 153.0 can support newer controls such as `AIControls` and `VisualSearchEnabled` that are absent in ESR 140.13.

Supported, unavailable, deprecated, unknown, and raw states

Supported settings can be edited and validated for the selected schema. Unavailable or unknown settings should be reviewed before handoff; deprecated settings may still exist but require current-channel confirmation; raw fallback values should be preserved or removed deliberately.

Review a channel change

Switching schema channels is a review decision, not a silent migration. Revalidate after switching and inspect newer-channel, ESR-unavailable, imported, raw, or deprecated values before you save or export.

Review the support boundary

`DisableTelemetry` is a common valid example. `AIControls` and `VisualSearchEnabled` can be valid on Release 153 or ESR 153.0 and unsupported on ESR 140.13. Wrong value types, such as a string for `DisableTelemetry`, are invalid for every schema.

Recovery

If validation fails, read the affected policy path, confirm the schema channel, inspect the setting in All settings or JSON editor, and only then edit, remove, or preserve the value.

Starter presets and CIS layers

Starter presets and CIS layers help create an initial profile before manual review and editing.

A starter preset gives a profile an initial purpose, such as corporate, classroom, or security-oriented use. A CIS layer adds BPM's mapped security baseline choices where BPM supports them.

Layered sources remain visible in All settings so you can distinguish baseline, CIS, imported, manual, and raw values. Some CIS-related items require manual review instead of automatic acceptance.

BPM documentation describes BPM mappings and workflow behavior. It does not claim CIS certification or endorsement.

Set the profile identity and schema channel

Choose the saved profile name and the Firefox schema channel before you configure guided settings.

Open a new or saved profile in Guided editor.

Use Step 1, Profile & baseline, to set the name and schema channel that will drive validation and available controls.

1. Confirm that you are editing the intended profile draft.

Expected result: the Guided profile remains consistent.

2. Enter a clear profile name.

Expected result: the Guided profile remains consistent.

3. Choose the Firefox schema channel: ESR 140.13, ESR 153.0, or Release 153.

Expected result: the Guided profile remains consistent.

4. Review whether the selected channel changes the visible controls before continuing.

Warning:

Changing schema-dependent controls can make values invalid for the selected Firefox channel.

The Guided draft has a stable identity and schema channel.

Recovery: if controls look different than expected, return to Step 1 and confirm the schema channel before changing settings.

Choose a Guided scenario

Select the scenario that best matches the profile goal so Guided editor can present a useful starting point.

You know the profile purpose you want to support.

Scenarios keep the first pass task-oriented and make the baseline easier to explain during review.

1. Open Step 1, Profile & baseline.

Expected result: the Guided profile remains consistent.

2. Review the scenario choices and their plain-language descriptions.

Expected result: the Guided profile remains consistent.

3. Choose the scenario closest to the deployment goal.

Expected result: the Guided profile remains consistent.

4. Check the affected baseline summary before adding presets or CIS layers.

Warning:

Changing schema-dependent controls can make values invalid for the selected Firefox channel.

The profile starts from an intentional scenario instead of an accidental blank baseline.

Recovery: if the scenario is wrong, switch it before fine-tuning later steps.

Apply a starter preset

Use a starter preset to seed common Firefox policy choices before detailed editing.

A profile draft is open in Step 1.

Starter presets provide a known baseline that you can still change in Guided editor, All settings, or JSON editor.

1. Open the starter preset area in Profile & baseline.

Expected result: the Guided profile remains consistent.

2. Compare the available presets against the profile scenario.

Expected result: the Guided profile remains consistent.

3. Apply the preset that matches the intended browser behavior.

Expected result: the Guided profile remains consistent.

4. Review the changed summary before moving to the next step.

Warning:

Changing schema-dependent controls can make values invalid for the selected Firefox channel.

The draft contains the preset settings as a starting point.

Recovery: if a preset added unwanted settings, choose a different preset or reset the affected controls before saving.

Apply a CIS layer

Add a supported CIS layer when the profile needs a hardened baseline from BPM's mapped recommendations.

A profile draft and schema channel are selected.

The CIS layer is a BPM mapping aid; review every resulting setting for the deployment and do not treat it as certification.

1. Open Step 1, Profile & baseline.

Expected result: the Guided profile remains consistent.

2. Choose the supported CIS layer that matches the target channel and scenario.

Expected result: the Guided profile remains consistent.

3. Review the compliance-aware baseline changes in the summary.

Expected result: the Guided profile remains consistent.

4. Keep or adjust settings that conflict with the deployment goal.

Warning:

Changing schema-dependent controls can make values invalid for the selected Firefox channel.

The profile includes the selected CIS layer as part of its baseline.

Recovery: if the layer is not suitable, remove it and revalidate before saving.

Create a first profile from the Library

Start a new Guided profile draft from the Library when no saved profile is suitable to reuse.

You are in the Library and want a new profile rather than opening or duplicating an existing one.

The create action opens a Guided editor draft. The draft becomes a saved profile only after you save it.

1. Choose the Library action to create a new profile.

Expected result: BPM opens the Guided editor for a new draft.

2. Choose the profile purpose, schema channel, and starter options shown by the editor.

The schema channel affects available controls and validation behavior.

3. Save the draft when it has the name and initial settings you want.

Warning:
Closing an unsaved draft can lose draft-only changes.

The new profile is saved and can be found again from the Library.

Recovery: if you meant to reuse an existing profile, cancel the draft and duplicate the saved profile instead.

Import Firefox policies.json into BPM

Import a canonical Firefox Enterprise policies.json document and let BPM create a normalized profile from it.

You have a Firefox Enterprise JSON document with a top-level policies object and a unique BPM profile name for the import.

Import crosses a product boundary: Firefox policies.json is the boundary document, while the created BPM profile stores normalized flags, source attribution, schema channel, validation state, and profile metadata.

1. In the Library, choose the Firefox policies import action and select the JSON file.

Expected result: BPM reads the document and prepares an import request.

2. Enter a unique profile name and choose the target Firefox schema channel, such as Release or ESR.

The schema channel controls validation and which policies are supported, deprecated, unknown, or raw-preserved after import.

3. Confirm the import and wait for the Library status.

Expected result: BPM creates a saved profile and returns it to the Library or editor workflow.

Warning:

Do not treat the imported file as BPM's internal model. Re-export if you need a fresh Firefox boundary document after BPM normalization.

The imported Firefox document becomes a BPM profile with a profile ID, revision, schema channel, and validation state.

JSON and multipart API-adjacent import shapes

API integrations send the same boundary document inside document:

```
{
  "name": "Example imported Firefox profile",
  "channel": "firefox-release",
  "document": {
    "policies": {
      "DisableTelemetry": true
    }
  }
}
```

Multipart import sends the file plus fields such as name, description, channel, and JSON-string compliance. The current runtime also accepts a document field, while the published OpenAPI schema names file as the documented file field.

Recovery: if import fails with malformed JSON, duplicate name, unsupported content type, schema mismatch, unknown policy, or validation errors, keep the original file unchanged, read the Library status, correct the input or name, and retry once from a clean Library state.

Open a saved profile in an editor

Open the same saved profile in Guided editor, All settings, or JSON editor depending on the change you need.

The profile is visible in the Library and its row identity matches the profile you intend to edit or inspect.

Opening a saved profile does not duplicate it. Each editor surface works with the same saved profile identity.

1. Use the row title or guided action for task-oriented edits.

Expected result: BPM opens the profile in Guided editor.

2. Use All settings when you need the complete supported catalog and source/attention details.

This is the safest choice for detailed policy and preference inspection.

3. Use JSON editor when you need to inspect or edit the raw boundary document.

Warning:

Raw JSON changes should be validated before export or comparison.

The selected editor opens in its own profile context and keeps the same profile ID.

Recovery: if you opened the wrong editor, return to the Library row or use another editor link for the same profile.

Configure profiles in Guided editor


Navigate the six Guided editor steps

Move through Profile & baseline, Browser access & defaults, Security & privacy, Users, add-ons & sites, AI & smart features, and Review & export.

Open a profile in Guided editor from the Library or creation flow.

Guided editor turns profile configuration into six task-first steps and keeps schema validation visible while you work.

Figure 1. Guided editor overview

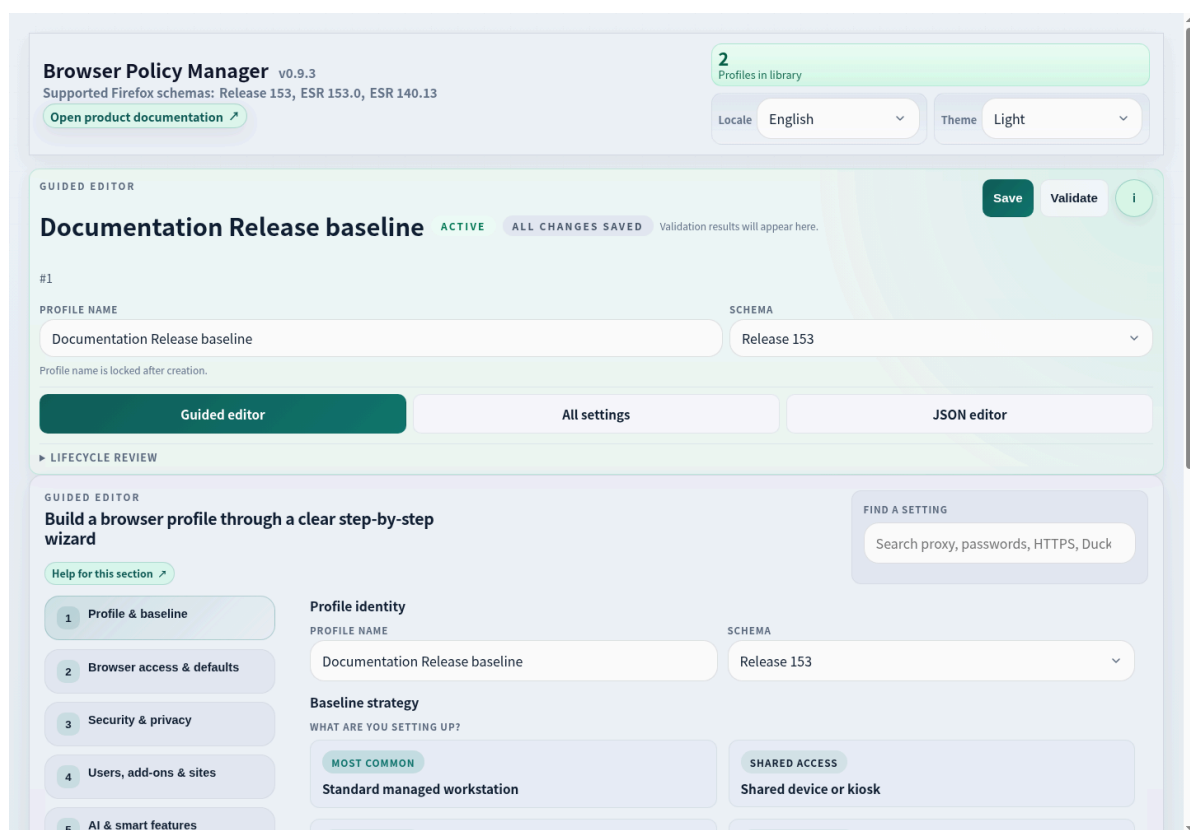

1. Start with Step 1, Profile & baseline, to confirm name, schema channel, scenario, starter preset, and CIS layer.

Expected result: the Guided profile remains consistent.

2. Continue through Step 2, Browser access & defaults, for network access, browser behavior, home, search, and navigation defaults.

Expected result: the Guided profile remains consistent.

3. Use Step 3 for privacy controls, permissions, cookies, cleanup, DNS, and security hardening posture.

Expected result: the Guided profile remains consistent.

4. Use Step 4 for accounts, extensions, bookmarks, language, translation, add-ons, and website handling.

Expected result: the Guided profile remains consistent.

5. Use Step 5 only for existing Firefox AI & smart features policy controls that the selected schema supports.

Expected result: the Guided profile remains consistent.

6. Finish in Step 6, Review & export, to validate, save, and download the reviewed profile.

Warning:

Changing schema-dependent controls can make values invalid for the selected Firefox channel.

You can explain where each guided setting belongs and continue from the correct step.

Recovery: if you land in the wrong area, use the stepper or search instead of changing unrelated controls.


Search Guided settings

Search Guided controls and jump to the matching setting without scanning every step.

A profile is open in Guided editor.

Guided search is useful when you know the policy goal but not the step that contains the control family.

Figure 1. Guided settings search results

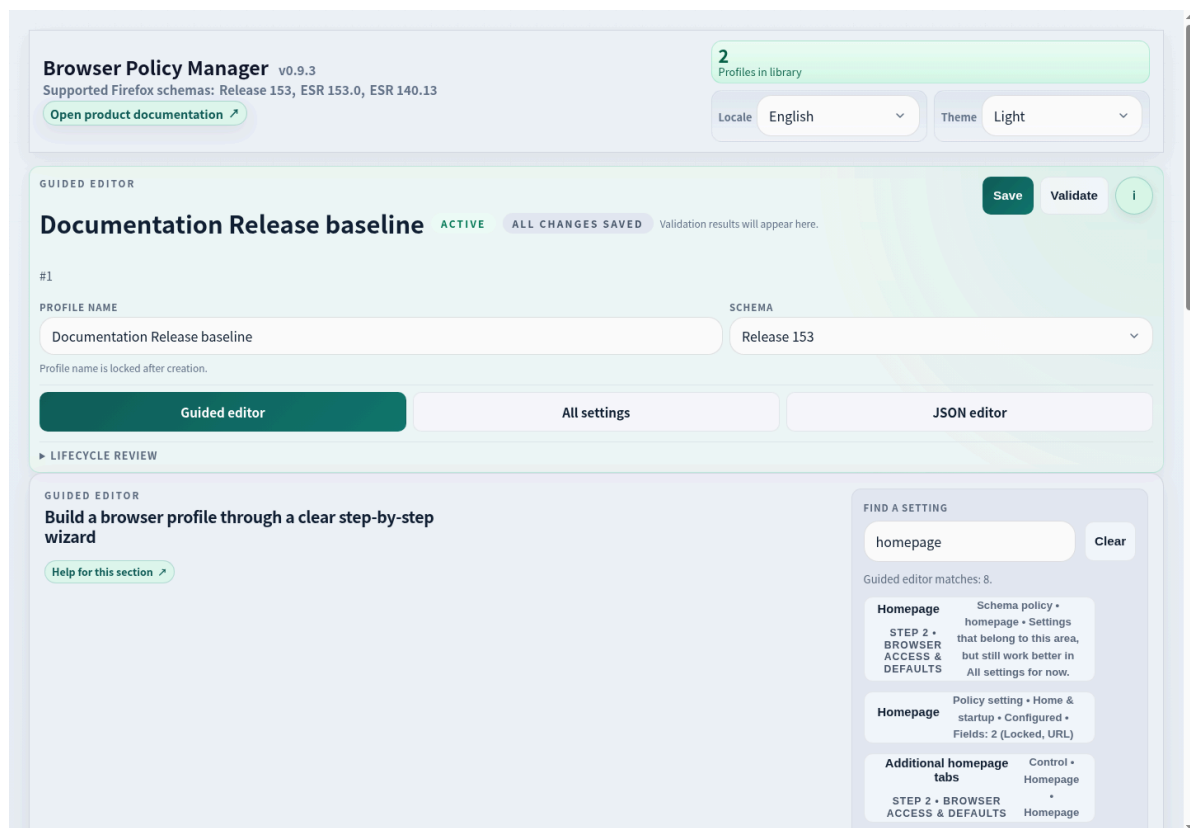

1. Place the cursor in the Guided settings search field.

Expected result: the Guided profile remains consistent.

2. Type a policy, preference, or plain-language term such as search, cookies, bookmarks, or permissions.

Expected result: the Guided profile remains consistent.

3. Choose a result to jump to the matching step and control.

Expected result: the Guided profile remains consistent.

4. Confirm the schema channel if the expected result is missing.

Warning:

Changing schema-dependent controls can make values invalid for the selected Firefox channel.

The matching setting is visible and ready to review or edit.

Recovery: if no result appears, clear filters and confirm the selected Firefox schema supports the control.

Configure browser access and defaults

Use Step 2 to configure browser access, network behavior, and baseline defaults.

A Guided profile draft is open.

Browser access & defaults collects controls that shape whether Firefox can reach resources and how it behaves before content-specific policy choices.

1. Open Step 2, Browser access & defaults.

Expected result: the Guided profile remains consistent.

2. Review network access and browser behavior controls for the deployment.

Expected result: the Guided profile remains consistent.

3. Set baseline defaults before adding home, search, or navigation-specific choices.

Expected result: the Guided profile remains consistent.

4. Validate warnings shown next to schema-dependent controls.

Warning:

Changing schema-dependent controls can make values invalid for the selected Firefox channel.

The profile has intentional browser access and default-behavior settings.

Recovery: if validation flags a value, undo the last change or use All settings to inspect the raw policy shape.

Configure home, search, and navigation

Set home surfaces, navigation behavior, managed search engines, and search suggestions from Step 2.

Step 2 is open and the schema channel is correct.

These controls affect what users see first and how Firefox resolves navigation and search activity.

1. Open the home, search, and navigation sections.

Expected result: the Guided profile remains consistent.

2. Set homepage or new-tab behavior required by the profile.

Expected result: the Guided profile remains consistent.

3. Configure managed search engines and search suggestions according to policy.

Expected result: the Guided profile remains consistent.

4. Review navigation defaults before moving to security settings.

Warning:

Changing schema-dependent controls can make values invalid for the selected Firefox channel.

The profile defines home, managed search, suggestions, and navigation behavior.

Recovery: if users would lose an expected search path, adjust the managed search engine entry before saving.

Configure security and privacy

Use Step 3 for privacy posture, permissions, cookies, cleanup, DNS, and hardening controls.

A Guided profile draft is open on the intended schema channel.

Security & privacy settings can change both user experience and risk posture, so review warnings before saving.

1. Open Step 3, Security & privacy.

Expected result: the Guided profile remains consistent.

2. Configure privacy controls and permission defaults.

Expected result: the Guided profile remains consistent.

3. Set cookies, cleanup, DNS, and security hardening options needed by the profile.

Expected result: the Guided profile remains consistent.

4. Check validation messages and explain any exception in the review.

Warning:

Changing schema-dependent controls can make values invalid for the selected Firefox channel.

The profile has a reviewed security and privacy posture.

Recovery: if a site workflow breaks, revisit permission or cookie settings and compare against the profile goal.

Configure users, add-ons, and sites

Use Step 4 for accounts, extensions, add-ons, bookmarks, language, translation, and site handling.

A Guided draft is open.

This step collects controls that affect user identity surfaces, extension governance, localization, and website-specific behavior.

1. Open Step 4, Users, add-ons & sites.

Expected result: the Guided profile remains consistent.

2. Review Mozilla accounts and identity-related browser surfaces.

Expected result: the Guided profile remains consistent.

3. Configure extensions, add-ons, and bookmarks according to deployment rules.

Expected result: the Guided profile remains consistent.

4. Set language, translation, and website handling options.

Warning:

Changing schema-dependent controls can make values invalid for the selected Firefox channel.

The profile contains reviewed user, add-on, bookmark, language, and site-handling controls.

Recovery: if an extension or site is blocked unexpectedly, inspect the matching section and validate again.

Configure Firefox AI and smart-feature policies

Use Step 5 to configure available Firefox policies for AI, visual search, and other smart features.

Select Release 153 or ESR 153.0. Some controls are unavailable on ESR 140.13.

This topic documents existing Firefox policy settings as product functionality. These browser controls are separate from the documentation assistant and do not change its chat or deterministic search behavior.

1. Open Step 5, AI & smart features.

Expected result: the profile remains consistent.

2. Review the browser AI, visual-search, and smart-browser policies supported by the selected schema.

Expected result: the profile remains consistent.

3. Enable, disable, or leave each supported policy according to the profile goal.

Expected result: the Guided profile remains consistent.

4. If a control is absent on ESR 140.13, treat it as unsupported rather than manually inventing a Guided setting.

Warning:

Changing schema-dependent controls can make values invalid for the selected Firefox channel.

Supported Firefox AI and smart-feature policies are reviewed as product settings. They do not control the documentation assistant.

Recovery: if a stakeholder expected an absent ESR control, switch to a supported Release schema for review or document the unsupported state.

Find schema-dependent Guided editor controls

Guided editor shows only the controls supported by the selected Firefox schema.

Controls in current schemas

On Release 153 and ESR 153.0, Step 5 can show supported AI and smart-feature, visual-search, and smart-browser policies.

Controls unavailable on ESR

On ESR 140.13, unsupported browser AI-policy controls are absent or unavailable. Do not add them manually as if Guided editor supported them.

Separate from the documentation assistant

This reference explains existing Firefox browser policy controls only. Those controls do not configure, enable, or restrict the separate documentation assistant.

Recovery

If a control is missing, confirm the schema channel, check All settings for the raw support boundary, and record the unsupported state during review.

Use Guided fine-tuning controls

Expand fine-tuning and advanced controls deliberately after the baseline choices are clear.

A Guided profile draft has a scenario, preset, or initial settings.

Fine-tuning lets you reach advanced controls without abandoning the task-first Guided workflow.

1. Open the step that owns the control family you need.

Expected result: the Guided profile remains consistent.

2. Expand the fine-tuning or advanced area for that family.

Expected result: the Guided profile remains consistent.

3. Change only the setting needed for the profile goal.

Expected result: the Guided profile remains consistent.

4. Recheck the plain-language summary and validation message before continuing.

Warning:

Changing schema-dependent controls can make values invalid for the selected Firefox channel.

The profile contains deliberate advanced changes rather than accidental broad edits.

Recovery: if the change is hard to explain, reset the control and use All settings or JSON editor for deeper inspection.

Review the Guided profile

Use Step 6 to review the configuration in plain language before handoff.

You have finished the Guided changes you want to keep.

The review step helps you catch missing schema choices, validation warnings, and settings that do not match the scenario.

1. Open Step 6, Review & export.

Expected result: the Guided profile remains consistent.

2. Read the selected profile summary and changed setting groups.

Expected result: the Guided profile remains consistent.

3. Resolve validation warnings or document why a supported exception remains.

Expected result: the Guided profile remains consistent.

4. Confirm that the scenario, CIS layer, schema channel, and edited controls match the handoff goal.

Warning:

Changing schema-dependent controls can make values invalid for the selected Firefox channel.

The profile is ready to save, download, or continue editing with a clear review trail.

Recovery: if the review reveals a mismatch, return to the owning step and correct it before saving.

Save and download a Guided profile

Save the reviewed Guided profile and download the handoff artifact when the configuration is ready.

Step 6 review is complete and validation warnings are understood.

Saving records the BPM profile; downloading provides the reviewed version for policy handoff.

1. Choose Save to store the current profile state.

Expected result: the Guided profile remains consistent.

2. Confirm the saved state appears in the Library before closing the editor.

Expected result: the Guided profile remains consistent.

3. Choose the download or export action needed for the handoff.

Expected result: the Guided profile remains consistent.

4. Share the exported file with the context needed to identify schema channel and profile purpose.

Warning:

Changing schema-dependent controls can make values invalid for the selected Firefox channel.

The reviewed profile is saved and the required download is available.

Recovery: if the download is stale, save again and repeat the export from the reviewed profile.

Review and complete profile changes

Save profile changes

Create the first saved profile from a draft or persist changes to an existing profile.

Open BPM in the browser and keep a profile, Library, All settings, Guided, JSON, or Compare surface available.

Saving establishes the profile ID for a new draft and makes the latest policy and managed-preference values available to other BPM surfaces.

1. Review the profile name, schema channel, and validation state before saving.

Expected result: BPM keeps the selected profile, editor surface, locale, and theme clear while you work.

2. Select Save on the active editor surface.

Expected result: BPM keeps the selected profile, editor surface, locale, and theme clear while you work.

3. Wait for the visible status message that confirms the save completed.

Expected result: BPM keeps the selected profile, editor surface, locale, and theme clear while you work.

4. If validation or connection feedback appears, read it before navigating away or retrying.

Warning:

Save or deliberately discard changes before leaving an editor, closing a tab, or confirming an irreversible action.

The profile has a saved state that can be reopened, validated, exported, or compared.

Recovery: if the visible state is unclear, stop editing, read the current status message, refresh once, and reopen the profile from the Library.

Validate a profile

Run schema-aware validation before saving, exporting, or comparing policy changes.

Open BPM in the browser and keep a profile, Library, All settings, Guided, JSON, or Compare surface available.

Validation checks policy names, value shapes, supported schema channel, unsupported ESR-only differences, and raw or unknown entries visible in BPM.

1. Open the profile in Guided, All settings, or JSON.

Expected result: BPM keeps the selected profile, editor surface, locale, and theme clear while you work.

2. Confirm the selected Firefox schema channel before validating.

Expected result: BPM keeps the selected profile, editor surface, locale, and theme clear while you work.

3. Run validation or review the visible validation panel on the active surface.

Expected result: BPM keeps the selected profile, editor surface, locale, and theme clear while you work.

4. Resolve unsupported policies, wrong value types, unknown raw entries, or stale imported values before treating the profile as ready.

Warning:

Save or deliberately discard changes before leaving an editor, closing a tab, or confirming an irreversible action.

You know whether the profile is ready to save and export for the selected Firefox channel.

Recovery: if the visible state is unclear, stop editing, read the current status message, refresh once, and reopen the profile from the Library.

Switch editor mode

Move between Guided, All settings, and JSON for the same saved profile while using the compact shared profile context.

Open BPM in the browser and keep a profile, Library, All settings, Guided, JSON, or Compare surface available.

The compact shared context identifies the current profile by name, state, schema channel, and validation signal. Switching mode changes the editing surface, not the underlying saved profile; save unsaved changes before relying on another surface.

1. Confirm that the current profile is saved and has a visible ID.

Expected result: BPM keeps the selected profile, editor surface, locale, and theme clear while you work.

2. Choose the target mode: Guided for common workflows, All settings for complete inspection, or JSON for raw document work.

Expected result: BPM keeps the selected profile, editor surface, locale, and theme clear while you work.

3. Open the target mode and verify the compact context: profile name, state, schema channel, and validation signal.

Expected result: BPM keeps the selected profile, editor surface, locale, and theme clear while you work.

4. Return to the previous mode only after saving or intentionally discarding changes.

Warning:

Save or deliberately discard changes before leaving an editor, closing a tab, or confirming an irreversible action.

You are working on the same profile in the editor mode that fits the current task.

Recovery: if the visible state is unclear, stop editing, read the current status message, refresh once, and reopen the profile from the Library.

Review profile context

Check profile identity, lifecycle, schema channel, validation state, and source context before finishing work.

Open BPM in the browser and keep a profile, Library, All settings, Guided, JSON, or Compare surface available.

Profile context prevents accidental edits to the wrong profile, wrong Firefox channel, archived row, imported source, or stale tab.

1. Read the profile name, lifecycle status, schema channel, and last updated context.

Expected result: BPM keeps the selected profile, editor surface, locale, and theme clear while you work.

2. Check whether the current value came from manual edit, baseline, CIS, import, or raw fallback when source attribution is shown.

Expected result: BPM keeps the selected profile, editor surface, locale, and theme clear while you work.

3. Review validation state and warnings before export or comparison.

Expected result: BPM keeps the selected profile, editor surface, locale, and theme clear while you work.

4. If context conflicts with the intended task, stop and reopen the profile from the Library.

Warning:

Save or deliberately discard changes before leaving an editor, closing a tab, or confirming an irreversible action.

You can explain what profile you are editing and which constraints apply to it.

Recovery: if the visible state is unclear, stop editing, read the current status message, refresh once, and reopen the profile from the Library.

Policies and managed preferences

BPM separates Firefox Enterprise policies from managed preference values while keeping both in one profile.

Policies are named Firefox Enterprise controls such as browser behavior, access, permissions, or feature settings. Managed preferences are preference keys with values and optional lock behavior.

Guided editor covers common policy goals. All settings exposes the broader supported catalog. JSON editor shows the exact document boundary used for import and export.

Policy-by-policy reference details belong to the Firefox Policy Guide; this User Guide explains how a user reaches and safely edits those controls in BPM.

Export a profile as Firefox policies.json

Download an active BPM profile as a canonical Firefox Enterprise policies.json boundary document.

The profile is active, saved, visible in the Library or JSON editor, and its validation state has been reviewed for the selected Firefox schema channel.

Export crosses the boundary in the opposite direction from import: BPM renders normalized profile data as a Firefox document with a top-level policies object. BPM profile metadata, source attribution, notes, and opaque compliance metadata are not exported.

1. Confirm the row identity, lifecycle state, schema channel, and validation state before export.

Expected result: you know which saved active profile will be rendered.

2. Choose the Library export action or the JSON editor Firefox download action.

Expected result: BPM returns an application/json document suitable for Firefox Enterprise policy use.

3. Use download and pretty-print options only to control delivery and formatting.

API-adjacent export supports download=1, pretty=1, and indent; these options do not change the policy meaning.

Warning:

Archived profiles are not normal direct Library export targets. The API has an explicit include_deleted option for archived export scenarios.

You have a canonical Firefox policies.json file containing only the exported policies document.

Canonical export shape and API-adjacent options

```
{
  "policies": {
    "DisableTelemetry": true,
    "Homepage": {
      "URL": "https://example.invalid/start"
    }
  }
}
```

Use /api/export/profiles/{profile_id}/firefox/policies.json?download=1&pretty=1 for an attachment-style, two-space formatted response, or use indent when a specific JSON indentation is required.

Recovery: if export reports a missing profile, archived profile, invalid query option, or stale row context, refresh the Library, confirm lifecycle and profile ID, and retry from the active saved row or the JSON editor for that profile.

Review and edit All settings


Use All settings

Open All settings for a saved profile when you need complete visual control beyond the shorter Guided workflow.

A saved profile exists. New unsaved drafts must be saved before All settings can open.

All settings is the complete visual editor for Firefox policies and known managed preferences. It opens in Review mode so attention items are visible before broad catalog browsing.

Figure 1. All settings review mode

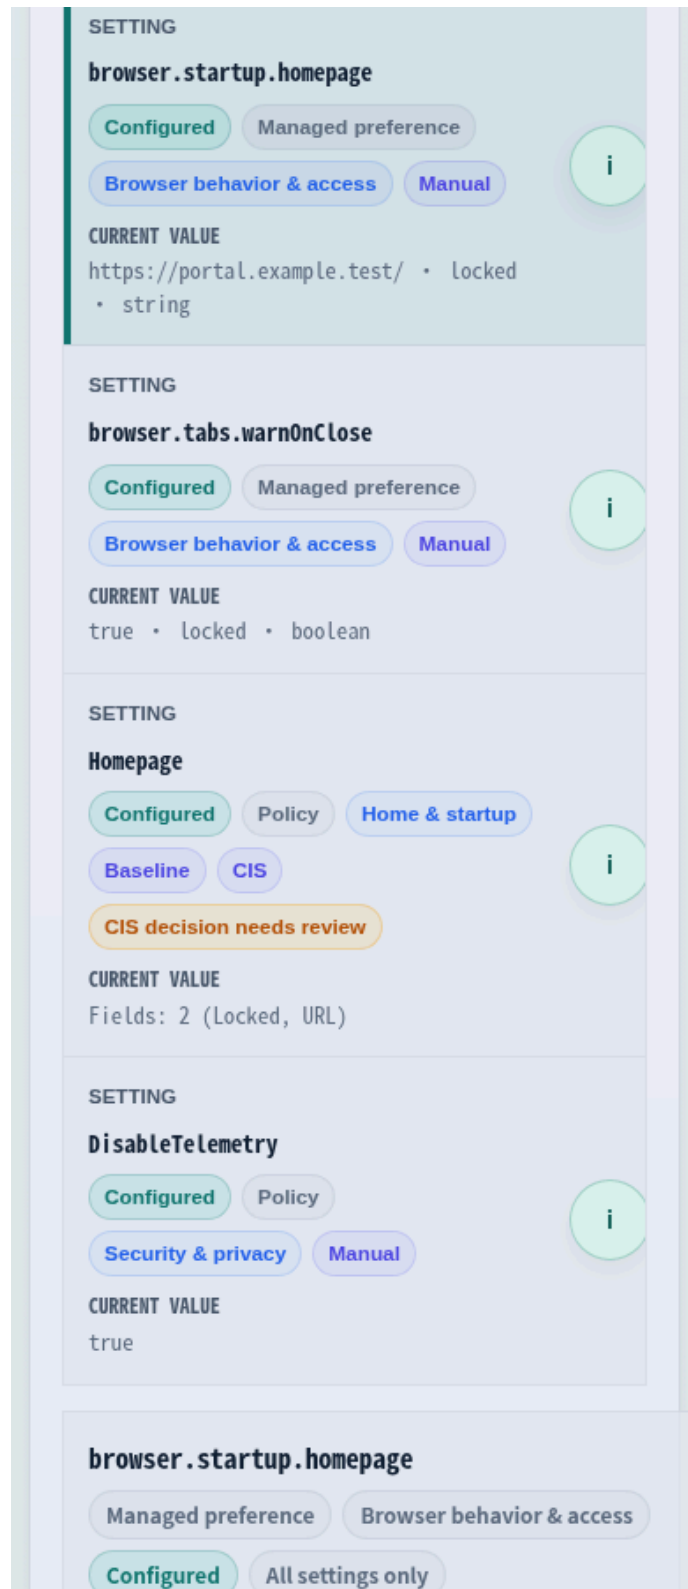

1. Open the saved profile from the Library.

Expected result: the All settings profile remains focused on the selected task.

2. Choose the All settings editor surface.

Expected result: the All settings profile remains focused on the selected task.

3. Confirm that Review, Configured, and Catalog modes are available.

Expected result: the All settings profile remains focused on the selected task.

4. Use the mode that matches the task: Review for attention, Configured for applied values, or Catalog for every supported setting.

Warning:

Changing settings can affect the exported Firefox policy. Review source, validation, and schema support before saving.

The saved profile is open in All settings with the correct mode available.

Recovery: if All settings is unavailable, save the Guided draft first or reopen a saved profile from the Library.

Review All settings attention items

Use Review mode to triage invalid, CIS manual-review, raw, unknown, deprecated, and imported items before routine editing.

Open a saved profile in All settings.

Review mode is the default attention-first view. It gathers settings that may require a decision before export, comparison, or handoff.

1. Open All settings and stay in Review mode.

Expected result: the All settings profile remains focused on the selected task.

2. Read the review summary and grouped action cards.

Expected result: the All settings profile remains focused on the selected task.

3. Open each invalid, CIS manual-review, raw, unknown, deprecated, or imported item that applies to the profile.

Expected result: the All settings profile remains focused on the selected task.

4. Resolve the item, document why it remains, or move to the linked detail view for a deliberate edit.

Warning:

Changing settings can affect the exported Firefox policy. Review source, validation, and schema support before saving.

Attention items are either resolved, intentionally retained, or ready for a focused detail edit.

Recovery: if Review looks empty but you expected issues, clear filters, refresh the profile, and confirm the selected schema channel.

Inspect configured settings

Use Configured mode to understand what the profile currently applies by domain, category, and source.

Open a saved profile in All settings.

Configured mode focuses on values already present in the profile, not on every possible policy. Domain summaries help you explain the active configuration.

1. Switch to Configured mode.

Expected result: the All settings profile remains focused on the selected task.

2. Review the configured summary cards by domain or category.

Expected result: the All settings profile remains focused on the selected task.

3. Open a category to inspect the settings applied there.

Expected result: the All settings profile remains focused on the selected task.

4. Use source filters if you need to separate baseline, CIS, manual, imported, or raw values.

Warning:

Changing settings can affect the exported Firefox policy. Review source, validation, and schema support before saving.

You can describe the active policy and managed preference values applied by the profile.

Recovery: if a value is missing, switch to Catalog mode or clear source filters before deciding it is absent.

Filter settings by source

Filter configured settings by baseline, CIS, manual, imported, or raw source attribution.

Open All settings in Configured mode or a source-aware list.

Source filters explain why a value exists. They help distinguish generated baselines, CIS layers, manual edits, imported policies, and raw fallback values.

1. Open the source filter controls.

Expected result: the All settings profile remains focused on the selected task.

2. Choose baseline, CIS, manual, imported, or raw depending on the question you are answering.

Expected result: the All settings profile remains focused on the selected task.

3. Review the list count and visible badges after each filter change.

Expected result: the All settings profile remains focused on the selected task.

4. Clear the filter before switching to a different investigation path.

Warning:

Changing settings can affect the exported Firefox policy. Review source, validation, and schema support before saving.

The visible list contains only settings from the selected source category.

Recovery: if a setting disappears, clear source filters and inspect its detail panel for the recorded source.

Browse the settings catalog

Use Catalog mode to browse every supported policy and known managed preference for the selected schema.

Open a saved profile in All settings.

Catalog mode is the full visual inventory. It includes configured and available settings while keeping advanced controls behind deliberate disclosures.

1. Switch to Catalog mode.

Expected result: the All settings profile remains focused on the selected task.

2. Browse categories for supported policies and known managed preferences.

Expected result: the All settings profile remains focused on the selected task.

3. Use category cards or search to narrow the inventory.

Expected result: the All settings profile remains focused on the selected task.

4. Select a setting before applying, editing, or resetting a value.

Warning:

Changing settings can affect the exported Firefox policy. Review source, validation, and schema support before saving.

You can find supported policies and known preferences without using raw JSON first.

Recovery: if the catalog is large, use search, filters, or bounded-list controls instead of scrolling blindly.

Search All settings

Search configured settings, available policies, known preferences, and setting actions from All settings.

Open All settings in any mode.

Search is shared across Review, Configured, and Catalog work. It can lead to a setting, an action, or a filtered group.

1. Place focus in the All settings search field.

Expected result: the All settings profile remains focused on the selected task.

2. Enter a policy ID, preference key, category, source, or plain-language term.

Expected result: the All settings profile remains focused on the selected task.

3. Choose a grouped result and confirm the target setting or action.

Expected result: the All settings profile remains focused on the selected task.

4. Clear the search when you return to browsing or filtering.

Warning:

Changing settings can affect the exported Firefox policy. Review source, validation, and schema support before saving.

The matching setting or action is selected without losing the current profile context.

Recovery: if no result appears, confirm the schema channel and try a policy ID or preference key.

Filter the All settings list

Filter by configured, available, Guided-covered, All-Settings-only, invalid, deprecated, raw, or unknown state.

Open All settings with a visible settings list.

State filters narrow a large inventory by the decision the user needs to make. They are different from source filters, which explain where a value came from.

1. Open the list filter toolbar.

Expected result: the All settings profile remains focused on the selected task.

2. Choose the state filter that matches the task: configured, available, Guided-covered, All-Settings-only, invalid, deprecated, raw, or unknown.

Expected result: the All settings profile remains focused on the selected task.

3. Inspect the filtered count and representative rows.

Expected result: the All settings profile remains focused on the selected task.

4. Clear the state filter before applying unrelated edits.

Warning:

Changing settings can affect the exported Firefox policy. Review source, validation, and schema support before saving.

The list shows settings with the selected state only.

Recovery: if a row is missing, clear state filters and search by exact policy or preference identifier.

Inspect setting details

Select a setting and inspect its value, source, validation, schema support, and product location.

Open All settings and select a setting row from Review, Configured, Catalog, search, or a deep link.

The detail panel is the safe place to understand a single setting before editing it. It shows value shape, source attribution, validation issues, and navigation context.

1. Select the setting row you need to understand.

Expected result: the All settings profile remains focused on the selected task.

2. Read the current value, source badge, validation messages, and schema/channel support.

Expected result: the All settings profile remains focused on the selected task.

3. Check the product location or related surface link if the setting is also covered elsewhere.

Expected result: the All settings profile remains focused on the selected task.

4. Decide whether to edit, remove, reset, or leave the value unchanged.

Warning:

Changing settings can affect the exported Firefox policy. Review source, validation, and schema support before saving.

You understand what the setting does in this profile and what action is safe next.

Recovery: if the value shape is unclear, compare with JSON editor or leave the setting unchanged until validation guidance is available.

Edit a setting detail

Apply or edit a Firefox policy or managed preference value from the All settings detail panel.

Open a setting detail panel for a supported editable value.

Detail editing keeps the change focused on one setting while reusing shared validation and save behavior.

1. Inspect the current value and validation state.

Expected result: the All settings profile remains focused on the selected task.

2. Enter or choose the new policy or managed preference value.

Expected result: the All settings profile remains focused on the selected task.

3. Apply the detail edit and watch for validation feedback.

Expected result: the All settings profile remains focused on the selected task.

4. Save the profile when the edited value is valid and intentional.

Warning:

Changing settings can affect the exported Firefox policy. Review source, validation, and schema support before saving.

The selected policy or managed preference has the new value in the profile.

Recovery: if validation fails, correct the value shape or reset the detail before saving.

Remove or reset a setting

Remove a configured value or reset it back to the inherited baseline, preset, or unconfigured state.

Open the setting detail panel for a configured value.

Remove and reset actions are destructive for the selected value, so the user should understand source and downstream effects first.

1. Inspect the current value and source badge.

Expected result: the All settings profile remains focused on the selected task.

2. Choose Remove or Reset only for the setting you intend to change.

Expected result: the All settings profile remains focused on the selected task.

3. Read any warning or validation message shown by the detail panel.

Expected result: the All settings profile remains focused on the selected task.

4. Save the profile after confirming the value is absent, reset, or inherited as expected.

Warning:

Changing settings can affect the exported Firefox policy. Review source, validation, and schema support before saving.

The setting no longer applies from the previous configured value.

Recovery: if the removal was unintended, reapply the previous value from history, import, comparison, or a saved source document.

Add a managed preference

Add a known managed preference that is not yet configured in the profile.

Open All settings with the correct schema channel selected.

Managed preferences complement Firefox policies when BPM exposes a known preference key and lock behavior. Add them deliberately and validate the result.

1. Open the add preference control or find the preference in Catalog mode.

Expected result: the All settings profile remains focused on the selected task.

2. Choose the known preference key and review its expected value type.

Expected result: the All settings profile remains focused on the selected task.

3. Enter the value and lock state required by the profile.

Expected result: the All settings profile remains focused on the selected task.

4. Apply, validate, and save the managed preference.

Warning:

Changing settings can affect the exported Firefox policy. Review source, validation, and schema support before saving.

The profile contains the new managed preference with the intended value and lock behavior.

Recovery: if the preference key is unknown or validation fails, remove the draft value and use JSON only for deliberate raw review.

Navigate settings categories

Navigate All settings categories and mapped control clusters to find related policy and preference controls.

Open All settings in Configured or Catalog mode.

Categories group settings by product domain rather than by file location. They help users move between browser access, privacy, search, extensions, raw/unmapped, and other clusters.

1. Open the category navigation or catalog summary.

Expected result: the All settings profile remains focused on the selected task.

2. Choose the domain or cluster that matches the configuration goal.

Expected result: the All settings profile remains focused on the selected task.

3. Review category counts for configured, attention, raw, or deprecated settings.

Expected result: the All settings profile remains focused on the selected task.

4. Open a setting detail or switch filters without losing the category context.

Warning:

Changing settings can affect the exported Firefox policy. Review source, validation, and schema support before saving.

You can move through the settings inventory by product domain and reach the relevant detail panel.

Recovery: if a category does not contain the expected control, search by policy ID or inspect raw/unmapped items.

Use advanced schema controls

Reach advanced schema-shell and preference controls from All settings without treating Guided as the complete editor.

Open All settings in Catalog mode.

Advanced controls remain deliberate. All settings is the superset for schema-backed policies and preferences that are not first-class Guided controls.

1. Switch to Catalog mode and open the advanced schema or preference disclosure.

Expected result: the All settings profile remains focused on the selected task.

2. Review whether the control is Guided-covered, All-Settings-only, raw, deprecated, or schema-dependent.

Expected result: the All settings profile remains focused on the selected task.

3. Edit only the advanced control needed for the profile goal.

Expected result: the All settings profile remains focused on the selected task.

4. Validate and save before returning to Guided, JSON, or the Library.

Warning:

Changing settings can affect the exported Firefox policy. Review source, validation, and schema support before saving.

The advanced setting is reached and changed deliberately without duplicate default editors.

Recovery: if the control is unsupported in the selected schema, leave it unchanged and document the schema boundary.

Handle raw and unknown settings

Inspect imported unknown keys and raw-fallback values without losing them accidentally.

Open Review mode or a raw/unknown filtered list in All settings.

Raw and unknown settings may come from import, schema differences, or values BPM cannot model visually. Treat them as preservation and review items, not routine edits.

1. Filter or open Review items for raw, unknown, or imported settings.

Expected result: the All settings profile remains focused on the selected task.

2. Inspect the raw value, source, validation state, and schema channel.

Expected result: the All settings profile remains focused on the selected task.

3. Decide whether to preserve, remove, reset, or inspect the value in JSON editor.

Expected result: the All settings profile remains focused on the selected task.

4. Save only after confirming the value should remain or be removed.

Warning:

Changing settings can affect the exported Firefox policy. Review source, validation, and schema support before saving.

Raw and unknown values are preserved or removed intentionally.

Recovery: if the value might be important, export or compare the profile before removing it.

Follow setting and documentation links

Open focused editor locations or the exact documentation topic for a supported policy or known managed preference.

Open All settings or another BPM surface that links to a setting.

Editor deep links focus a setting or raw location. In All settings, the separate circled-information control opens manifest-resolved documentation for every supported policy and known managed preference.

1. For a supported policy or known managed preference, activate the circled-information control beside its row.

Expected result: the localized documentation opens in a new tab without selecting the row or changing profile data.

2. Confirm the documentation destination and active tree item.

Expected result: the tree expands from Documents through the owning guide and section to the exact topic, which is visible and active.

3. Return to BPM and use an editor or search deep link when you need to change the setting.

Expected result: the correct editor opens with the relevant setting, review state, raw key, or JSON location focused.

4. Return to the previous surface only after saving or discarding changes deliberately.

Warning:

Changing settings can affect the exported Firefox policy. Review source, validation, and schema support before saving.

Documentation links and editor deep links open their exact destinations while preserving orientation.

Recovery: unknown raw settings and missing, stale, incompatible, or unavailable documentation show a localized noninteractive state. Open Documentation from the BPM header and search by exact policy ID or preference key instead of treating that state as a broken link.

Trace a setting source

Trace a configured setting to baseline, CIS, manual, imported, or raw source attribution.

Open a configured setting in All settings.

Source attribution helps explain why a value exists and whether changing it would override a baseline, CIS layer, manual edit, import, or raw fallback.

1. Open the setting detail or configured summary that shows source badges.

Expected result: the All settings profile remains focused on the selected task.

2. Identify whether the value comes from baseline, CIS, manual, imported, or raw source.

Expected result: the All settings profile remains focused on the selected task.

3. Follow related CIS or profile context links when a generated layer contributed the value.

Expected result: the All settings profile remains focused on the selected task.

4. Record the source before editing, removing, or resetting the setting.

Warning:

Changing settings can affect the exported Firefox policy. Review source, validation, and schema support before saving.

You know where the configured value came from and can explain the impact of changing it.

Recovery: if source attribution is ambiguous, compare the profile with a clean baseline or inspect the imported source document.

Resolve CIS manual-review items

Find CIS recommendations requiring manual review and decide whether to configure, document, or leave them for external verification.

Open All settings Review mode for a profile that includes a CIS layer or CIS-derived source metadata.

Some CIS recommendations cannot be fully automated by BPM. Review mode surfaces those items so the user can make an explicit decision without claiming certification.

1. Open Review mode and filter for CIS manual-review items if needed.

Expected result: the All settings profile remains focused on the selected task.

2. Read the recommendation identifiers, affected policy or preference, and current value.

Expected result: the All settings profile remains focused on the selected task.

3. Configure a supported value, document why manual verification remains, or leave the item intentionally unresolved.

Expected result: the All settings profile remains focused on the selected task.

4. Revalidate and record the decision before export or handoff.

Warning:

Changing settings can affect the exported Firefox policy. Review source, validation, and schema support before saving.

CIS manual-review items are configured, documented, or intentionally left for external verification.

Recovery: if the recommendation cannot be mapped to a visible setting, keep the item in review and consult the CIS guide when that guide is authored.

All settings review states

Use this reference to interpret clean, invalid, CIS manual-review, raw, unknown, deprecated, and imported review states.

Overview

Review states explain why All settings asks for attention before the user edits routine values.

Clean profile

A clean profile has no remaining Review items. It can still contain configured settings; it simply has no attention states that BPM can detect.

Invalid items

Invalid items have values that fail current validation for the selected schema channel and should be fixed or removed before handoff.

CIS manual review

CIS manual-review items need a human decision or external verification. BPM can surface the item without claiming certified compliance.

Raw, unknown, and imported items

Raw fallback, unknown, and imported items should be preserved or removed deliberately because BPM may not be able to model their intent visually.

Deprecated items

Deprecated settings may still exist in a profile, but the user should confirm current Release/ESR support before relying on them.

Recovery

If a state is unexpected, clear filters, confirm the schema channel, refresh the profile, and inspect the setting detail before editing.

Large settings inventories

Use bounded-list behavior, search, filters, and categories when All settings contains a large policy and preference inventory.

Overview

All settings can expose many schema-backed policies and known preferences. Bounded lists keep the interface usable and make the next narrowing action explicit.

List budget

All settings may show a bounded subset, count, or continuation action instead of rendering every row at once.

Narrowing tools

Search, category navigation, source filters, and state filters are the supported ways to reduce a large inventory.

Performance boundary

Large-inventory handling is a UI boundary, not a signal that settings are missing from the profile or catalog.

Recovery

If the expected row is not visible, search by exact ID, clear filters, or switch between Configured and Catalog mode.

Work with JSON and data exchange


Use JSON editor

Open the complete profile as a Firefox policies.json document for exact review or raw editing.

Open a saved profile. JSON editor works on a saved profile and represents the profile as a Firefox boundary document.

JSON editor is the raw document surface. Use it when Guided or All settings is too high-level for exact review, migration checks, troubleshooting, or raw values.

Figure 1. JSON editor in dark theme

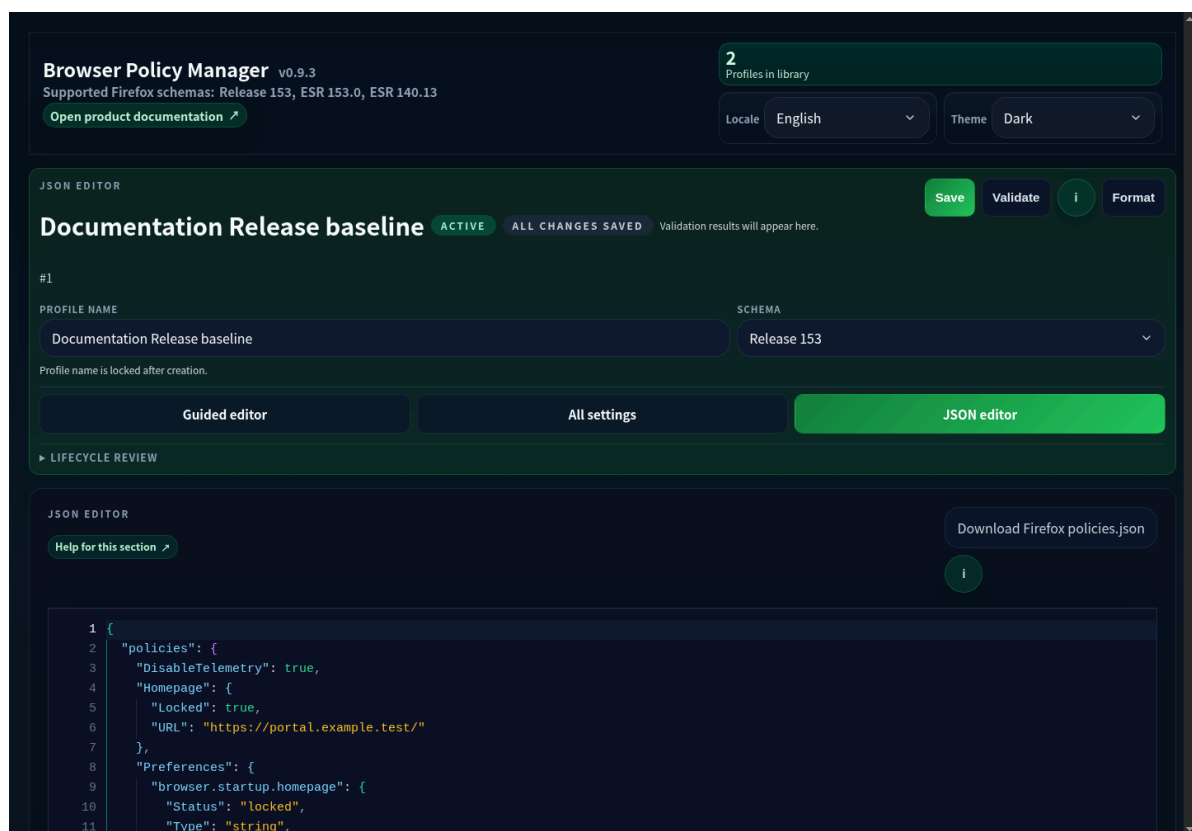

1. Open the saved profile from the Library or another editor.

Expected result: the JSON document remains focused on the selected task.

2. Switch to JSON editor.

Expected result: the JSON document remains focused on the selected task.

3. Confirm the editor shows a top-level policies object and the download action is available.

Expected result: the JSON document remains focused on the selected task.

4. Use JSON editor only when exact raw document control is needed.

Warning:

Saving raw JSON can change the canonical BPM profile. Validate syntax and policy values before saving.

The current profile is visible as editable Firefox policies.json content.

Recovery: if the route cannot open, save the profile first or return to All settings for visual editing.

Edit raw policies JSON

Edit the raw policies.json document with the locally bundled Monaco editor.

Open JSON editor for a saved profile.

The Monaco editor is bundled locally and edits the raw JSON text. BPM still validates before saving to the normalized profile model.

1. Place focus in the JSON editor.

Expected result: the JSON document remains focused on the selected task.

2. Edit only the policy, preference, or raw value required by the task.

Expected result: the JSON document remains focused on the selected task.

3. Keep the top-level policies object and valid JSON syntax.

Expected result: the JSON document remains focused on the selected task.

4. Use validation before saving the raw edit.

Warning:

Saving raw JSON can change the canonical BPM profile. Validate syntax and policy values before saving.

The editor contains the intended raw JSON change and is ready for validation.

Recovery: if the edit becomes confusing, format the document or discard changes before saving.

Format the JSON document

Format the current JSON document before review, validation, or handoff.

Open JSON editor with a JSON document in the editor.

Formatting changes whitespace and indentation only. It should make review easier without changing the policy meaning.

1. Choose the JSON format action.

Expected result: the JSON document remains focused on the selected task.

2. Review the resulting indentation and object layout.

Expected result: the JSON document remains focused on the selected task.

3. Confirm no policy value changed during formatting.

Expected result: the JSON document remains focused on the selected task.

4. Validate the document after formatting if you plan to save.

Warning:

Saving raw JSON can change the canonical BPM profile. Validate syntax and policy values before saving.

The JSON document is easier to review and remains semantically unchanged.

Recovery: if formatting fails, fix JSON syntax first; trailing commas and missing braces are common causes.

Validate the JSON document

Validate raw JSON syntax and Firefox policy values before saving.

Open JSON editor with the document you want to check.

Validation distinguishes malformed JSON from policy or schema errors. A document can parse as JSON and still fail policy validation.

1. Choose the shared Validate action.

Expected result: the JSON document remains focused on the selected task.

2. If validation reports malformed JSON, fix syntax such as trailing commas or missing braces.

Expected result: the JSON document remains focused on the selected task.

3. If validation reports policy errors, correct unsupported keys, wrong value types, or schema-channel mismatches.

Expected result: the JSON document remains focused on the selected task.

4. Validate again until the status explains that the document is acceptable or the remaining issue is intentional for raw review.

Warning:

Saving raw JSON can change the canonical BPM profile. Validate syntax and policy values before saving.

The document has a known validation state before save or export.

Recovery: if errors are hard to read, use All settings to inspect the affected policy or preference visually.

Save the JSON document

Save a valid raw JSON document back to the canonical BPM profile.

The JSON document has been validated or the remaining warnings are understood.

Saving writes the raw document back through BPM normalization. The saved profile can then be opened in Guided, All settings, Compare, or export workflows.

1. Validate the JSON document.

Expected result: the JSON document remains focused on the selected task.

2. Choose Save only when the top-level policies object and policy values are correct.

Expected result: the JSON document remains focused on the selected task.

3. Wait for the saved status before leaving the route.

Expected result: the JSON document remains focused on the selected task.

4. Reopen the profile or export policies.json when you need handoff evidence.

Warning:

Saving raw JSON can change the canonical BPM profile. Validate syntax and policy values before saving.

The BPM profile stores the JSON changes in the canonical profile model.

Recovery: if save fails, fix validation errors or return to a previous saved profile before editing again.

When to use JSON editor

Use JSON editor for exact raw review, migration checks, troubleshooting, and values that are easier to handle as raw policies.json.

JSON editor is powerful but less guided than the visual editors. It should be a deliberate choice when the user needs boundary-document precision.

Good fit

Use JSON editor for exact policies.json review, migration checks, raw fallback values, or troubleshooting malformed import/export documents.

Not the first choice

Use Guided editor for common workflows and All settings for full visual inspection before choosing raw JSON for routine edits.

Validation boundary

Valid JSON syntax is not enough. BPM also validates Firefox policy values, schema channel support, and the canonical normalized model before save.

Examples

A valid example keeps a top-level policies object with entries such as DisableTelemetry and Preferences, including a locked browser.startup.homepage value. Invalid examples include malformed JSON syntax and schema-invalid policy values such as a string where a boolean is required.

Find, manage, and compare profiles

Review an archived profile

Open an archived profile deliberately with archived context before restore or permanent delete decisions.

The archived profile is still visible through a Library lifecycle filter or an include_deleted route.

Archived profiles can be reviewed through include-deleted routes and Library lifecycle filters, but they are not normal active editing/export targets.

1. Set the Library lifecycle filter to Archived or All states.

Expected result: archived lifecycle context remains visible before any restore or destructive action.

2. Confirm the archived badge, profile name, schema channel, validation state, and update time before opening the row.

Expected result: archived lifecycle context remains visible before any restore or destructive action.

3. Open the archived profile only when you need review context, restore planning, comparison, or a deletion decision.

Expected result: archived lifecycle context remains visible before any restore or destructive action.

4. Restore the profile before normal editing/export, or cancel if the archived context is not the intended target.

Warning:

Archived profile actions can affect profiles that are intentionally hidden from the normal active Library view.

You review the archived profile with its lifecycle context visible and avoid treating it as an active profile by mistake.

Recovery: if a bookmarked archived route reports Profile not found, return to the Library with archived profiles included and reopen from the visible row.


Use the Library

Open the Library and use its counts, status, and row actions as the starting point for saved profile work.

BPM is open and you are working with saved profile records, not an unsaved editor draft.

The Library lists saved profiles and shows filtered and total counts so you know whether filters or search are hiding rows. Its action grid comes first; the filter row is immediately above the profile table.

Figure 1. Library overview

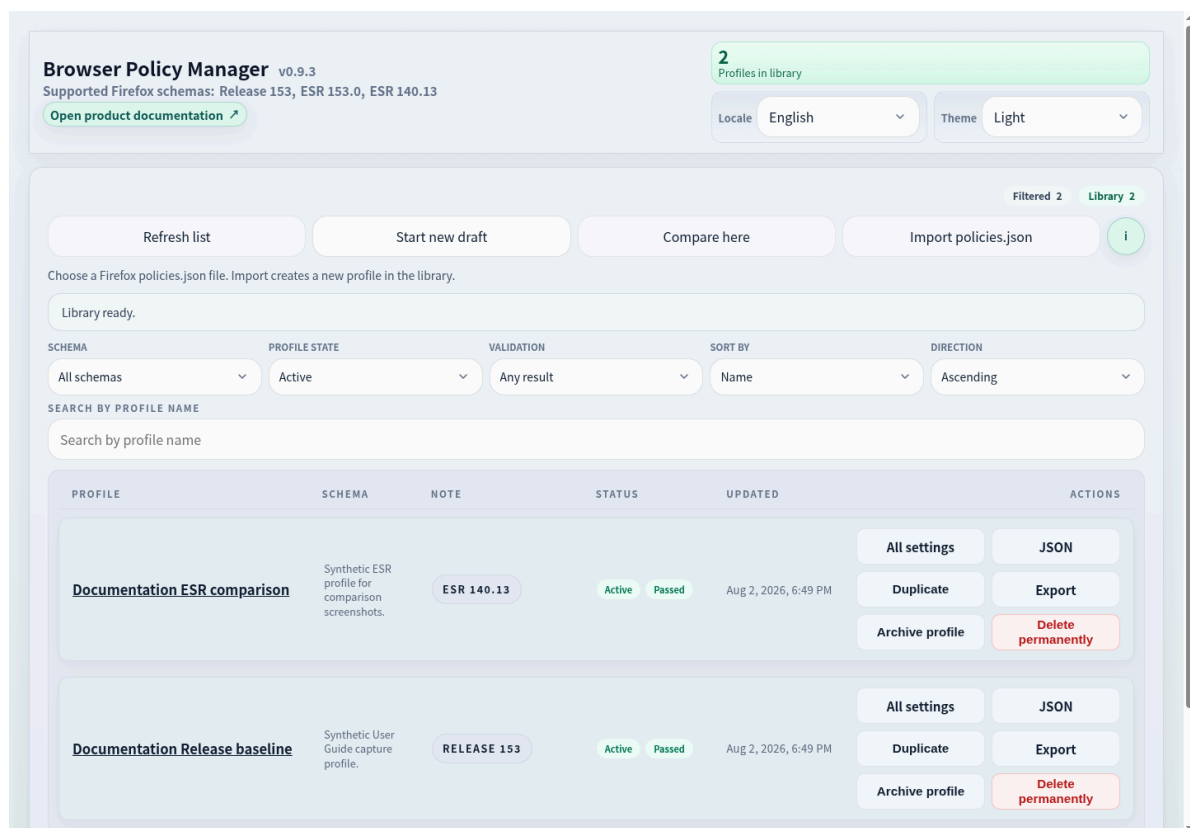

1. Open the Library.

Expected result: the Library loads profile rows, or an empty-state message if no saved profiles exist.

2. Use the action grid to refresh the list, start a new draft, open Compare, or import policies.json.

These actions appear before the filters and table.

3. Set search, schema, profile-state, validation, and sort filters directly above the table; then read the filtered and total counts before using a row action.

Warning:

A row action applies to that saved profile, not to a temporary editor draft.

You can identify the active Library view and choose the next profile action without losing context.

Recovery: if rows do not load or an action status remains failed, refresh the Library and then use the Library troubleshooting topic.

Find a profile by name

Use Library search to narrow saved profiles by name before opening, duplicating, or changing lifecycle state.

The Library is open and profile rows have finished loading.

Search narrows the current Library view. It works together with schema, lifecycle, validation, and sort controls.

1. Place the cursor in the Library search field.

Expected result: the current row list remains visible while you type.

2. Enter a distinctive part of the profile name.

The filtered count updates to match the rows still visible.

3. Confirm the row identity before choosing an action.

Warning:

Search does not save or change profiles. It only changes what the Library shows.

The Library shows only rows that match the search text and any active filters.

Recovery: clear the search text if the expected profile is missing, then refresh if the row still does not appear.

Filter the Library

Combine schema, lifecycle, and validation filters to focus the saved profile list.

The Library is open and you know which profile state you need to inspect.

Filters are view controls. They do not change profile content, validation state, or lifecycle state.

1. Choose a Firefox schema channel filter when you need Release, ESR, or all profiles.

Expected result: the filtered count reflects only rows for the selected channel.

2. Choose a lifecycle filter to show active, archived, or all profiles.

Use archived when you are preparing to restore or permanently delete a retained profile.

3. Choose a validation filter to show passed, failed, or not-yet-validated profiles.

Warning:

A validation filter does not run validation. It only shows the last saved validation state.

4. Reset filters to all states when you need the complete Library view.

This reset changes only the visible list, not the saved profile data.

The Library shows the profile subset that matches the selected schema, lifecycle, validation, and search criteria.

Recovery: if a profile seems missing, reset filters and search before treating it as absent.

Sort Library rows

Sort saved profiles by update time, creation time, name, schema channel, or ID in ascending or descending order.

The Library is open and contains at least two visible profile rows.

Sorting changes the row order inside the current search and filter result.

1. Select the field to sort by.

Expected result: rows reorder by updated time, created time, name, schema, or ID.

2. Select the order direction.

Use descending updated time for recent work or ascending name for alphabetic browsing.

3. Check the filtered and total counts before acting on the first row.

Warning:

Sorting does not remove filters. A row can still be hidden by search or filters.

The visible Library rows appear in the selected order.

Recovery: switch back to updated-time sorting if the row order no longer matches your work context.

Refresh the Library

Reload Library rows and interpret load or action status before repeating an operation.

The Library is open, and you need to confirm current saved profile state after a change or failed load.

Refresh reloads the Library from BPM. It does not validate profiles or save unsaved editor changes.

1. Choose Refresh in the Library.

Expected result: the status announces loading and then either a refreshed list or an error.

2. Wait for the status message before starting another Library action.

Warning:

Repeating lifecycle or delete actions while the status is unresolved can make it harder to tell which operation failed.

3. Review filtered and total counts after refresh.

Counts can change if another tab saved, archived, restored, or deleted a profile.

The Library view reflects the latest profile list available to BPM.

Recovery: if refresh fails, keep the current page open and use the troubleshooting topic to decide whether to retry or preserve context.

Library row fields

Each Library row summarizes identity, schema, note, validation state, lifecycle state, and update time for one saved profile.

Identity

The row name, ID, note, and update time help confirm that you are acting on the intended saved profile.

State

The schema channel, validation state, and lifecycle state explain which editor actions, lifecycle actions, and export-related actions are currently suitable.

Warning

Do not rely on row position alone after sorting or filtering. Confirm identity fields before duplicate, archive, restore, or permanent delete actions.

Recovery

If row information appears stale, refresh the Library before repeating the action.

Duplicate a profile

Create a named Guided draft from an existing saved profile when you want a safe starting point for changes.

The source profile is visible in the Library and you have confirmed its row identity.

Duplicate creates a separate profile draft based on the selected saved profile. It does not change the source profile.

1. Choose Duplicate on the source profile row.

Expected result: BPM opens a clone-name panel.

2. Enter a clear name that differs from existing profile names.

BPM requires a name and reports duplicate-name validation before confirming.

3. Confirm the duplicate action.

Warning:

A duplicate is separate from the source. Later edits to one profile do not update the other.

BPM opens or creates the duplicated profile as a named Guided draft or saved profile according to the current workflow.

Recovery: cancel the clone-name panel if the selected source row or new name is wrong.

Archive an active profile

Move an active profile out of the normal active list without permanently deleting it.

The profile is active, visible in the Library, and no longer needed for normal editing or export workflows.

Archiving is reversible. It keeps the profile available through archived or all lifecycle filters.

1. Confirm the row name, schema, validation state, and updated time.

Expected result: you know exactly which profile will change lifecycle state.

2. Choose the Archive lifecycle action.

Warning:

Archived profiles are retained but no longer behave like normal active export targets.

3. Wait for the action status and refresh the Library if needed.

The row appears under archived or all lifecycle filters after the action completes.

The profile is archived and can be restored later.

Recovery: restore the profile if you archived the wrong row.

Restore an archived profile

Return an archived profile to the active Library lifecycle when it should be edited or used again.

The lifecycle filter shows archived or all profiles, and the target profile row is visible.

Restore reverses archive. It does not revalidate the profile or change policy values.

1. Confirm the archived row identity and updated time.

Expected result: you identify the archived profile you want to bring back.

2. Choose Restore on that row.

Warning:

Restore makes the profile active again, but its previous validation state may still need review.

3. Switch to the active lifecycle filter or all profiles to confirm the restored row.

Refresh if the status reports success but the row remains hidden.

The profile is active again and available for normal editor workflows.

Recovery: archive the profile again if it was restored by mistake.

Permanently delete a profile

Remove an active or archived profile only after confirming that it should not be retained.

The profile row is visible and you have confirmed that the profile is no longer needed.

Permanent delete is the destructive Library lifecycle action. Archive first when you need a reversible hold.

1. Confirm the row name, ID, schema, lifecycle state, and updated time.

Expected result: you can distinguish the target profile from similarly named rows.

2. Choose the permanent delete action.

Warning:
Permanent delete cannot be restored from the Library.

3. Complete the confirmation only when the prompt names the intended profile.

Cancel the confirmation if any row detail is unexpected.

The profile is removed from the Library after the delete action succeeds.

Recovery: if deletion fails, do not repeat immediately; refresh and use the troubleshooting topic to inspect the status.

Archived profile behavior

Archived profiles stay visible through lifecycle filters but have limitations compared with active profiles.

Purpose

Archive keeps a profile for review or later restore without keeping it in the normal active working set.

Limitations

Archived rows are not normal active export targets, and some row actions are disabled until the profile is restored.

Warning

Permanent delete can still remove an archived profile. Confirm the row carefully before destructive actions.

Recovery

Restore an archived profile when you need normal editing or active lifecycle behavior again.


Open Compare from the Library

Open the dedicated Compare surface in a new tab before selecting two saved profiles.

The Library is open and at least two saved profiles exist.

Compare is a dedicated saved-profile surface. It keeps the current language and theme and does not replace the Library tab.

Figure 1. Profile comparison surface

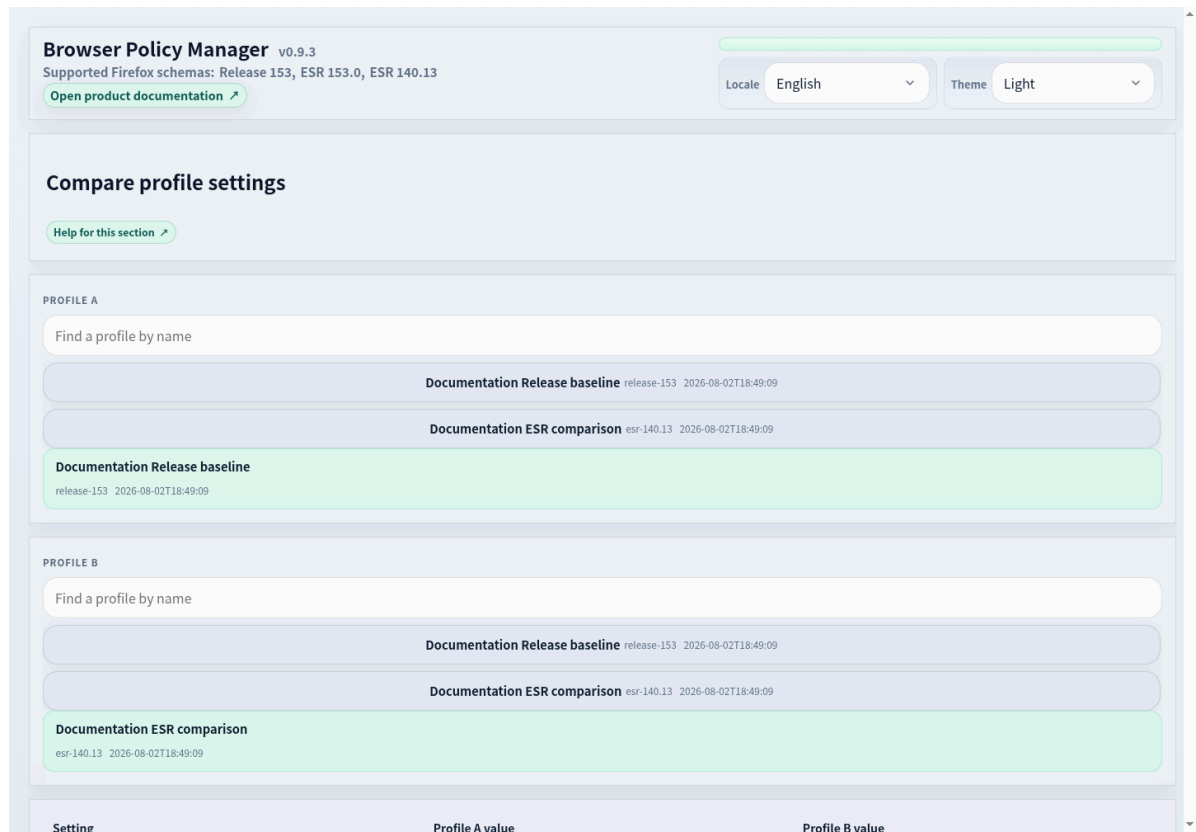

1. Choose the Compare profile settings action in the Library.

Expected result: BPM opens the Compare interface in a new browser tab.

2. Use the left and right search fields to choose Profile A and Profile B.

Warning:

Compare reads saved profile state. Save editor changes before relying on the comparison.

The Compare surface is ready for independent Profile A and Profile B selection.

Recovery: if the Compare tab opens without expected profiles, return to the Library, refresh it, and confirm both profiles are saved and visible.

Profile comparison workflow

Compare helps review the saved setting differences between two profiles without changing either profile.

The workflow is: open Compare from the Library, search independently for Profile A and Profile B, review each selected profile summary, then read the comparison table.

The table uses the union of policy and managed-preference settings from both profiles. A row can be equal, changed, or missing on one side. Compare is read-only and does not merge values.

Use Compare when deciding whether two saved profiles are equivalent, whether one profile missed a setting, or whether a policy or preference changed between versions.

Select profiles to compare

Search independently for Profile A and Profile B, select rows from bounded result lists, and review each summary.

The Compare surface is open from the Library.

Each side has its own search field and result list so you can choose profiles with similar names without mixing sides.

1. Search for Profile A in the left search field and select the intended row.

Expected result: the left selected-profile summary shows the profile name, schema channel, lifecycle, and status context.

2. Search for Profile B in the right search field and select the intended row.

Expected result: the right summary updates independently.

3. Confirm both summaries before reading the comparison table.

Warning:

Do not rely on search result position alone. Confirm identity and schema on both sides.

Profile A and Profile B are selected and ready for comparison.

Recovery: if one profile is missing, clear that side's search, refresh the Library in the original tab, and confirm the profile is saved.

Interpret the comparison table

Read policy and managed-preference rows across equal, changed, and missing states.

Profile A and Profile B are selected and the comparison table is visible.

The table compares the union of settings from both profiles. Policy rows and managed-preference rows may appear together because both can affect Firefox behavior.

1. Scan the row type to distinguish policy rows from managed-preference rows.

Expected result: you know whether the row represents a Firefox Enterprise policy or a managed preference key.

2. Read each side's value and state.

Equal rows have matching values, changed rows have different values, and missing rows exist only on one side.

3. Use missing or changed rows to decide which profile needs review.

Warning:

Compare does not apply changes. Open the relevant profile editor to update values.

You can explain whether the selected profiles are equivalent, different, or missing settings on one side.

Recovery: if rows look stale, save editor changes first and reopen Compare from the Library.

Comparison states and row types

Comparison rows explain whether a policy or managed preference is equal, changed, or missing on either side.

Row types

A policy row represents a Firefox Enterprise policy. A preference row represents a managed preference key and value.

Equal

Both profiles contain the setting and the compared values match.

Changed

Both profiles contain the setting, but Profile A and Profile B have different values or value details.

Missing

The setting exists on only one side. Review the profile where the value is missing before assuming the absence is intentional.

Recovery

If a state is unexpected, confirm both selected profiles, save any editor changes, and reopen Compare from the Library.

Resolve problems safely

Resolve a save conflict

Recover from a concurrent update or stale tab without silently losing profile changes.

A visible BPM status, validation message, browser warning, or failed action indicates that the current workflow cannot safely continue.

A save conflict means another tab or session changed the saved profile after the current editor loaded it.

1. Stop on the save-conflict panel and do not overwrite immediately.

Expected result: you preserve the profile state and understand the next safe recovery action.

2. Compare the visible profile name, schema channel, editor mode, and last saved state with the tab that produced the conflict.

Expected result: you preserve the profile state and understand the next safe recovery action.

3. Copy any unsaved draft values that must be preserved before reloading the profile.

Expected result: you preserve the profile state and understand the next safe recovery action.

4. Reload the profile or retry save only after choosing whether to keep the current draft or the newer saved state.

Warning:

Retry only from the BPM interface; do not change profile data outside the application.

The stale tab is resolved without silently discarding the current draft or the newer saved profile.

If the error repeats, stop the workflow and contact support with the visible message, profile name, schema channel, and current page.

Troubleshoot a Library operation

Recover safely from Library load, lifecycle, deletion, and action-status failures.

A Library load or row action reported an error, timed out, or left the visible rows in an unexpected state.

Troubleshooting starts by preserving context and reading the visible status before retrying.

1. Do not repeat a destructive action until the current status is clear.

Warning:

Repeating archive or permanent delete after a partial failure can hide which action actually succeeded.

2. Record the profile name, row state, filter state, and visible status message.

Expected result: you can explain what BPM showed before retrying.

3. Refresh the Library once.

If the refreshed state matches the intended result, continue from the refreshed row list.

4. If the refreshed state is still wrong, reset search and filters and inspect the profile under all lifecycle states.

This distinguishes a hidden row from a failed or completed operation.

You know whether to retry the operation, restore the profile, stop before deletion, or continue from the refreshed Library view.

If the error repeats, stop the workflow and contact support with the visible message, profile name, schema channel, and current page.

Recover from malformed JSON

Diagnose malformed JSON syntax before saving, importing, or validating a policy document.

A visible BPM status, validation message, browser warning, or failed action indicates that the current workflow cannot safely continue.

Malformed JSON is a syntax problem: BPM cannot parse the document far enough to validate policy names or values.

1. Keep the JSON editor or import error open so the line, column, or parse message remains visible.

Expected result: you preserve the profile state and understand the next safe recovery action.

2. Check the nearest braces, brackets, commas, quotation marks, and escaped characters around the reported location.

Expected result: you preserve the profile state and understand the next safe recovery action.

3. Format or validate the document again after the syntax correction.

Expected result: you preserve the profile state and understand the next safe recovery action.

4. Continue to schema validation only after the JSON parses successfully.

Warning:

Retry only from the BPM interface; do not change profile data outside the application.

The document parses as JSON and can move to normal policy validation.

If the error repeats, stop the workflow and contact support with the visible message, profile name, schema channel, and current page.

Recover from a failed import

Diagnose a failed JSON or multipart policy import from the BPM workflow.

A visible BPM status, validation message, browser warning, or failed action indicates that the current workflow cannot safely continue.

Import can fail because the file is not readable, the JSON is malformed, the Firefox boundary shape is wrong, or normalized values cannot pass validation.

1. Keep the import failure message visible and identify whether the input was JSON or multipart.

Expected result: you preserve the profile state and understand the next safe recovery action.

2. Confirm that the file contains a Firefox boundary document with a top-level policies object when JSON import is used.

Expected result: you preserve the profile state and understand the next safe recovery action.

3. If the message reports syntax, recover the malformed JSON first.

Expected result: you preserve the profile state and understand the next safe recovery action.

4. Retry import once with the corrected file and then review normalized values before saving.

Warning:

Retry only from the BPM interface; do not change profile data outside the application.

The import either succeeds into a reviewable BPM profile draft or remains blocked with a preserved visible reason.

If the error repeats, stop the workflow and contact support with the visible message, profile name, schema channel, and current page.

Interpret policy validation errors

Diagnose validation errors for unsupported policy, wrong value type, unknown entry, raw fallback, or affected policy path.

A visible BPM status, validation message, browser warning, or failed action indicates that the current workflow cannot safely continue.

Validation errors are structured feedback about the selected Firefox schema channel and the exact policy or managed preference that BPM cannot accept as ready.

1. Read the affected policy path and message before changing values.

Expected result: you preserve the profile state and understand the next safe recovery action.

2. Classify the issue as unsupported policy, wrong value type, deprecated setting, unknown entry, imported value, or raw fallback.

Expected result: you preserve the profile state and understand the next safe recovery action.

3. Use All settings or JSON to navigate to the affected location and correct only the reported value.

Expected result: you preserve the profile state and understand the next safe recovery action.

4. Revalidate the profile in the same schema channel before saving or exporting.

Warning:

Retry only from the BPM interface; do not change profile data outside the application.

The validation error is either resolved or documented as a deliberate raw/unsupported value that cannot be treated as release-ready.

If the error repeats, stop the workflow and contact support with the visible message, profile name, schema channel, and current page.

Resolve a schema mismatch

Handle unsupported schema channel, ESR/Release mismatch, or schema-dependent setting without forcing hidden data changes.

A visible BPM status, validation message, browser warning, or failed action indicates that the current workflow cannot safely continue.

Schema mismatch usually means a setting exists in one Firefox channel but is unavailable, deprecated, or shaped differently in the selected channel.

1. Confirm whether the profile targets ESR 140.13, ESR 153.0, or Release 153.

Expected result: you preserve the profile state and understand the next safe recovery action.

2. Identify the setting that is unavailable, unsupported, deprecated, or schema-dependent in that channel.

Expected result: you preserve the profile state and understand the next safe recovery action.

3. Choose whether to switch the schema channel or remove/change the affected setting for the intended Firefox target.

Expected result: you preserve the profile state and understand the next safe recovery action.

4. Revalidate and review export readiness after the channel or setting decision.

Warning:

Retry only from the BPM interface; do not change profile data outside the application.

The profile targets the intended Firefox channel and no longer hides a schema-dependent mismatch.

If the error repeats, stop the workflow and contact support with the visible message, profile name, schema channel, and current page.

Resolve profile name errors

Fix an empty, duplicate, or unclear profile name during creation or clone.

A visible BPM status, validation message, browser warning, or failed action indicates that the current workflow cannot safely continue.

Profile names identify Library rows, editor tabs, comparison choices, imports, and recovery messages, so name validation blocks ambiguous saves.

1. Read the name validation hint before changing other profile fields.

Expected result: you preserve the profile state and understand the next safe recovery action.

2. Enter a non-empty name that distinguishes the profile purpose, Firefox channel, or source file.

Expected result: you preserve the profile state and understand the next safe recovery action.

3. For clone workflows, change the suggested clone name before confirming if it duplicates an existing row.

Expected result: you preserve the profile state and understand the next safe recovery action.

4. Save or duplicate again after the name hint clears.

Warning:

Retry only from the BPM interface; do not change profile data outside the application.

The profile or clone has a unique visible name that can be found later in the Library.

If the error repeats, stop the workflow and contact support with the visible message, profile name, schema channel, and current page.

Recover from a missing profile route

Recover when a bookmark, stale tab, or editor URL reports Profile not found.

A visible BPM status, validation message, browser warning, or failed action indicates that the current workflow cannot safely continue.

A missing profile route means the URL no longer resolves to an active profile; the profile may be archived, deleted, filtered out, or already removed.

1. Return to the Library instead of editing the failed route.

Expected result: you preserve the profile state and understand the next safe recovery action.

2. Clear search and filters, then look for the profile by name, schema channel, and last known status.

Expected result: you preserve the profile state and understand the next safe recovery action.

3. Include archived profiles when the profile may have been archived deliberately.

Expected result: you preserve the profile state and understand the next safe recovery action.

4. If the profile is still missing, stop using the stale URL and continue only from a visible Library row or known export.

Warning:

Retry only from the BPM interface; do not change profile data outside the application.

You either reopen the profile from a visible Library state or confirm that the bookmarked route is no longer usable.

If the error repeats, stop the workflow and contact support with the visible message, profile name, schema channel, and current page.

Recover from product connection failure

Recover from a network, browser, or BPM API operation failure visible in Library or editor surfaces.

A visible BPM status, validation message, browser warning, or failed action indicates that the current workflow cannot safely continue.

Connection failures can result from network interruptions, server restarts, or API failures; preserve the visible context before retrying.

1. Read the visible status and identify whether the failed operation was load, save, import, export, archive, restore, delete, validation, or comparison.

Expected result: you preserve the profile state and understand the next safe recovery action.

2. Check whether other BPM surfaces in the same browser session are still responsive before retrying the same action.

Expected result: you preserve the profile state and understand the next safe recovery action.

3. Retry the failed action once after preserving unsaved changes and profile context.

Expected result: you preserve the profile state and understand the next safe recovery action.

4. If the connection or API error persists, stop editing and contact support with the visible error details.

Warning:

Retry only from the BPM interface; do not change profile data outside the application.

The workflow either resumes after a clean retry or stops with enough visible context to diagnose the product connection problem.

If the error repeats, stop the workflow and contact support with the visible message, profile name, schema channel, and current page.

Manage destructive actions safely

Cancel or confirm archive, restore, reset, remove, and permanent-delete actions deliberately.

Open BPM in the browser and keep a profile, Library, All settings, Guided, JSON, or Compare surface available.

Destructive actions can hide a profile, remove settings, reset values, or permanently delete a row after confirmation.

1. Read the action label and affected profile or setting before confirming.

Expected result: BPM keeps the selected profile, editor surface, locale, and theme clear while you work.

2. Cancel if the visible profile, lifecycle state, schema channel, or source attribution does not match the intended target.

Expected result: BPM keeps the selected profile, editor surface, locale, and theme clear while you work.

3. For permanent delete, confirm that export, comparison, and review are no longer needed.

Expected result: BPM keeps the selected profile, editor surface, locale, and theme clear while you work.

4. After confirmation, wait for the status message and refresh the Library or editor once before repeating the action.

Warning:

Save or deliberately discard changes before leaving an editor, closing a tab, or confirming an irreversible action.

The action is either canceled safely or completed with a visible status and understood impact.

Recovery: if the visible state is unclear, stop editing, read the current status message, refresh once, and reopen the profile from the Library.

Recover from unsaved changes

Avoid losing unsaved editor changes during navigation, tab close, refresh, or mode switching.

Open BPM in the browser and keep a profile, Library, All settings, Guided, JSON, or Compare surface available.

BPM warns about dirty editor state, but users still need to decide whether to save, discard, or stay on the page.

1. Stop when the browser or BPM reports unsaved changes.

Expected result: BPM keeps the selected profile, editor surface, locale, and theme clear while you work.

2. Identify the active tab, profile name, schema channel, and editor mode that contains the draft.

Expected result: BPM keeps the selected profile, editor surface, locale, and theme clear while you work.

3. Save the profile if the changes should become the new profile state, or cancel navigation to review them first.

Expected result: BPM keeps the selected profile, editor surface, locale, and theme clear while you work.

4. If you intentionally discard changes, reopen the profile from the Library and confirm the saved state before continuing.

Warning:

Save or deliberately discard changes before leaving an editor, closing a tab, or confirming an irreversible action.

You either preserve the draft by saving it or knowingly return to the last saved profile state.

Recovery: if the visible state is unclear, stop editing, read the current status message, refresh once, and reopen the profile from the Library.