M1 (liboqs 0.10.0 historical Kyber768): message-zero vs message-ones, before/after the official 982c762 fix

The two arms are separate builds (historical-clangover vs historical-fixed-982c762). M1 has no pre-registered Holm family (outside-family), so the MDE uses alpha = 0.05 without correction.

panels (a) and (b) use INDEPENDENT y-scales: the arm-to-arm level offset is a build difference, not the tested effect. The tested effect is the within-arm class0 - class1 difference, shown in panel (c).

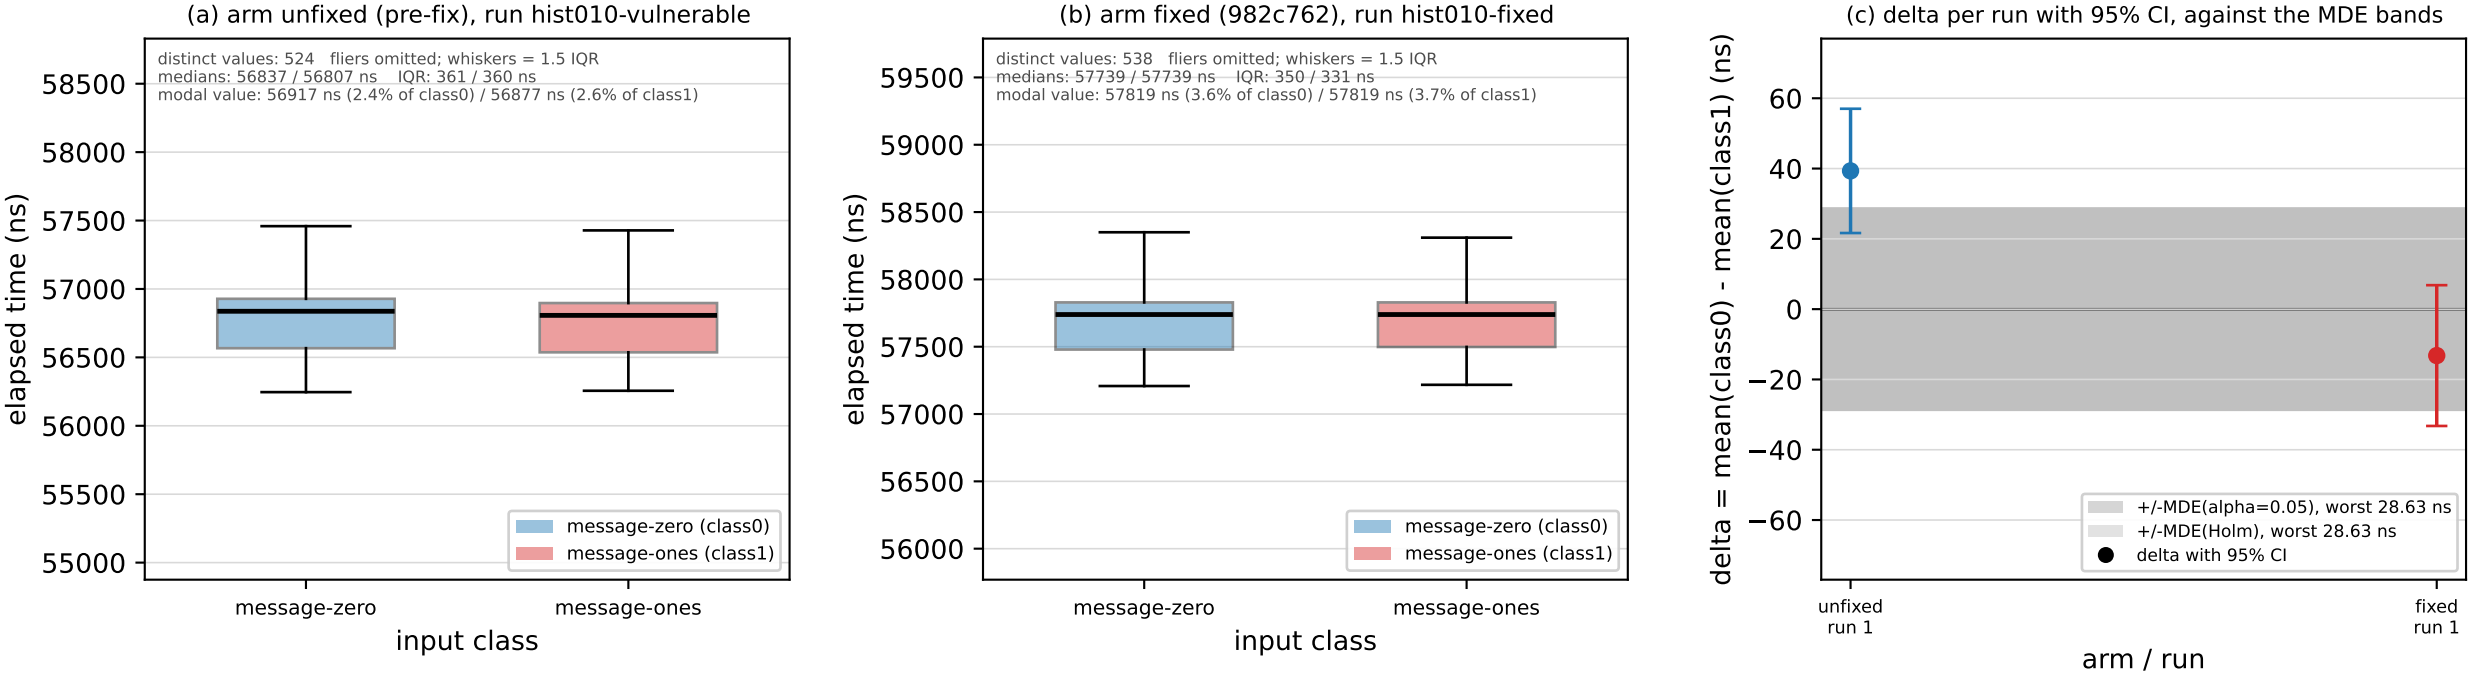

Source CSVs: docs/evidence/liboqs010-locked-20261015/runs/fixed/samples.csv; docs/evidence/liboqs010-locked-20261015/runs/vulnerable/samples.csv
Source CSV: docs/evidence/liboqs010-locked-20261015/runs/vulnerable/samples.csv
run: hist010-vulnerable | seed 31337 | taskset CPU2 | n = 10000 per class | unit: ns