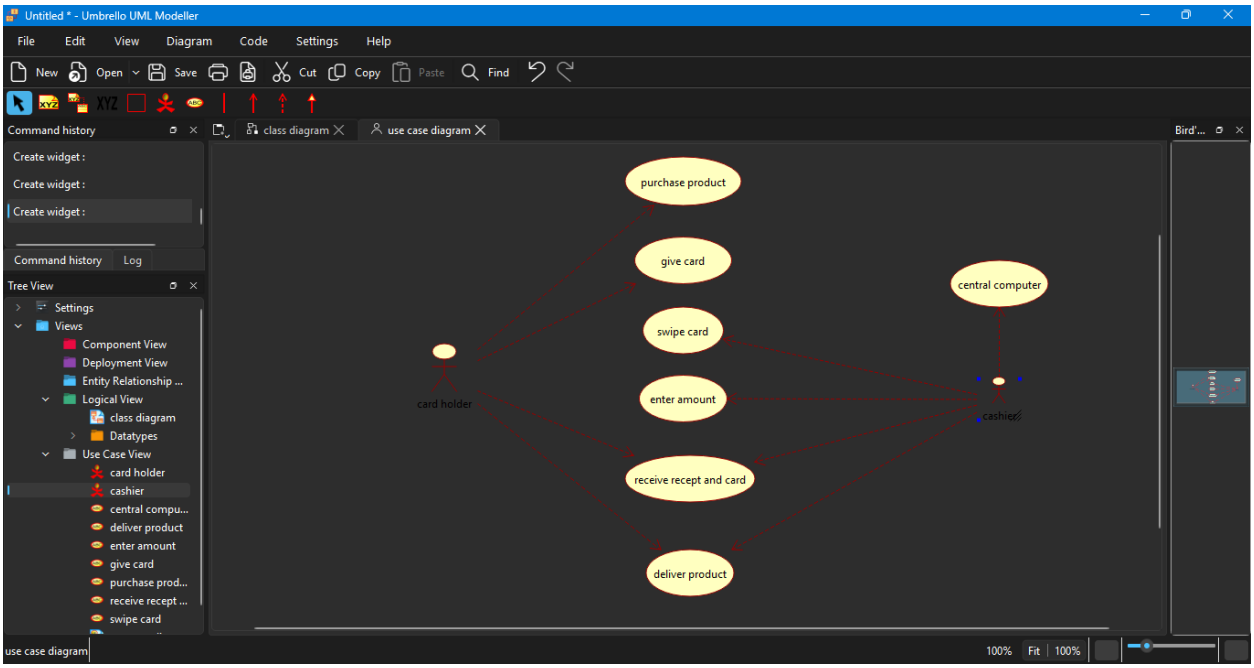
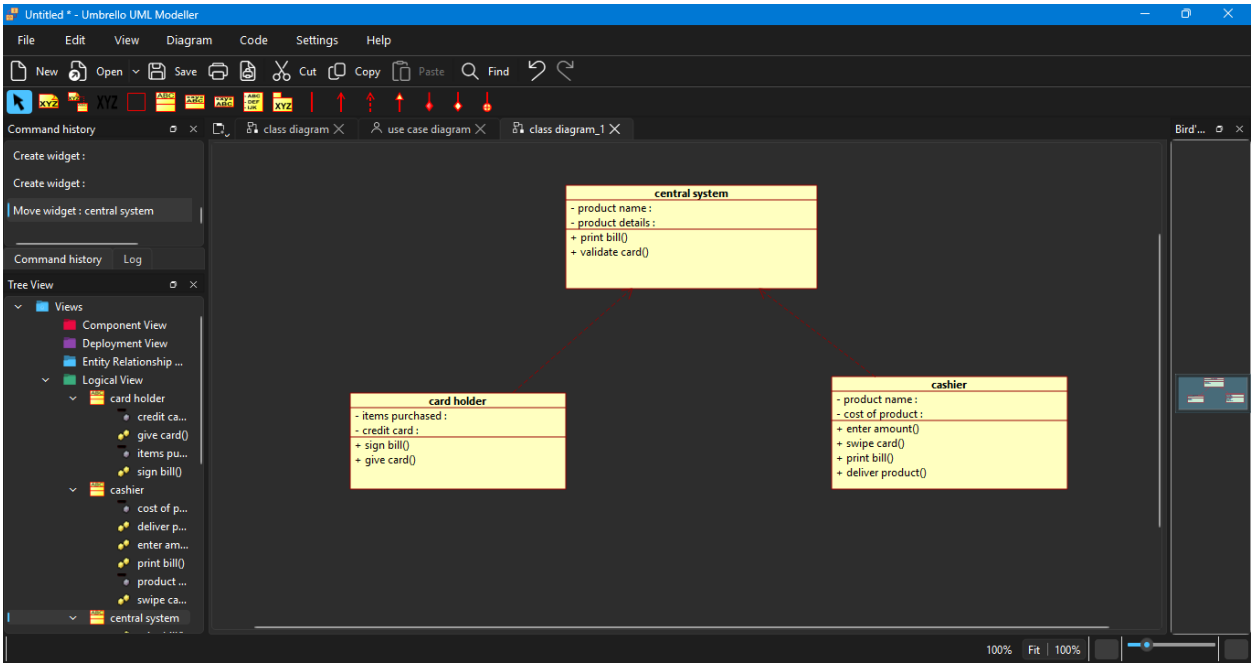
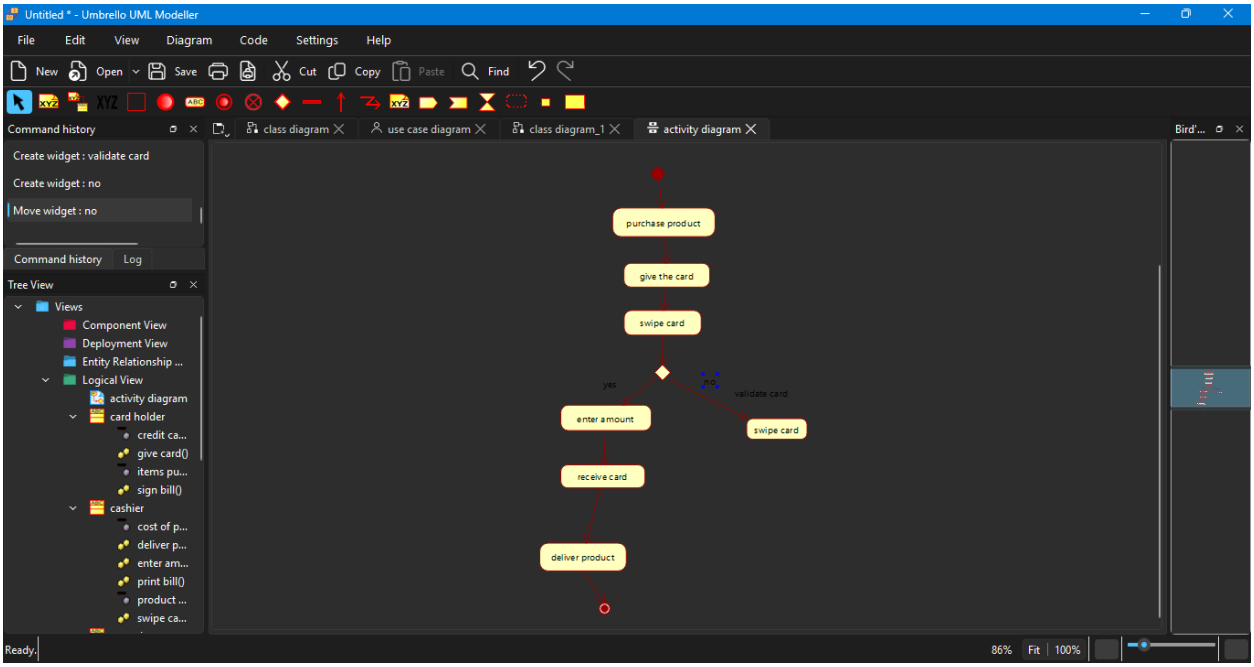
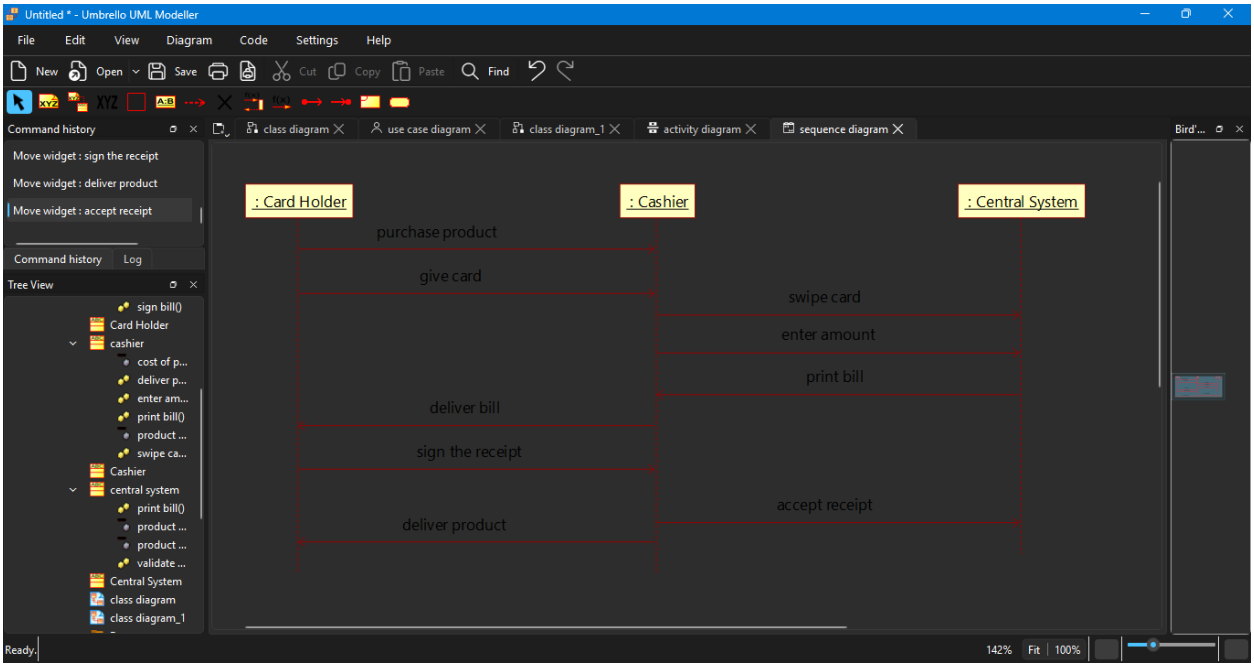
**EXP 7**

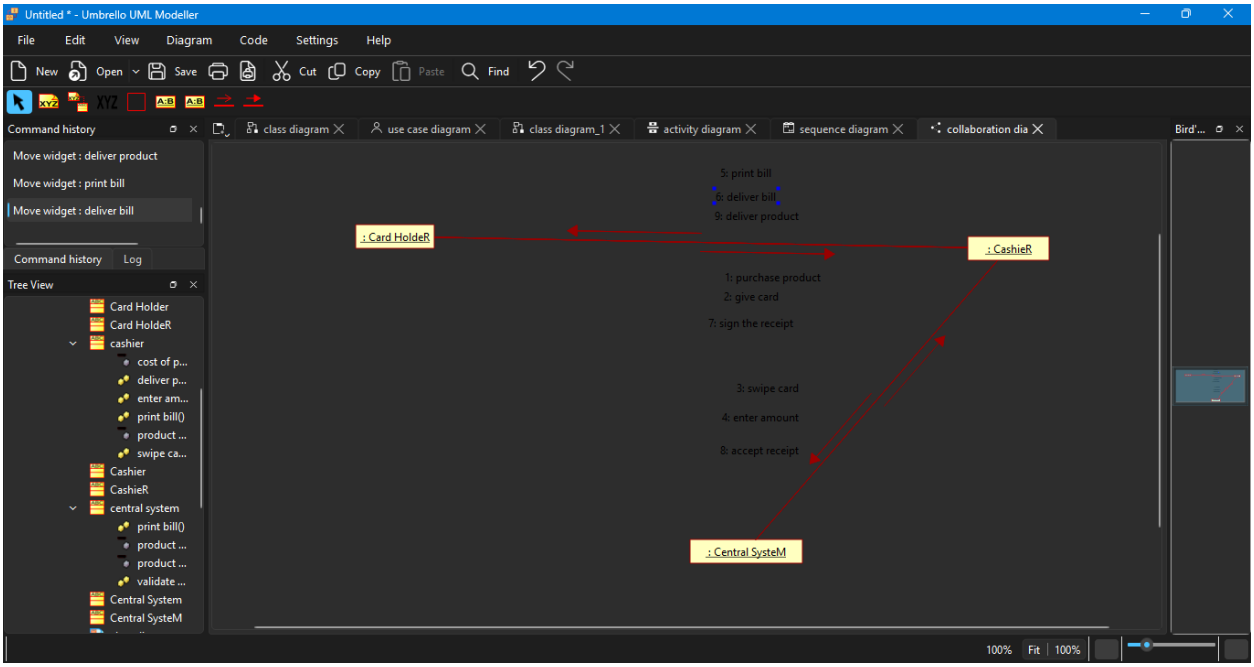
**Credit Card Processing System**

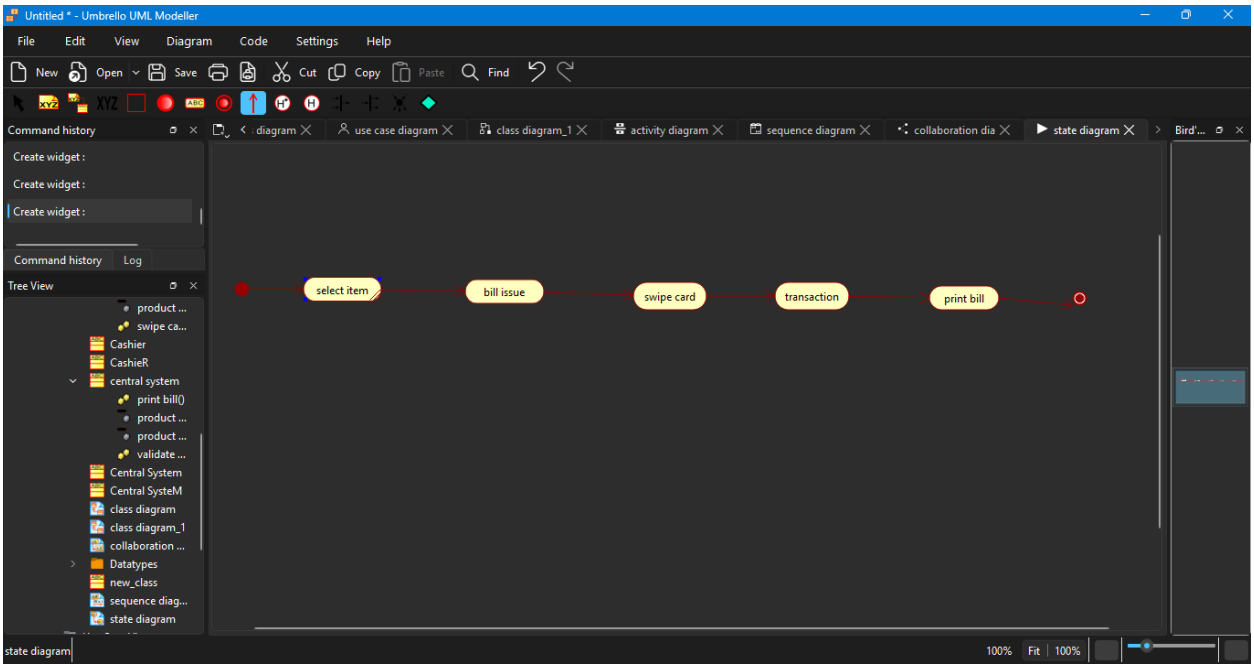


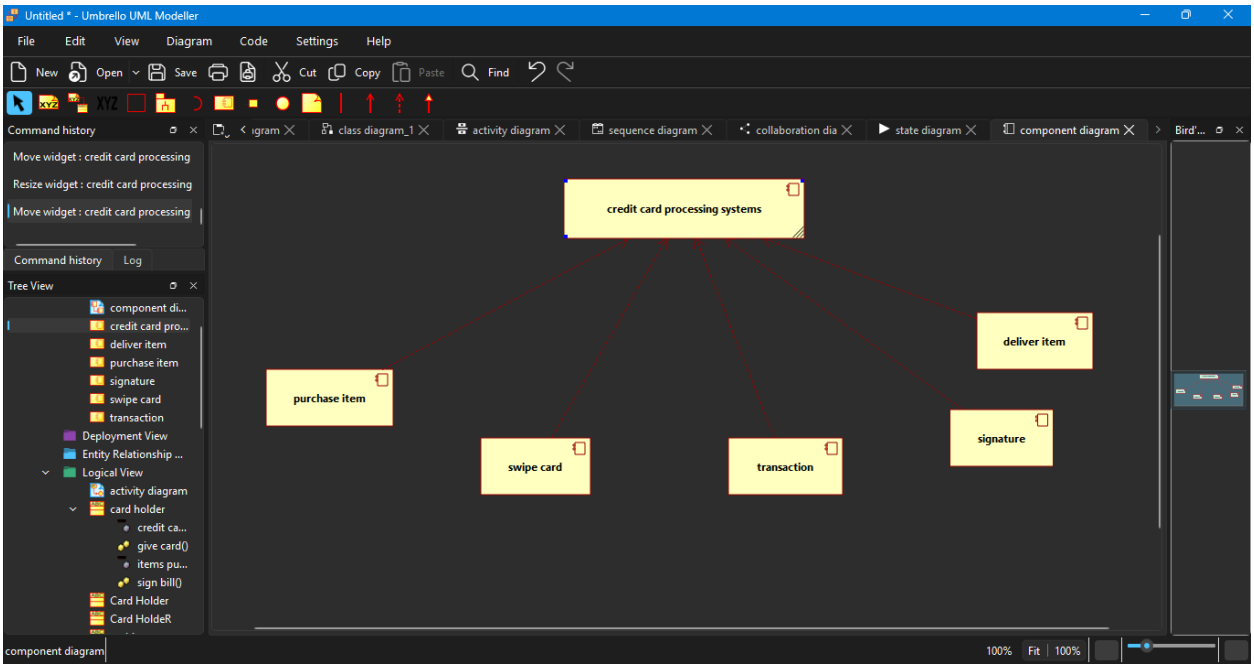



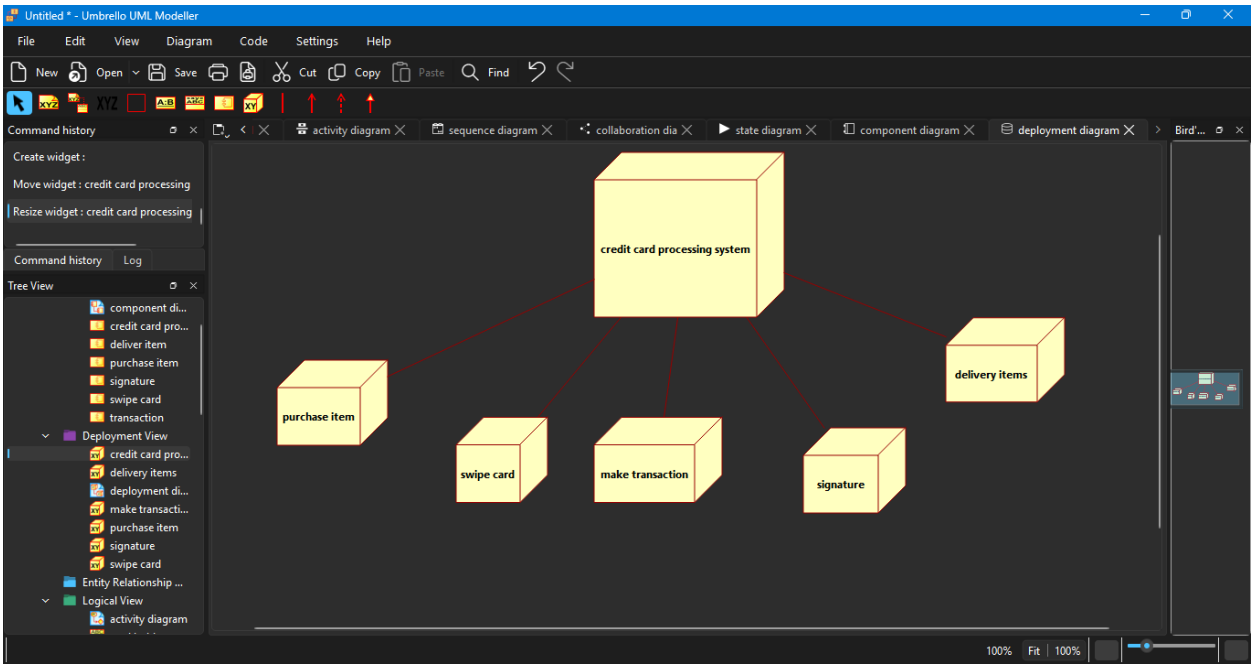

Untitled * - Umbrello UML Modeller
File Edit View Diagram Code Settings Help
New Open Save Cut Copy Paste Find
Command history
Create widget : validate card
Create widget : no
Move widget : no
Command history Log
Tree View
Views
Component View
Deployment View
Entity Relationship ...
Logical View
activity diagram
card holder
credit ca...
give card()
items pu...
sign bill()
cashier
cost of p...
deliver p...
enter am...
print bill()
product ...
swipe ca...
class diagram
use case diagram
class diagram_1
activity diagram
purchase product
give the card
swipe card
yes
validate card
enter amount
swipe card
receive card
deliver product
Ready.
86% Fit 100%

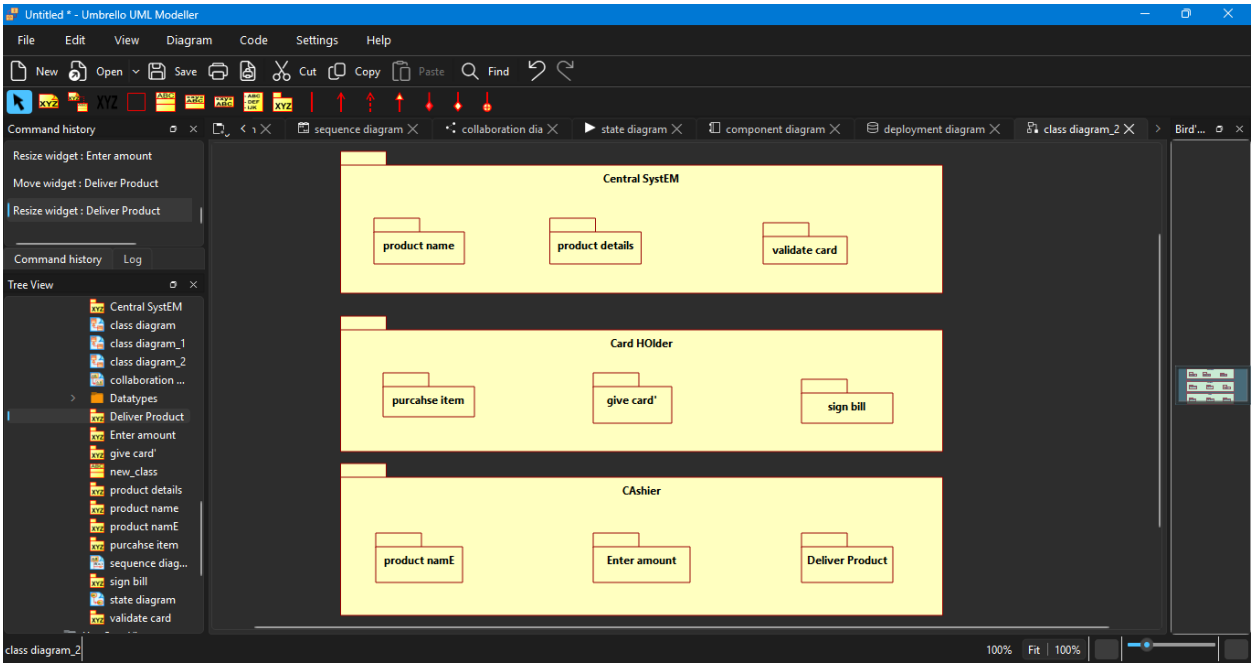

Untitled * - Umbrello UML Modeller
File Edit View Diagram Code Settings Help
New Open Save Cut Copy Paste Find
Command history
Move widget : sign the receipt
Move widget : deliver product
Move widget : accept receipt
Command history Log
Tree View
sign bill()
Card Holder
cashier
cost of p...
deliver p...
enter am...
print bill()
product ...
swipe ca...
Cashier
central system
print bill()
product ...
product ...
validate ...
Central System
class diagram
class diagram_1
class diagram
use case diagram
class diagram_1
activity diagram
sequence diagram
: Card Holder
: Cashier
: Central System
purchase product
give card
swipe card
enter amount
print bill
deliver bill
sign the receipt
accept receipt
deliver product
Ready.
142% Fit 100%

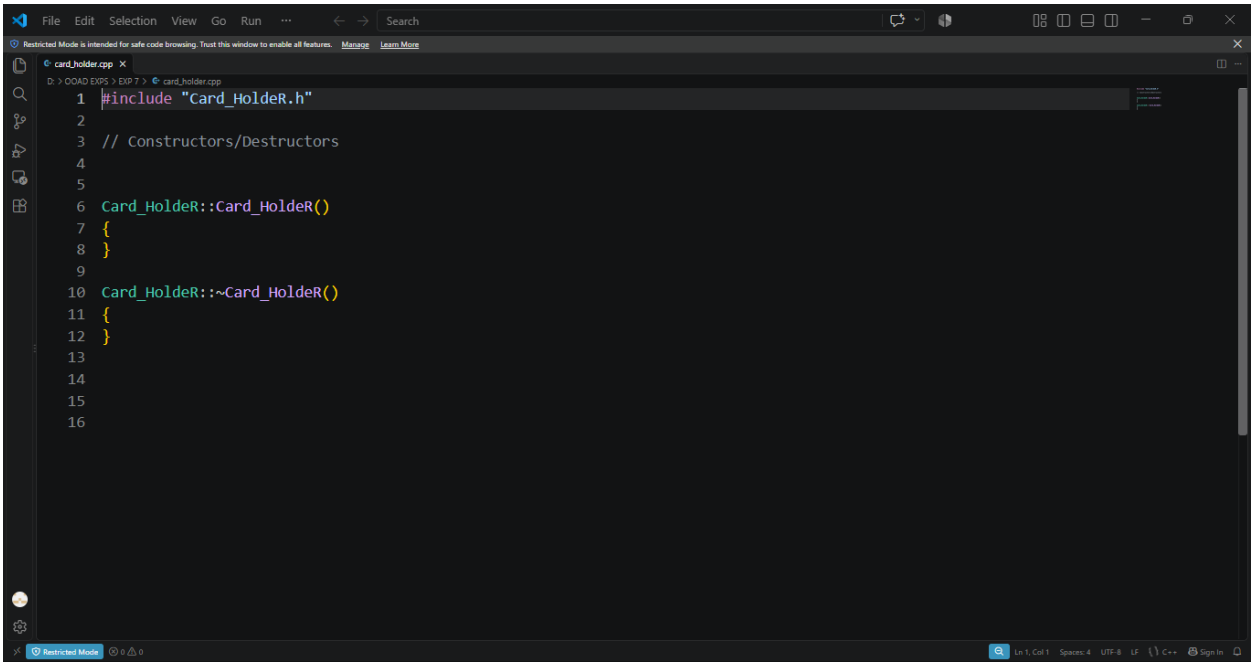

Untitled * - Umbrello UML Modeller
File
Edit
View
Diagram
Code
Settings
Help
New
Open
Save
Cut
Copy
Paste
Find
Command history
Move widget : deliver product
Move widget : print bill
Move widget : deliver bill
Command history
Log
Tree View
Card Holder
Card HoldeR
cashier
cost of p...
deliver p...
enter am...
print bill()
product ...
swipe ca...
Cashier
CashieR
central system
print bill()
product ...
product ...
validate ...
Central System
Central SysteM
class diagram
use case diagram
class diagram_1
activity diagram
sequence diagram
collaboration dia
Bird'...
5: print bill
6: deliver bill
9: deliver product
: Card HoldeR
: CashieR
1: purchase product
2: give card
7: sign the receipt
3: swipe card
4: enter amount
8: accept receipt
: Central SysteM
100%
Fit
100%

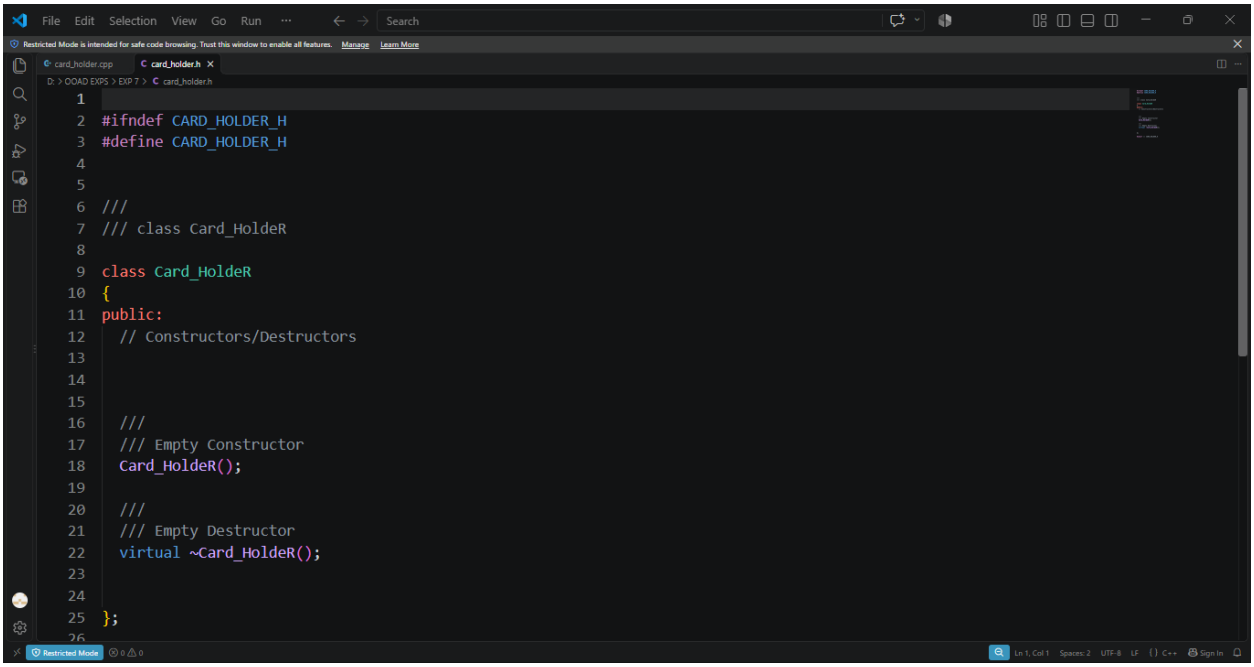

Untitled * - Umbrello UML Modeller
File
Edit
View
Diagram
Code
Settings
Help
New
Open
Save
Cut
Copy
Paste
Find
Command history
Create widget :
Create widget :
Create widget :
Command history
Log
Tree View
product ...
swipe ca...
Cashier
CashieR
central system
print bill()
product ...
product ...
validate ...
Central System
Central SysteM
class diagram
class diagram_1
collaboration ...
Datatypes
new_class
sequence diag...
state diagram
diagram
use case diagram
class diagram_1
activity diagram
sequence diagram
collaboration dia
state diagram
Bird'...
select item
bill issue
swipe card
transaction
print bill
state diagram
100%
Fit
100%

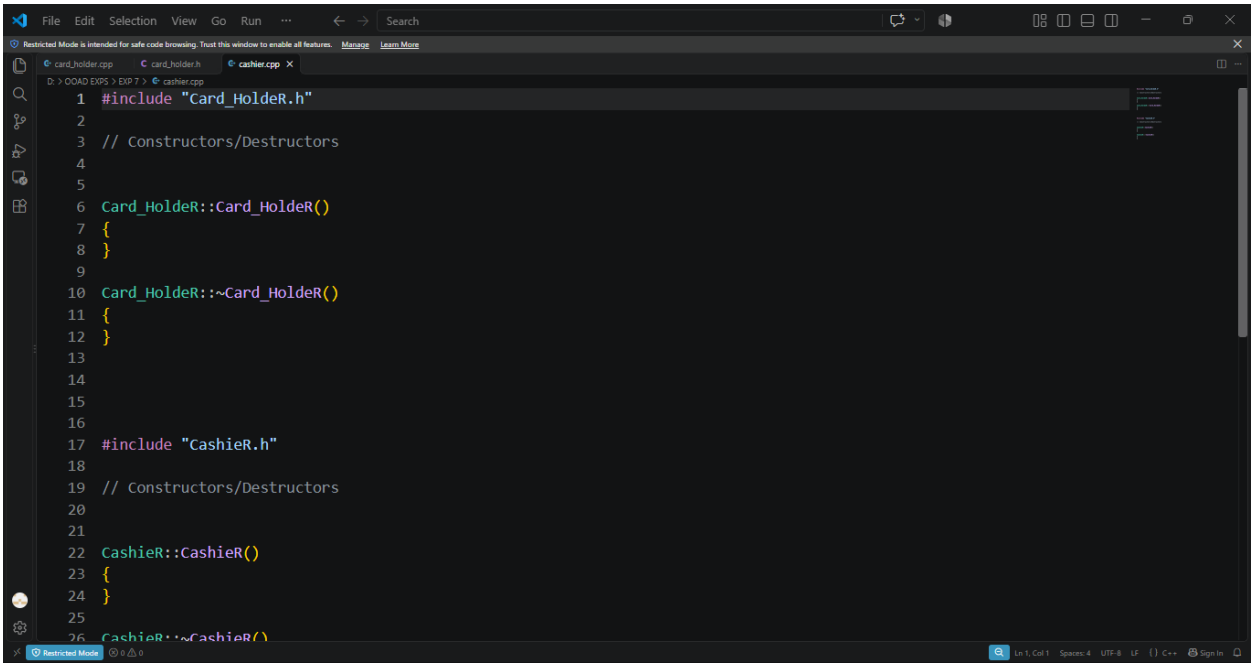

Untitled * - Umbrello UML Modeller
File
Edit
View
Diagram
Code
Settings
Help
New
Open
Save
Cut
Copy
Paste
Find
Command history
Move widget : credit card processing
Resize widget : credit card processing
Move widget : credit card processing
Command history
Log
Tree View
component di...
credit card pro...
deliver item
purchase item
signature
swipe card
transaction
Deployment View
Entity Relationship ...
Logical View
activity diagram
card holder
credit ca...
give card()
items pu...
sign bill()
Card Holder
Card HoldeR
class diagram_1
activity diagram
sequence diagram
collaboration dia
state diagram
component diagram
credit card processing systems
deliver item
purchase item
signature
swipe card
transaction
component diagram
100%
Fit
100%

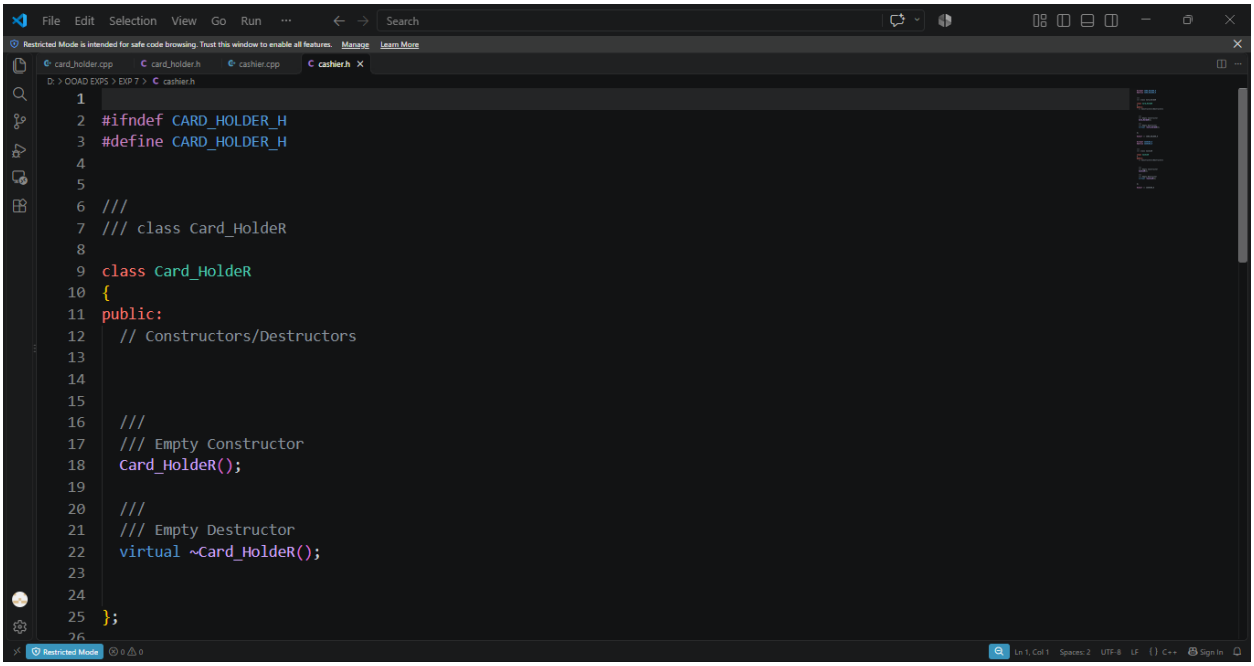

Untitled * - Umbrello UML Modeller
File
Edit
View
Diagram
Code
Settings
Help
New
Open
Save
Cut
Copy
Paste
Find
Command history
Create widget :
Move widget : credit card processing
Resize widget : credit card processing
Command history
Log
Tree View
component di...
credit card pro...
deliver item
purchase item
signature
swipe card
transaction
Deployment View
credit card pro...
delivery items
deployment di...
make transacti...
purchase item
signature
swipe card
Entity Relationship ...
Logical View
activity diagram
activity diagram
sequence diagram
collaboration dia
state diagram
component diagram
deployment diagram
credit card processing system
delivery items
purchase item
swipe card
make transaction
signature
100%
Fit
100%

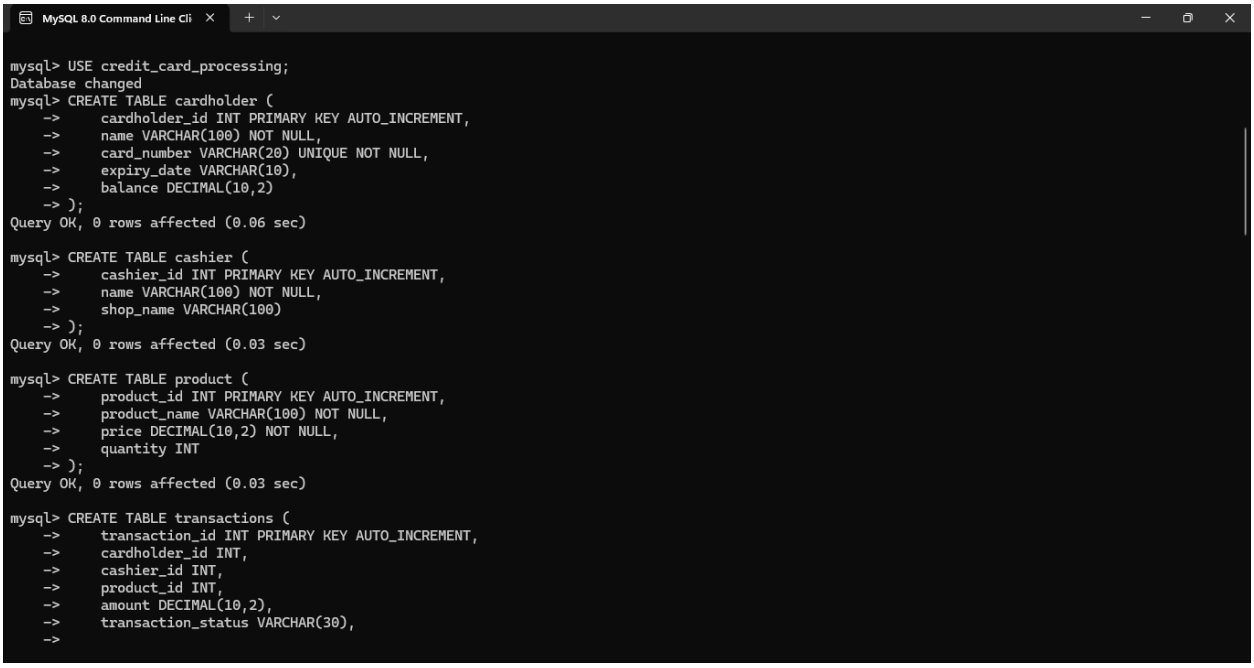

Untitled * - Umbrello UML Modeller
File
Edit
View
Diagram
Code
Settings
Help
New
Open
Save
Cut
Copy
Paste
Find
Command history
Resize widget : Enter amount
Move widget : Deliver Product
Resize widget : Deliver Product
Command history
Log
Tree View
Central SystEM
class diagram
class diagram_1
class diagram_2
collaboration ...
Datatypes
Deliver Product
Enter amount
give card'
new_class
product details
product name
product namE
purcahse item
sequence diag...
sign bill
state diagram
validate card
sequence diagram
collaboration dia
state diagram
component diagram
deployment diagram
class diagram_2
Central SystEM
product name
product details
validate card
Card HOlder
purcahse item
give card'
sign bill
CAshier
product namE
Enter amount
Deliver Product
class diagram_2
100%
Fit
100%

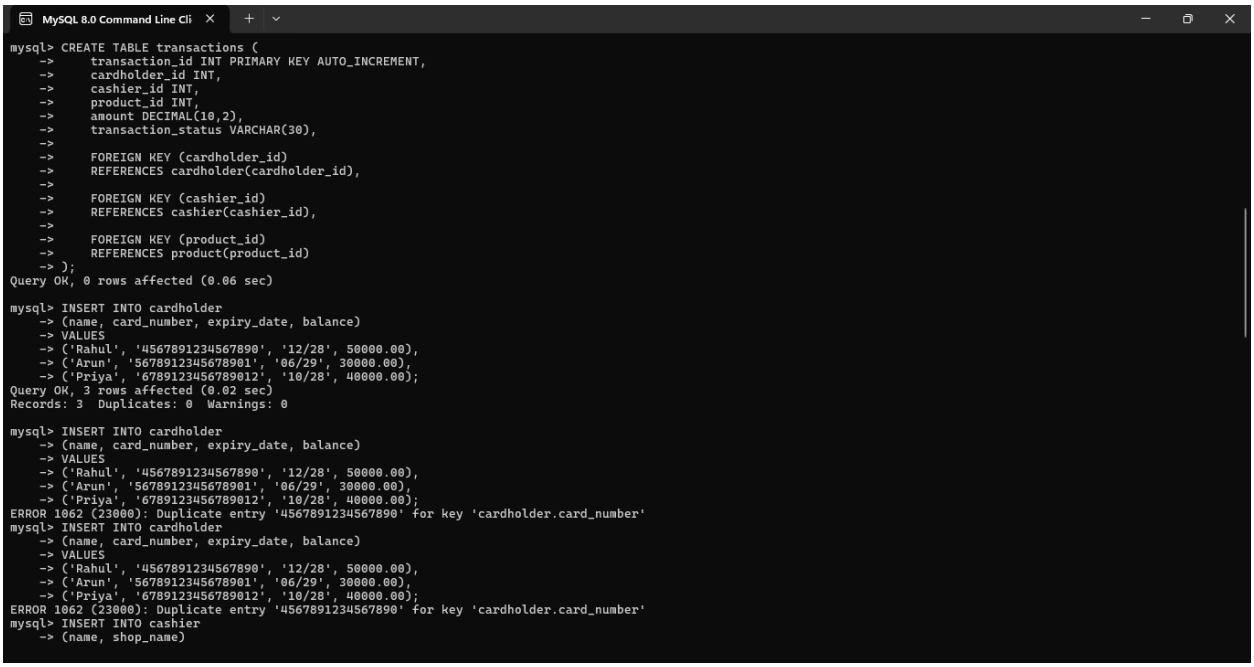

File
Edit
Selection
View
Go
Run
Search
card_holder.cpp
#include "Card_HolderR.h"
// Constructors/Destructors
Card_HolderR::Card_HolderR()
{
}
Card_HolderR::~Card_HolderR()
{
}


File Edit Selection View Go Run
Search
Restricted Mode is intended for safe code browsing. Trust this window to enable all features. Manage Learn More
card_holder.cpp
card_holder.h
D: > OOAD EXPS > EXP 7 > card_holder.h
#ifndef CARD_HOLDER_H
#define CARD_HOLDER_H
///
/// class Card_HolderR
class Card_HolderR
{
public:
// Constructors/Destructors
///
/// Empty Constructor
Card_HolderR();
///
/// Empty Destructor
virtual ~Card_HolderR();
};
Restricted Mode


File Edit Selection View Go Run
Search
Restricted Mode is intended for safe code browsing. Trust this window to enable all features. Manage Learn More
card_holder.cpp
card_holder.h
cashier.cpp
D: > OOAD EXPS > EXP 7 > cashier.cpp
#include "Card_HolderR.h"
// Constructors/Destructors
Card_HolderR::Card_HolderR()
{
}
Card_HolderR::~Card_HolderR()
{
}
#include "CashieR.h"
// Constructors/Destructors
CashieR::CashieR()
{
}
Restricted Mode


File Edit Selection View Go Run
Search
Restricted Mode is intended for safe code browsing. Trust this window to enable all features. Manage Learn More
card_holder.cpp
card_holder.h
cashier.cpp
cashier.h
D: > OOAD EXPS > EXP 7 > cashier.h
#ifndef CARD_HOLDER_H
#define CARD_HOLDER_H
///
/// class Card_HolderR
class Card_HolderR
{
public:
// Constructors/Destructors
///
/// Empty Constructor
Card_HolderR();
///
/// Empty Destructor
virtual ~Card_HolderR();
};
Restricted Mode

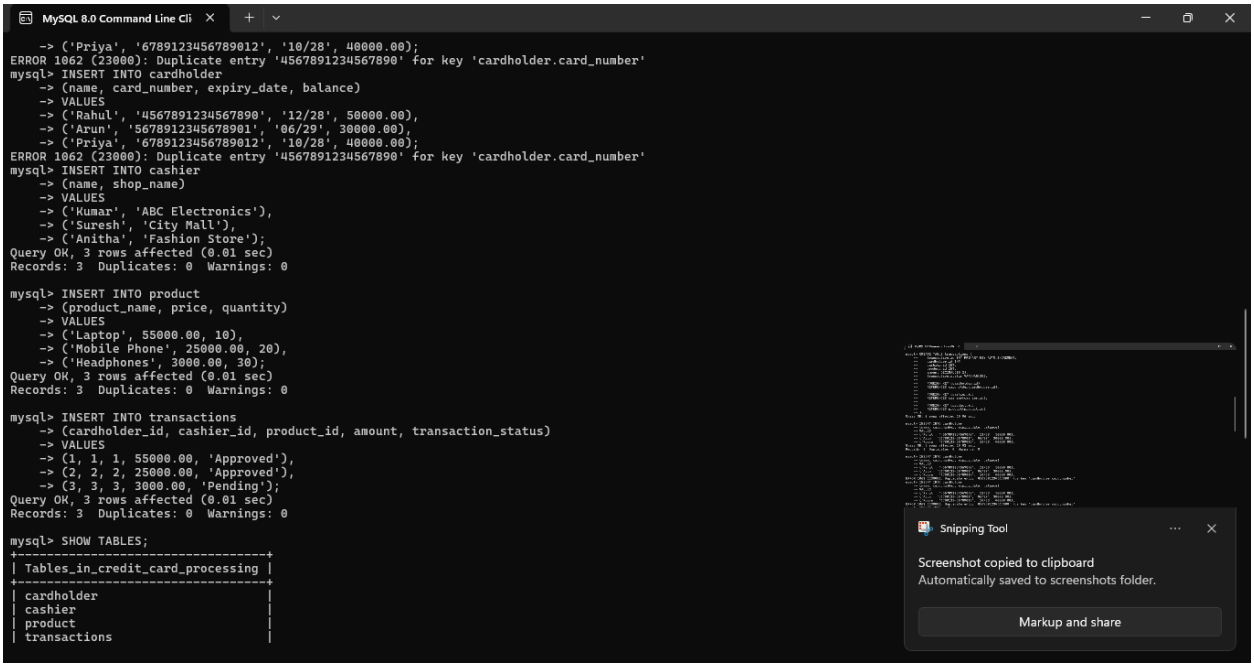

MySQL 8.0 Command Line Cli
mysql> USE credit_card_processing;
Database changed
mysql> CREATE TABLE cardholder (
-> cardholder_id INT PRIMARY KEY AUTO_INCREMENT,
-> name VARCHAR(100) NOT NULL,
-> card_number VARCHAR(20) UNIQUE NOT NULL,
-> expiry_date VARCHAR(10),
-> balance DECIMAL(10,2)
-> );
Query OK, 0 rows affected (0.06 sec)
mysql> CREATE TABLE cashier (
-> cashier_id INT PRIMARY KEY AUTO_INCREMENT,
-> name VARCHAR(100) NOT NULL,
-> shop_name VARCHAR(100)
-> );
Query OK, 0 rows affected (0.03 sec)
mysql> CREATE TABLE product (
-> product_id INT PRIMARY KEY AUTO_INCREMENT,
-> product_name VARCHAR(100) NOT NULL,
-> price DECIMAL(10,2) NOT NULL,
-> quantity INT
-> );
Query OK, 0 rows affected (0.03 sec)
mysql> CREATE TABLE transactions (
-> transaction_id INT PRIMARY KEY AUTO_INCREMENT,
-> cardholder_id INT,
-> cashier_id INT,
-> product_id INT,
-> amount DECIMAL(10,2),
-> transaction_status VARCHAR(30),
->




```
mysql> CREATE TABLE transactions (
    ->     transaction_id INT PRIMARY KEY AUTO_INCREMENT,
    ->     cardholder_id INT,
    ->     cashier_id INT,
    ->     product_id INT,
    ->     amount DECIMAL(10,2),
    ->     transaction_status VARCHAR(30),
    ->
    ->     FOREIGN KEY (cardholder_id)
    ->     REFERENCES cardholder(cardholder_id),
    ->
    ->     FOREIGN KEY (cashier_id)
    ->     REFERENCES cashier(cashier_id),
    ->
    ->     FOREIGN KEY (product_id)
    ->     REFERENCES product(product_id)
    -> );
Query OK, 0 rows affected (0.06 sec)

mysql> INSERT INTO cardholder
    -> (name, card_number, expiry_date, balance)
    -> VALUES
    -> ('Rahul', '4567891234567890', '12/28', 50000.00),
    -> ('Arun', '5678912345678901', '06/29', 30000.00),
    -> ('Priya', '6789123456789012', '10/28', 40000.00);
Query OK, 3 rows affected (0.02 sec)
Records: 3  Duplicates: 0  Warnings: 0

mysql> INSERT INTO cardholder
    -> (name, card_number, expiry_date, balance)
    -> VALUES
    -> ('Rahul', '4567891234567890', '12/28', 50000.00),
    -> ('Arun', '5678912345678901', '06/29', 30000.00),
    -> ('Priya', '6789123456789012', '10/28', 40000.00);
ERROR 1062 (23000): Duplicate entry '4567891234567890' for key 'cardholder.card_number'
mysql> INSERT INTO cardholder
    -> (name, card_number, expiry_date, balance)
    -> VALUES
    -> ('Rahul', '4567891234567890', '12/28', 50000.00),
    -> ('Arun', '5678912345678901', '06/29', 30000.00),
    -> ('Priya', '6789123456789012', '10/28', 40000.00);
ERROR 1062 (23000): Duplicate entry '4567891234567890' for key 'cardholder.card_number'
mysql> INSERT INTO cashier
    -> (name, shop_name)
```

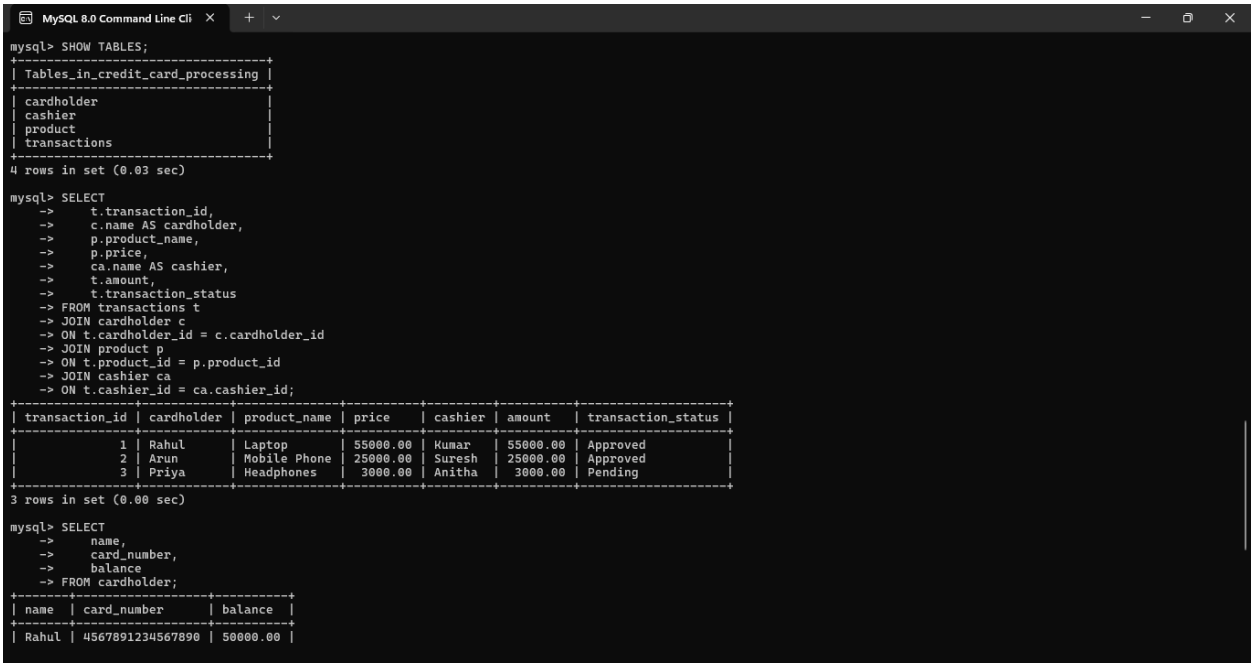



```
    -> ('Priya', '6789123456789012', '10/28', 40000.00);
ERROR 1062 (23000): Duplicate entry '4567891234567890' for key 'cardholder.card_number'
mysql> INSERT INTO cardholder
    -> (name, card_number, expiry_date, balance)
    -> VALUES
    -> ('Rahul', '4567891234567890', '12/28', 50000.00),
    -> ('Arun', '5678912345678901', '06/29', 30000.00),
    -> ('Priya', '6789123456789012', '10/28', 40000.00);
ERROR 1062 (23000): Duplicate entry '4567891234567890' for key 'cardholder.card_number'
mysql> INSERT INTO cashier
    -> (name, shop_name)
    -> VALUES
    -> ('Kumar', 'ABC Electronics'),
    -> ('Suresh', 'City Mall'),
    -> ('Anitha', 'Fashion Store');
Query OK, 3 rows affected (0.01 sec)
Records: 3  Duplicates: 0  Warnings: 0

mysql> INSERT INTO product
    -> (product_name, price, quantity)
    -> VALUES
    -> ('Laptop', 55000.00, 10),
    -> ('Mobile Phone', 25000.00, 20),
    -> ('Headphones', 3000.00, 30);
Query OK, 3 rows affected (0.01 sec)
Records: 3  Duplicates: 0  Warnings: 0

mysql> INSERT INTO transactions
    -> (cardholder_id, cashier_id, product_id, amount, transaction_status)
    -> VALUES
    -> (1, 1, 1, 55000.00, 'Approved'),
    -> (2, 2, 2, 25000.00, 'Approved'),
    -> (3, 3, 3, 3000.00, 'Pending');
Query OK, 3 rows affected (0.01 sec)
Records: 3  Duplicates: 0  Warnings: 0

mysql> SHOW TABLES;
+---------------------------------+
| Tables_in_credit_card_processing |
+---------------------------------+
| cardholder                      |
| cashier                         |
| product                         |
| transactions                    |
```

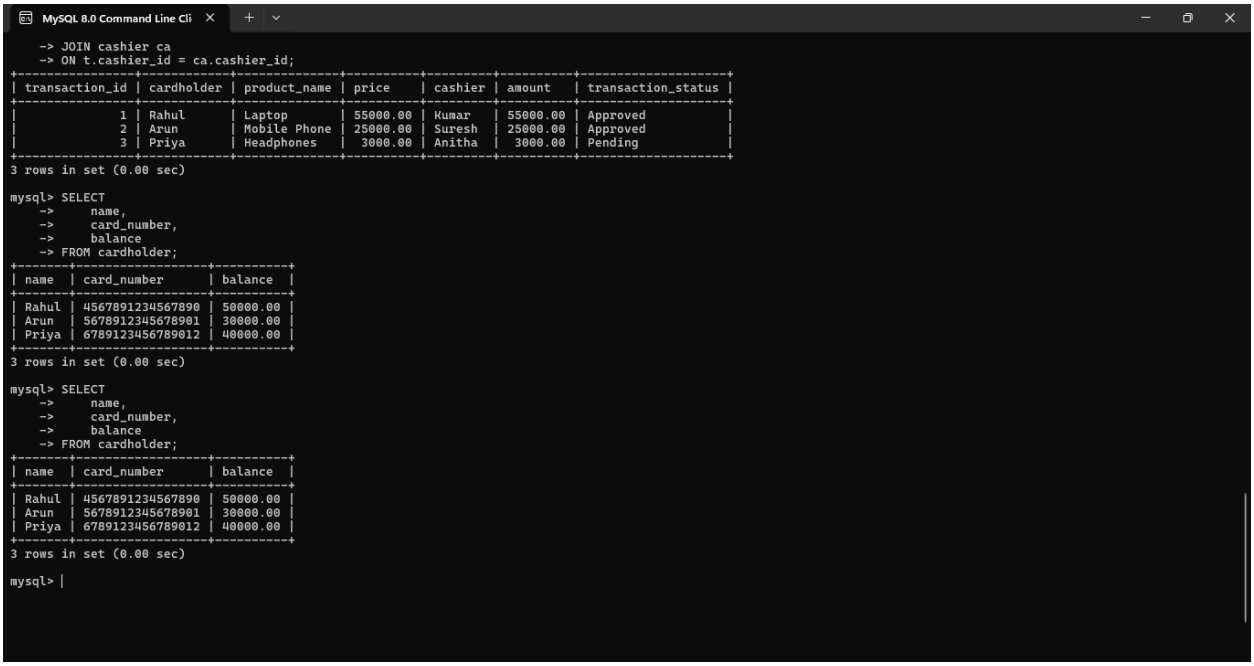


```
MySQL 8.0 Command Line Cli

mysql> SHOW TABLES;
+----------------------------------+
| Tables_in_credit_card_processing |
+----------------------------------+
| cardholder                       |
| cashier                          |
| product                          |
| transactions                     |
+----------------------------------+
4 rows in set (0.03 sec)

mysql> SELECT
    ->     t.transaction_id,
    ->     c.name AS cardholder,
    ->     p.product_name,
    ->     p.price,
    ->     ca.name AS cashier,
    ->     t.amount,
    ->     t.transaction_status
    -> FROM transactions t
    -> JOIN cardholder c
    -> ON t.cardholder_id = c.cardholder_id
    -> JOIN product p
    -> ON t.product_id = p.product_id
    -> JOIN cashier ca
    -> ON t.cashier_id = ca.cashier_id;
+----------------+------------+--------------+----------+---------+----------+--------------------+
| transaction_id | cardholder | product_name | price    | cashier | amount   | transaction_status |
+----------------+------------+--------------+----------+---------+----------+--------------------+
|              1 | Rahul      | Laptop       | 55000.00 | Kumar   | 55000.00 | Approved           |
|              2 | Arun       | Mobile Phone | 25000.00 | Suresh  | 25000.00 | Approved           |
|              3 | Priya      | Headphones   |  3000.00 | Anitha  |  3000.00 | Pending            |
+----------------+------------+--------------+----------+---------+----------+--------------------+
3 rows in set (0.00 sec)

mysql> SELECT
    ->     name,
    ->     card_number,
    ->     balance
    -> FROM cardholder;
+-------+------------------+----------+
| name  | card_number      | balance  |
+-------+------------------+----------+
| Rahul | 4567891234567890 | 50000.00 |
```



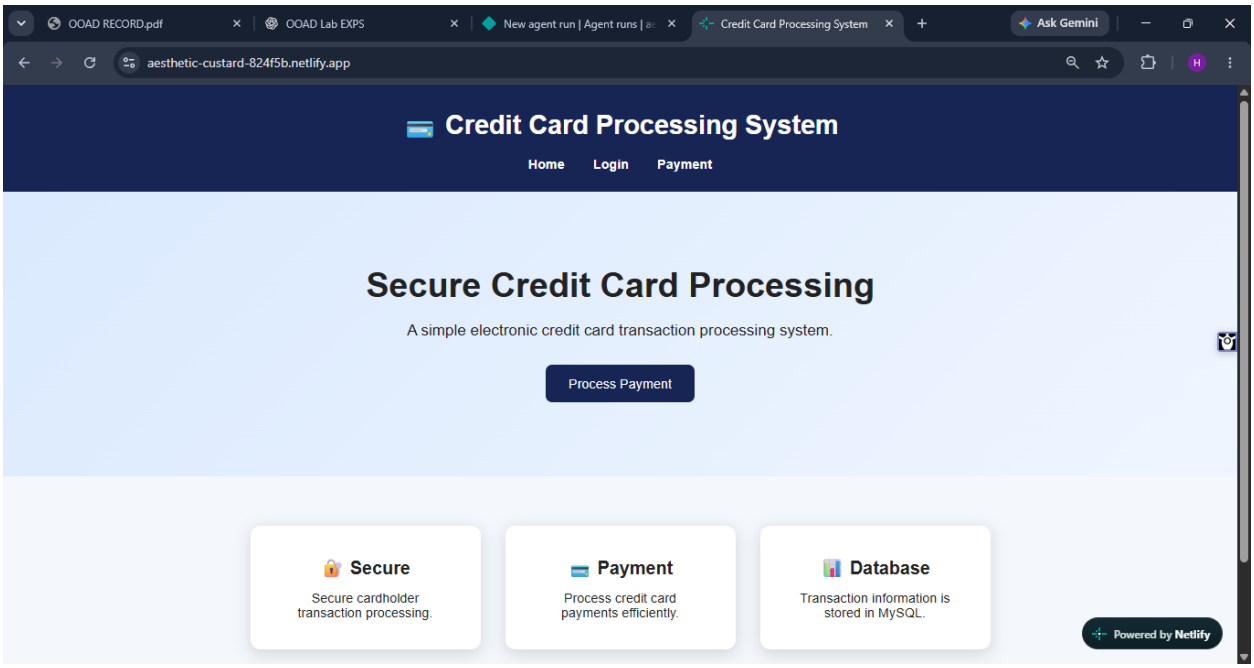
```
MySQL 8.0 Command Line Cli

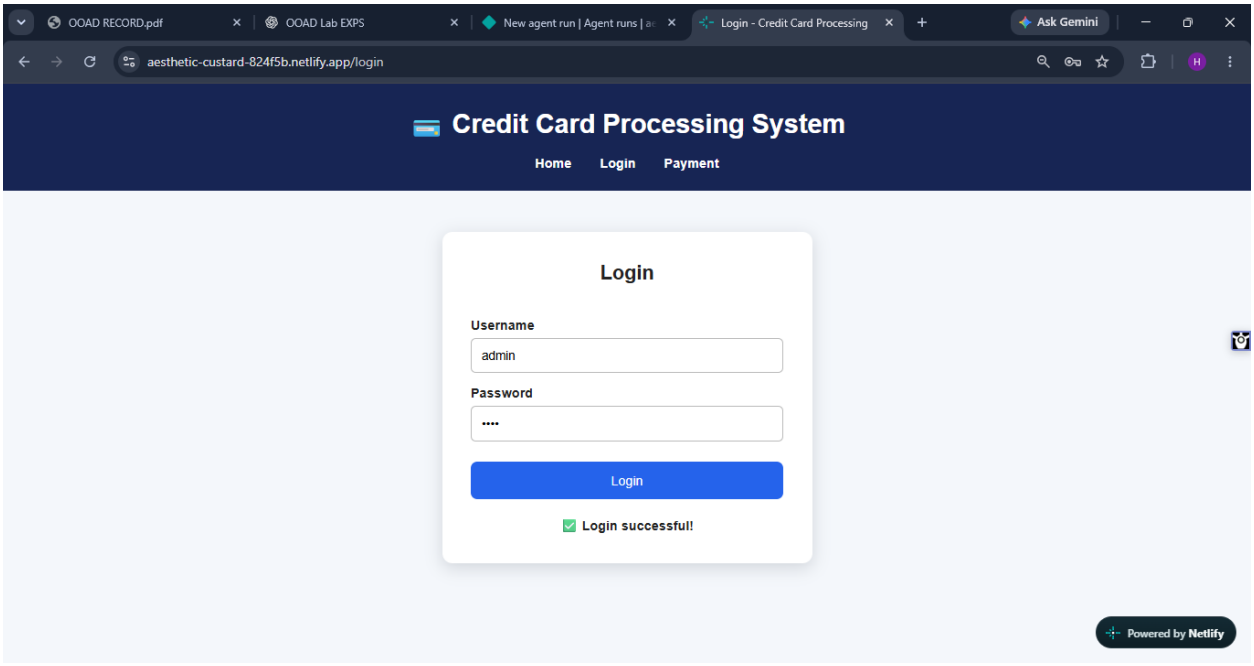
    -> JOIN cashier ca
    -> ON t.cashier_id = ca.cashier_id;
+----------------+------------+--------------+----------+---------+----------+--------------------+
| transaction_id | cardholder | product_name | price    | cashier | amount   | transaction_status |
+----------------+------------+--------------+----------+---------+----------+--------------------+
|              1 | Rahul      | Laptop       | 55000.00 | Kumar   | 55000.00 | Approved           |
|              2 | Arun       | Mobile Phone | 25000.00 | Suresh  | 25000.00 | Approved           |
|              3 | Priya      | Headphones   |  3000.00 | Anitha  |  3000.00 | Pending            |
+----------------+------------+--------------+----------+---------+----------+--------------------+
3 rows in set (0.00 sec)

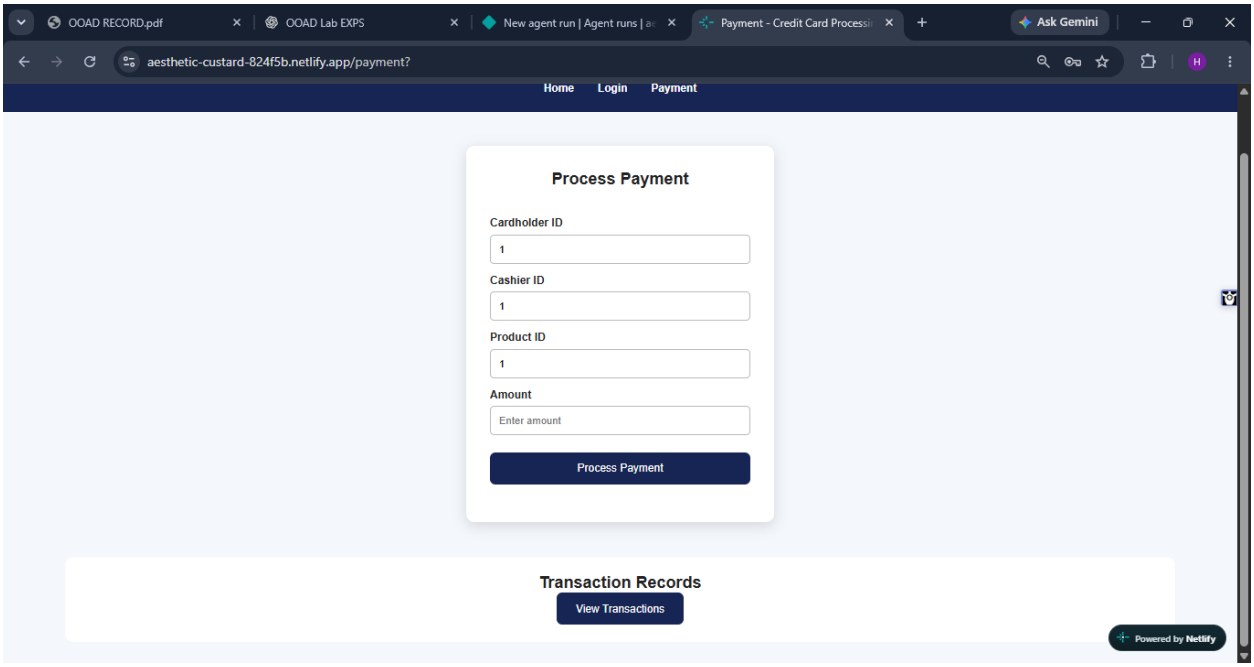
mysql> SELECT
    ->     name,
    ->     card_number,
    ->     balance
    -> FROM cardholder;
+-------+------------------+----------+
| name  | card_number      | balance  |
+-------+------------------+----------+
| Rahul | 4567891234567890 | 50000.00 |
| Arun  | 5678912345678901 | 30000.00 |
| Priya | 6789123456789012 | 40000.00 |
+-------+------------------+----------+
3 rows in set (0.00 sec)

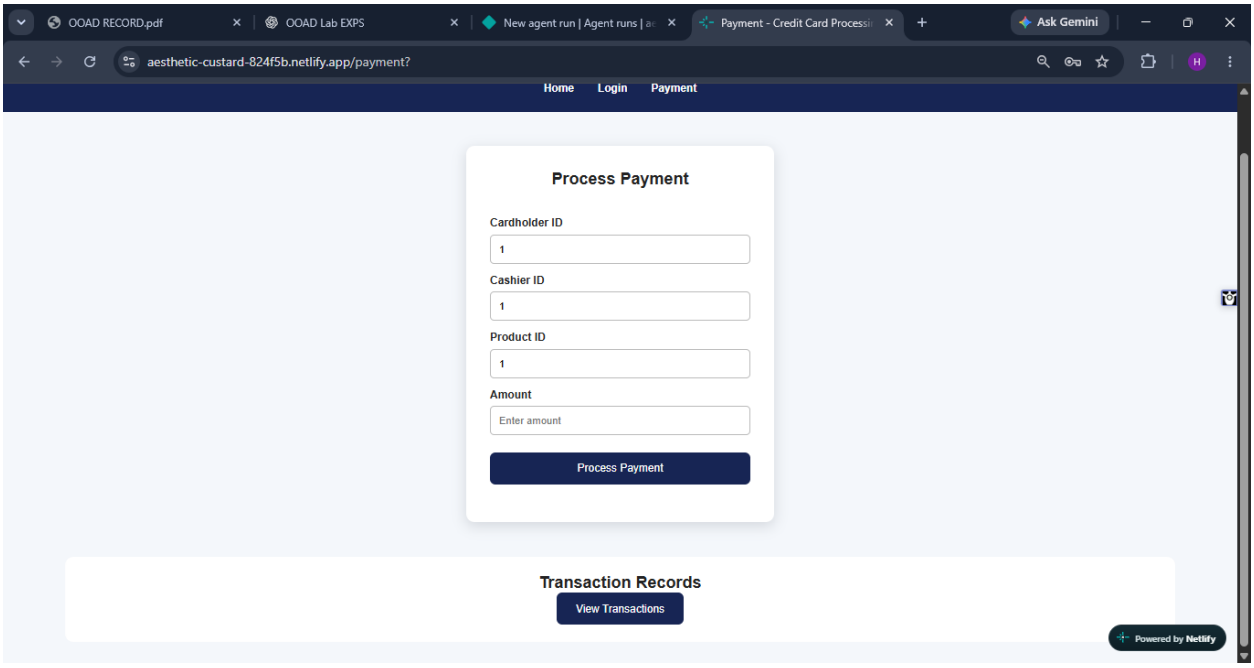
mysql> SELECT
    ->     name,
    ->     card_number,
    ->     balance
    -> FROM cardholder;
+-------+------------------+----------+
| name  | card_number      | balance  |
+-------+------------------+----------+
| Rahul | 4567891234567890 | 50000.00 |
| Arun  | 5678912345678901 | 30000.00 |
| Priya | 6789123456789012 | 40000.00 |
+-------+------------------+----------+
3 rows in set (0.00 sec)

mysql>
```


OOAD RECORD.pdf
OOAD Lab EXPS
New agent run | Agent runs | ae
Credit Card Processing System
Ask Gemini
aesthetic-custard-824f5b.netlify.app
Credit Card Processing System
Home
Login
Payment
Secure Credit Card Processing
A simple electronic credit card transaction processing system.
Process Payment
Secure
Secure cardholder transaction processing.
Payment
Process credit card payments efficiently.
Database
Transaction information is stored in MySQL.
Powered by Netlify


OOAD RECORD.pdf
OOAD Lab EXPS
New agent run | Agent runs | ae
Login - Credit Card Processing
Ask Gemini
aesthetic-custard-824f5b.netlify.app/login
Credit Card Processing System
Home
Login
Payment
Login
Username
admin
Password
Login
Login successful!
Powered by Netlify


OOAD RECORD.pdf
OOAD Lab EXPS
New agent run | Agent runs |
Payment - Credit Card Processi
Ask Gemini
aesthetic-custard-824f5b.netlify.app/payment?
Home
Login
Payment
Process Payment
Cardholder ID
1
Cashier ID
1
Product ID
1
Amount
Enter amount
Process Payment
Transaction Records
View Transactions
Powered by Netlify


OOAD RECORD.pdf
OOAD Lab EXPS
New agent run | Agent runs |
Payment - Credit Card Processi
Ask Gemini
aesthetic-custard-824f5b.netlify.app/payment?
Home
Login
Payment
Process Payment
Cardholder ID
1
Cashier ID
1
Product ID
1
Amount
Enter amount
Process Payment
Transaction Records
View Transactions
Powered by Netlify