

WEEK 4 – Loan Microservice

Objective

To develop a RESTful Loan Microservice using Spring Boot that returns loan details based on the loan number.

1.LoanApplication.java

```
package com.cognizant;

import org.springframework.boot.SpringApplication;
import org.springframework.boot.autoconfigure.SpringBootApplication;

@SpringBootApplication

public class LoanApplication {

    public static void main(String[] args) {

        SpringApplication.run(LoanApplication.class, args);

    }

}
```

2.Loan.java

```
package com.cognizant.model;

public class Loan {
```

```
private String number;
```

```
private String type;
```

```
private double loan;
```

```
public Loan() {
```

```
}
```

```
public Loan(String number, String type, double loan) {
```

```
    this.number = number;
```

```
    this.type = type;
```

```
    this.loan = loan;
```

```
}
```

```
public String getNumber() {
```

```
    return number;
```

```
}
```

```
public void setNumber(String number) {
```

```
    this.number = number;
```

```
}
```

```
public String getType() {
```

```
    return type;
```

```
}
```

```
public void setType(String type) {  
    this.type = type;  
}
```

```
public double getLoan() {  
    return loan;  
}
```

```
public void setLoan(double loan) {  
    this.loan = loan;  
}  
}
```

3.LoanController.java

```
package com.cognizant.controller;
```

```
import com.cognizant.model.Loan;
```

```
import org.springframework.web.bind.annotation.GetMapping;
```

```
import org.springframework.web.bind.annotation.PathVariable;
```

```
import org.springframework.web.bind.annotation.RestController;
```

```
@RestController
```

```
public class LoanController {
```

```
@GetMapping("/loans/{number}")
```

```
public Loan getLoan(@PathVariable String number) {
```

```
    return new Loan(
```

```
        number,
```

```
        "Car Loan",
```

```
        500000.00
```

```
    );
```


```
}
```



```
}
```

4.applications.properties

```
spring.application.name=loan
```

```
server.port=8080
```

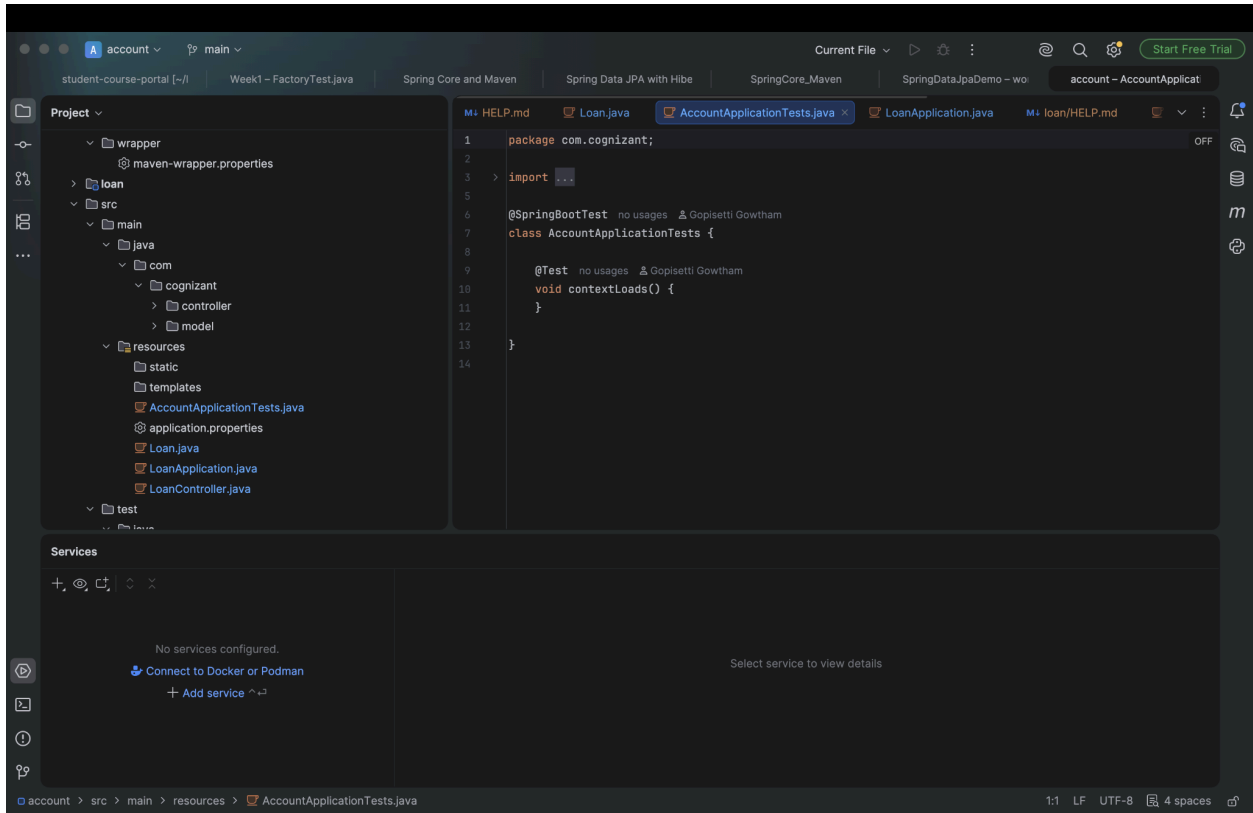

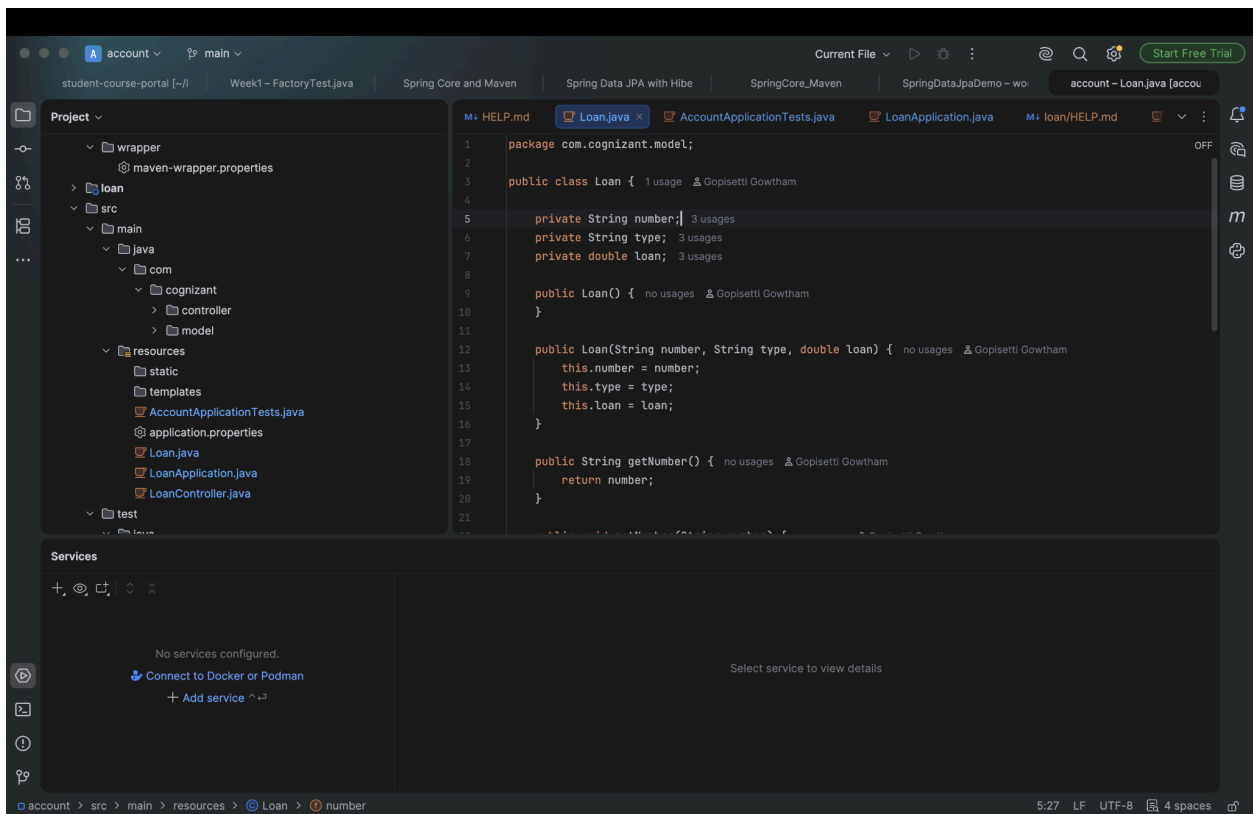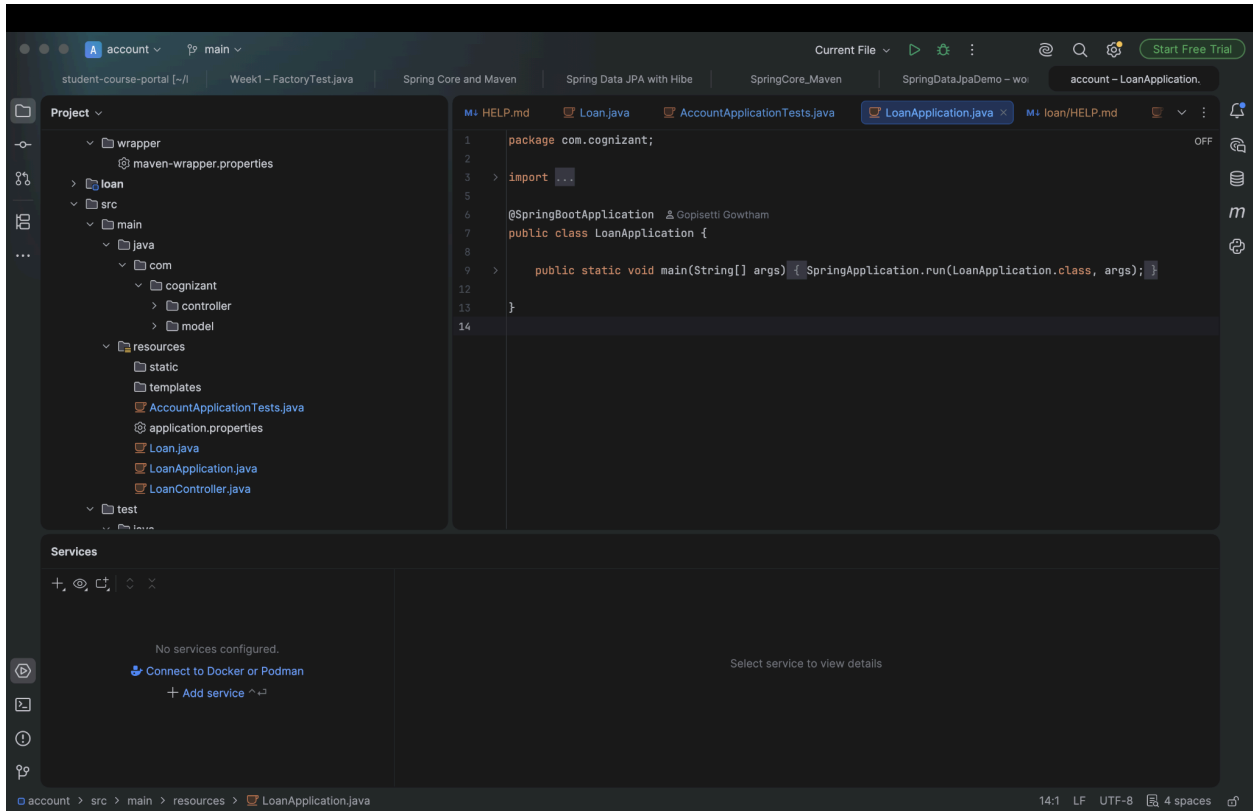

```
{"number": "H00987987972342", "type": "car", "loan": 400000, "emi": 3258, "tenure": 18}
```