

AEM Training - Day 3 Assignment (20-03-2025)

Output Screenshots : [Click here](#)

Day 2 (20-03-2025)

1. Create a New Component with News Headline, News Detail, Published Date, Image, and Titles Using Sling Model

Answer:

We will create a new **News Component** using the **Sling Model** to display a **news headline, news detail, published date, image, and titles**.

Steps:

1. Create a new component at `apps/gowthamxeno/components/news`.
2. Implement a Sling Model for this component.
3. Map component fields (`newsHeadline`, `newsDetail`, `newsPublishDate`, `newsImg`, `newsTitle`).
4. Update `news.html` to display these fields.

Code Snippet (`NewsModel.java`):

```
@Model(adaptables = Resource.class)
public class NewsModel {

    @Inject
    private String newsHeadline;

    @ValueMapValue
    private String newsDetail;

    @ValueMapValue
    private Date newsPublishDate;

    @ValueMapValue
    private String newsImg;

    @ValueMapValue
    private List<String> newsTitle;

    public String getNewsDetail() {
        return newsDetail;
    }

    public Date getNewsPublishDate() {
        return newsPublishDate;
    }
}
```

```
    }

    public String getNewsImg() {
        return newsImg;
    }

    public String getNewsHeadline() {
        return newsHeadline;
    }


    public List<String> getNewsTitle() {
        if (newsTitle != null) {
            return new ArrayList<String>(newsTitle);
        } else {
            return Collections.emptyList();
        }
    }
}
```

Code Snippet (news.html):


```
<div class="news-item">
    <h2>${newsModel.newsHeadline}</h2>
    <p>${newsModel.newsDetail}</p>
    <span>${newsModel.newsPublishDate}</span>
    
    <ul>
        <sly data-sly-list.title="${newsModel.newsTitle}">
            <li>${title}</li>
        </sly>
    </ul>
</div>
```

Screenshots

1. News Component

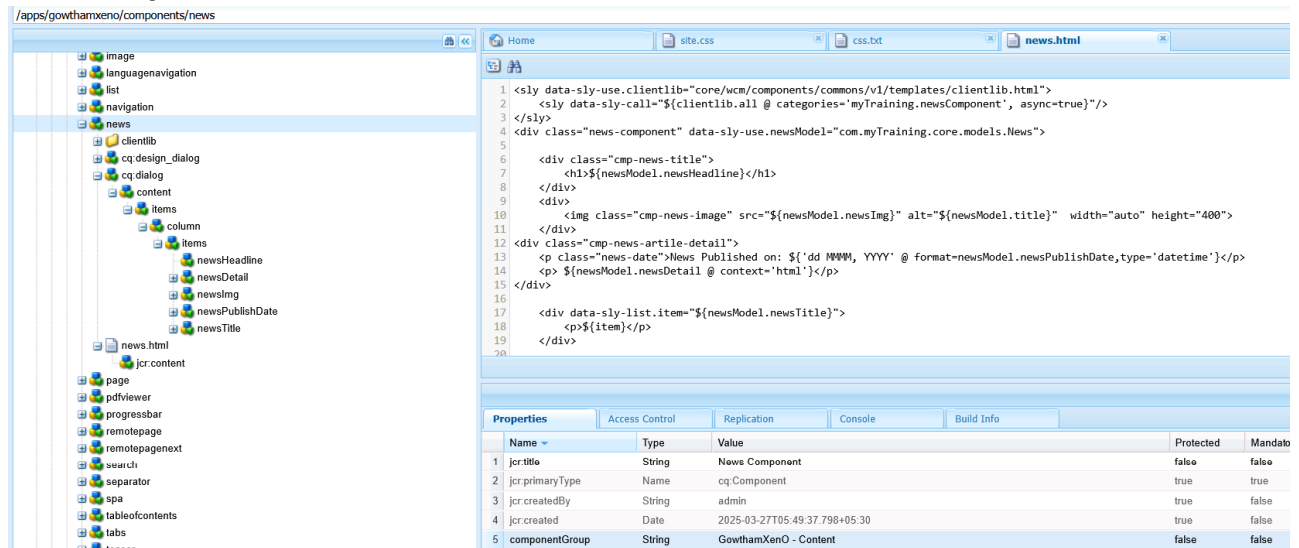

2. Cq:Dialog

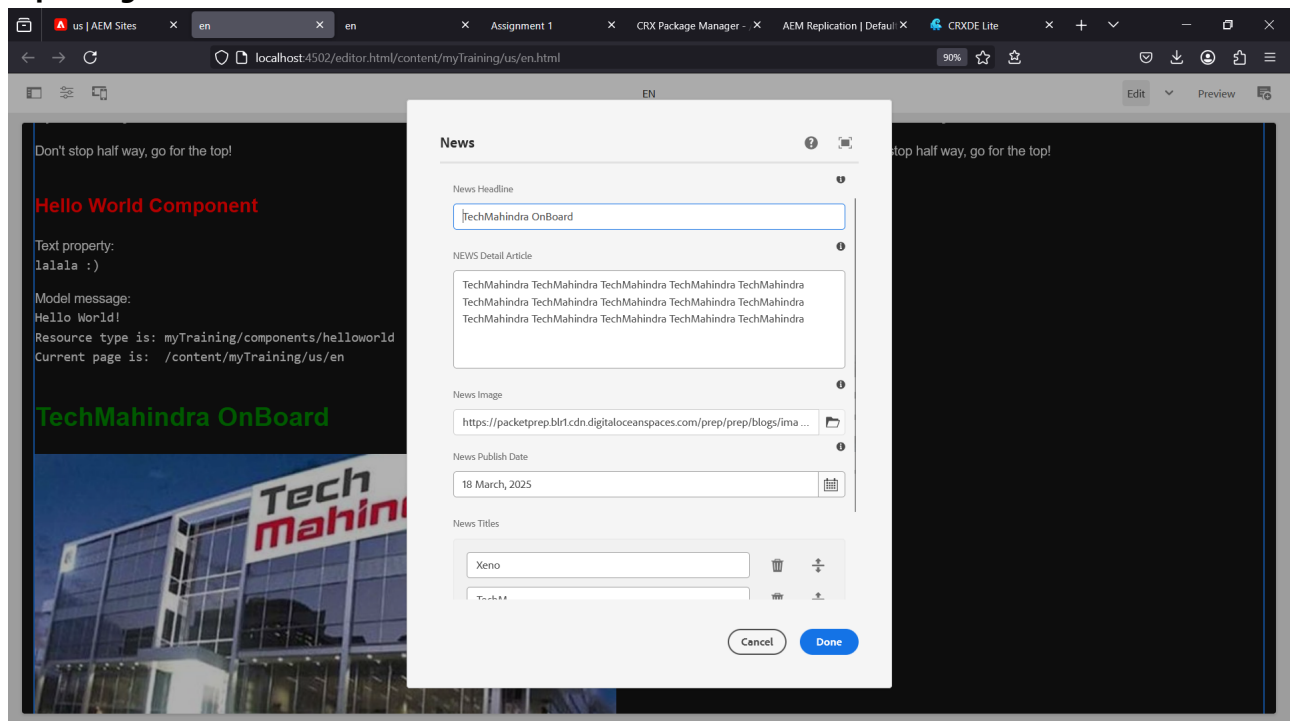

2. Create a Multi-field Component (Multiple News) Using Sling Model

Answer:

A multi-field component allows authors to add **multiple news items** dynamically.

Steps:

1. Create a multi-field component at `apps/gowthamxeno/components/multi-news`.
2. Implement a **Sling Model List**.
3. Map fields: **title** and **source**.
4. Update `multi-news.html` to loop through news items.

Code Snippet (MultiNewsModel.java):

```
@Model(adaptables = Resource.class)
public class MultiNewsModel {
    @Inject
    @Children
    private List<NewsModel> newsList;


    public List<NewsModel> getNewsList() { return newsList; }
}
```

Code Snippet (multi-news.html):

```
<div class="multi-news">
    <sly data-sly-list.newsItem="${multiNewsModel.newsList}">
        <h2>${newsItem.title}</h2>
        <p>${newsItem.source}</p>
    </sly>
</div>
```

Screenshots

1. Multi-news

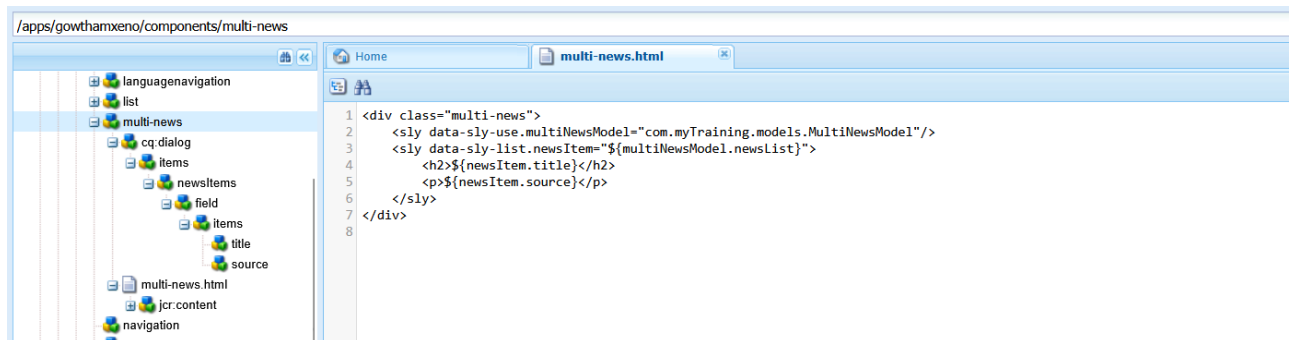

3. Create Clientlibs for News Component

Answer:

Clientlibs are used to **apply styles and scripts** to components.

Steps:

1. Create a clientlib at `apps/gowthamxeno/clientlibs/news`.
2. Include **CSS and JS** files.
3. Add clientlib categories in the component.

Code Snippet (clientlibs/news/css.txt):


```
news.css
```

Code Snippet (style.css):

```
.news-component h1{
color:green;
}
.news-component p{
color:yellow;
}
.news-date p{
color:black
}
```

Screenshots

1. Clientlib

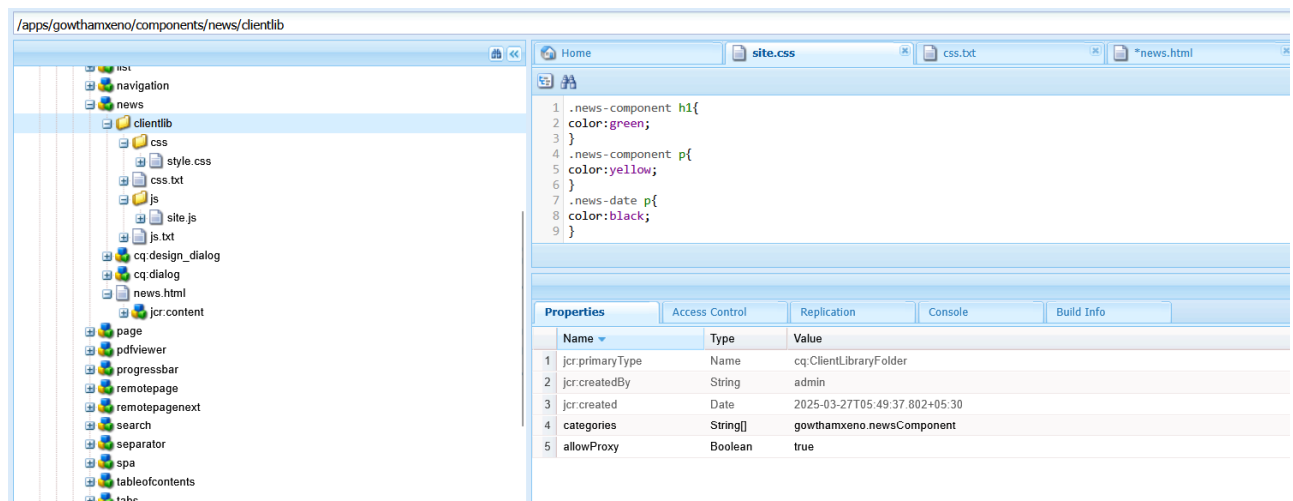

4. Apply Green Color to Heading (h2), Yellow to News Detail (p), and Black to Date

Answer:

This is done using **CSS** inside the `clientlibs/news`.


Code Snippet:

```
.news-component h1{
color:green;
}
.news-component p{
color:yellow;
}
.news-date p{
```

```
color:black  
}
```

Screenshots

1. News Component

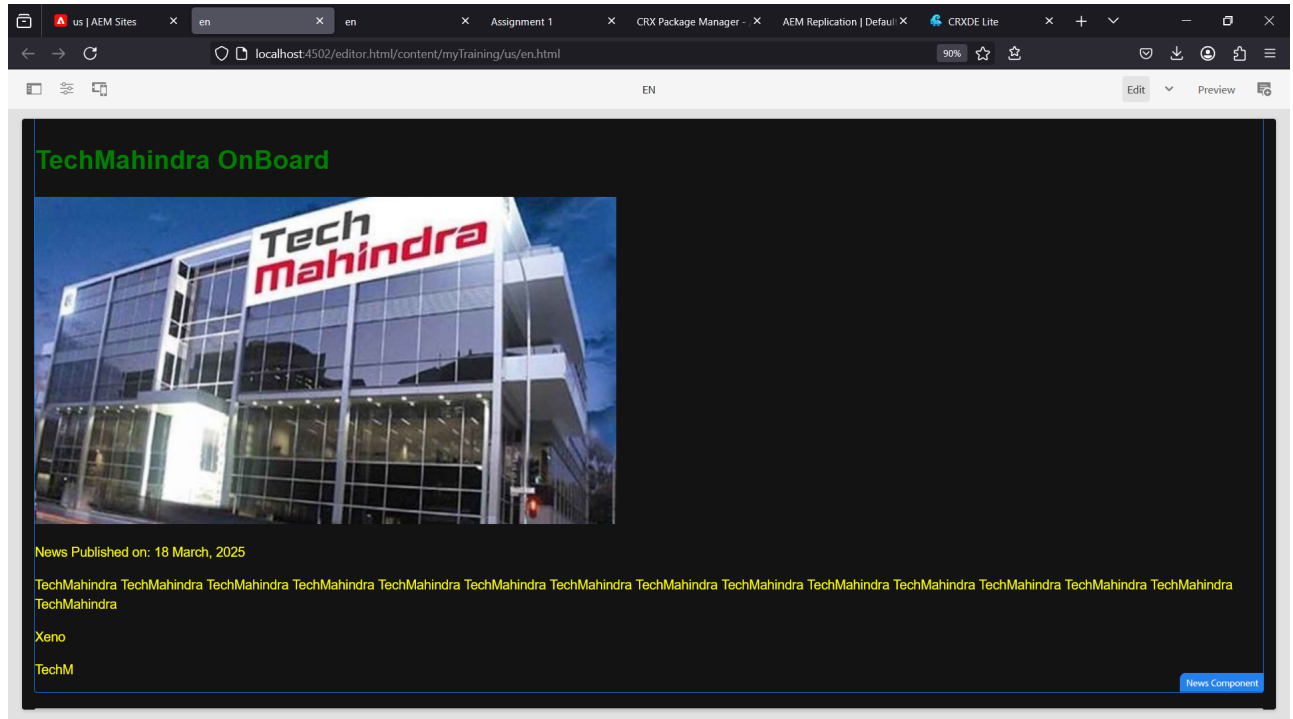

5. Add Component Style (cop-news-component) in News Component

Answer:

We will add a **custom style name** to the news component.

Steps:


1. Navigate to `apps/gowthamxeno/components/news` in **CRXDE Lite**.
2. Update `cq:dialog` to include the style property.
3. Modify `news.html` to include the class.

Code Snippet:

```
<div class="cop-news-component">  
  <h2>${properties.newsTitle}</h2>  
  <p>${properties.newsDescription}</p>  
</div>
```

Screenshots

1. Style

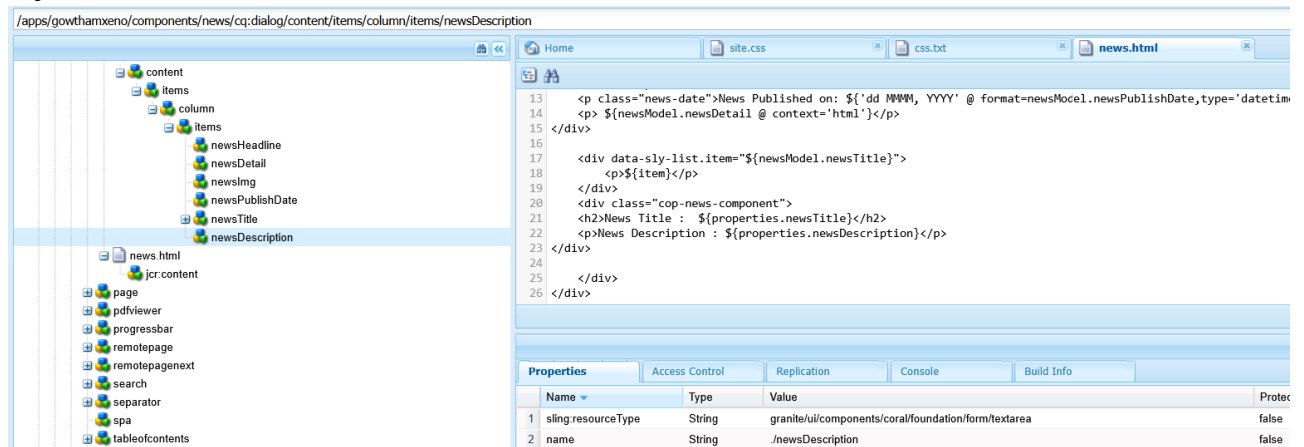

6. Create a Base Page Component and Add Metadata for OG Tags

Answer:

We will create a **metadata.html** file to **print OG meta tags**.

Steps:


1. Create **metadata.html** inside the **basepage** component.
2. Add OG metadata properties.
3. Link **metadata.html** in **basepage.html**.

Code Snippet (**metadata.html**):

```
<meta property="og:title" content="${pageProperties.ogTitle}">
<meta property="og:description" content="${pageProperties.ogDescription}">
<meta property="og:image" content="${pageProperties.ogImage}">
```

Screenshots

1. Base Page Properties

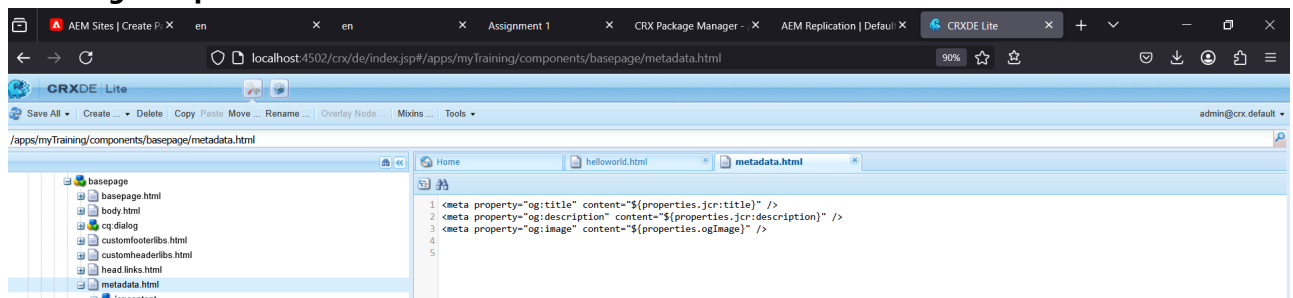

7. Create Custom Page Properties (Global Properties)

Answer:


Adding three custom fields (`og:title`, `og:description`, `og:image path`) in **Page Properties**.

Steps:

- 1. Navigate to `apps/gowthamxeno/components/page/basepage/cq:dialog`.
- 2. Add a **tab** named `Global Properties`.
- 3. Create fields: `ogTitle`, `ogDescription`, `ogImage`.

Screenshots

1. Global Properties

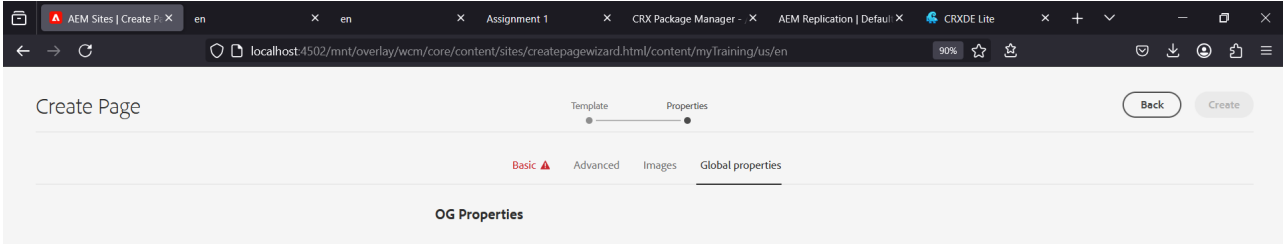

8. What is ExtraClientLibs and How to Use It in a Multi-field Component?

Answer:

extraClientLibs is used to include additional resources such as **CSS**, **JavaScript**, **fonts**, or **images** that are required for a component.

Code Snippet:

```
<extraClientLibs jcr:primaryType="nt:unstructured">
  <css>
    <item0>clientlibs/gowthamxeno/styles.css</item0>
  </css>
</extraClientLibs>
```

Screenshots

1. extraClientLibs

