

AEM Training - Day 3 Assignment (20-03-2025)

1. Create a New Component with News Headline, News Detail, Published Date, Image, and Titles Using Sling Model

Answer:

We will create a new **News Component** using the **Sling Model** to display a **news headline, news detail, published date, image, and titles**.

Steps:

1. Create a new component at `apps/gowthamxeno/components/news`.
2. Implement a Sling Model for this component.
3. Map component fields (`newsHeadline`, `newsDetail`, `newsPublishDate`, `newsImg`, `newsTitle`).
4. Update `news.html` to display these fields.

Code Snippet (`NewsModel.java`):

```
@Model(adaptables = Resource.class)
public class NewsModel {

    @Inject
    private String newsHeadline;

    @ValueMapValue
    private String newsDetail;

    @ValueMapValue
    private Date newsPublishDate;

    @ValueMapValue
    private String newsImg;

    @ValueMapValue
    private List<String> newsTitle;

    public String getNewsDetail() {
        return newsDetail;
    }

    public Date getNewsPublishDate() {
        return newsPublishDate;
    }

    public String getNewsImg() {
        return newsImg;
    }
}
```

```

public String getNewsHeadline() {
    return newsHeadline;
}

public List<String> getNewsTitle() {
    if (newsTitle != null) {
        return new ArrayList<String>(newsTitle);
    } else {
        return Collections.emptyList();
    }
}
}
}

```

Code Snippet (news.html):

```

<div class="news-item">
    <h2>${newsModel.newsHeadline}</h2>
    <p>${newsModel.newsDetail}</p>
    <span>${newsModel.newsPublishDate}</span>
    
    <ul>
        <sly data-sly-list.title="${newsModel.newsTitle}">
            <li>${title}</li>
        </sly>
    </ul>
</div>

```


Screenshots

1. News Component

The screenshot shows the AEM interface for the 'news' component. The left sidebar lists various components, with 'news' selected. The main editor displays the HTML code for the component, which includes a title, a detail, a publish date, an image, and a list of titles. The bottom panel shows the component's properties, including its name, type, and creation date.

Name	Type	Value	Protected	Mandato
1 jcr:title	String	News Component	false	false
2 jcr:primaryType	Name	cq:Component	true	true
3 jcr:createdBy	String	admin	true	false
4 jcr:created	Date	2025-03-27T05:49:37.798+05:30	true	false
5 componentGroup	String	GowthamXenO - Content	false	false

2. Cq:Dialog

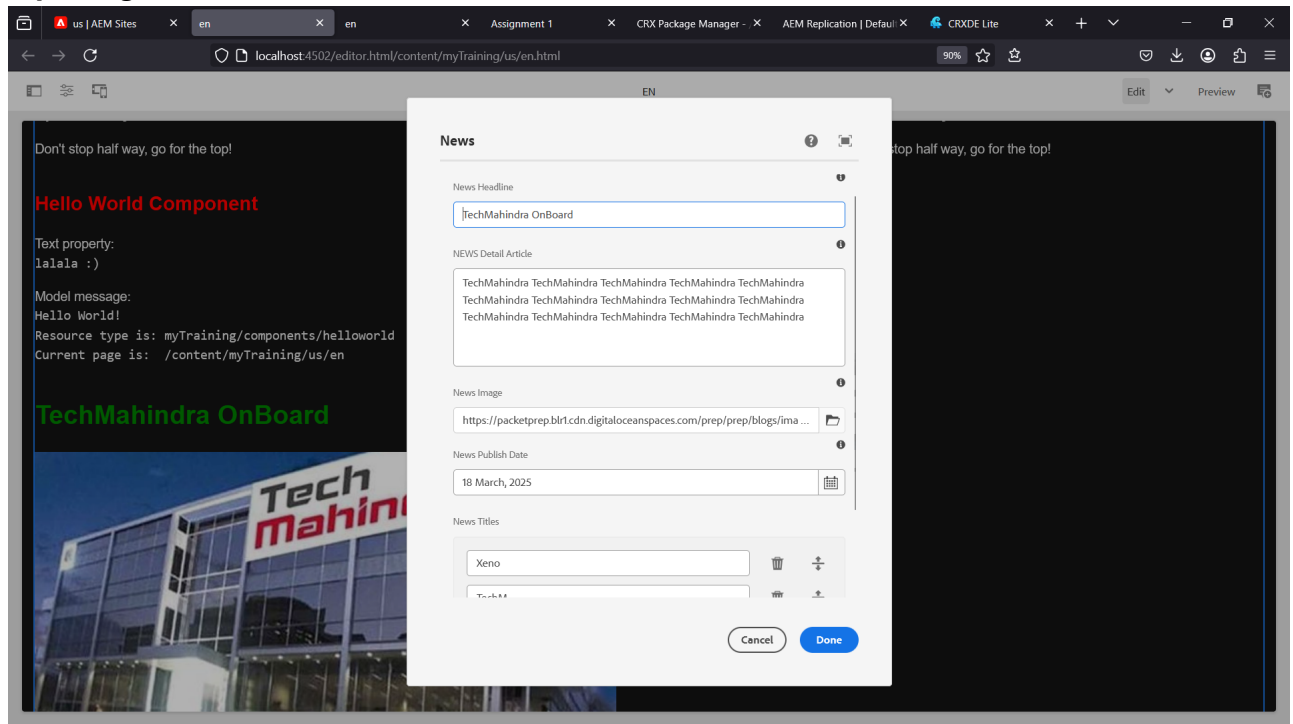

2. Create a Multi-field Component (Multiple News) Using Sling Model

Answer:

A multi-field component allows authors to add **multiple news items** dynamically.

Steps:

1. Create a multi-field component at `apps/gowthamxeno/components/multi-news`.
2. Implement a **Sling Model List**.
3. Map fields: **title** and **source**.
4. Update `multi-news.html` to loop through news items.

Code Snippet (`MultiNewsModel.java`):

```
@Model(adaptables = Resource.class)
public class MultiNewsModel {
    @Inject
    @Children
    private List<NewsModel> newsList;


    public List<NewsModel> getNewsList() { return newsList; }
}
```

Code Snippet (`multi-news.html`):

```
<div class="multi-news">
  <sly data-sly-list.newsItem="${multiNewsModel.newsList}">
    <h2>${newsItem.title}</h2>
    <p>${newsItem.source}</p>
  </sly>
</div>
```

Screenshots

1. Multi-news

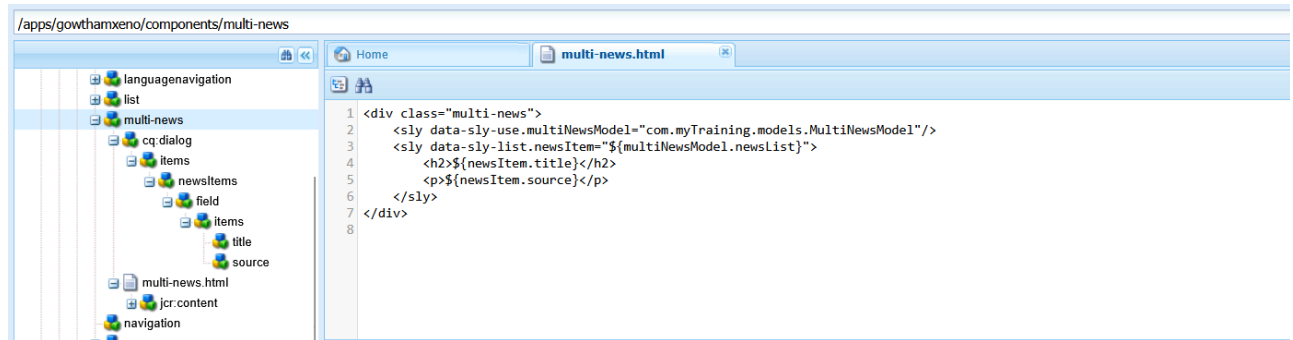

3. Create Clientlibs for News Component

Answer:

Clientlibs are used to **apply styles and scripts** to components.

Steps:

1. Create a clientlib at `apps/gowthamxeno/clientlibs/news`.
2. Include **CSS and JS** files.
3. Add clientlib categories in the component.

Code Snippet (`clientlibs/news/css.txt`):

```
news.css
```


Code Snippet (`style.css`):

```
.news-component h1{
color:green;
}
.news-component p{
color:yellow;
}
.news-date p{
```

```
color:black
}
```

Screenshots

1. Clientlib

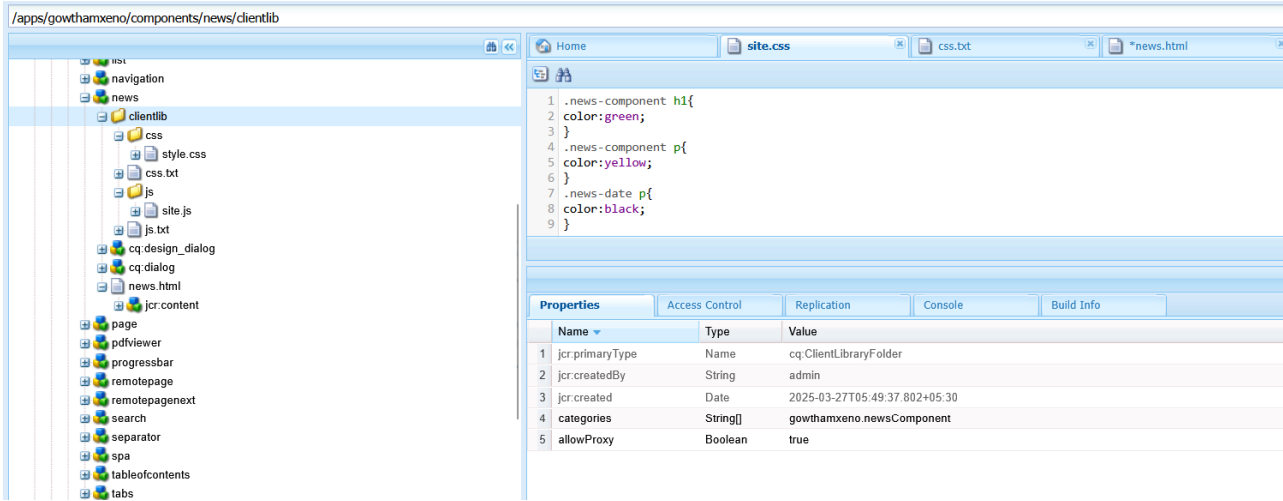

4. Apply Green Color to Heading (h2), Yellow to News Detail (p), and Black to Date

Answer:


This is done using **CSS** inside the `clientlibs/news`.

Code Snippet:

```
.news-component h1{
color:green;
}
.news-component p{
color:yellow;
}
.news-date p{
color:black
}
```

Screenshots

1. News Component

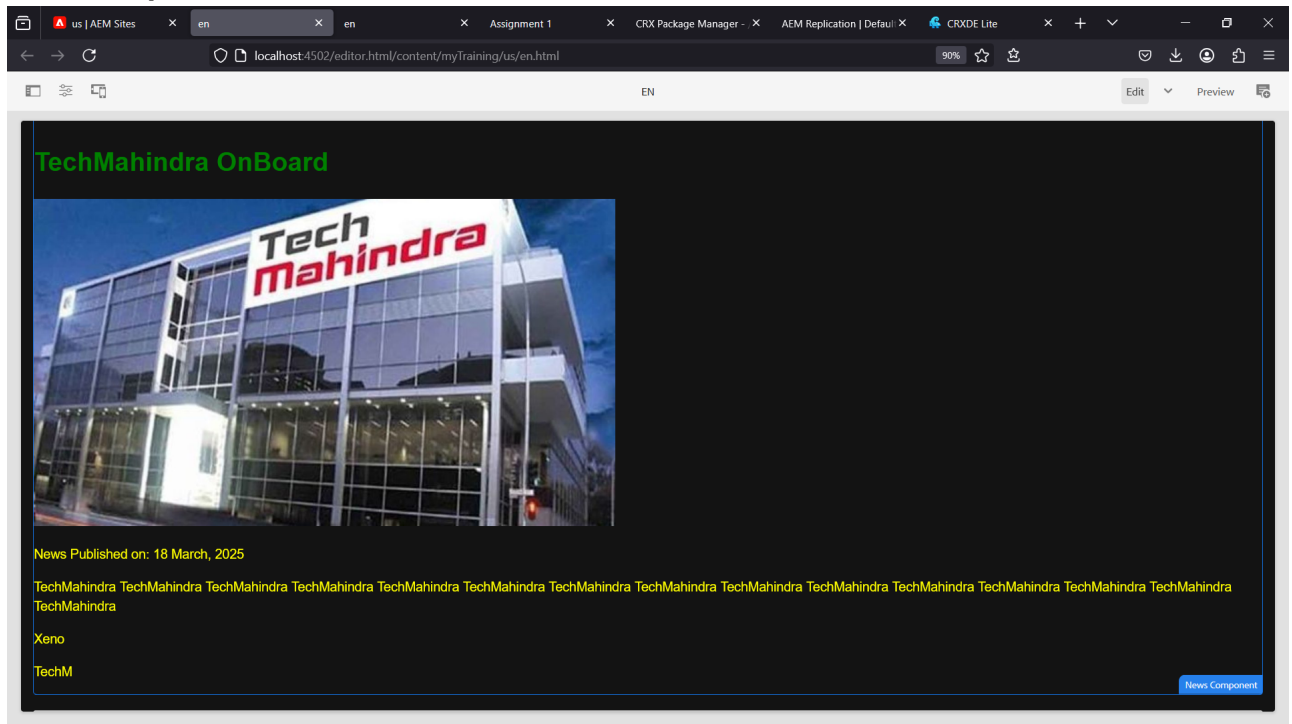

5. Add Component Style (cop-news-component) in News Component

Answer:

We will add a **custom style name** to the news component.

Steps:


1. Navigate to `apps/gowthamxeno/components/news` in **CRXDE Lite**.
2. Update `cq:dialog` to include the style property.
3. Modify `news.html` to include the class.

Code Snippet:

```
<div class="cop-news-component">
  <h2>${properties.newsTitle}</h2>
  <p>${properties.newsDescription}</p>
</div>
```

Screenshots

1. Style

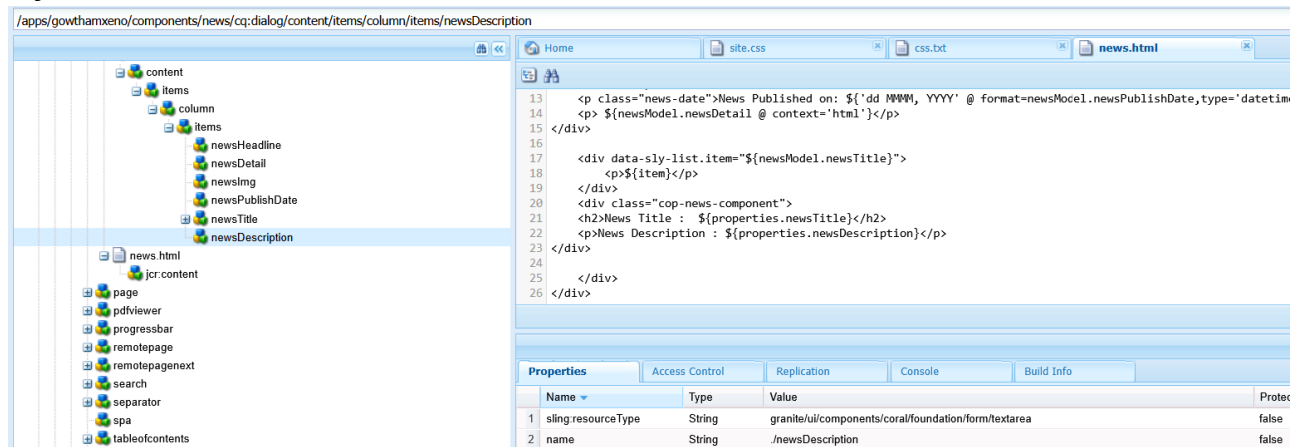

6. Create a Base Page Component and Add Metadata for OG Tags

Answer:

We will create a **metadata.html** file to **print OG meta tags**.

Steps:


1. Create **metadata.html** inside the **basepage** component.
2. Add OG metadata properties.
3. Link **metadata.html** in **basepage.html**.

Code Snippet (**metadata.html**):

```
<meta property="og:title" content="${pageProperties.ogTitle}">
<meta property="og:description" content="${pageProperties.ogDescription}">
<meta property="og:image" content="${pageProperties.ogImage}">
```

Screenshots

1. Base Page Properties

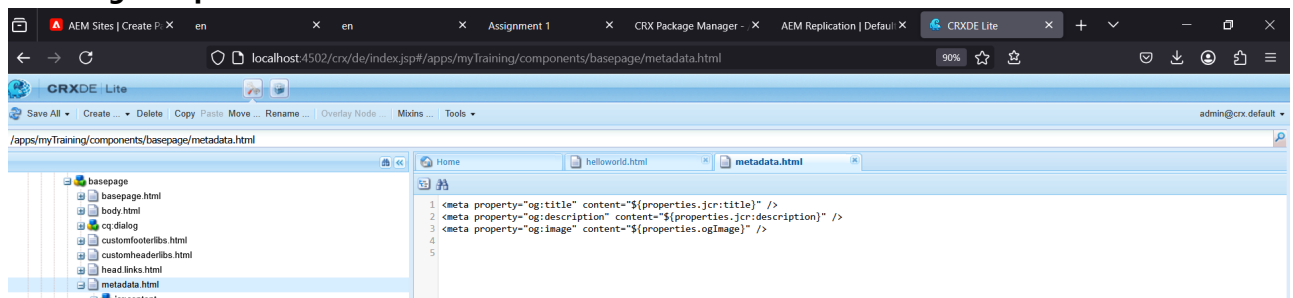

7. Create Custom Page Properties (Global Properties)

Answer:


Adding three custom fields (`og:title`, `og:description`, `og:image path`) in **Page Properties**.

Steps:

- 1. Navigate to `apps/gowthamxeno/components/page/basepage/cq:dialog`.
- 2. Add a **tab** named `Global Properties`.
- 3. Create fields: `ogTitle`, `ogDescription`, `ogImage`.

Screenshots

1. **Global Properties**

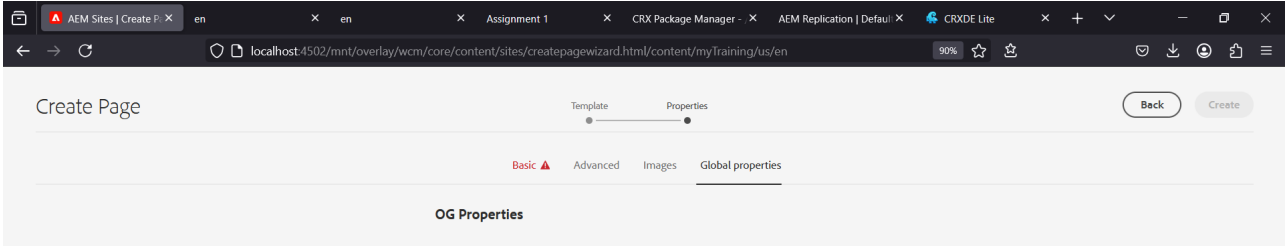

8. What is ExtraClientLibs and How to Use It in a Multi-field Component?

Answer:

extraClientLibs is used to include additional resources such as **CSS**, **JavaScript**, **fonts**, or **images** that are required for a component.

Code Snippet:

```
<extraClientLibs jcr:primaryType="nt:unstructured">
  <css>
    <item0>clientlibs/gowthamxeno/styles.css</item0>
  </css>
</extraClientLibs>
```

Screenshots

1. **extraClientLibs**

