

Which scored recipes can we inspect?

† = documented local replay / reconstruction; LB labels remain hidden. CV and LB have different populations.

All officially scored submissions

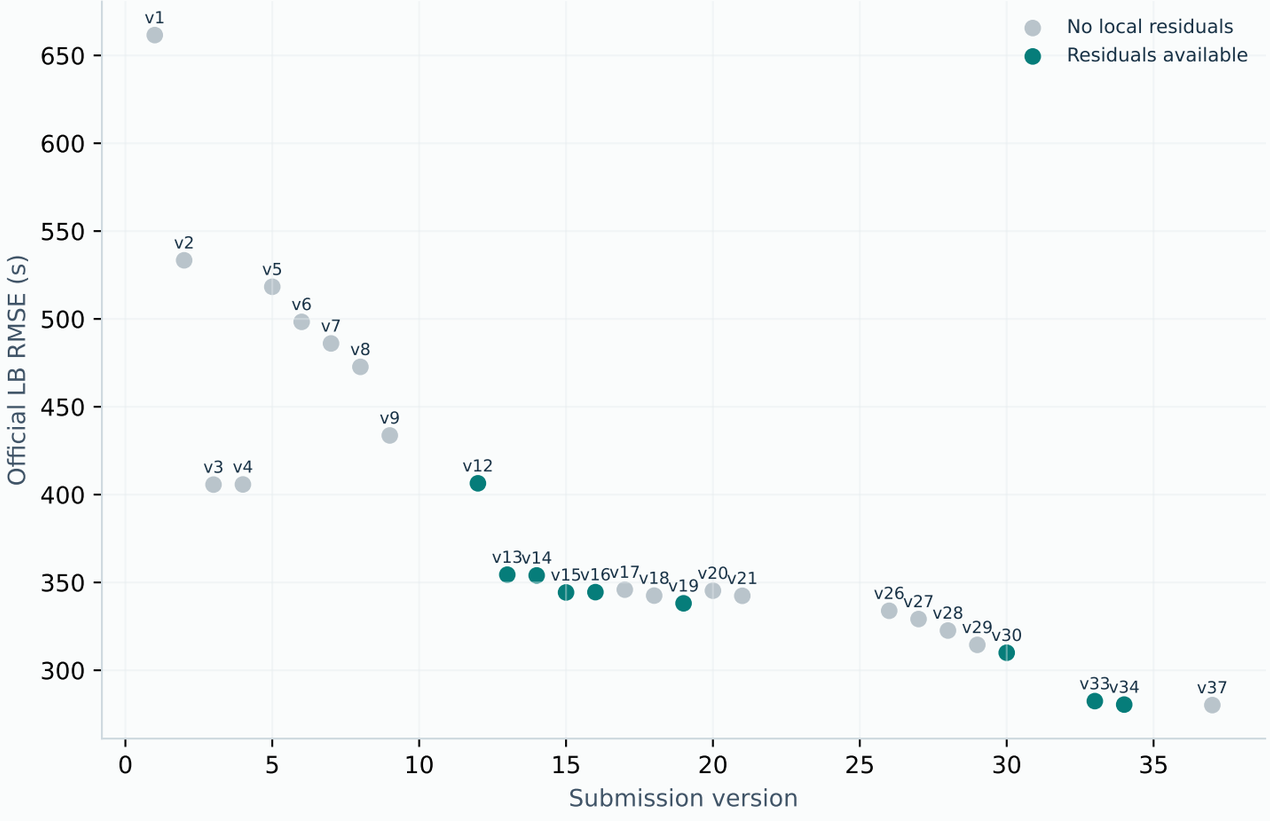


Matched validation: next month and longer gaps

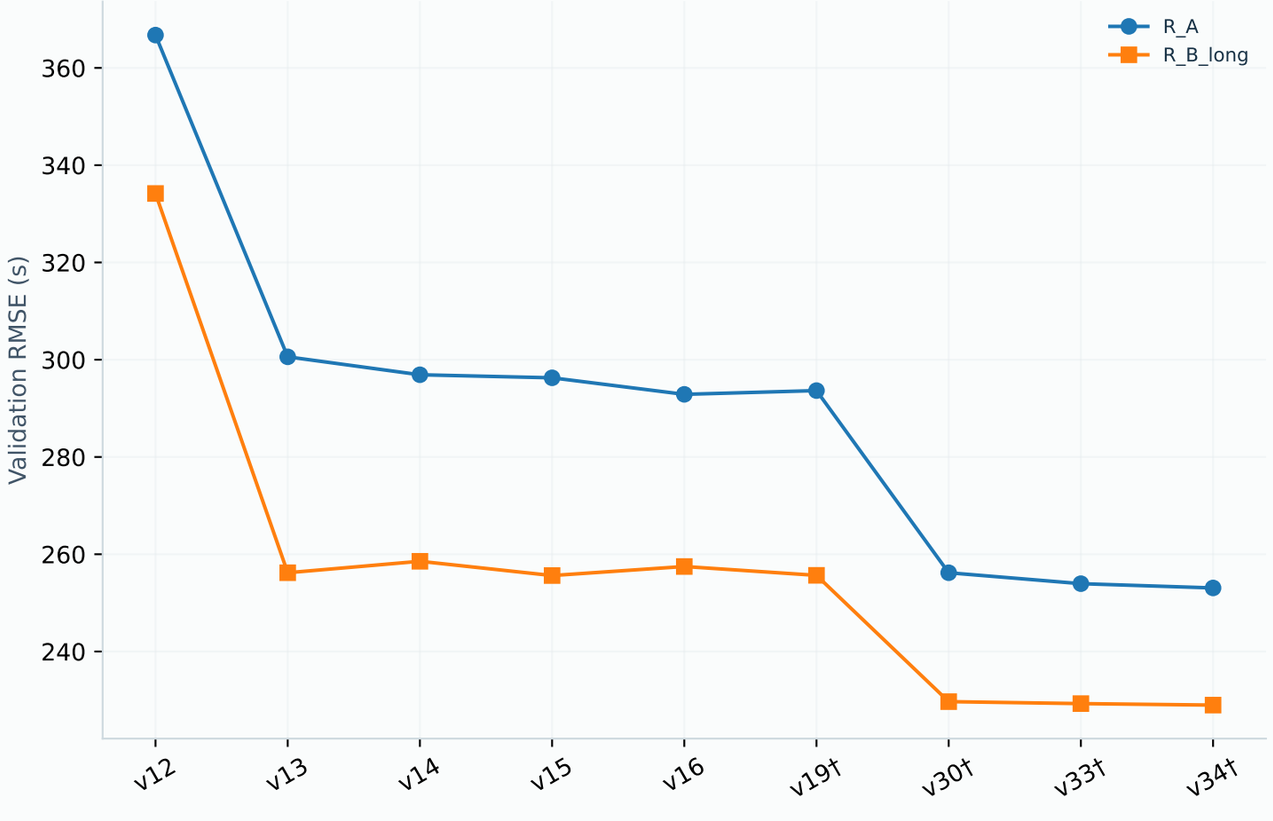


Typical errors and catastrophic tails need different explanations

A1–A6 only; each flight once. Tail plot contains all errors. Concentration averages losses over three seeds.


Signed residuals: central view (seed 42)

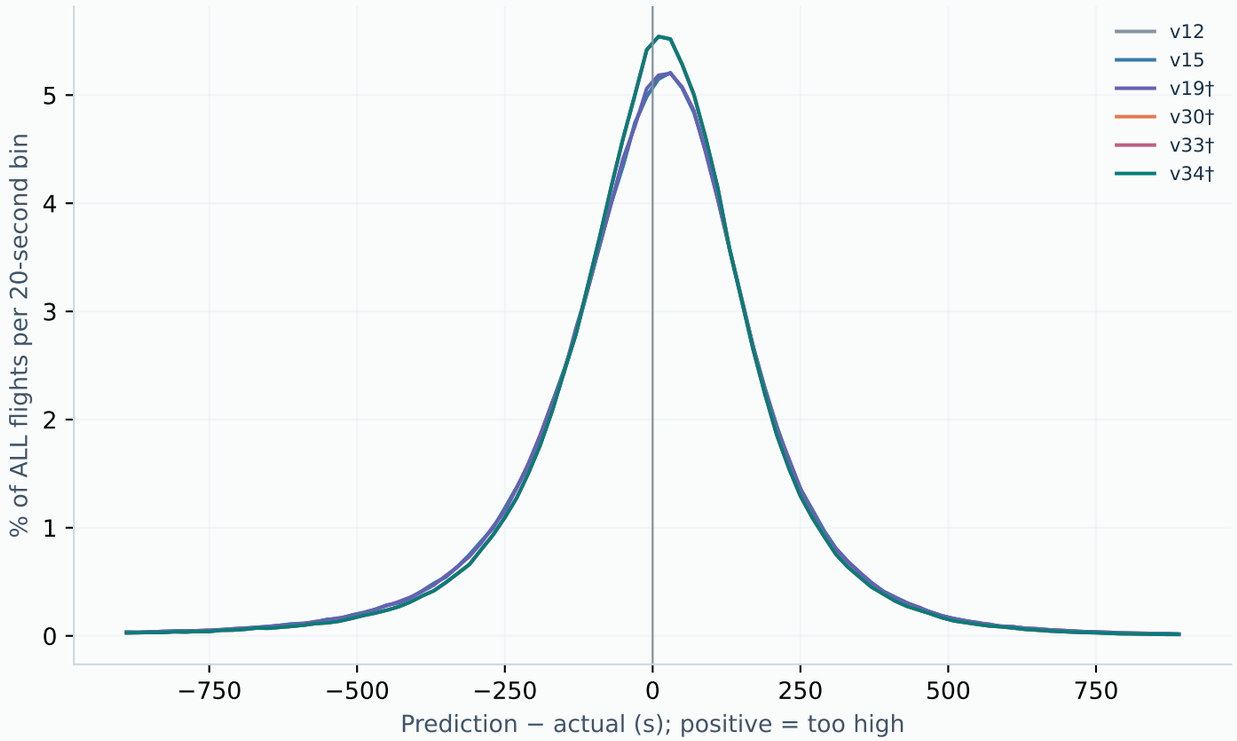


Full absolute-error tail (seed 42)

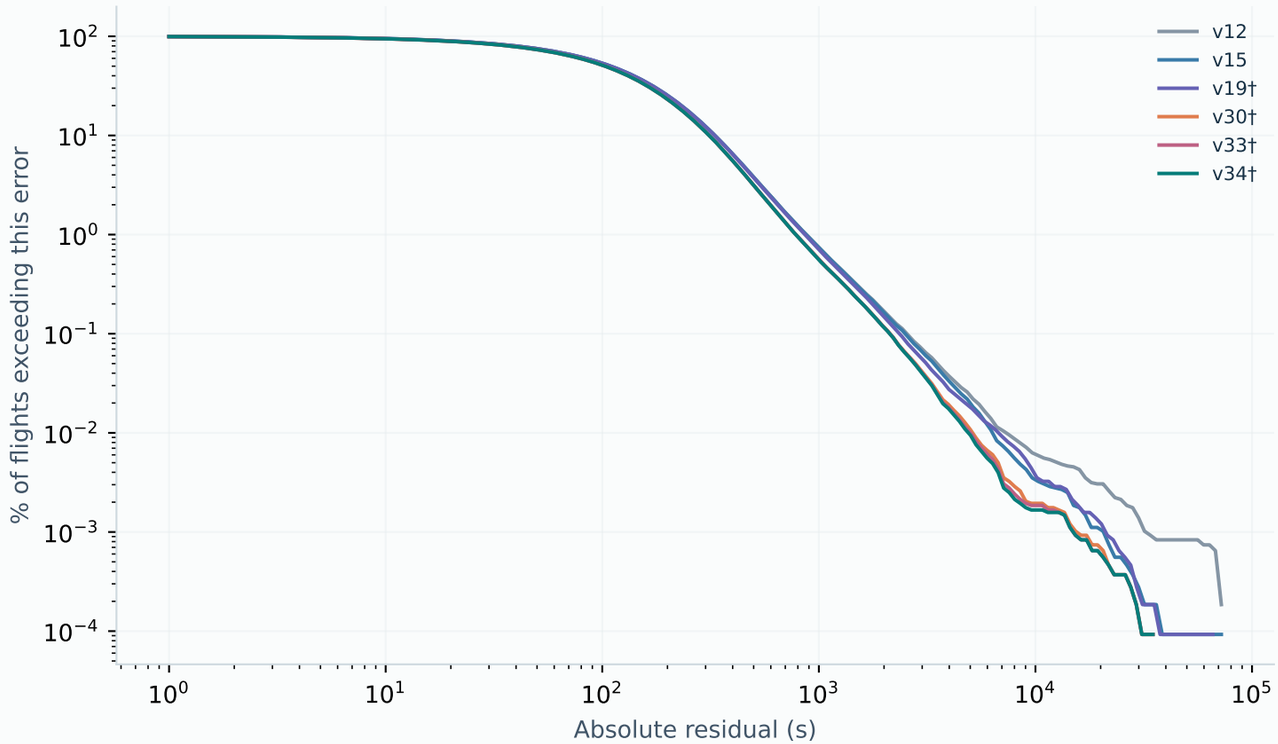

Few flights carry much of the squared error

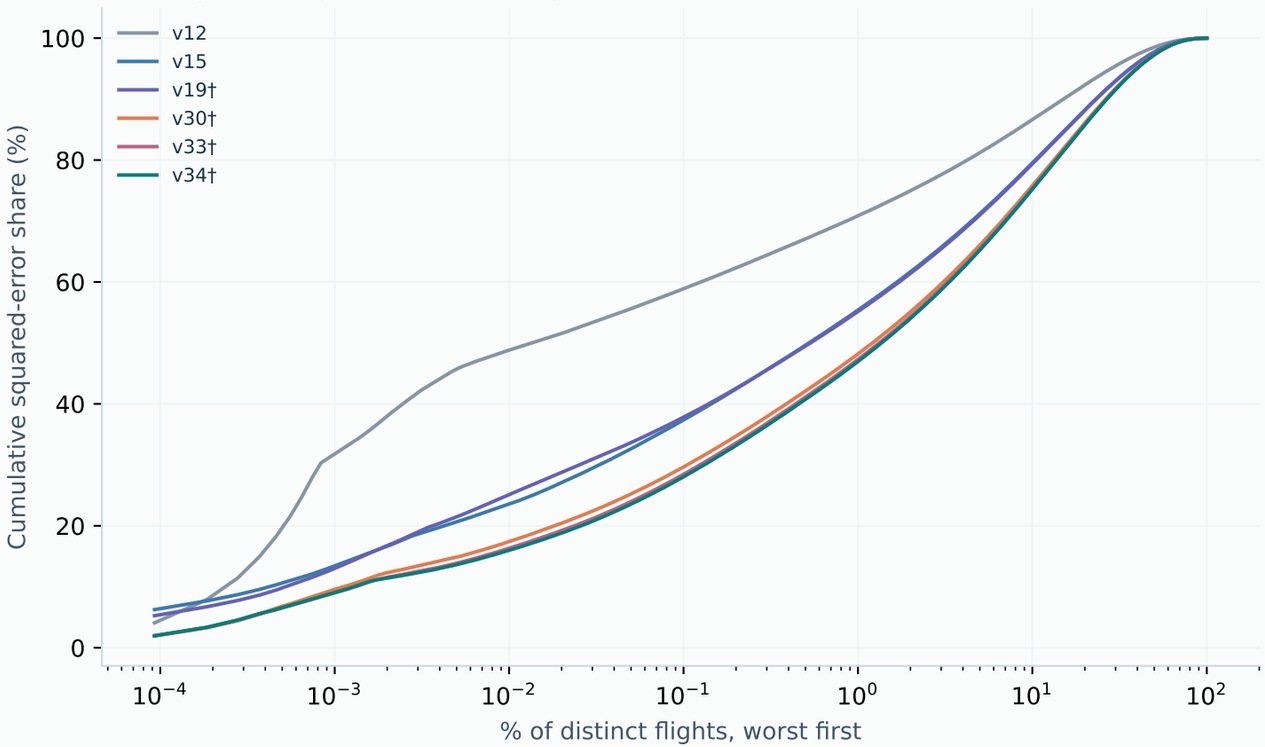



Calibration by predicted value (seed 42)

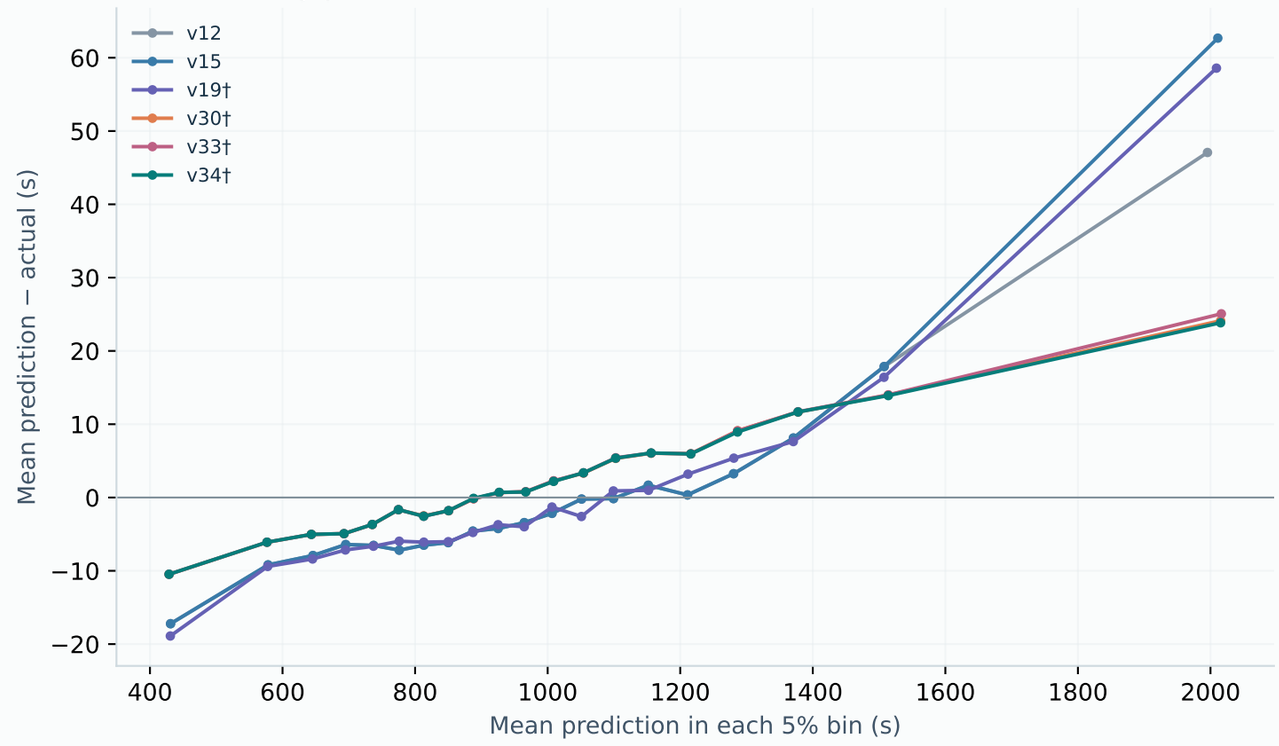


Where the models miss, and where errors cost the most

Next-month flights; three-seed loss/bias averages. Airport differences alone do not identify their causes.

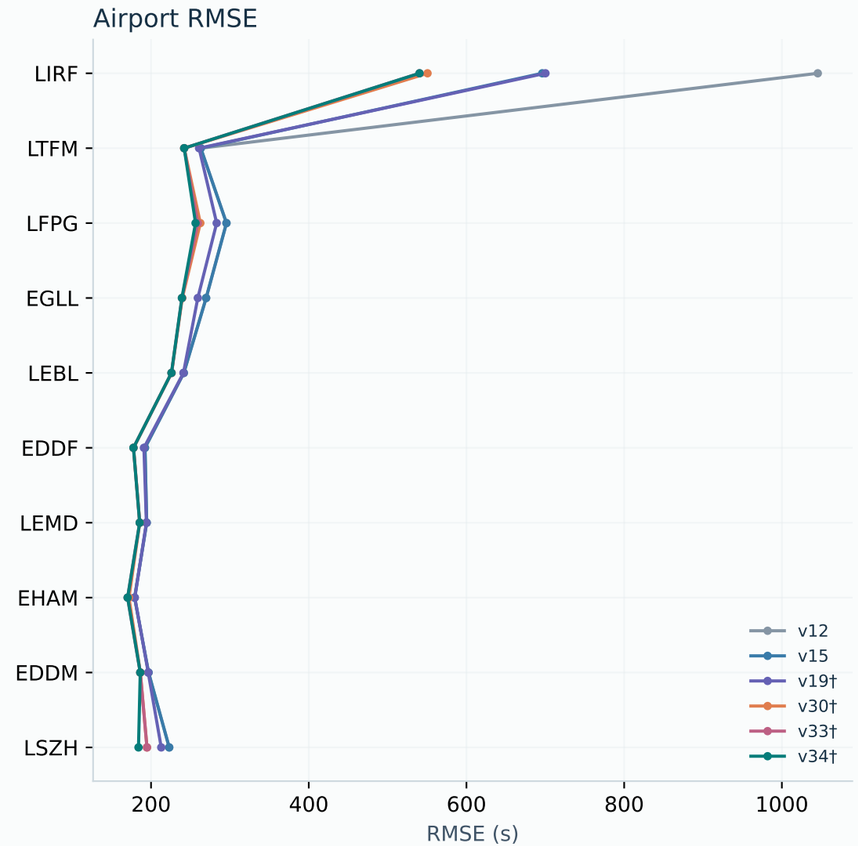


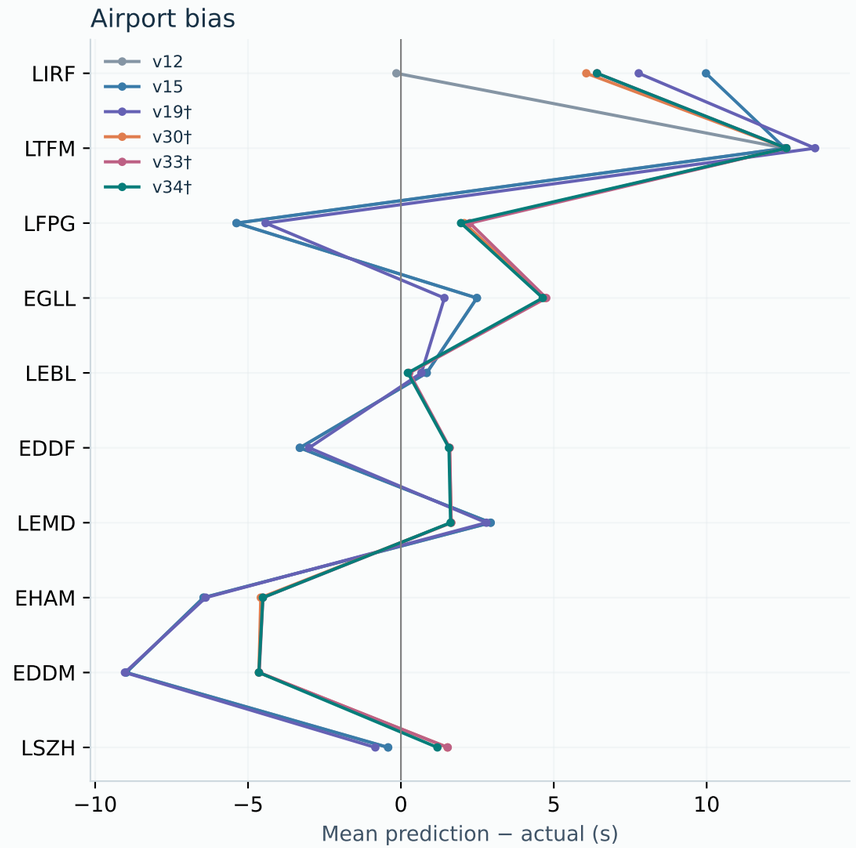


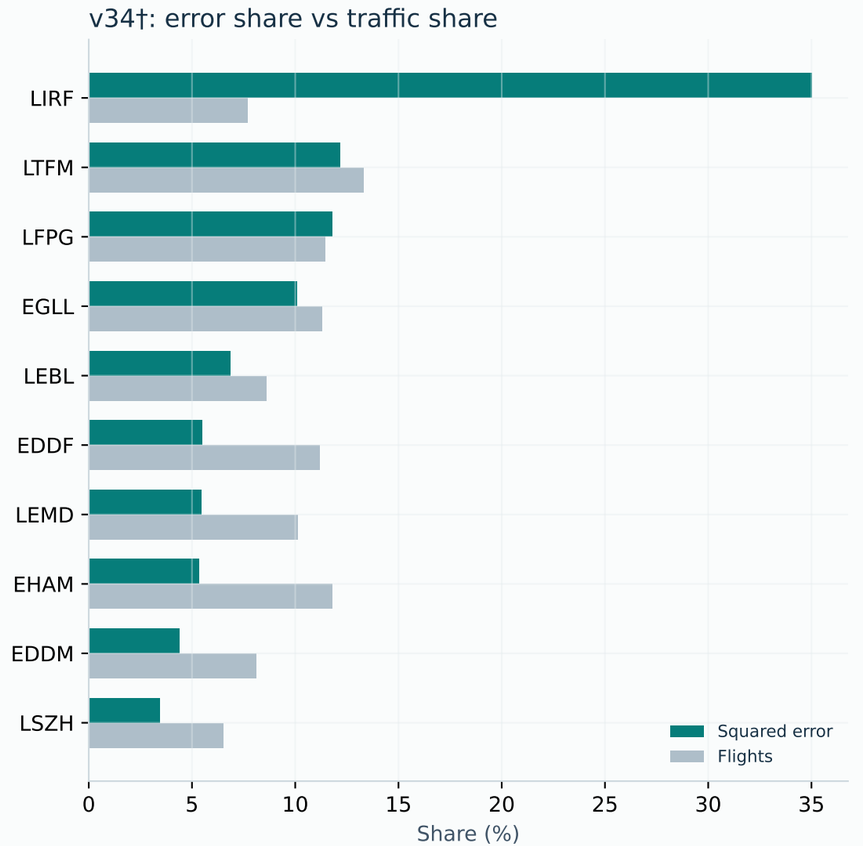

Separate recording regimes from ordinary operational errors


Disjoint groups defined using observable inputs only. No target-defined route or label filtering.

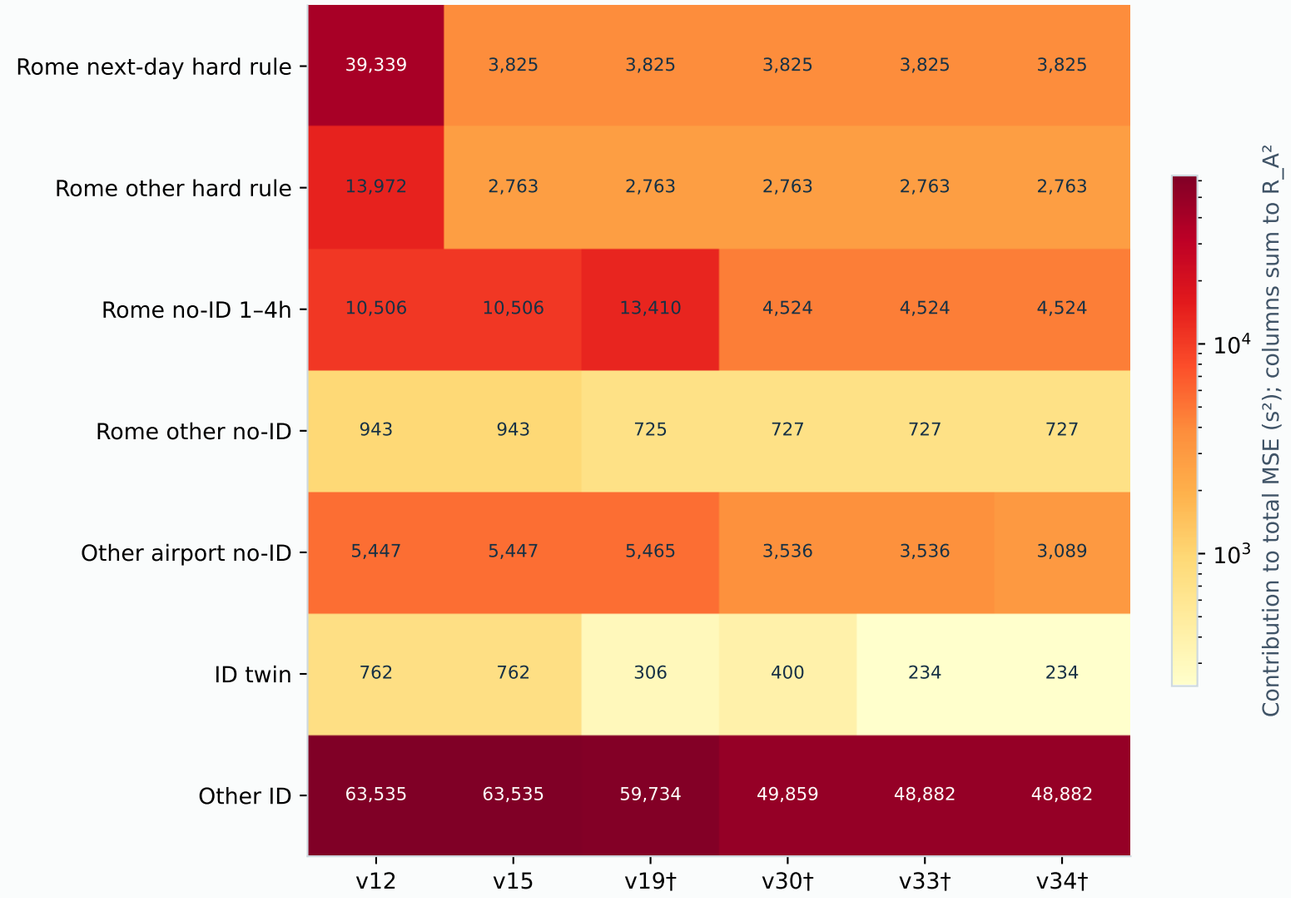


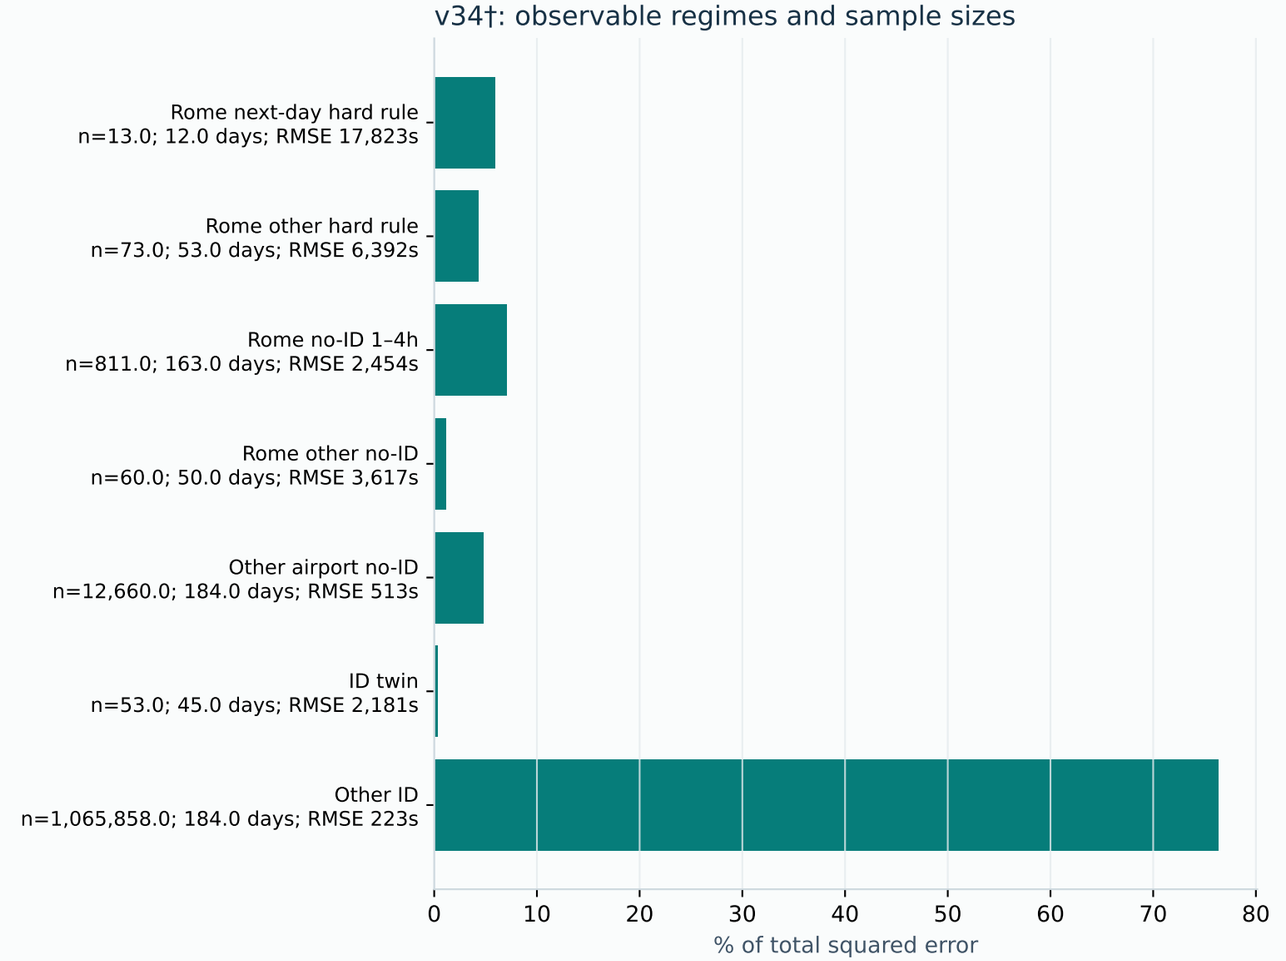


What do the worst residuals actually look like?

Signed points use seed 42. Worst-flight ranking uses mean squared error across all three seeds.

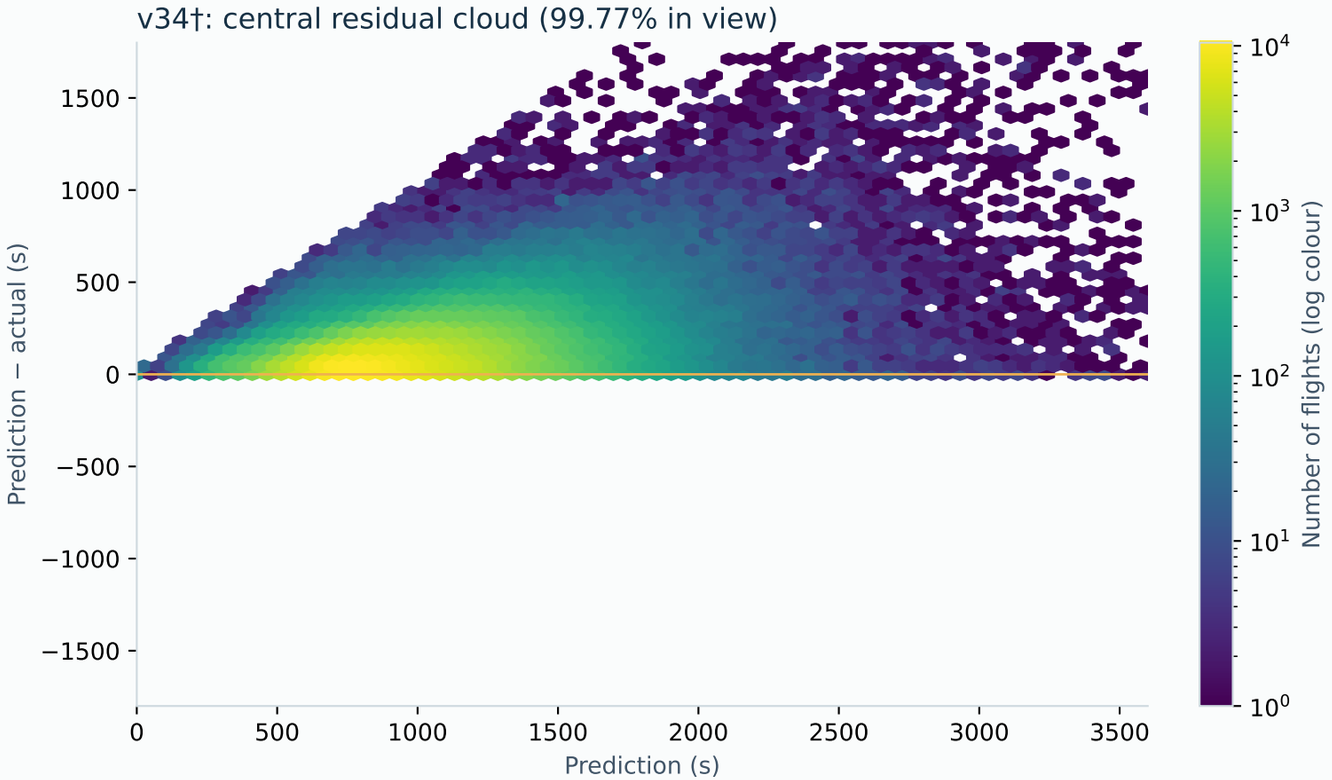

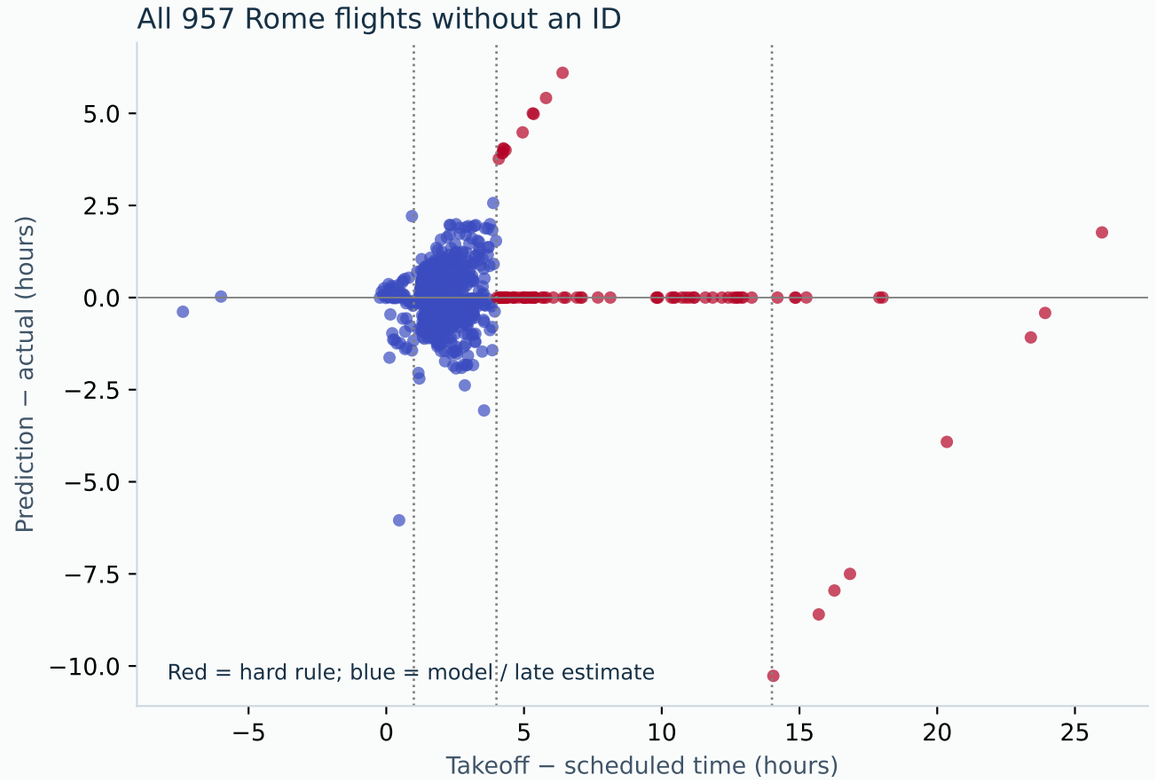


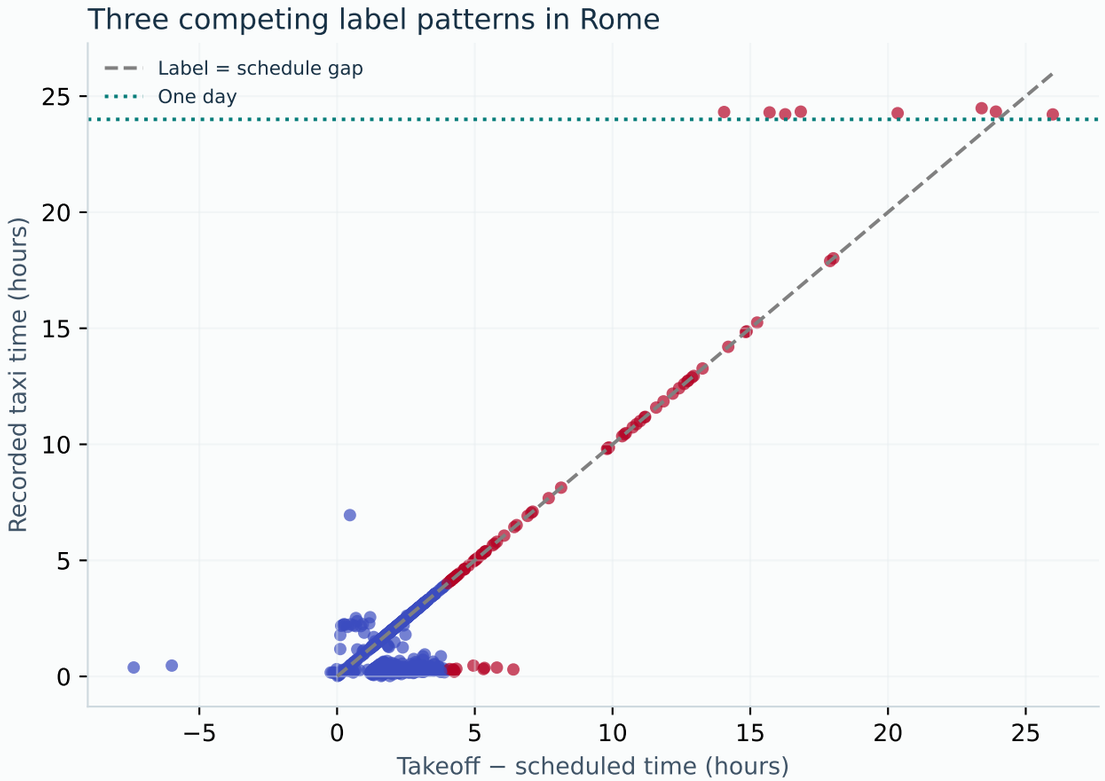






Recurring operational errors after separating no-ID records

v34†, next-month, three seeds. Within-airport descriptive curves; cells below 100 flights are omitted from curves only.

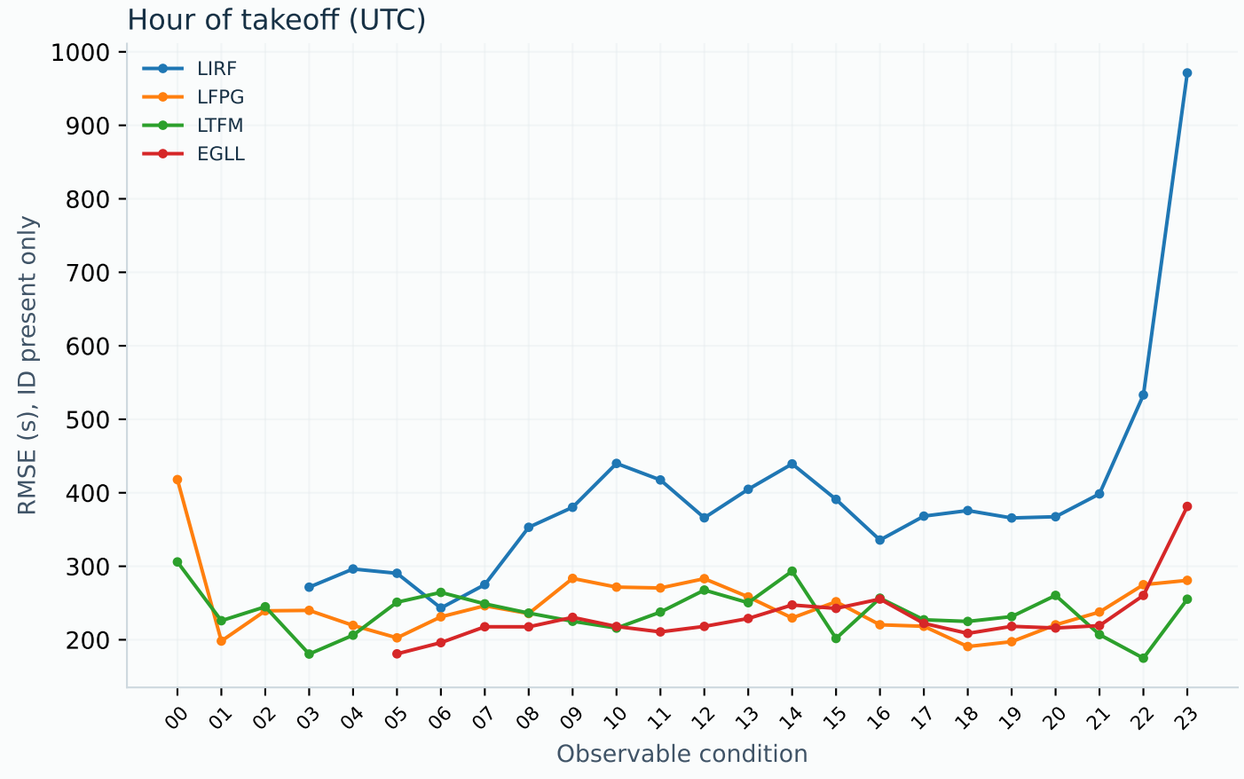

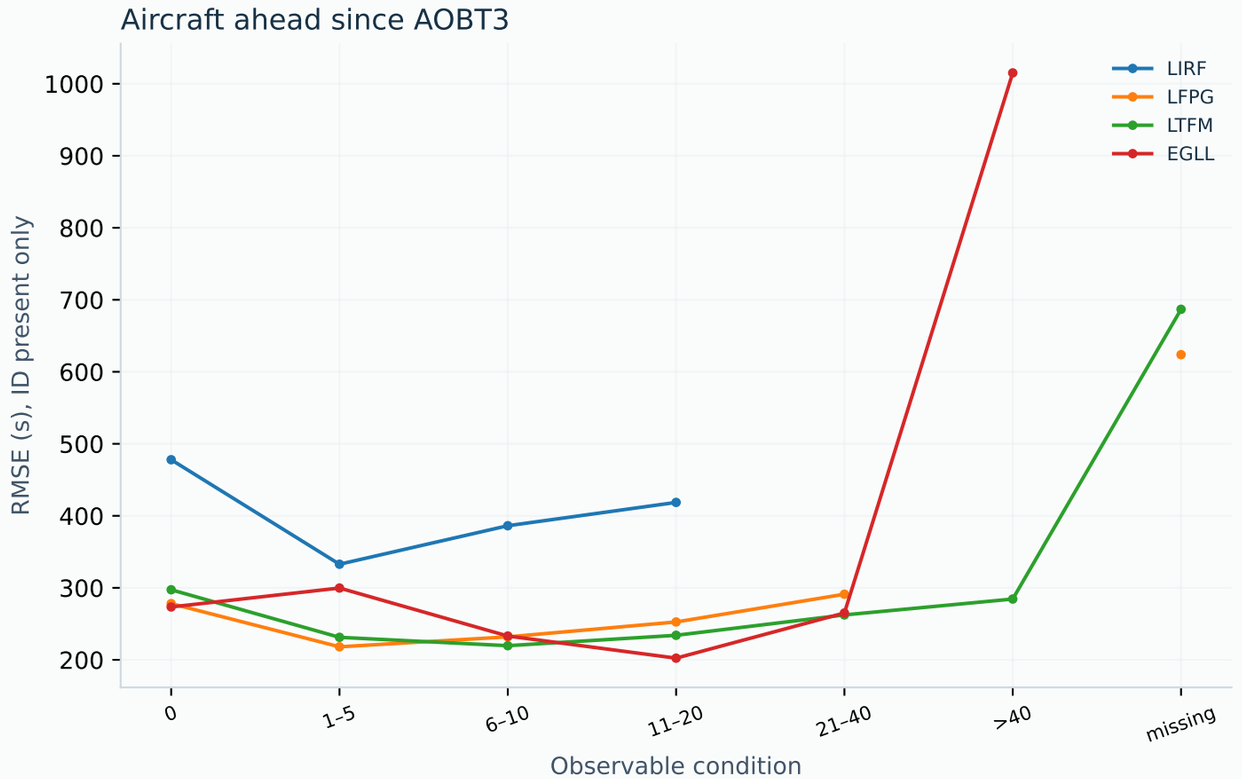

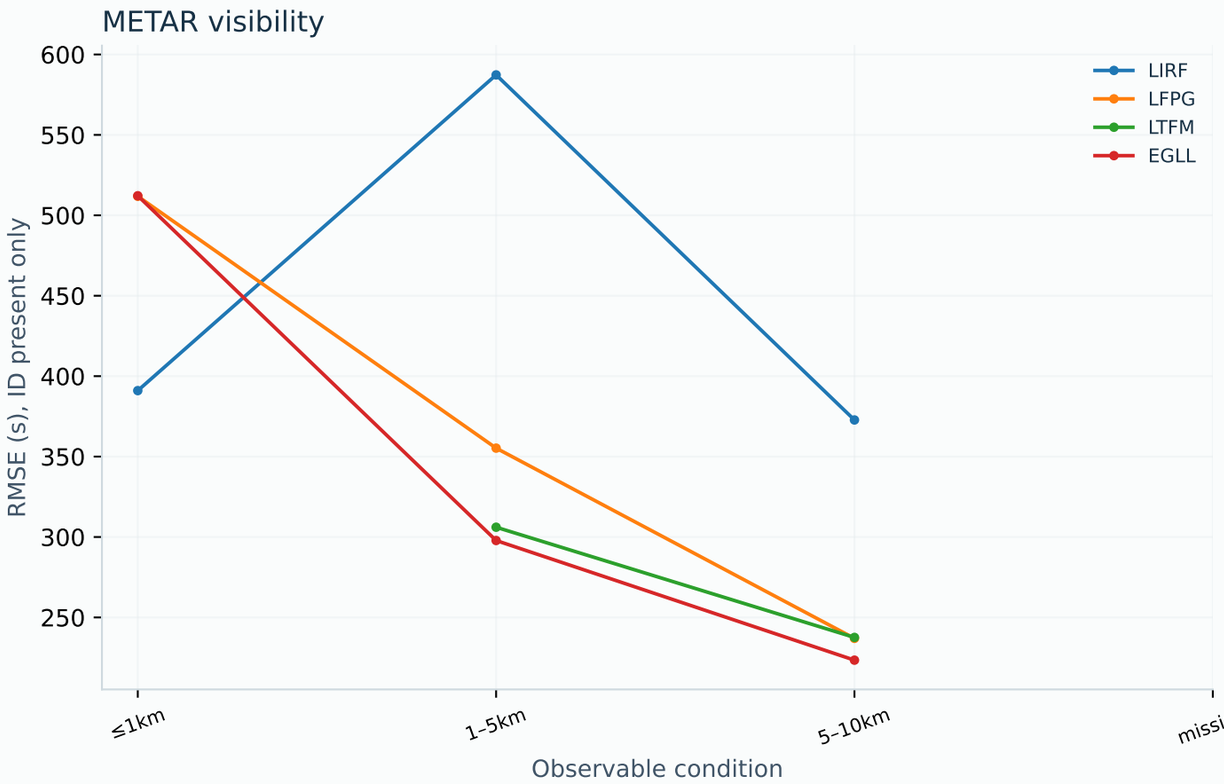


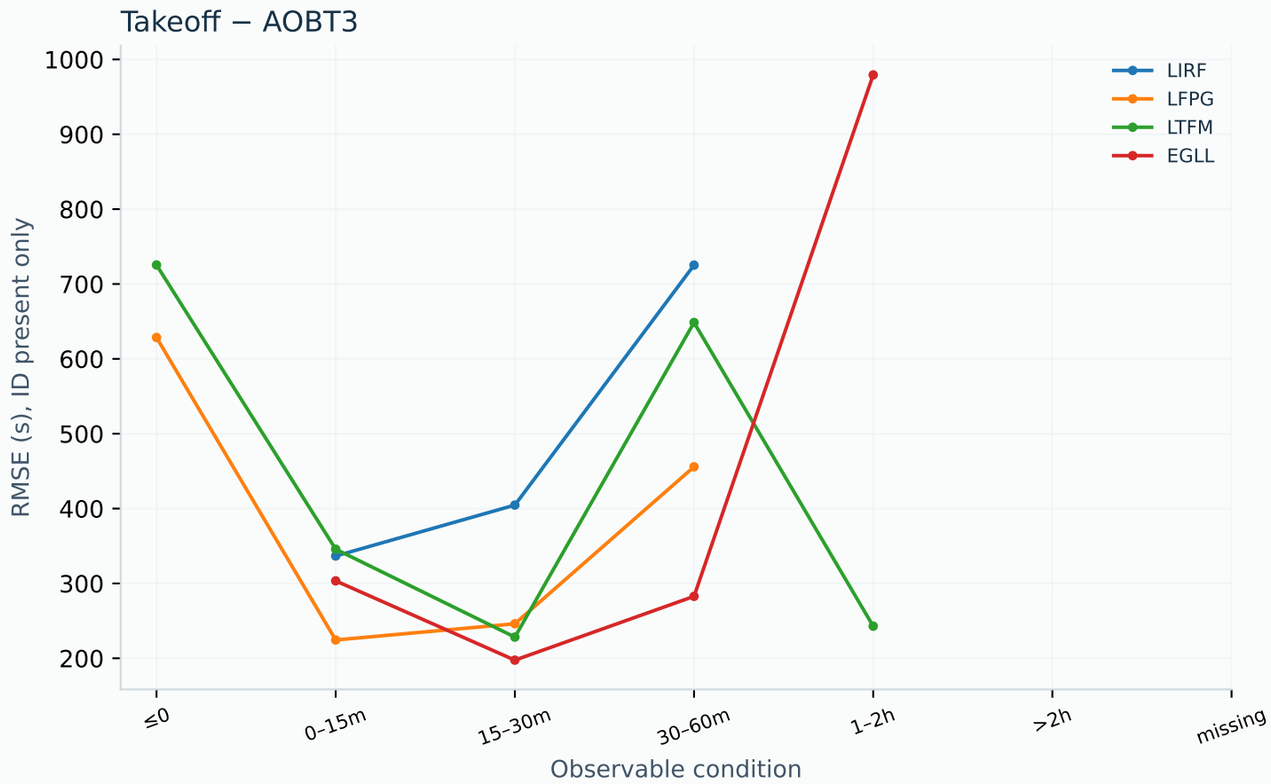


Do failures repeat across dates and training origins?

All folds remain visible. November/December repeat in B; the main A charts never count a flight twice.

All 16 validation folds, each averaging three-seed loss

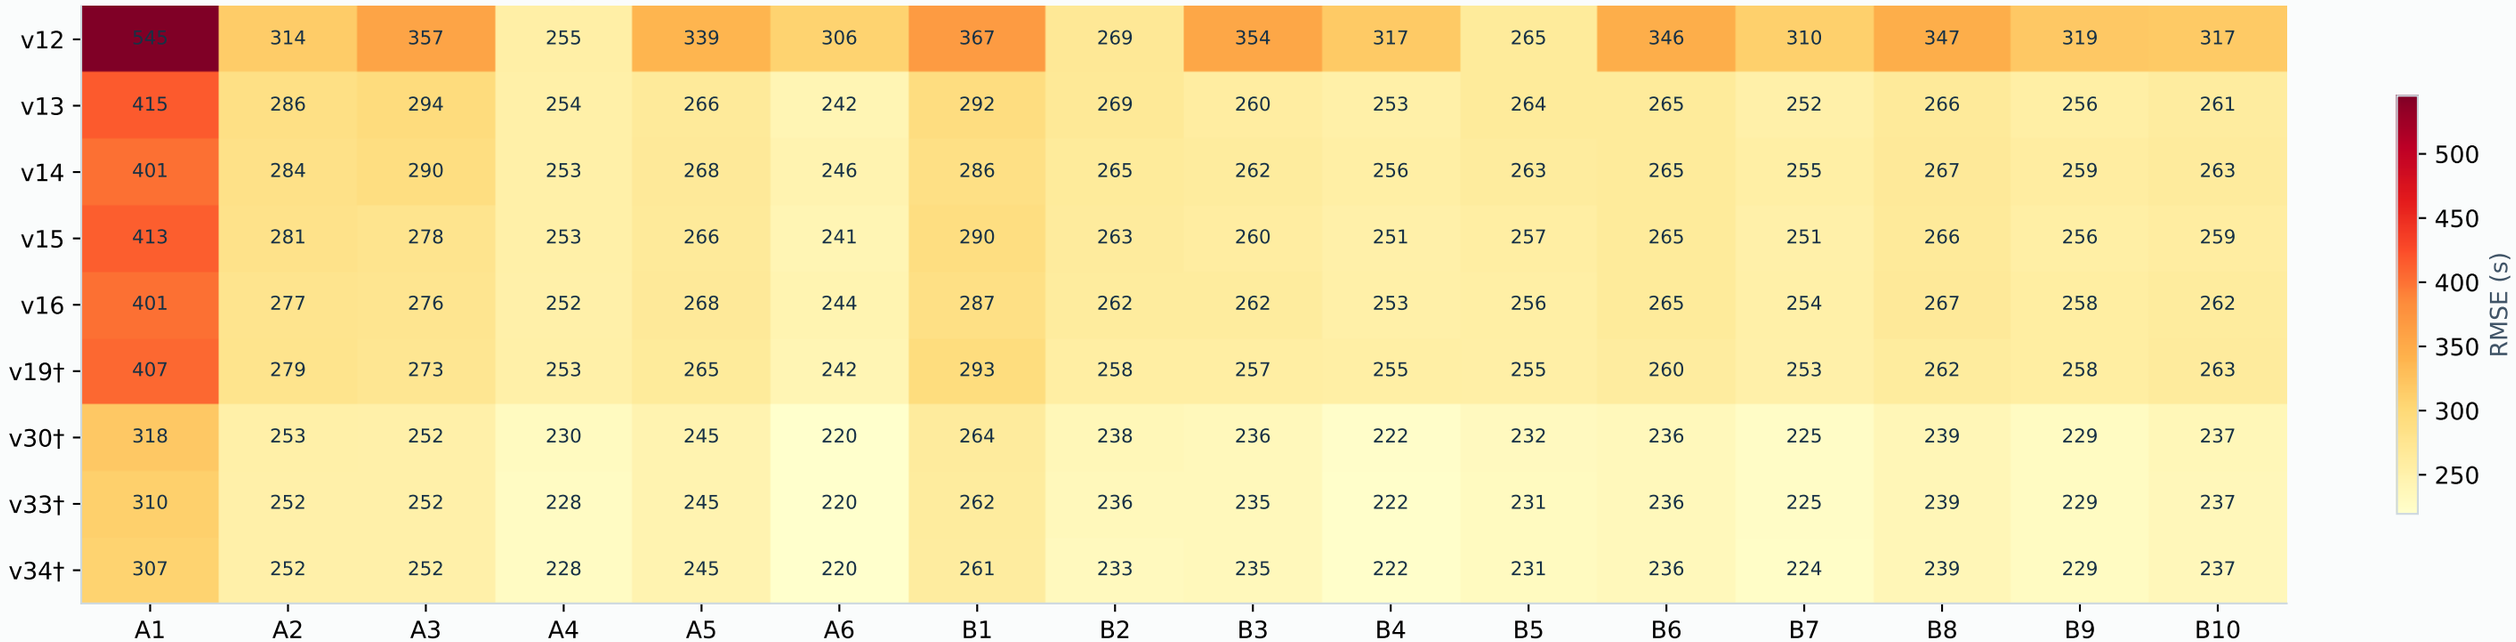


Daily next-month RMSE exposes bursts

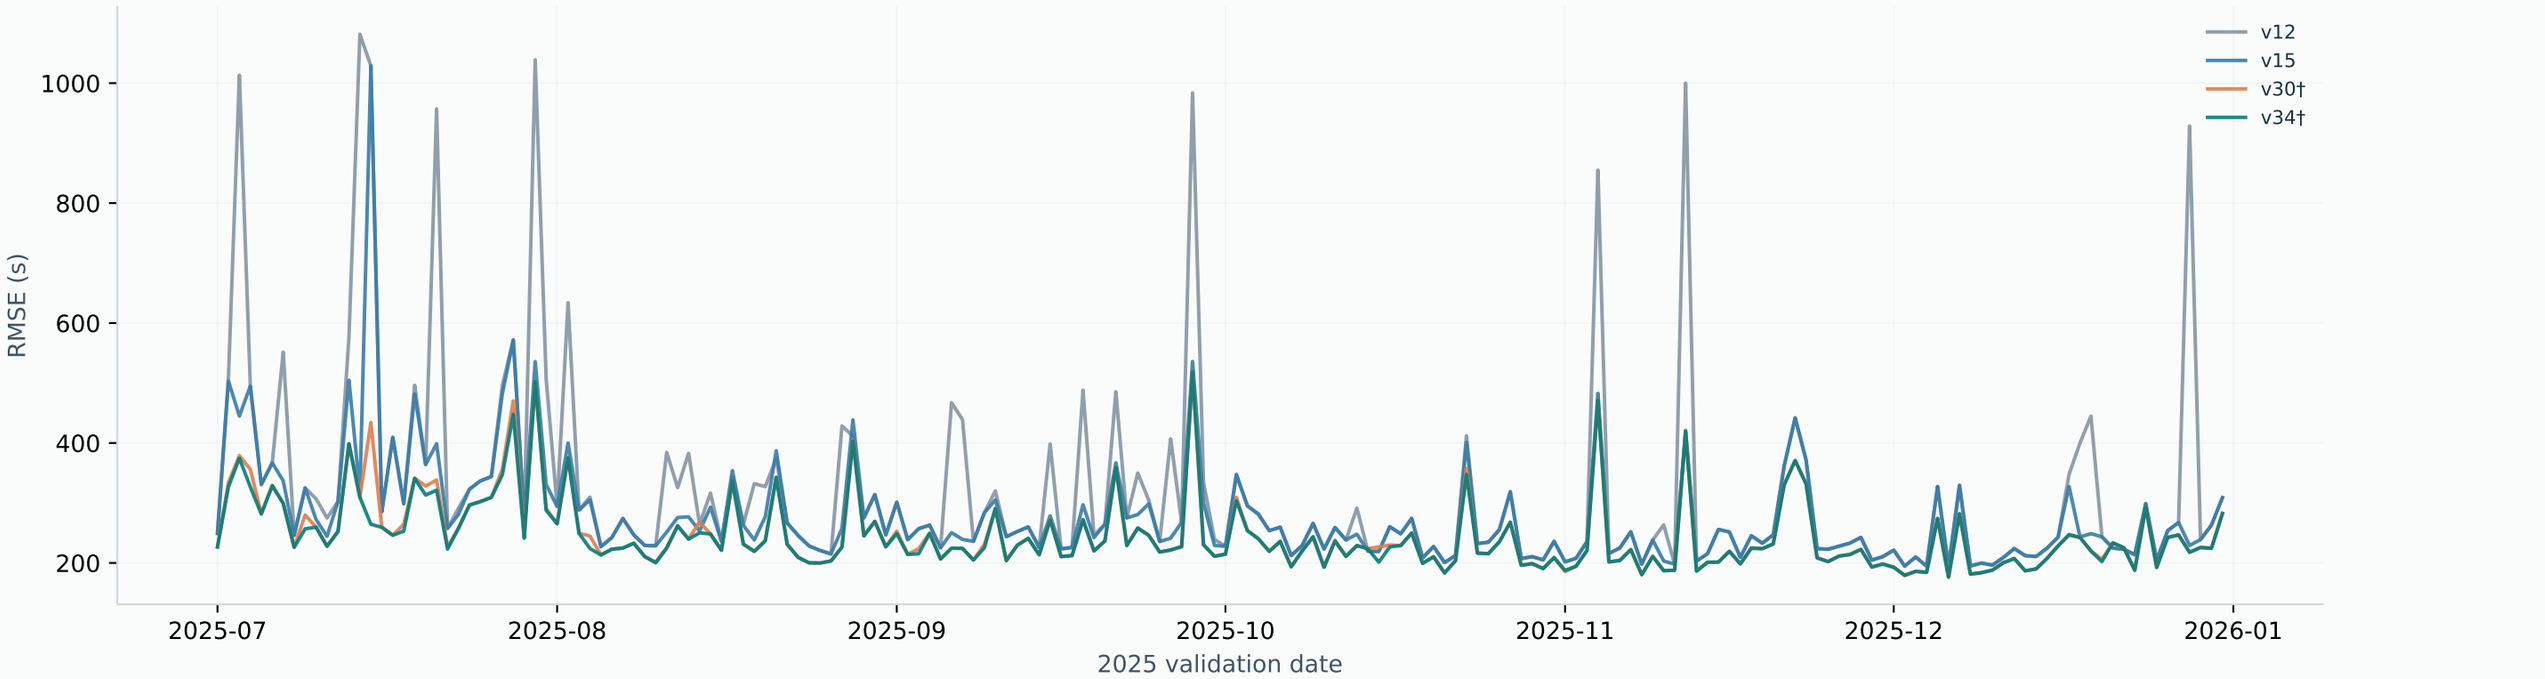

Persistent mistakes and the scope for combining models

Scatter: deterministic sample plus all worst 0.1% v34 flights. MSE changes: every flight, all three seeds.

Are the errors shared? (seed 42)

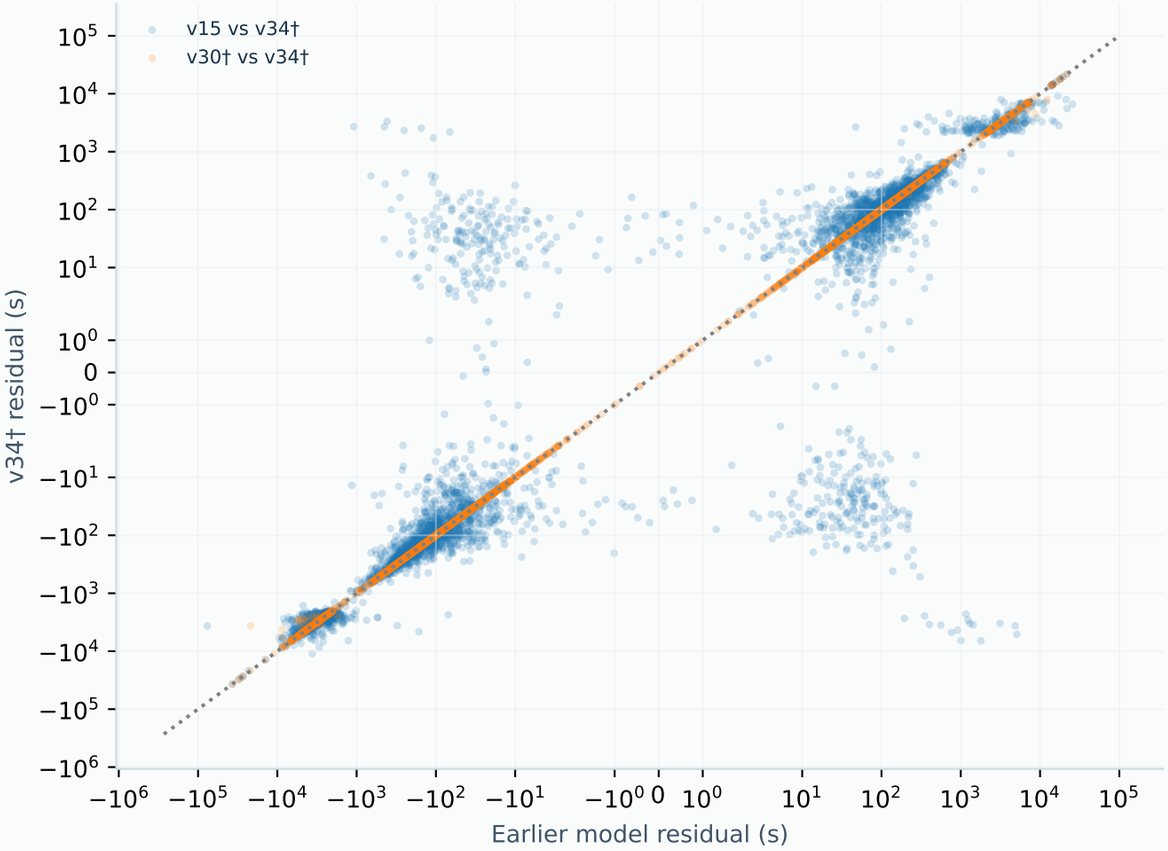

Where the last two corrections helped

