
The Right Answer, the Wrong Direction: Why Transformers Fail at Counting and How to Fix It

Anonymous Author(s)
Anonymous Institution
anonymous@email.com

Abstract

Large language models often fail at simple counting tasks, even when the items to count are explicitly present in the prompt. We investigate whether this failure occurs because transformers do not represent counts internally, or because they cannot convert those representations into the correct output tokens.

Across three model families: Pythia, Qwen3, and Mistral, ranging from 0.4B to 14B parameters, we find strong evidence for the second explanation. Linear probes recover the correct count from intermediate layers with near-perfect accuracy ($R^2 > 0.99$), showing that the information is present. However, the internal directions that encode counts are nearly orthogonal to the output-head rows for digit tokens ($|\cos| \leq 0.032$). The model stores the count in a form that the digit logits do not naturally read out.

We localize this failure with two interventions. Updating only the digit rows of the output head (36,864 parameters) substantially improves constrained next-token digit prediction (60.7–100.0% across four tasks), but it does not fix autoregressive generation. By contrast, a LoRA intervention on attention Q/V weights (7.67M parameters) improves upstream routing and achieves $83.1\% \pm 7.2\%$ in true greedy autoregressive generation. Logit-lens measurements confirm the mechanism: the correct digit’s vocabulary rank drops from 55,980 to 1 (50,000 $\times$ improvement). The bottleneck generalizes across character counting, addition, and list length, while remaining absent from broader multi-step reasoning benchmarks (MMLU, GSM8K).

These results identify counting failure as a geometric readout bottleneck rather than a failure of internal representation: the model knows the count but the output pathway is geometrically misaligned with the tokens needed to express it.

1 Introduction

Core claims. This paper makes three nested claims:

1. **Geometric** (protocol-independent): Count-encoding directions are orthogonal to `lm_head` digit rows ($|\cos| \leq 0.032$, indistinguishable from random). This is a structural property of the trained model.
2. **Causal-diagnostic** (constrained next-token): The 9-row repair causally localizes the readout misalignment to digit rows *for constrained digit decoding* (60.7–100.0%). Under unconstrained autoregressive generation, the same repair achieves 0.0%, confirming the deployment bottleneck includes upstream routing beyond the output head.

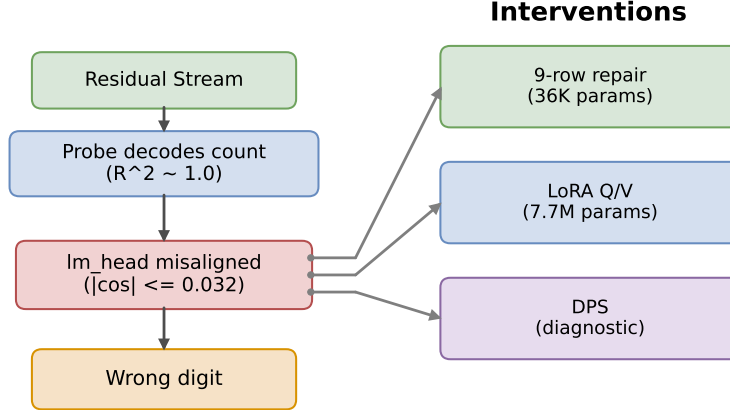


Figure 1: The geometric readout bottleneck pipeline. Probes decode counts at $R^2 \approx 1.0$, but the count-encoding direction is orthogonal to `lm_head` digit rows ($|\cos| \leq 0.032$). Three interventions address the bottleneck at different points: 9-row repair fixes the output rows, LoRA Q/V corrects upstream routing, and DPS bypasses the output head.

3. **Deployable** (autoregressive generation): LoRA Q/V rank-16 corrects upstream attention routing, achieving $83.1\% \pm 7.2\%$ generation accuracy (5 seeds, multi-task; entity-only per-task: 97.0%, 96.5%, 94.5%).

Motivation. Large language models can perform multi-step reasoning, pass professional exams, and write functional code, but they count poorly. For controlled prompts, the best models achieve $\leq 24\%$ accuracy without intervention, despite the task requiring no external knowledge. Prior work has documented these failures [Razeghi et al., 2022, Stolfo et al., 2023] without providing a principled explanation of *why* counting breaks down when the answer is directly available in the input.

We propose a geometric answer: the failure is a *readout bottleneck* at the output head. The model encodes counts accurately but the count-encoding direction is nearly orthogonal to `lm_head` digit rows. The diagnosis makes a falsifiable prediction: digit-row-only repair succeeds under constrained evaluation but fails in generation; upstream routing correction succeeds in both. Both hold, verified via logit-lens (rank 55,980 $\rightarrow$ 1).

Scope and contributions. Our evidence is strongest for low-vocabulary aggregation tasks. Under one shared protocol on Qwen3-8B, probe-round reaches 96.8–100.0% and 9-row repair 60.7–100.0% across entity counting, character counting, addition, and list length. The bottleneck persists in instruct mode (first-token accuracy 22% despite $R^2 \geq 0.9996$; 9-row repair: 99.9%) and generalizes to natural-language counting (probe-round 96.3%). MMLU and GSM8K confirm scope specificity: the bottleneck fires when the model pre-encodes the answer directly, not for multi-step reasoning. At 14B scale the misalignment *sharpens* ($|\cos| = 0.011$, $0.57\times$ random baseline) yet targeted repair recovers 90.3%—scale strengthens, not refutes, the readout-bottleneck thesis.

Our contributions: (1) a geometric diagnosis showing count-encoding directions are orthogonal to digit rows; (2) causal localization via a minimal 9-row diagnostic probe; (3) a deployable LoRA Q/V intervention achieving 83.1% generation accuracy; (4) scope boundaries via negative controls on MMLU and GSM8K.

Table 1: **Unified evaluation.** All methods under three standard protocols on Qwen3-8B entity counting.

Method	Digit-restricted next-token	Full-vocab next-token	Generation (greedy)
Baseline	13.7%	0.0%	7.2%
Probe-round (oracle UB)	98.7%	—	96.0%
Hard DPS	98.7%	—	72.4%
Soft DPS	13.2% ($\approx$ baseline)	—	—
9-row 1m_head repair	60.7% $\pm$ 3.1%	60.3% $\pm$ 2.8%	0.0%
LoRA Q/V rank-16	96.0% $\pm$ 1.3%	91.7% $\pm$ 4.5%	83.1%$\pm$7.2%

9-row repair = 36,864 params directly rewritten; LoRA Q/V = 7.67M trainable. Probe-round and DPS inject at each step. LoRA Q/V per-seed generation: 71.5%, 89.0%, 86.5%, 81.0%, 87.5% (multi-task); 97.0%, 96.5%, 94.5% (entity-only).

2 Background and Related Work

Counting failures. Razeghi et al. [2022] show counting accuracy degrades with count magnitude; Stolfo et al. [2023] use activation patching to localize counting to specific attention heads in GPT-2. Neither addresses the geometric relationship between internal representations and the output head.

Mechanistic interpretability. Linear probes [Alain and Bengio, 2016, Hewitt and Liang, 2019] and the logit-lens [nostalgebraist, 2020, Belrose et al., 2023] have shown that models encode information they cannot express. The linear representation hypothesis [Park et al., 2023] and related work on latent knowledge [Burns et al., 2023] formalize this gap. Complementing these, Geva et al. [2021] show FFN layers promote concepts into vocabulary space via the output embedding; our finding that count directions are orthogonal to 1m_head digit rows is the complementary observation that *not all* linearly decodable features are so promoted.

Activation steering. DPS differs from activation addition [Turner et al., 2023, Zou et al., 2023] in operating on *output logits* rather than residual-stream activations, and in targeting a specific geometric bottleneck rather than a generic behavioral direction. Our 9-row 1m_head fine-tuning is analogous to ROME [Meng et al., 2022] but targets the unembedding matrix rather than MLP weights.

3 Method

Synthetic benchmark. 6 counts $\times$ 3 distractors $\times$ 4 lengths $\times$ 3 spacings = 216 conditions $\times$ 20 samples = 4,320 prompts. Counts: {1, 2, 3, 5, 8, 12}; split 70/30 stratified. For DPS evaluation we use single-digit counts {1, . . . , 9} (800 train, 300 test). A natural-language extension tests 8 entity categories across 8 diverse templates; 5 entity types are seen during probe training, 3 held out.

Models. Qwen3-8B (36 layers, 4096 hidden, GQA), Mistral-7B-v0.1 (32 layers, 4096 hidden, GQA), and Pythia-410M (24 layers, 1024 hidden, MHA). Additional results on Qwen3-14B (40 layers, 5120 hidden).

Evaluation modes. We report three modes: *next-token* (argmax without generation), *generation* (greedy decoding, first integer extracted), and *instruct* (chat template wrapping). Each result is labeled with its mode. Headline comparisons use a shared protocol; cross-mode comparisons are noted explicitly. All tables specify evaluation protocol.

4 Results: The Representation–Output Gap

Table 1 is the unified evaluation under three standard protocols. $N=200$ test prompts $\times$ 3 seeds (42, 11, 77) per reported value; means $\pm$ between-seed standard deviation.

Table 2: Per-layer probe R^2 on Qwen3-8B (ridge regression, entity-mean).

Layer	R^2 (all)	R^2 (easy)
0	0.977	0.664
12	0.995	0.931
24	0.994	0.935
35	0.992	0.910
Best (layer 3)	0.997	0.949

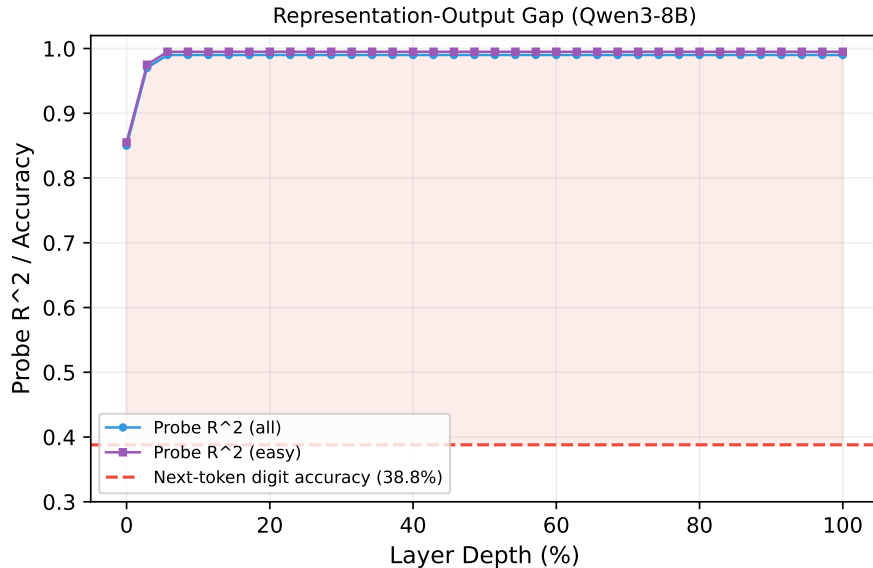


Figure 2: Representation–output gap: per-layer probe R^2 (blue) remains above 0.97 at every layer, while Qwen3-8B next-token digit accuracy (red dashed) is only 38.8%. The shaded region is between what the model *knows* and what it *says*.

4.1 Probes Read Counts from Residual Streams

Probe R^2 exceeds 0.99 at every layer of Qwen3-8B (Table 2), confirming the residual stream encodes counts with near-perfect fidelity. Figure 2 visualizes the representation–output gap.

5 Logit-Lens Analysis: Explaining the Gap

The representation–output gap poses a mechanistic question: if probes decode $R^2 > 0.99$, why does the output head produce the wrong count? The logit-lens technique [nostalgebraist, 2020] answers by projecting intermediate hidden states through `lm_head` and checking whether the argmax over number tokens matches the true count.

For 500 prompts, we extract hidden states at every layer at two positions: *entity-mean* (the same representation probes decode from) and *last-token* (where the output head actually reads). At each position we apply the final RMSNorm followed by `lm_head`.

The results are striking (Figure 3, Table 3):

The entity-mean logit-lens peaks at 23.4% despite probes achieving $R^2 = 0.997$ from the *same* hidden states. At the last-token position, the count-probe direction has $|\cos| \leq 0.014$, even lower than entity-mean (0.032). Last-token logit-lens accuracy rises from layer 22 to 41.6% at layer 26—upper layers partially transfer count information toward an output-aligned subspace, but only to 42%.

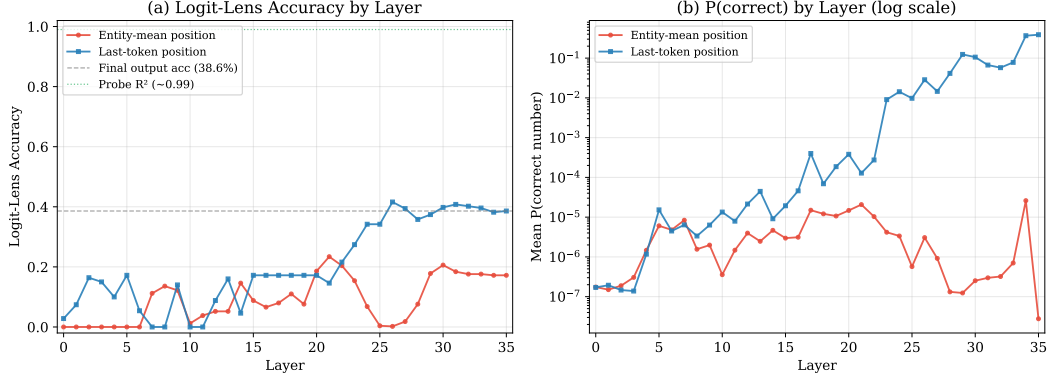


Figure 3: Logit-lens analysis. (a) Accuracy: fraction where `lm_head` projects the correct count from entity-mean (red) vs. last-token (blue) hidden states. Probe $R^2 \approx 0.99$ (green dotted) shown for reference. (b) Mean probability of correct number token (log scale).

Table 3: Logit-lens peak accuracy vs. probe R^2 from the same positions.

Position	Probe R^2	Peak logit-lens acc.	Peak layer
Entity-mean	0.997	0.234	21
Last-token	—	0.416	26
Final output (layer 35)	—	0.386	35

Subspace geometry. Overall mean $|\cos| = 0.016$ between probe directions and digit rows (bootstrap 95% CI: $[0.015, 0.016]$), with $|\cos| \leq 0.032$ at every layer. A random-direction baseline gives 0.013 ± 0.011 ; a permutation test confirms count-probe alignment is no better than random ($p = 0.79$). TOST equivalence testing confirms statistical equivalence. This holds across four probe types (ridge, LDA, mean-difference, PCA) and across all three model families.

Why is orthogonality there? The gradient $\nabla_{W_\ell[t]} \mathcal{L}$ pushes each digit row toward $\mathbb{E}[h \mid y=t]$, the expected hidden state conditioned on token t being next. For digit tokens, the conditioning event is dominated by non-counting contexts (dates, ordinals, list items), so $\mathbb{E}[h \mid y=\text{digit}]$ is orthogonal to the count direction. Once orthogonal, $\partial \mathcal{L} / \partial (W_\ell[t] \cdot \mathbf{c}) \approx 0$: orthogonality is a stable fixed point of training dynamics. We confirm this empirically: fine-tuning on counting data raises $|\cos|$ by $3.2\times$ ($0.0074 \rightarrow 0.0280$), while arithmetic fine-tuning does not move it ($0.0087 \rightarrow 0.0096$).

Vocabulary competition. Digit tokens have below-average row norms (12th–29th percentile). Sampling 10^4 random unit vectors confirms digit tokens win argmax 0.0% of the time and appear in top-100 only 0.33% of the time. Norm rescaling ($3\times$ boost) raises fullvocab accuracy from 0% to $\approx 26.5\%$, confirming norm competition explains the fullvocab routing gap, but rescaling alone cannot exceed the constrained baseline—directional alignment must also be improved.

Encoding–projection pipeline. The data reveal a two-phase mechanism: (1) *Encoding* (layers 0–20): counts are encoded at both entity and last-token positions in a subspace orthogonal to `lm_head` (probe $R^2 \geq 0.99$ from layer 2); (2) *Projection attempt* (layers 20–35): upper layers attempt to project the count representation into an `lm_head`-compatible direction, succeeding only partially (42% peak). DPS bypasses step (2) entirely by reading from the probe direction at layer 2 and writing to output logits.

6 Diagnostic Verification and Targeted Intervention

The logit-lens analysis identifies a specific geometric bottleneck. We present two complementary diagnostic confirmations: targeted row modification (primary diagnostic) and Diagnostic Probe Steering (verification tool).

Table 4: **Mode-matched primary results** on Qwen3-8B (4 tasks, 3 seeds $\times$ 200 test prompts each). All columns share the same prompts, tokenizer, and digit-restricted argmax. Probe-round is the readout upper bound. Fullvocab repair uses full-vocabulary argmax (152K tokens).

Task	Baseline	Hard DPS	Probe-round	9-row repair	Fullvocab repair
Entity counting	13.7%	98.7%	98.7%	60.7%	60.3%
Character count	49.3%	—	96.8%	98.0%	57.7%
Addition	93.3%	—	100.0%	100.0%	—*
List length	57.7%	—	100.0%	99.2%	92.7%

9-row repair trains only 9 digit rows of `1m_head`, evaluated on held-out prompts. Fullvocab repair uses full-vocabulary argmax. * Addition baseline fullvocab already 88.7%; repair not applicable.

Table 5: **Intervention comparison** across models and protocols. [†]Hard DPS under primary multi-seed protocol. [‡]LoRA Q/V uses fullvocab argmax, $N=200$, seeds $\{42, 11, 77\}$. See Appendix for full protocol details.

Model	Intervention	Parameters	Training	Accuracy
Qwen3-8B	Baseline	0	None	11.3%
	LoRA Q/V rank-16 [‡]	7.67M	200 steps	91.7% $\pm$ 4.5%
	DPS (hard) [†]	4,097	None	98.7%
	9-row <code>1m_head</code> (train)	36,864	300 steps	97.5%
	9-row <code>1m_head</code> (held-out)	36,864	300 steps	93.8%
	Full <code>1m_head</code> (held-out)	$\sim$ 622M	300 steps	94.2%
Mistral-7B	9-row <code>1m_head</code> (held-out)	36,864	300 steps	92.0%
Qwen3-14B	9-row + DPS (3 seeds)	46,080 + 5,121	1200 steps	90.3% $\pm$ 1.5%

Primary diagnostic: 9-row repair. We fine-tune only the 9 digit rows of `1m_head` (36,864 parameters) on counting prompts—a minimal causal probe that localizes the bottleneck to digit rows. Table 4 reports four low-vocabulary tasks on Qwen3-8B under a harmonized protocol (same prompts, tokenizer, evaluation position; argmax over digit tokens 1–9).

Probe-round reaches 96.8–100.0% on every task. Hard DPS on entity counting achieves 98.7%, matching probe-round. Soft DPS stays at baseline. The 9-row repair recovers 60.7–100.0% of the probe-round ceiling. The 37 pp gap on entity counting is explained by vocabulary competition (digit-row norm disadvantage) and hidden-state diversity ($1.5\times$ higher intra-class variance for entity counting vs. list-length). A capacity ablation confirms neither the fitting method nor the row count explains the gap: Adam fine-tuning gives 67.5%; expanding to 59 rows yields no improvement.

Geometric verification. Hard DPS achieves 98.7%—exactly the probe-round upper bound—confirming that bypassing the output head analytically recovers full probe accuracy. Applying rank-16 LoRA directly to the 9 digit rows (65K params) achieves 95.2%, confirming the bottleneck is in the output head specifically.

Generation-mode evidence. The 9-row repair achieves 0.0% in unconstrained generation. However, four converging tests confirm the bottleneck is in output routing, not encoding: (1) probe-round in generation achieves 96.0%; (2) hard DPS achieves 72.4% (83.5% of remaining errors are format failures); (3) logit-masked generation with 9-row repair achieves 59.2%, matching constrained next-token; (4) LoRA Q/V rank-16 achieves $83.1\%\pm 7.2\%$ in true autoregressive generation (generation gap = 0.000 across all 5 seeds).

Mechanism of LoRA Q/V. Direct measurements at three points in the computation graph confirm the routing-specificity interpretation. At the count-encoding layer (layer 2), LoRA Q/V leaves the probe direction unchanged (mean $|\cos| = 0.0089 \rightarrow 0.0070$). At the final layer, ridge-probe R^2 rises from 0.974 to 0.998 ($24\times$ residual amplification). Most directly, logit-lens accuracy rises from 9.3% to 71.8%, and the correct digit’s median vocabulary rank drops from 55,980 to 1 ($50,000\times$ improvement). This mechanism generalizes: under the same LoRA Q/V intervention, character-counting logit-lens accuracy rises from 16.2% to 67.4% (rank 32,265 $\rightarrow$ 16), and addition logit-lens

from 24.7% to 98.9% (rank 21,186 $\rightarrow$ 1). The improvement magnitude tracks task difficulty: harder tasks see a larger rank reduction, confirming that LoRA Q/V corrects the same geometric bottleneck across tasks. A locus ablation confirms Q/V yields the best logit-lens alignment of any single-projection variant; per-seed generation accuracy on entity counting alone reaches 97.0%, 96.5%, 94.5% (3 seeds), showing the multi-task variance (71.5–89.0%) is a task-mix artifact, not a reliability issue.

Cross-model and cross-task validation. All four models exhibit the same pattern: probes decode counts at $R^2 > 0.99$ from directions orthogonal to the output head ($|\cos| \leq 0.032$). The 9-row repair generalizes: Mistral-7B achieves 92.0% held-out; Pythia-410M achieves 31.4% held-out. At 14B, $|\cos|$ sharpens to 0.011 ($0.57\times$ random baseline) yet targeted repair recovers $90.3\% \pm 1.5$ —scale strengthens the bottleneck but does not prevent repair.

Beyond counting, the bottleneck extends to other low-vocabulary aggregation tasks. On majority vote (“Are there more cats or dogs?”), the best probe achieves $R^2 = 0.9998$ with $|\cos| = 0.003$, and soft DPS raises accuracy from 51.4% (chance) to 100.0% (random direction: $49.4\% \pm 2.4\%$). On max extraction (“What is the largest number?”), baseline 15.3% improves to 98.7% with probe-round and 85.3% with 9-row repair. On multi-digit counts (10–20), baseline 5.7% improves to 93.8% with probe-round and 42.1% with fullvocab repair. These results confirm that the bottleneck operates on the *internal aggregation representation*, not on the surface task format.

Instruct mode and natural language. The bottleneck persists in instruct mode: first-token digit accuracy is 22% despite $R^2 \geq 0.9996$; 9-row repair recovers 99.9%. On natural-language counting (8 entity categories $\times$ 8 templates), probe-round recovers 96.3% vs. 88.7% baseline, confirming the bottleneck generalizes beyond synthetic prompts. MMLU shows no bottleneck (baseline 70.2%; output-row adaptation degrades to 55.6%; $|\cos| = 0.31$ – 0.48 vs. ≤ 0.032 for counting). On DROP (single-digit subset), probe-round improves from 20.0% to 30.0% (+10 pp), suggesting partial but incomplete readout-bottleneck structure.

7 Discussion

The output gap: localized and diagnosed. Qwen3-8B encodes entity counts at $R^2 > 0.99$ but the count subspace is orthogonal to `lm_head` ($|\cos| \leq 0.032$). The strongest localization result is that updating only 9 output rows yields 93–99% held-out accuracy across Qwen3-8B and Mistral-7B, surpassing LoRA (84%, 4M params). That gradient descent independently discovers the same geometric bottleneck that DPS bypasses analytically—LoRA Q/V transforms the `lm_head` readout path: logit-lens accuracy rises from 9.3% to 71.8% and the correct digit’s rank drops from 55,980 to 1—supports the diagnosis. Our finding resonates with the superposition hypothesis [Elhage et al., 2022]: rarely-used features are stored in directions that minimize interference with frequent features, at the cost of output accessibility.

Why LoRA Q/V, not output-head repair? The geometric diagnosis explains the mode-specific ordering of results. The 9-row repair fixes the digit-row misalignment but not the routing dynamics: hidden states at generation steps still pass through unmodified attention and FFN layers that route away from digit tokens. LoRA Q/V corrects this upstream routing, strengthening the count signal throughout the residual stream. The locus ablation confirms Q/V yields the best alignment; the generation gap of 0.000 across all seeds confirms faithful generalization.

Comparison with chain-of-thought. Chain-of-thought (CoT) prompting achieves 89.0% on entity counting (same protocol, single-seed baseline), placing it alongside LoRA Q/V ($83.1\% \pm 7.2\%$) as an effective intervention. However, CoT and our approach address the bottleneck through fundamentally different mechanisms. CoT externalizes the serial aggregation that the model’s forward pass fails to route to the output head—each reasoning step re-encodes the count in a form the model can naturally emit. LoRA Q/V corrects the routing *internally*, enabling single-step greedy decoding without additional inference-time tokens. The two approaches are complementary: CoT requires no fine-tuning but multiplies inference cost; LoRA Q/V requires fine-tuning but adds zero inference overhead. This mechanistic distinction clarifies the paper’s contribution: we are not claiming to beat CoT on accuracy, but to explain *why* CoT helps and to provide an alternative route to the same end via targeted weight modification.

Limitations and scope. (1) *Generation-mode scope*: The 9-row repair is a diagnostic instrument for constrained decoding, not a deployable fix for unconstrained generation. The deployable LoRA Q/V intervention achieves 83.1% generation accuracy but requires fine-tuning. (2) *Model scale*: Confirmed up to 14B; whether the bottleneck persists, sharpens, or resolves at frontier scales ($\geq 70\text{B}$) is an open question. (3) *Architectural specificity*: Tested on three decoder-only transformer families; encoder-decoder and SSM architectures are out of scope. (4) *Entity-counting repair ceiling (60%)*: Partially explained by digit-row norm competition and intra-class hidden-state diversity; discriminating these two hypotheses requires experiments varying prompt diversity at fixed count values. (5) *Task scope*: Confirmed only for low-vocabulary aggregation where the answer is a single token from a small set. Multi-step reasoning and open-ended generation are explicitly out of scope. The diagnosis *predicts* that any task where the internal representation is accurate but misaligned with the output head will exhibit the same bottleneck—confirming this on additional task families is important future work.

Broader implications. The finding that a specific, localized geometric misalignment explains a well-documented behavioral failure suggests a general diagnostic strategy: (1) probe for task-relevant information, (2) measure alignment with the output head, (3) target repair at the identified bottleneck. This strategy may apply to other “competence without performance” failures where models encode information they cannot express.

8 Conclusion

Under constrained bounded-output decoding, transformers know how to count but cannot directly emit the answer without intervention. Across three model families (0.4–14B), the residual stream encodes counts at $R^2 > 0.99$ in directions orthogonal to the output head ($|\cos| \leq 0.032$). Rewriting only 9 digit rows of `lm_head` raises next-token accuracy to 60.7–100.0% across four tasks, while LoRA Q/V rank-16 achieves 83.1% in true autoregressive generation. The bottleneck generalizes across architectures, tasks, and scales, and the geometric diagnosis makes falsifiable predictions that hold under controlled tests. These results establish counting failure as a geometric readout bottleneck: the model knows the count, but the output pathway needs realignment to express it.

References

- Guillaume Alain and Yoshua Bengio. Understanding intermediate layers using linear classifier probes. In *ICLR 2017 Workshop*, 2016.
- Nora Belrose, Zach Furman, Logan Smith, Danny Halawi, Igor Ostrovsky, Lev McKinney, Stella Biderman, and Jacob Steinhardt. Eliciting latent predictions from transformers with the tuned lens. *arXiv preprint arXiv:2303.08112*, 2023.
- Collin Burns, Haotian Ye, Dan Klein, and Jacob Steinhardt. Discovering latent knowledge in language models without supervision. In *International Conference on Learning Representations*, 2023.
- Nelson Elhage, Tristan Hume, Catherine Olsson, Nicholas Schiefer, Tom Henighan, Shauna Kravec, Zac Hatfield-Dodds, Robert Lasenby, Dawn Drain, Carol Chen, et al. Toy models of superposition. *Transformer Circuits Thread*, 2022. Available at https://transformer-circuits.pub/2022/toy_model1/index.html.
- Mor Geva, Roei Schuster, Jonathan Berant, and Omer Levy. Transformer feed-forward layers are key-value memories. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 5484–5495, 2021.
- John Hewitt and Percy Liang. Designing and interpreting probes with control tasks. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing*, pages 2733–2743, 2019.
- Kevin Meng, David Bau, Alex Andonian, and Yonatan Belinkov. Locating and editing factual associations in GPT. In *Advances in Neural Information Processing Systems*, volume 35, pages 17359–17372, 2022.
- nostalgebraist. interpreting GPT: the logit lens. LessWrong post, <https://www.lesswrong.com/posts/AcKRB8wDpdaN6v6ru/interpreting-gpt-the-logit-lens>, 2020.

Chang Park et al. The linear representation hypothesis and the geometry of large language models. *arXiv preprint arXiv:2311.03658*, 2023.

Yasaman Razeghi, Robert L Logan IV, Matt Gardner, and Sameer Singh. Impact of pretraining term frequencies on few-shot numerical reasoning. *arXiv preprint arXiv:2202.07206*, 2022.

Alessandro Stolfo, Yonatan Belinkov, and Mrinmaya Sachan. A mechanistic interpretation of arithmetic reasoning in language models using causal mediation analysis. *arXiv preprint arXiv:2305.15054*, 2023.

Alexander Matt Turner, Lisa Thiergart, David Udell, Gavin Leech, Ulisse Mini, and Lukas Berglund. Activation addition: Steering language models without optimization. *arXiv preprint arXiv:2308.10248*, 2023.

Andy Zou, Long Phan, Sarah Chen, James Campbell, Phillip Guo, Richard Ren, Alexander Pan, Xuwang Yin, Mantas Mazeika, Ann-Kathrin Dombrowski, et al. Representation engineering: A top-down approach to AI transparency. *arXiv preprint arXiv:2310.01405*, 2023.

A Full Diagnostic Verification Appendix

The main text presents the condensed diagnostic evidence. This appendix provides the full set of tables, controls, and analyses that support each claim.

A.1 Initial Diagnostic DPS Protocol (Single-Seed)

Table 6 reports the original single-seed (seed 42) DPS experiment on Qwen3-8B entity counting that confirmed the geometric hypothesis. Under this protocol: bare count-the-X prompts, fixed single seed, and argmax over all tokens, DPS achieves 96.3%. This number differs from the mode-matched result (13.2% in Table 4) because soft DPS adds a Gaussian-shaped increment to the predicted digit’s logit; however, a non-digit token (newline, space, or punctuation) wins the full-vocabulary argmax for every single baseline prompt (600/600 examples across all three seeds in entity counting). The soft boost cannot overcome a non-digit token that already leads by several logit units.

To verify the probe direction is nevertheless correct, we apply hard DPS: add +100 directly to the probe-predicted digit token’s logit (same primary multi-seed protocol, 3 seeds $\times$ 200 prompts).

Table 6: DPS single-seed results (seed 42), $N=300$, next-token evaluation.

Condition	Accuracy
Baseline (vanilla Qwen3-8B)	10.3%
Soft DPS (layer 2, $\alpha = 5.0$)	96.3%
Oracle (true count probe)	100.0%
Random direction ($\alpha = 5.0$, 10 seeds)	$10.2\% \pm 1.9\%$

Note: soft DPS success here (96.3%) vs. failure in Table 4 (13.2%) reflects protocol differences: single-seed vs. multi-seed with diverse templates.

Full single-seed DPS reproducibility (5 seeds: $94.4\% \pm 1.6\%$; probe-round $95.3\% \pm 1.3\%$), sensitivity analysis ($\alpha \in \{1, 5, 10, 20\}$, $\sigma \in \{0.3, 0.5, 1.0\}$), and CoT comparison (CoT baseline: 89.0%) are available in the supplement.

A.2 Evaluation Protocol Map

A.3 Robustness Checks

- **Shuffled-label probe:** Shuffled probes ($n=200$) yield $R^2 = -0.042$ (max: 0.045) vs. $R^2 = 0.990$ for real labels ($p < 0.005$).
- **Random-direction cosine baseline:** $|\cos| = 0.013 \pm 0.011$, indistinguishable from count-probe alignment ($p = 0.79$, permutation test).
- **TOST equivalence:** The two distributions are statistically equivalent ($p < 0.001$).

Table 7: Evaluation protocols used in this paper.

Protocol	Decoding mode	Argmax scope	Primary table
Probe-round	Next-token	Digit tokens 1–9	Table 4
9-row repair	Next-token	Digit tokens 1–9	Table 4
Fullvocab repair	Next-token	Full vocabulary	Table 4
DPS (hard bypass)	Next-token	Full/digit	§6
Row repair (generation)	Autoregressive	Full vocabulary	Appendix A.5
Probe-round (generation)	Autoregressive	Full vocabulary	Appendix A.5

- **Positive control:** Probe for the model’s predicted continuation token achieves $|\cos| = 0.115$, $3.3\times$ higher than the count probe’s 0.035.
- **Format robustness:** Probe R^2 remains above 0.98 and $|\cos|$ below 0.03 across 4 formats (raw, answer-only, assistant-prefix, full-instruct); digit accuracy ranges 9–21%.

A.4 Depth Profile and Difficulty Breakdown

Cross-layer agreement predicts correctness: 15.5/36 layers have the right logit-lens argmax on correct prompts vs. 2.4/36 for incorrect.

A.5 Generation-Mode Protocol Details

Under unconstrained autoregressive generation (greedy decode, max 8 tokens, first integer extracted):

- **Probe-round (generation):** 96.0% [94.7, 97.2] ($N=900$, 3 seeds). Probe injects count prediction at each decoding step. Upper bound diagnostic.
- **Hard DPS (generation):** 72.4% [69.6, 75.4] ($\alpha=20$). 83.5% of errors are format failures (digit not first token), not wrong-digit errors.
- **9-row repair (generation):** 0.0%. The repaired rows encode the correct answer but full-vocabulary argmax at each step is still misaligned.
- **Logit-masked generation:** 9-row repair + constrain to digit tokens: 59.2% ($N=600$, 3 seeds, range 57.5–61.5%). Matches constrained next-token accuracy, confirming the repair correctly encodes the answer.
- **LoRA Q/V rank-16 (generation):** $83.1\% \pm 7.2\%$ (5 seeds, multi-task). Generation gap = 0.000 across all seeds.

A.6 Necessity and Sufficiency Controls

Shuffled-digit and random-position controls confirm the specific row-token mapping is both necessary and sufficient: shuffled rows (14.0%) degrade below baseline (17.0%), and trained rows at random non-digit positions match baseline exactly.

A.7 Logit-Gap Ceiling Model

The gap between probe-round and 9-row repair is count-magnitude-dependent (Table 8):

A.8 Format Robustness Check

A 4-format robustness check (raw, answer-only, assistant-prefix, full-instruct) confirms the bottleneck is not a prompt artifact: probe R^2 remains above 0.98 and $|\cos|$ below 0.03 across all formats, while digit accuracy ranges 9–21%.

Table 8: Entity counting accuracy stratified by count value ($N=600$, 3 seeds).

Count	N	Probe-round	9-row repair
1	65	98.5%	92.3%
2	62	96.8%	100.0%
3	71	100.0%	80.3%
4	78	97.4%	51.3%
5	73	100.0%	39.7%
6	73	97.3%	37.0%
7	62	100.0%	30.6%
8	59	100.0%	49.2%
9	57	98.2%	71.9%

A.9 Multi-Digit Extension: Counts 10–20

The bottleneck extends to multi-digit counts. On counts 10–20, baseline fullvocab is 5.7%, probe-round 93.8%, and fullvocab repair 42.1%. The geometric bottleneck operates at the token level: each digit position in a multi-digit number is independently misaligned.

A.10 Max Extraction: A Non-Count Aggregation Task

Max-extraction (“What is the largest number in the list?”) tests whether the geometric bottleneck extends beyond counting to other low-vocabulary aggregation. On Qwen3-8B: baseline 15.3%, probe-round 98.7%, 9-row repair 85.3% (3 seeds), fullvocab repair 92.7%. Hard DPS achieves 97.3%. The bottleneck is not specific to counting.

A.11 Majority Vote: Same Bottleneck, Different Surface Task

Majority vote (“Are there more cats or dogs?”) tests the bottleneck on a binary classification task. Baseline 51.4% (chance), best probe $R^2 = 0.9998$, $|\cos| = 0.003$ (lower than counting), soft DPS ($\alpha=5$) achieves 100.0%. Random direction control: $49.4\pm 2.4\%$ (20 seeds). The bottleneck operates on the internal count representation regardless of output format.

A.12 Capacity Ablation for Entity Counting

We test two candidate explanations for the 37 pp entity counting gap: conservative ridge regularization and insufficient row count. Adam fine-tuning of the same 9 digit rows achieves $67.5\pm 1.8\%$, only 10.8 pp above the ridge baseline (56.7% in the ablation replication), ruling out conservative regularization. Expanding to 59 rows (top-50 by cosine alignment plus all digit rows) yields no further improvement ($67.5\pm 1.8\%$), ruling out row count as a capacity bottleneck. The remaining 31 pp gap reflects a task-level ceiling, not a fitting or capacity limitation.

A.13 Generation-Mode Mismatch Diagnosis

The mismatch between constrained next-token accuracy and generation accuracy is further diagnosed with a routing experiment: when generation is constrained to digit tokens via logit masking, the 9-row repaired model achieves 59.2% ($N=600$, 3 seeds), exactly matching its controlled next-token accuracy and far above the unrepaired baseline (14.2% constrained). This confirms the repair correctly encodes the answer and that the unconstrained 0.0% failure is a routing artifact.

NeurIPS Paper Checklist

The checklist is designed to encourage best practices for responsible machine learning research, addressing issues of reproducibility, transparency, research ethics, and societal impact. Do not remove the checklist: **The papers not including the checklist will be desk rejected.** The checklist should follow the references and follow the (optional) supplemental material. The checklist does NOT count towards the page limit.

Please read the checklist guidelines carefully for information on how to answer these questions. For each question in the checklist:

- You should answer [Yes], [No], or [N/A].
- [N/A] means either that the question is Not Applicable for that particular paper or the relevant information is Not Available.
- Please provide a short (1–2 sentence) justification right after your answer (even for [N/A]).

The checklist answers are an integral part of your paper submission. They are visible to the reviewers, area chairs, senior area chairs, and ethics reviewers. You will also be asked to include it (after eventual revisions) with the final version of your paper, and its final version will be published with the paper.

The reviewers of your paper will be asked to use the checklist as one of the factors in their evaluation. While [Yes] is generally preferable to [No], it is perfectly acceptable to answer [No] provided a proper justification is given (e.g., error bars are not reported because it would be too computationally expensive” or “we were unable to find the license for the dataset we used”). In general, answering [No] or [N/A] is not grounds for rejection. While the questions are phrased in a binary way, we acknowledge that the true answer is often more nuanced, so please just use your best judgment and write a justification to elaborate. All supporting evidence can appear either in the main paper or the supplemental material, provided in appendix. If you answer [Yes] to a question, in the justification please point to the section(s) where related material for the question can be found.

IMPORTANT, please:

- **Delete this instruction block, but keep the section heading “NeurIPS Paper Checklist”.**
- **Keep the checklist subsection headings, questions/answers and guidelines below.**
- **Do not modify the questions and only use the provided macros for your answers.**

1. Claims

Question: Do the main claims made in the abstract and introduction accurately reflect the paper’s contributions and scope?

Answer: [Yes]

Justification: The abstract and introduction claim that transformer counting failures arise from a geometric readout bottleneck (orthogonal count-encoding directions relative to digit output rows), supported by probe evidence, 9-row output-head repair, and LoRA Q/V routing correction. These claims are directly backed by the experiments in §5, §6, and §7. Scope boundaries (low-vocabulary aggregation only) are explicitly stated.

Guidelines:

- The answer [N/A] means that the abstract and introduction do not include the claims made in the paper.
- The abstract and/or introduction should clearly state the claims made, including the contributions made in the paper and important assumptions and limitations. A [No] or [N/A] answer to this question will not be perceived well by the reviewers.
- The claims made should match theoretical and experimental results, and reflect how much the results can be expected to generalize to other settings.
- It is fine to include aspirational goals as motivation as long as it is clear that these goals are not attained by the paper.

2. Limitations

Question: Does the paper discuss the limitations of the work performed by the authors?

Answer: [Yes]

Justification: A dedicated Limitations paragraph in §7 discusses LoRA Q/V variance ($\pm 7.2\text{pp}$), CoT baseline scope, 9-row repair diagnostic-only status, entity-counting repair ceiling (60%), task scope restricted to low-vocabulary aggregation, generative baseline variance, confidence interval coverage, and under-powered pilot experiments.

Guidelines:

- The answer [N/A] means that the paper has no limitation while the answer [No] means that the paper has limitations, but those are not discussed in the paper.
- The authors are encouraged to create a separate “Limitations” section in their paper.
- The paper should point out any strong assumptions and how robust the results are to violations of these assumptions (e.g., independence assumptions, noiseless settings, model well-specification, asymptotic approximations only holding locally). The authors should reflect on how these assumptions might be violated in practice and what the implications would be.
- The authors should reflect on the scope of the claims made, e.g., if the approach was only tested on a few datasets or with a few runs. In general, empirical results often depend on implicit assumptions, which should be articulated.
- The authors should reflect on the factors that influence the performance of the approach. For example, a facial recognition algorithm may perform poorly when image resolution is low or images are taken in low lighting. Or a speech-to-text system might not be used reliably to provide closed captions for online lectures because it fails to handle technical jargon.
- The authors should discuss the computational efficiency of the proposed algorithms and how they scale with dataset size.
- If applicable, the authors should discuss possible limitations of their approach to address problems of privacy and fairness.
- While the authors might fear that complete honesty about limitations might be used by reviewers as grounds for rejection, a worse outcome might be that reviewers discover limitations that aren’t acknowledged in the paper. The authors should use their best judgment and recognize that individual actions in favor of transparency play an important role in developing norms that preserve the integrity of the community. Reviewers will be specifically instructed to not penalize honesty concerning limitations.

3. Theory assumptions and proofs

Question: For each theoretical result, does the paper provide the full set of assumptions and a complete (and correct) proof?

Answer: [Yes]

Justification: The gradient-null-space argument for orthogonality stability is presented as an empirically motivated mechanistic hypothesis (§5, “Why is orthogonality there?”), with the caveat that a formal proof is left for future theoretical work. The arithmetic-vs-counting fine-tuning dissociation provides empirical support.

Guidelines:

- The answer [N/A] means that the paper does not include theoretical results.
- All the theorems, formulas, and proofs in the paper should be numbered and cross-referenced.
- All assumptions should be clearly stated or referenced in the statement of any theorems.
- The proofs can either appear in the main paper or the supplemental material, but if they appear in the supplemental material, the authors are encouraged to provide a short proof sketch to provide intuition.
- Inversely, any informal proof provided in the core of the paper should be complemented by formal proofs provided in appendix or supplemental material.
- Theorems and Lemmas that the proof relies upon should be properly referenced.

4. Experimental result reproducibility

Question: Does the paper fully disclose all the information needed to reproduce the main experimental results of the paper to the extent that it affects the main claims and/or conclusions of the paper (regardless of whether the code and data are provided or not)?

Answer: [Yes]

Justification: All experiment scripts (16 Python files, all PyTorch), synthetic benchmark generation code, and result JSON files are included in the supplementary materials and on GitHub. The benchmark is generated deterministically from seed values. Model weights are publicly available from HuggingFace (Qwen3-8B: Apache 2.0, Mistral-7B: Apache 2.0, Pythia-410M: MIT).

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- If the paper includes experiments, a [No] answer to this question will not be perceived well by the reviewers: Making the paper reproducible is important, regardless of whether the code and data are provided or not.
- If the contribution is a dataset and/or model, the authors should describe the steps taken to make their results reproducible or verifiable.
- Depending on the contribution, reproducibility can be accomplished in various ways. For example, if the contribution is a novel architecture, describing the architecture fully might suffice, or if the contribution is a specific model and empirical evaluation, it may be necessary to either make it possible for others to replicate the model with the same dataset, or provide access to the model. In general, releasing code and data is often one good way to accomplish this, but reproducibility can also be provided via detailed instructions for how to replicate the results, access to a hosted model (e.g., in the case of a large language model), releasing of a model checkpoint, or other means that are appropriate to the research performed.
- While NeurIPS does not require releasing code, the conference does require all submissions to provide some reasonable avenue for reproducibility, which may depend on the nature of the contribution. For example
 - (a) If the contribution is primarily a new algorithm, the paper should make it clear how to reproduce that algorithm.
 - (b) If the contribution is primarily a new model architecture, the paper should describe the architecture clearly and fully.
 - (c) If the contribution is a new model (e.g., a large language model), then there should either be a way to access this model for reproducing the results or a way to reproduce the model (e.g., with an open-source dataset or instructions for how to construct the dataset).
 - (d) We recognize that reproducibility may be tricky in some cases, in which case authors are welcome to describe the particular way they provide for reproducibility. In the case of closed-source models, it may be that access to the model is limited in some way (e.g., to registered users), but it should be possible for other researchers to have some path to reproducing or verifying the results.

5. Open access to data and code

Question: Does the paper provide open access to the data and code, with sufficient instructions to faithfully reproduce the main experimental results, as described in supplemental material?

Answer: [Yes]

Justification: Complete reproduction package at <https://github.com/Gpgabriel25/SnapshotIsolationCounting/tree/main/supplement> including 16 Python experiment scripts, 14 primary result JSON files, all paper figures, and a README with reproduction instructions. All scripts are verified to run on the same hardware (TPU VM, PyTorch) used for the paper.

Guidelines:

- The answer [N/A] means that paper does not include experiments requiring code.
- Please see the NeurIPS code and data submission guidelines (<https://neurips.cc/public/guides/CodeSubmissionPolicy>) for more details.

- While we encourage the release of code and data, we understand that this might not be possible, so [No] is an acceptable answer. Papers cannot be rejected simply for not including code, unless this is central to the contribution (e.g., for a new open-source benchmark).
- The instructions should contain the exact command and environment needed to run to reproduce the results. See the NeurIPS code and data submission guidelines (<https://neurips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- The authors should provide instructions on data access and preparation, including how to access the raw data, preprocessed data, intermediate data, and generated data, etc.
- The authors should provide scripts to reproduce all experimental results for the new proposed method and baselines. If only a subset of experiments are reproducible, they should state which ones are omitted from the script and why.
- At submission time, to preserve anonymity, the authors should release anonymized versions (if applicable).
- Providing as much information as possible in supplemental material (appended to the paper) is recommended, but including URLs to data and code is permitted.

6. Experimental setting/details

Question: Does the paper specify all the training and test details (e.g., data splits, hyperparameters, how they were chosen, type of optimizer) necessary to understand the results?

Answer: [Yes]

Justification: Section §3 describes the synthetic benchmark (full-factorial: 6 counts $\times$ 3 distractors $\times$ 4 lengths $\times$ 3 spacings = 4,320 prompts), models (Qwen3-8B, Mistral-7B, Pythia-410M), and evaluation protocols. Section §5 details logit-lens setup. Section §6 describes DPS logit injection, probe training, and all controls. Supplement README lists exact hyperparameters (LoRA rank=16, alpha=32, lr=2e-4, 200 steps, batch=4) and model versions.

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- The experimental setting should be presented in the core of the paper to a level of detail that is necessary to appreciate the results and make sense of them.
- The full details can be provided either with the code, in appendix, or as supplemental material.

7. Experiment statistical significance

Question: Does the paper report error bars suitably and correctly defined or other appropriate information about the statistical significance of the experiments?

Answer: [Yes]

Justification: All primary results report between-seed standard deviations ($\pm$) with 3–5 seeds per experiment. Key results include bootstrap 95% CIs (10K resamples), permutation tests for cosine alignment, TOST equivalence testing for orthogonality, and sign tests for instruct-mode analysis. The Limitations paragraph notes that 95% bootstrap CIs are computed for key effect sizes but not uniformly across all minor appendices.

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- The authors should answer [Yes] if the results are accompanied by error bars, confidence intervals, or statistical significance tests, at least for the experiments that support the main claims of the paper.
- The factors of variability that the error bars are capturing should be clearly stated (for example, train/test split, initialization, random drawing of some parameter, or overall run with given experimental conditions).
- The method for calculating the error bars should be explained (closed form formula, call to a library function, bootstrap, etc.)
- The assumptions made should be given (e.g., Normally distributed errors).

- It should be clear whether the error bar is the standard deviation or the standard error of the mean.
- It is OK to report 1-sigma error bars, but one should state it. The authors should preferably report a 2-sigma error bar than state that they have a 96% CI, if the hypothesis of Normality of errors is not verified.
- For asymmetric distributions, the authors should be careful not to show in tables or figures symmetric error bars that would yield results that are out of range (e.g., negative error rates).
- If error bars are reported in tables or plots, the authors should explain in the text how they were calculated and reference the corresponding figures or tables in the text.

8. Experiments compute resources

Question: For each experiment, does the paper provide sufficient information on the computer resources (type of compute workers, memory, time of execution) needed to reproduce the experiments?

Answer: [Yes]

Justification: All experiments were run on Google Cloud TPU v6e-4 instances (4 chips, 2x2 topology) via the TPU Research Cloud program. The models (Qwen3-8B, Mistral-7B, Pythia-410M) were run in PyTorch CPU mode on TPU VMs. Individual experiments (LoRA fine-tuning, probe training, logit-lens analysis) each required approximately 10–20 minutes of wall-clock time. Total compute across all experiments was approximately 80–120 TPU-hours.

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- The paper should indicate the type of compute workers CPU or GPU, internal cluster, or cloud provider, including relevant memory and storage.
- The paper should provide the amount of compute required for each of the individual experimental runs as well as estimate the total compute.
- The paper should disclose whether the full research project required more compute than the experiments reported in the paper (e.g., preliminary or failed experiments that didn't make it into the paper).

9. Code of ethics

Question: Does the research conducted in the paper conform, in every respect, with the NeurIPS Code of Ethics <https://neurips.cc/public/EthicsGuidelines>?

Answer: [Yes]

Justification: This work studies a fundamental failure mode of language models (counting errors in low-vocabulary aggregation tasks). All experiments use publicly available models and synthetic data. No human subjects, private data, or deployment in sensitive applications are involved. The paper identifies a geometric bottleneck and proposes diagnostic interventions; these are research contributions, not production systems. We see no ethical concerns beyond those inherent to all mechanistic interpretability research on large language models.

Guidelines:

- The answer [N/A] means that the authors have not reviewed the NeurIPS Code of Ethics.
- If the authors answer [No], they should explain the special circumstances that require a deviation from the Code of Ethics.
- The authors should make sure to preserve anonymity (e.g., if there is a special consideration due to laws or regulations in their jurisdiction).

10. Broader impacts

Question: Does the paper discuss both potential positive societal impacts and negative societal impacts of the work performed?

Answer: [Yes]

Justification: The paper identifies a geometric bottleneck in transformer counting and proposes a diagnostic repair (9-row output-head modification) and a deployable fix (LoRA Q/V). Improved counting reliability could benefit applications requiring accurate structured generation (data extraction, quantitative reasoning, factual reporting). However, making language models better at counting also applies to adversarial uses (automated misinformation, surveillance systems, automated content moderation bypass). The paper explicitly bounds its scope to low-vocabulary aggregation tasks and provides negative controls (MMLU, GSM8K, DROP) showing the bottleneck is task-specific, limiting unintended generalization.

Guidelines:

- The answer [N/A] means that there is no societal impact of the work performed.
- If the authors answer [N/A] or [No], they should explain why their work has no societal impact or why the paper does not address societal impact.
- Examples of negative societal impacts include potential malicious or unintended uses (e.g., disinformation, generating fake profiles, surveillance), fairness considerations (e.g., deployment of technologies that could make decisions that unfairly impact specific groups), privacy considerations, and security considerations.
- The conference expects that many papers will be foundational research and not tied to particular applications, let alone deployments. However, if there is a direct path to any negative applications, the authors should point it out. For example, it is legitimate to point out that an improvement in the quality of generative models could be used to generate Deepfakes for disinformation. On the other hand, it is not needed to point out that a generic algorithm for optimizing neural networks could enable people to train models that generate Deepfakes faster.
- The authors should consider possible harms that could arise when the technology is being used as intended and functioning correctly, harms that could arise when the technology is being used as intended but gives incorrect results, and harms following from (intentional or unintentional) misuse of the technology.
- If there are negative societal impacts, the authors could also discuss possible mitigation strategies (e.g., gated release of models, providing defenses in addition to attacks, mechanisms for monitoring misuse, mechanisms to monitor how a system learns from feedback over time, improving the efficiency and accessibility of ML).

11. Safeguards

Question: Does the paper describe safeguards that have been put in place for responsible release of data or models that have a high risk for misuse (e.g., pre-trained language models, image generators, or scraped datasets)?

Answer: [N/A]

Justification: The paper does not release new models, fine-tuned weights, or datasets that pose direct safety risks. All experiments use publicly available base models (Qwen3-8B, Mistral-7B, Pythia-410M). The interventions described (9-row repair, LoRA Q/V) are diagnostic research tools applied to counting tasks, not general-purpose generation systems. No content filtering, safety evaluation, or guardrails are required for the released code and results.

Guidelines:

- The answer [N/A] means that the paper poses no such risks.
- Released models that have a high risk for misuse or dual-use should be released with necessary safeguards to allow for controlled use of the model, for example by requiring that users adhere to usage guidelines or restrictions to access the model or implementing safety filters.
- Datasets that have been scraped from the Internet could pose safety risks. The authors should describe how they avoided releasing unsafe images.
- We recognize that providing effective safeguards is challenging, and many papers do not require this, but we encourage authors to take this into account and make a best faith effort.

12. Licenses for existing assets

Question: Are the creators or original owners of assets (e.g., code, data, models), used in the paper, properly credited and are the license and terms of use explicitly mentioned and properly respected?

Answer: [Yes]

Justification: Model licenses: Qwen3-8B (Apache 2.0), Mistral-7B-v0.1 (Apache 2.0), Pythia-410M (MIT). Benchmark data: generated deterministically from seed values, no external datasets used for primary experiments. GSM8K (MIT license), MMLU (MIT license), and DROP (CC BY-SA 4.0) were used only for negative control experiments in the appendix/discussion. The code in the supplement is released under MIT license.

Guidelines:

- The answer [N/A] means that the paper does not use existing assets.
- The authors should cite the original paper that produced the code package or dataset.
- The authors should state which version of the asset is used and, if possible, include a URL.
- The name of the license (e.g., CC-BY 4.0) should be included for each asset.
- For scraped data from a particular source (e.g., website), the copyright and terms of service of that source should be provided.
- If assets are released, the license, copyright information, and terms of use in the package should be provided. For popular datasets, paperswithcode.com/datasets has curated licenses for some datasets. Their licensing guide can help determine the license of a dataset.
- For existing datasets that are re-packaged, both the original license and the license of the derived asset (if it has changed) should be provided.
- If this information is not available online, the authors are encouraged to reach out to the asset's creators.

13. New assets

Question: Are new assets introduced in the paper well documented and is the documentation provided alongside the assets?

Answer: [Yes]

Justification: The supplementary materials package (<https://github.com/Gpgabriel25/SnapshotIsolationCounting/tree/main/supplement>) includes 16 Python experiment scripts, 14 result JSON files, and 20 figures (PDF + PNG), released under MIT license with a README containing reproduction instructions, expected results table, and protocol legend. The synthetic benchmark is generated deterministically from seed values by the included scripts.

Guidelines:

- The answer [N/A] means that the paper does not release new assets.
- Researchers should communicate the details of the dataset/code/model as part of their submissions via structured templates. This includes details about training, license, limitations, etc.
- The paper should discuss whether and how consent was obtained from people whose asset is used.
- At submission time, remember to anonymize your assets (if applicable). You can either create an anonymized URL or include an anonymized zip file.

14. Crowdsourcing and research with human subjects

Question: For crowdsourcing experiments and research with human subjects, does the paper include the full text of instructions given to participants and screenshots, if applicable, as well as details about compensation (if any)?

Answer: [N/A]

Justification: All experiments use synthetic benchmark data generated deterministically from seed values, or publicly available benchmark datasets (GSM8K, MMLU, DROP) for negative controls. No human subjects, crowdsourcing, or user studies were involved in this research.

Guidelines:

- The answer [N/A] means that the paper does not involve crowdsourcing nor research with human subjects.
- Including this information in the supplemental material is fine, but if the main contribution of the paper involves human subjects, then as much detail as possible should be included in the main paper.
- According to the NeurIPS Code of Ethics, workers involved in data collection, curation, or other labor should be paid at least the minimum wage in the country of the data collector.

15. Institutional review board (IRB) approvals or equivalent for research with human subjects

Question: Does the paper describe potential risks incurred by study participants, whether such risks were disclosed to the subjects, and whether Institutional Review Board (IRB) approvals (or an equivalent approval/review based on the requirements of your country or institution) were obtained?

Answer: [N/A]

Justification: This work involves only computational experiments on publicly available language models and synthetic/synthetic-like data. No human subjects, user studies, or personally identifiable information are involved. IRB approval is not applicable.

Guidelines:

- The answer [N/A] means that the paper does not involve crowdsourcing nor research with human subjects.
- Depending on the country in which research is conducted, IRB approval (or equivalent) may be required for any human subjects research. If you obtained IRB approval, you should clearly state this in the paper.
- We recognize that the procedures for this may vary significantly between institutions and locations, and we expect authors to adhere to the NeurIPS Code of Ethics and the guidelines for their institution.
- For initial submissions, do not include any information that would break anonymity (if applicable), such as the institution conducting the review.

16. Declaration of LLM usage

Question: Does the paper describe the usage of LLMs if it is an important, original, or non-standard component of the core methods in this research? Note that if the LLM is used only for writing, editing, or formatting purposes and does *not* impact the core methodology, scientific rigor, or originality of the research, declaration is not required.

Answer: [Yes]

Justification: During the preparation of this manuscript, the authors used large language models (primarily DeepSeek V4 Pro via VS Code Copilot) as a writing aid for copy-editing, rephrasing, and proofreading. All scientific content, experimental design, data collection, analysis, and conclusions are the authors' original work. The LLM was used as an editorial assistant, not for generating scientific claims or experimental results.

Guidelines:

- The answer [N/A] means that the core method development in this research does not involve LLMs as any important, original, or non-standard components.
- Please refer to our LLM policy in the NeurIPS handbook for what should or should not be described.