MSC ARTIFICIAL INTELLIGENCE DISSERTATION


Learning to Select Actions for Complex Hand Tasks

A comparative study of visuomotor policies and latent world models

Graham Pellegrini
Supervised by Prof. Alexiei Dingli
Department of Artificial Intelligence, Faculty of ICT, University of Malta


What is a policy?

A policy is a model that learns from demonstrations (human, robot or simulated) to turn the current scene into a chunk of future actions.

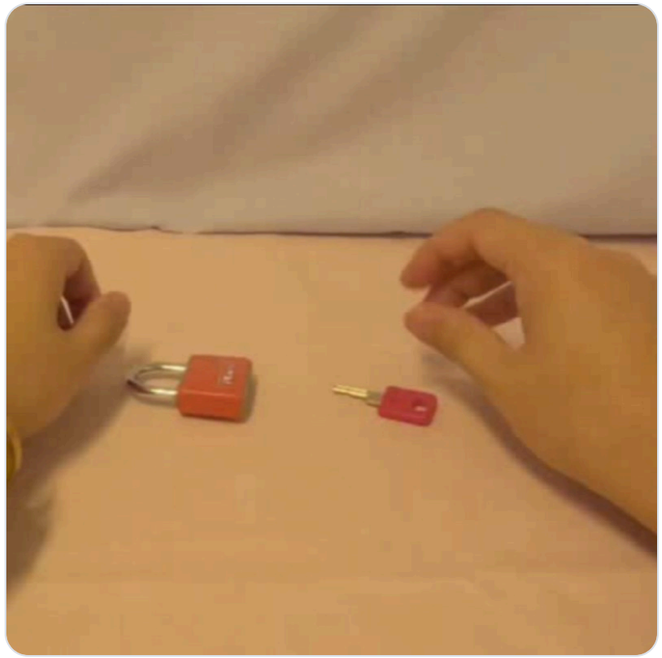

Input: the current scene




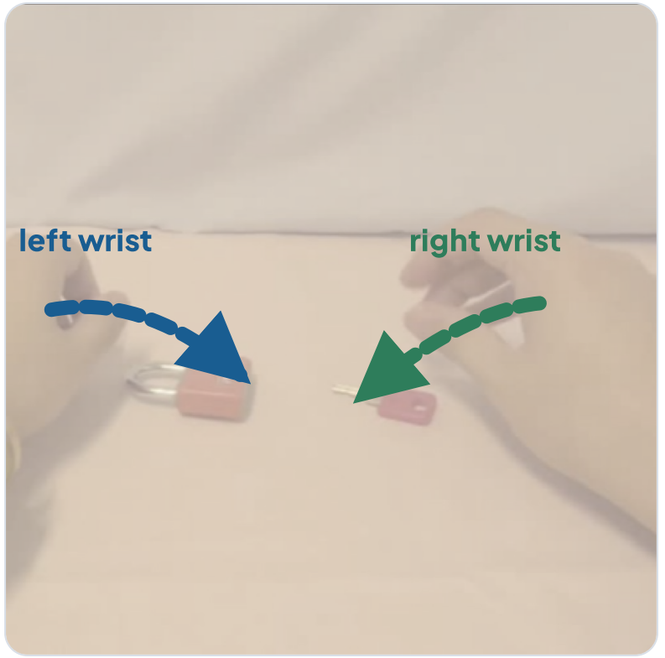


Output: the next 16 frames of motion for both wrists

WHERE A POLICY FALLS SHORT

A policy can produce many motions, but commits to one

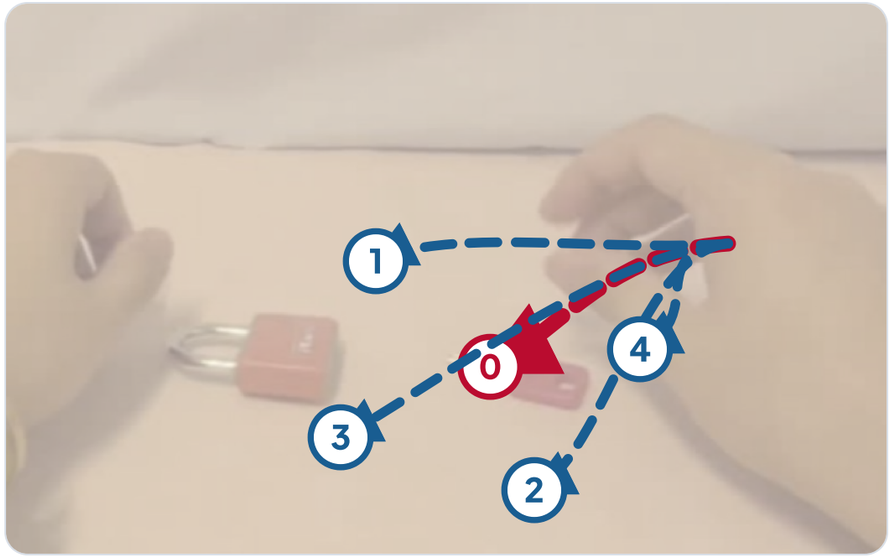

Different latent or noise samples give different candidates.
Candidate 0 is the one the policy prefers by its own criterion.

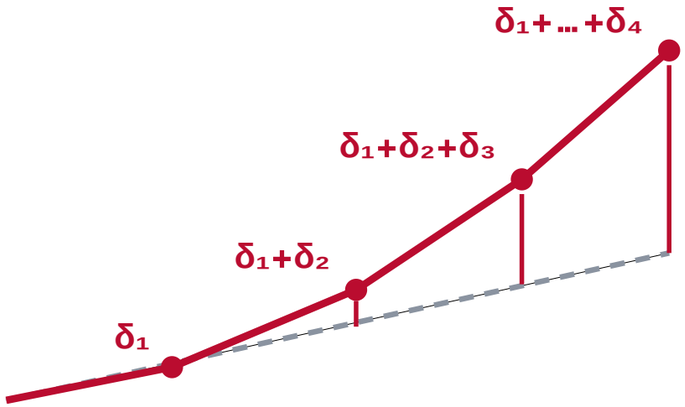


expert motion (dashed) policy rollout

$$e_t = e_{t-1} + \delta_t = \delta_1 + \ldots + \delta_t$$


When a suboptimal candidate is chosen, errors compound and can lead to an unsuccessful or dangerous state.

TECHNOLOGY OVERVIEW: WHY NOT A VLA?

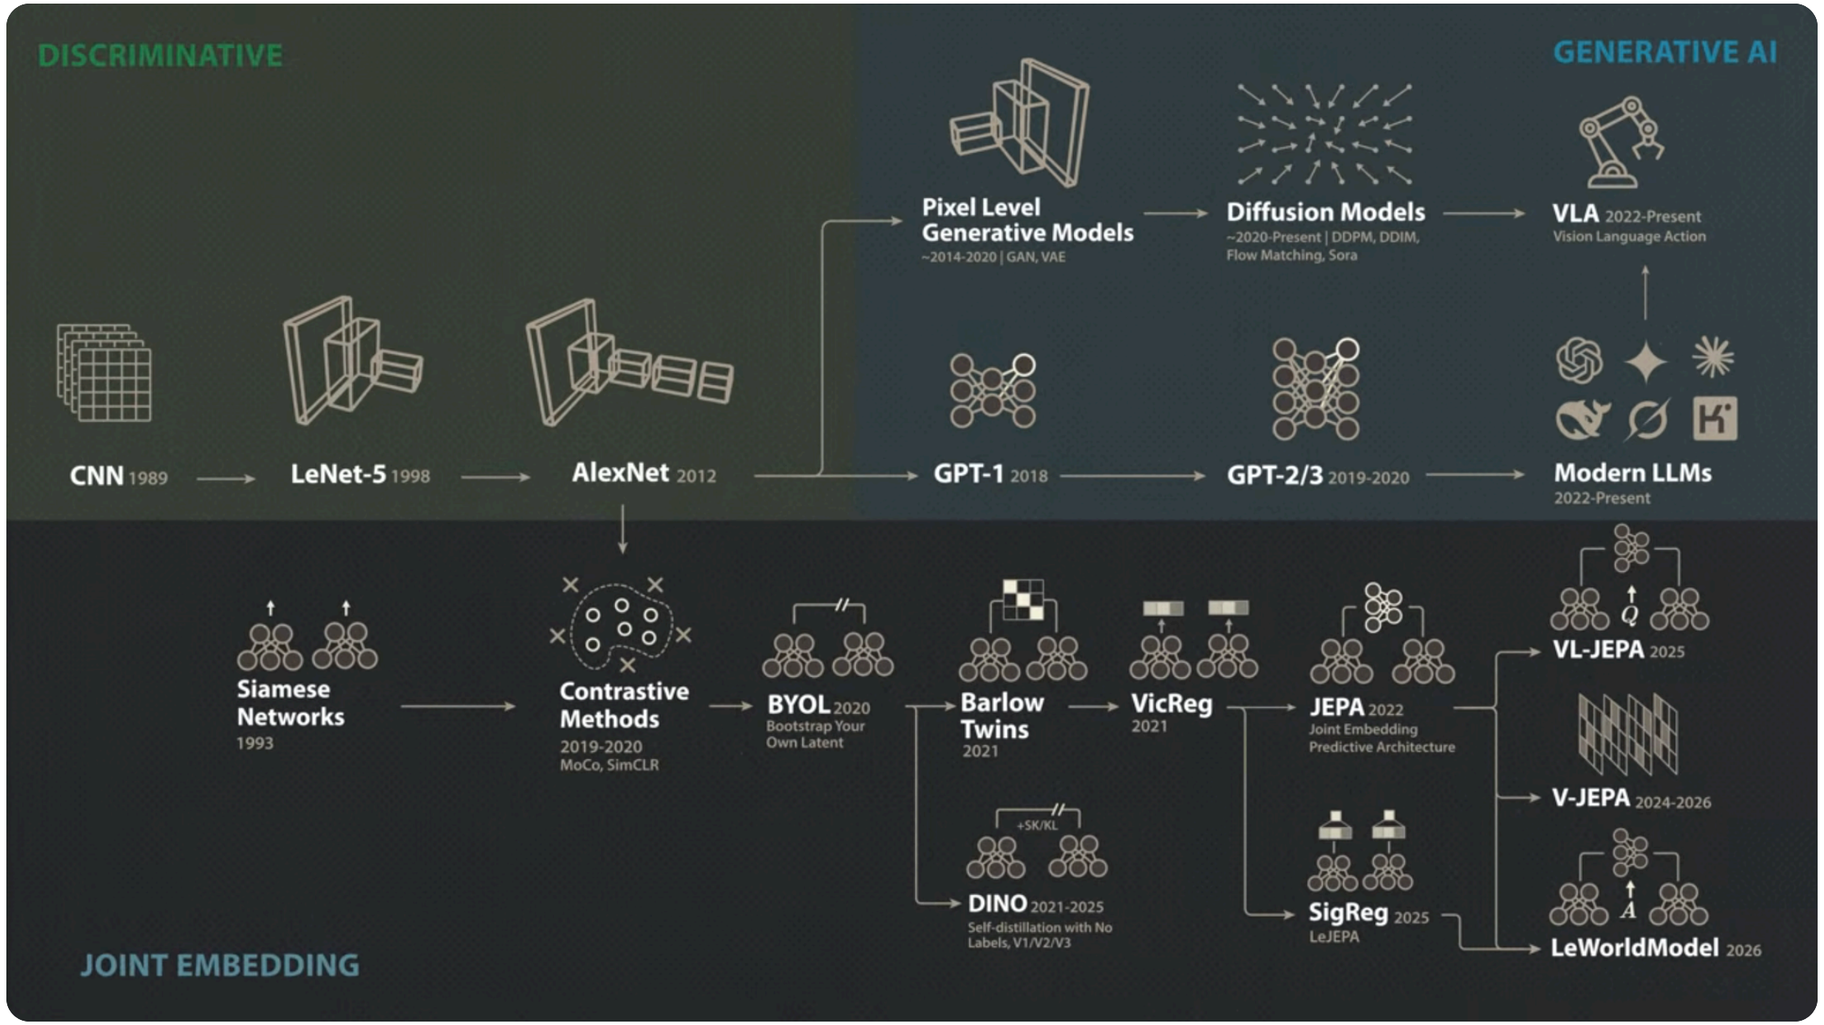


Screenshot from Welch Labs, Yann LeCun's $1B Bet Against LLMs (2026).

DIWA: THE PAPER WE BUILD ON

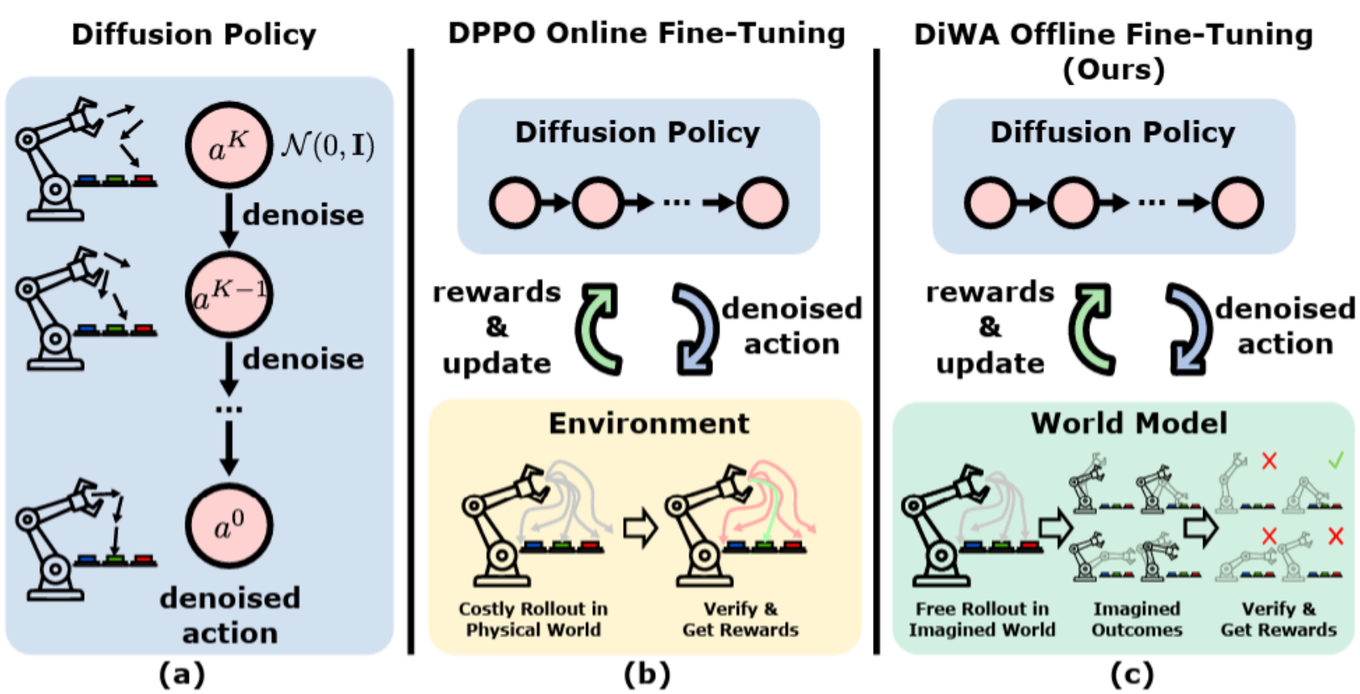


OUR APPROACH: EXTERNAL WORLD-MODEL SELECTION

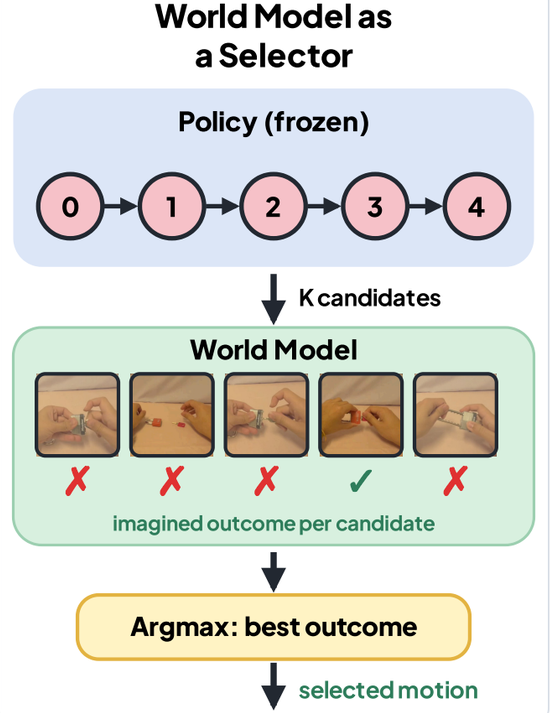

Left: Chandra et al. (2025). DiWA is evaluated on CALVIN, where this study reproduces (c) as its comparison point. The online route (b) is not part of this study. Right: the policy is left untouched and queried for several candidates to exploit the randomness of its sampler. The world model imagines each outcome and the best one is selected. Illustrative frames.

HOW SELECTION WORKS

Imagine each outcome, then choose the best candidate

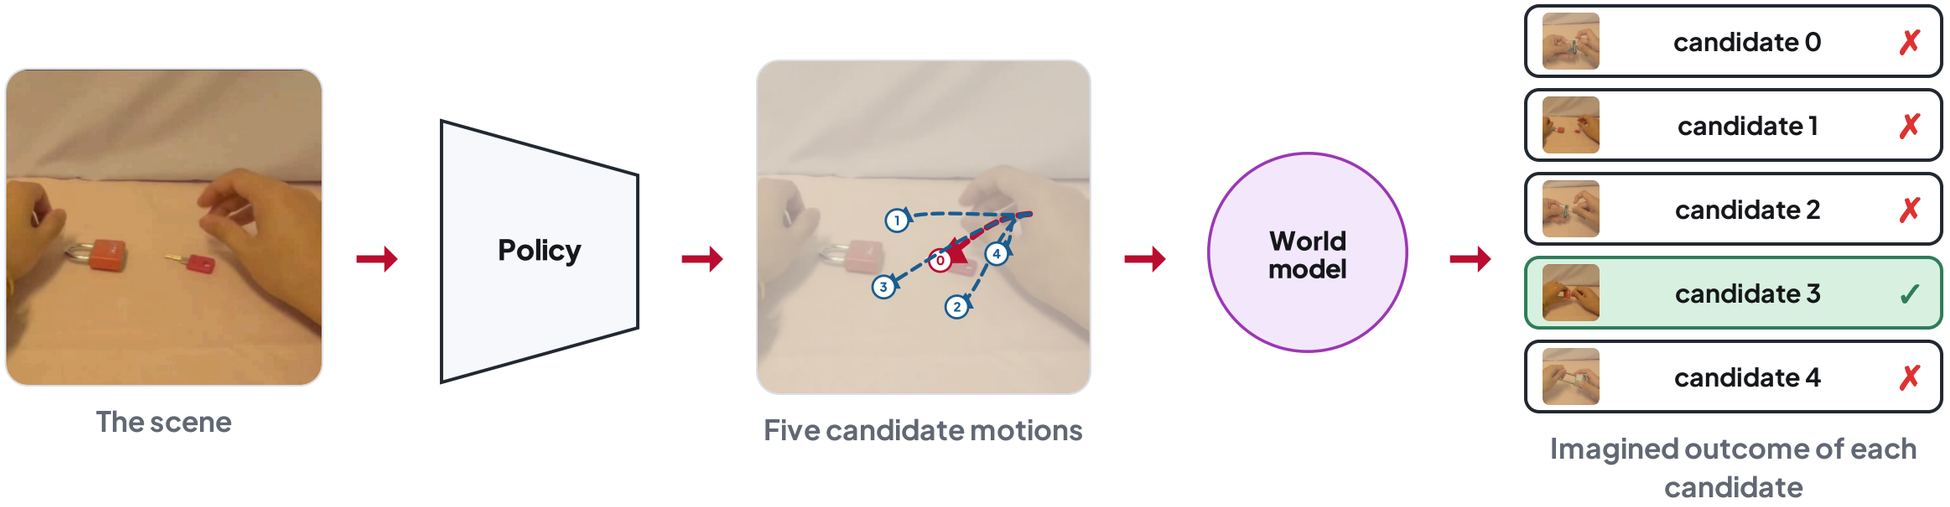

Argmax picks candidate 3

compared with



The real outcome, the expert's actual motion. It is used only to measure the error. The scorer never sees it.

RESEARCH QUESTION


Can a frozen world model improve which motion a policy chooses?

Tested offline, with the world model acting only as the final decision stage over candidates the policy already proposed.

- How much does it help, and for which policy and world-model pairings?
- When does selection fail, and why?
- How does selecting compare with finetuning the policy inside a world model (DiWA on CALVIN)?

THE METHOD

One pool of candidates, three ways to choose

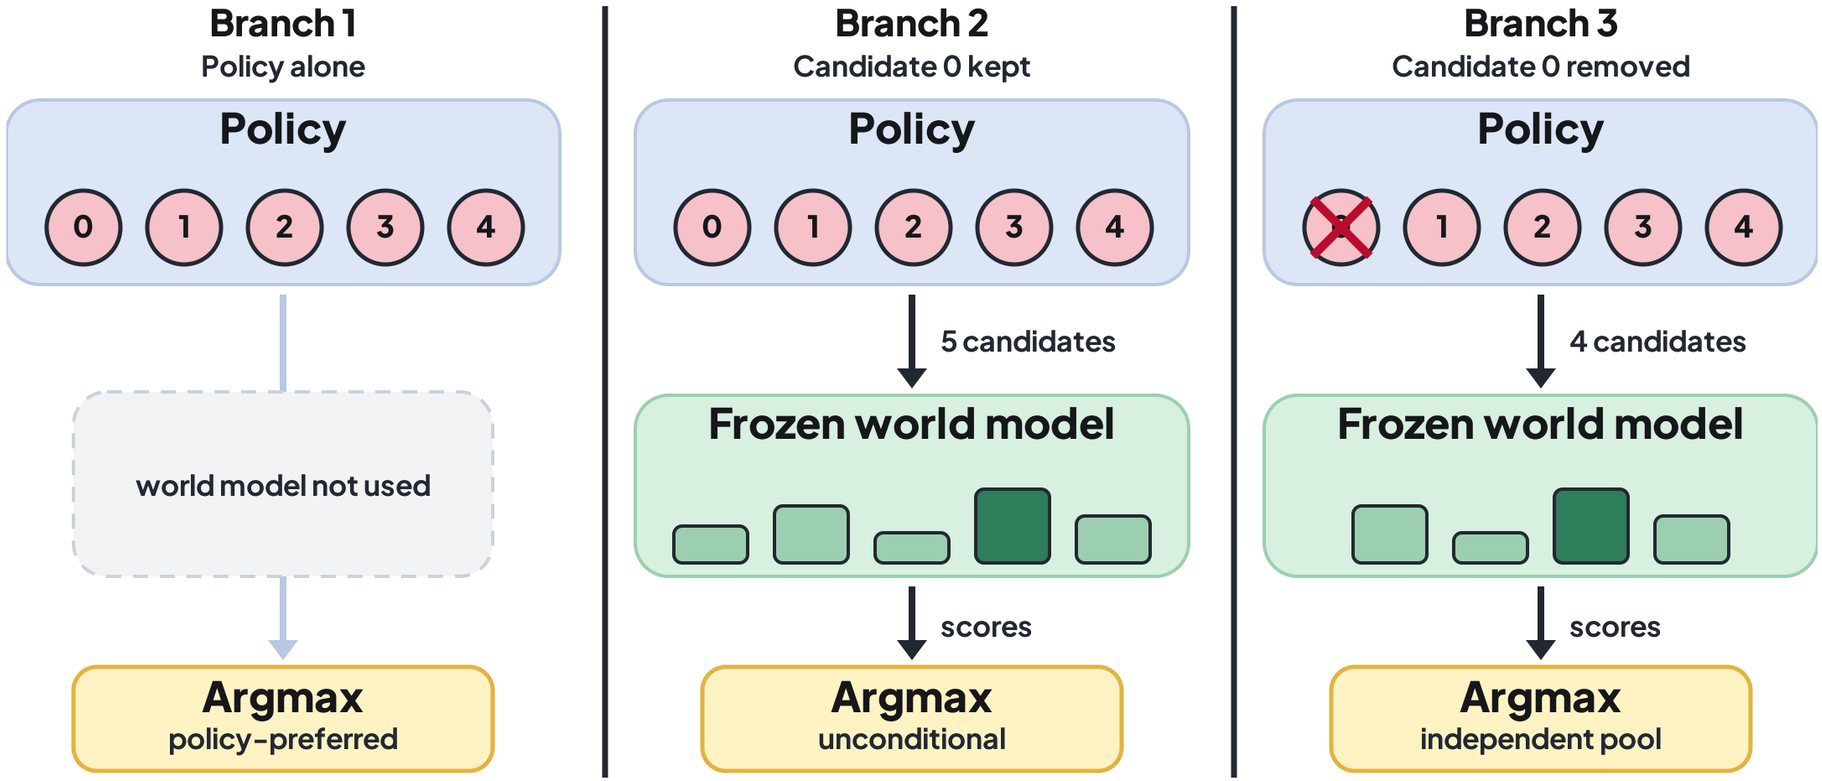


7,607	16 to 16	18-D	K = 5	3 seeds
HELD-OUT WINDOWS	FRAMES IN, FRAMES OUT	BIMANUAL WRIST MOTION	CANDIDATES PER WINDOW	POOLED RESULTS

WHERE THE CANDIDATES COME FROM

The source of candidates changes what the result means


Diffusion Policy

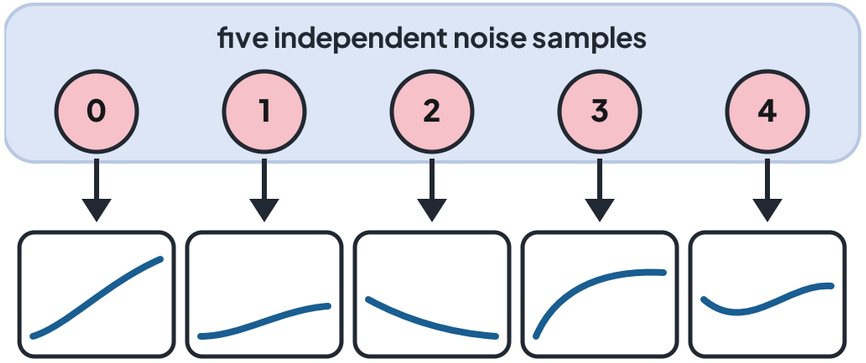

Five genuinely different motions

independent pool, clean measurement

ACT

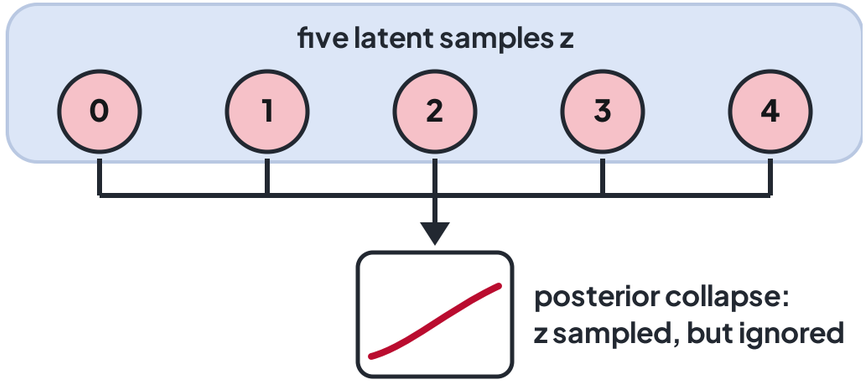

Five copies of one motion

no diversity, so selection has nothing to choose between

Next: what we tried to repair the latent, and what we did instead.

CAN THE LATENT BE REPAIRED?


Four training configurations, the same collapse

RUN	WHAT CHANGED	WHAT IT IS MEANT TO DO	DIVERSITY OF FIVE SAMPLES
v1	KL weight 10, the standard ACT recipe	The baseline. The decoder gets what it needs from the observation and ignores z.	none, below 10^{-6}
v2	KL weight 100	Punish information in z ten times harder. The penalty exceeded the reconstruction loss, yet z was still ignored: KL shapes the encoder, it cannot force the decoder to use z.	none, below 10^{-6}
v3	Cyclical KL annealing and 30% observation dropout	Relax and tighten the KL penalty in cycles, and hide some observations so the decoder has to lean on z.	none, below 10^{-6}
v4	Cyclical KL annealing and free bits, 0.5 nats per dimension	Reserve a minimum amount of information that z may carry without penalty.	none, below 10^{-6}

All four were tested at seed 42 on every training split. EgoDex observations are informative enough that the decoder ignores z whatever the training pressure. A real repair needs an architectural change, such as a discrete latent or a diversity head, which is outside the scope of this thesis.

WHAT WE DID INSTEAD

CEMP rebuilds the pool, and makes the result less clean

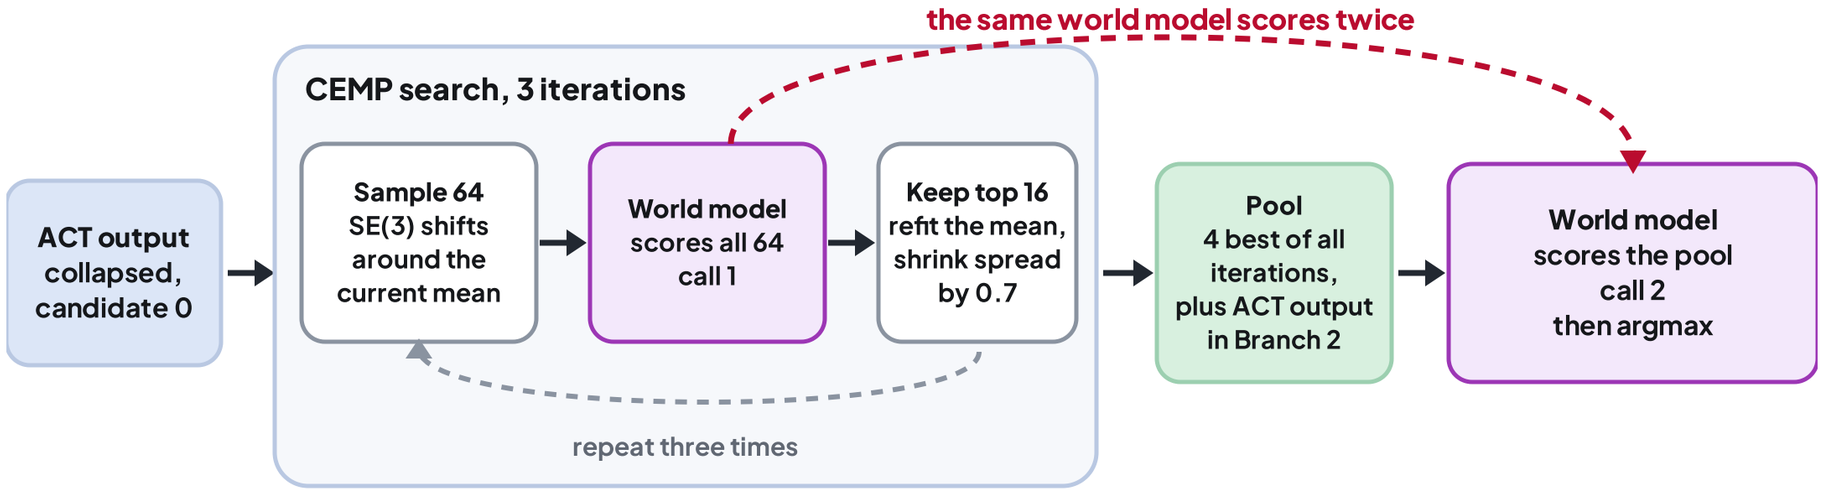


It shapes the pool before it picks from it
The pool is already biased towards the scorer's own taste

About 197 candidates scored per window, not 5
ACT rows measure world model and planner as one unit

WHERE CEMP WAS APPLIED

CEMP was used only on the seed that collapsed

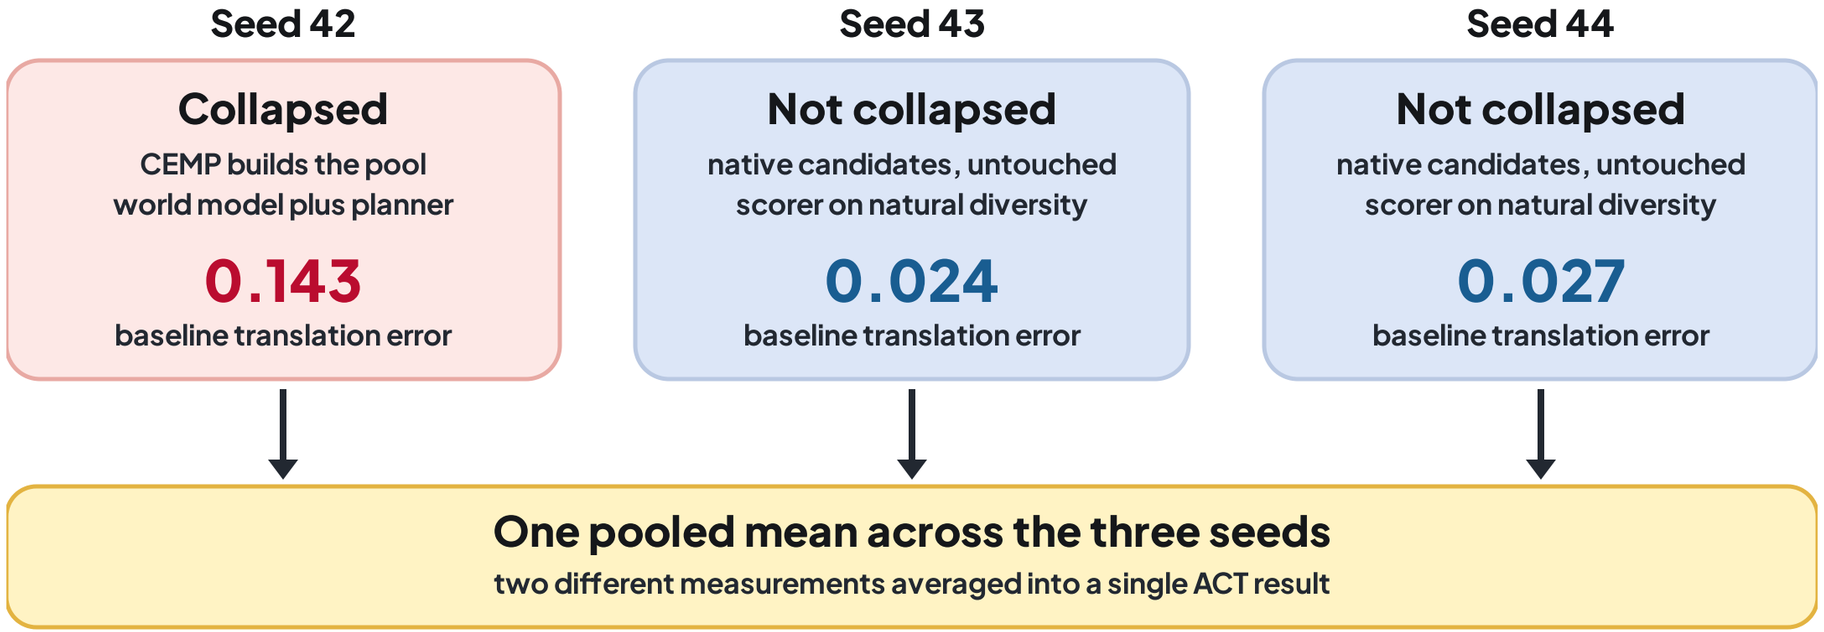


Only seed 42 needed CEMP, so seeds 43 and 44 were scored on ACT's own candidates. The pooled ACT result therefore mixes a world-model-plus-planner measurement with a plain scorer measurement. Read it as one result for this rule, not as a clean measurement of the scorer. This is why Diffusion Policy carries the main claim.

Five world-model families, plus two controls

MODEL	WHAT IT IS	ROLE IN THIS STUDY
V-JEPA2-AC	Frozen video backbone pretrained on over a million hours, with an action-conditioned head trained locally	Main candidate scorer
DexWM	Dexterous-manipulation world model on a DINOv2 encoder	Trained at a fixed budget, one seed
LeWM	Compact encoder and predictor trained from scratch	Two scorer configurations
DINO-WM, JEPA-WM	Official checkpoints with a 7-D action interface	Validation pilot through an adapter
No-AC, PointWorld proxy	Same backbone with the action input removed or weakened	Controls for the mechanism

Every locally trained model receives the same exposure of 100,000 items. Externally pretrained backbones still carry training that budget does not offset, so results are read model by model.

Ranking Diffusion Policy candidates with V-JEPA2-AC cuts translation error by 5.98%

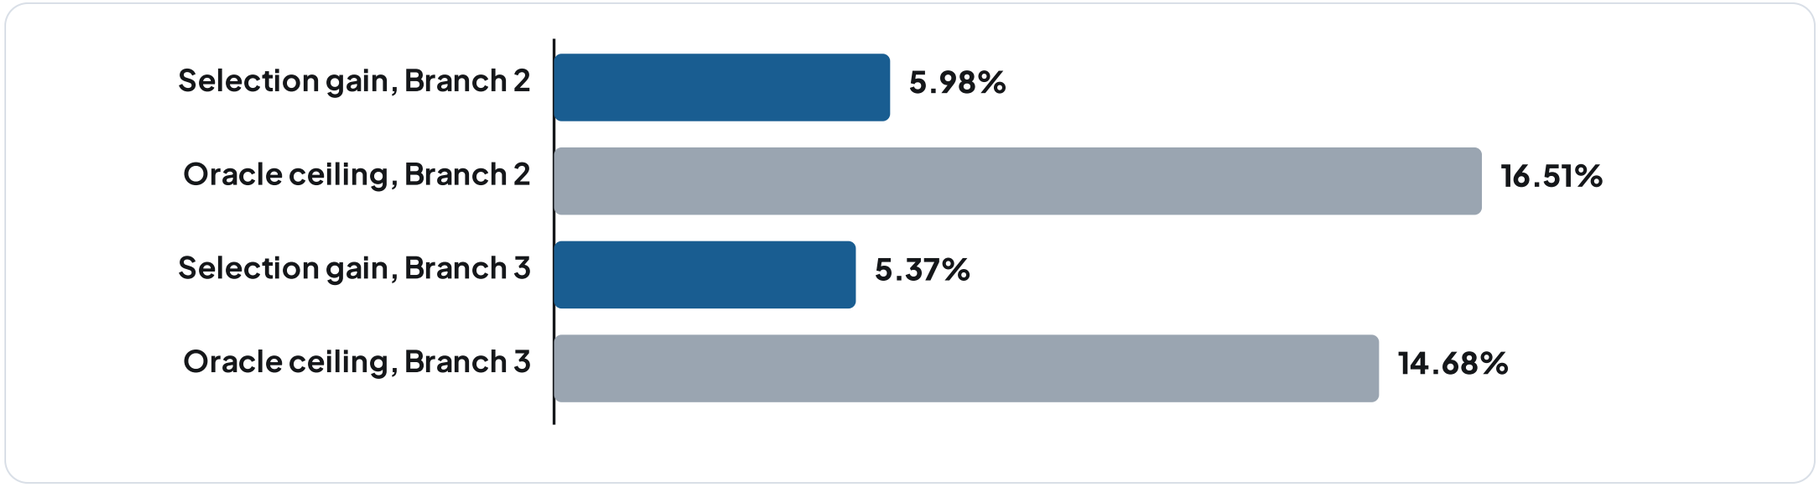

−0.96°	**about 36%**	**49.9 / 23.2 / 27.0**	**0.00%**
ROTATION ERROR	OF ORACLE HEADROOM	WIN / TIE / LOSS, %	WITHOUT ACTION INPUT

Pooled across three training seeds, 95% CI [5.43, 6.47]. No retraining. The oracle ceiling is what a perfect ground-truth selector could remove from the same five candidates. Translation error is root-mean-square per axis.


The other routes did not reproduce it, and one result needs care

LEWM: THE LARGEST NUMBER, NOT THE BEST EVIDENCE

LeWM shows a 10.1% translation reduction, but its score does not predict which candidate is better (rank correlation −0.51 on the full test set). Disabling its dynamics model gives almost the same gain. It is reported as unvalidated and held out of the headline.

ROUTE	OUTCOME	LIKELY EXPLANATION
DexWM	+0.57% worse one seed	Predictor trained at a fixed budget, published checkpoint unavailable
DINO-WM, JEPA-WM	Latent score only	Adapter squeezes 18-D actions into a 7-D interface
PointWorld proxy	+0.27% not significant	Weakened action input, a control by design
ACT with CEMP	−0.58% small	Scorer shapes its own pool, read as a unit

Finetuning inside a world model beats selecting with one

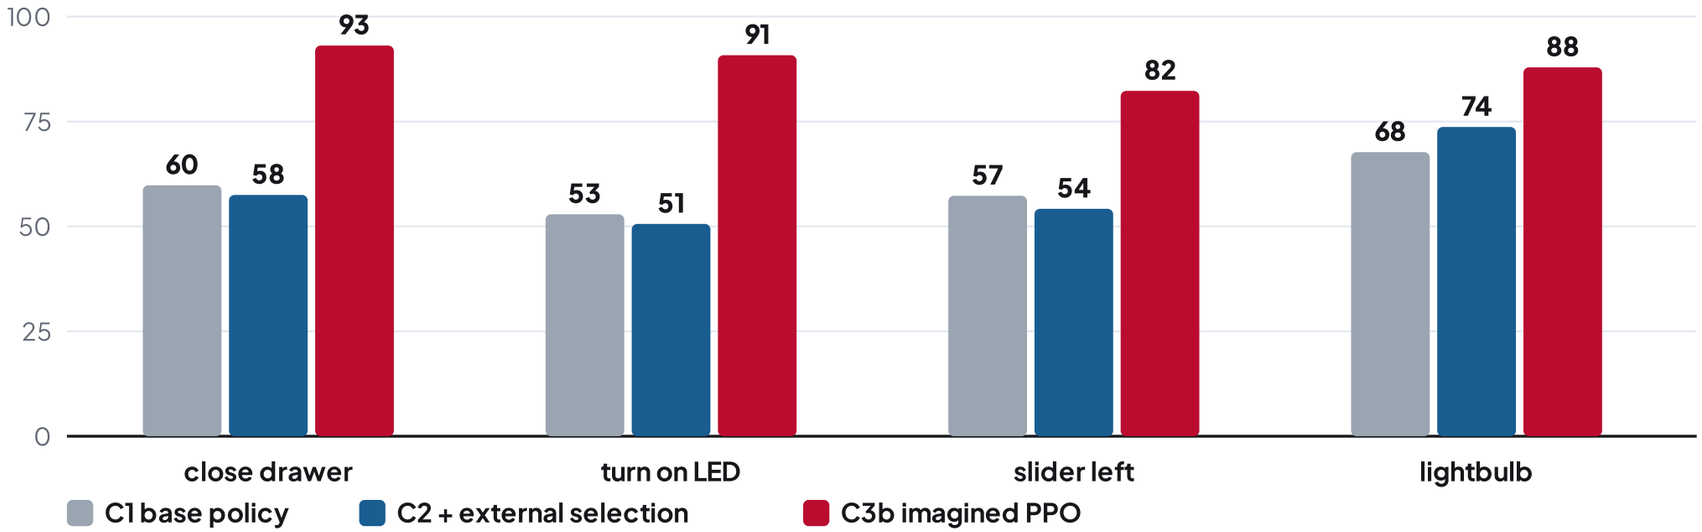

SELECTION (C2 VS C1)

Moves tasks by −3.1 to +6.1 points, with overlapping intervals.

FINETUNING (C3B VS C2)

Adds 14 to 40 points on every task, about an order of magnitude more.

Task success (%), four CALVIN tasks, DiWA's own checkpoints, pooled across three seeds.

Selection helped when three conditions held together

1 Diverse pool

There must be real alternatives to choose between. ACT's collapsed pool offered none until search restored it.

2 Action information

The scorer must see the action. Removing it gave exactly 0.00%.

3 In-support candidates

Candidates must lie within what the scorer was trained on. Adapter pilots improved a latent score and not the trajectory.

WHY FINETUNING WINS

DiWA's imagined-PPO finetuning meets all three conditions by construction, because its reward signal is what the policy is trained against. External selection has no such guarantee.

This is a pattern supported by the tested configurations, not a general law.

What this does and does not show

LIMITS

- Offline trajectory error, not robot task success
- One dataset and one positive pairing
- Matched exposure, not equal pretraining
- LeWM's gain is unexplained
- Selection worsens the easiest fifth of windows

NEXT STEPS

- Closed-loop execution, starting with CALVIN-style tasks
- A second, independent world model as selector over a finetuned policy
- Native 18-D finetuning of DINO-WM and JEPA-WM
- DexWM at its published scale
- A diversity mechanism for ACT

Contribution in one sentence. A controlled offline benchmark and protocol showing a frozen world model can improve which of a policy's own proposed motions is chosen, for one tested pairing, without retraining and without any claim yet about real-robot success.

THANK YOU FOR LISTENING

Questions

Backup slides follow, covering the AI-use workflow, how each method was chosen, LeWM's gate, seeds, pool size, and where selection fails.

Graham Pellegrini | graham.pellegrini@um.edu.mt

How AI was used in this work

NotebookLM

Queried paper sets for related work and citations, then each source was skimmed manually.

Claude skills

Query, draft and polish workflows, with my own review and edits.

Gemini

Paper discovery and critical review of chapters against a rubric.

Coding agents

Wrote most of the code under my specification, then tested and audited.

WHERE THE DECISIONS SAT

Research question, benchmark design, which methods to adopt, what counted as a valid result, and every claim in the dissertation.

HOW CORRECTNESS WAS CHECKED


Separate audit passes and re-runs found real defects, including a DDIM sampler indexing error, a training-exposure undershoot, and a DiWA configuration mistake. All were fixed before reporting.

Used most in the literature review and methodology, for example to find established reference methods for handling ACT and LeWM without inventing new verification tests.

Which published work anchored each method choice

CHOICE	ANCHOR	STATUS
Policy-guided candidate search (CEMP)	Cross-entropy method, initialised from the policy output, inspired by TD-MPC2	Adapted, not a published recipe
Posterior-collapse fixes for ACT	KL annealing (Fu et al.), free bits (Kingma et al.), observation dropout	All tried, all failed
Diffusion sampling	DDIM (Song et al.), DP-T architecture (Chi et al.)	Implemented, sampler bug fixed
Action-conditioned scorer	V-JEPA2-AC (Assran et al.)	Head trained locally
Finetuning comparison	DiWA (Chandra et al.) on CALVIN, own checkpoints	Reproduced, secondary study
Pool size K = 5	No literature anchor	Compute choice, ranking stable K = 2 to 20
Matched exposure 100,000 items	Compute ceiling, loss still falling	Not a convergence claim

LeWM passes its ranking gate on 512 windows and fails it on 7,607

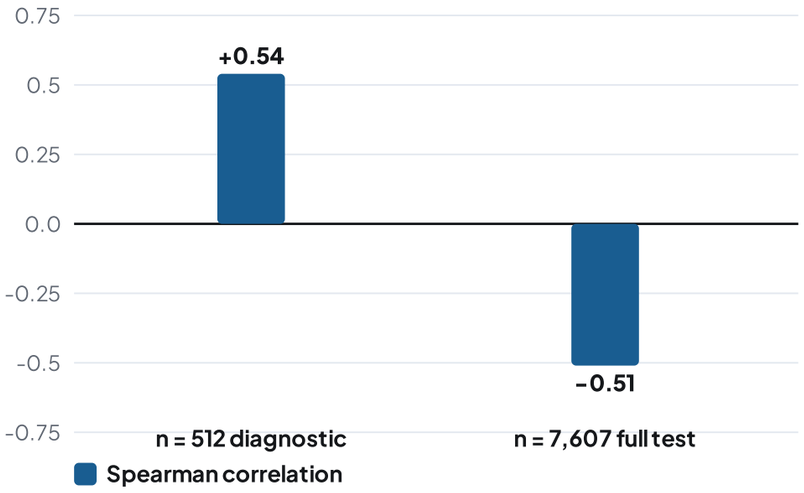

WHAT IS AND IS NOT ESTABLISHED

- The gain is real, −10.1% translation, intervals exclude zero
- The reported configuration never invokes LeWM's learned dynamics
- Its score does not predict which candidate is better at full scale
- Reweighting terms to pass the gate was rejected as overfitting the gate


Spearman correlation between score margin and true translation improvement. The 512-window figure was +0.537, the full test set gave −0.51.

The result holds at every seed, and the controls behave as designed

	SEED 42	SEED 43	SEED 44
Baseline translation error	0.1142	0.1178	0.1191
V-JEPA2-AC, Branch 2	-6.41%	-6.09%	-5.46%
V-JEPA2 without action input	0.00%	0.00%	0.00%
PointWorld proxy	+0.50%	+0.23%	+0.07%
LeWM rollout (unvalidated)	-10.10%	-10.06%	-10.12%

Three seeds are a basic robustness check, not proof of stability. DexWM is single-seed by a cost decision of roughly 121 extra GPU-hours.


More candidates buy more headroom, not better selection

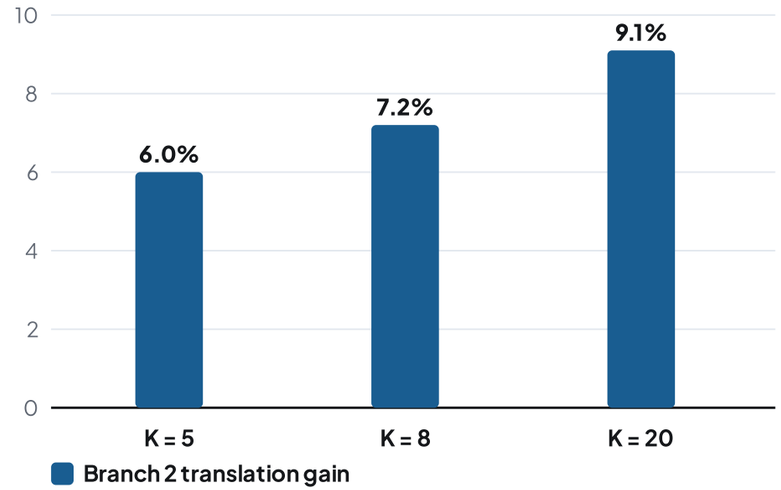

WHAT THE SWEEP SHOWS

- Scorer ranking identical at every K from 2 to 20
- Gain grows steadily with K and does not plateau
- Capture of the oracle ceiling stays near 40%
- K = 5 was a compute choice, with no literature anchor

On the easiest fifth of windows, selection makes things worse

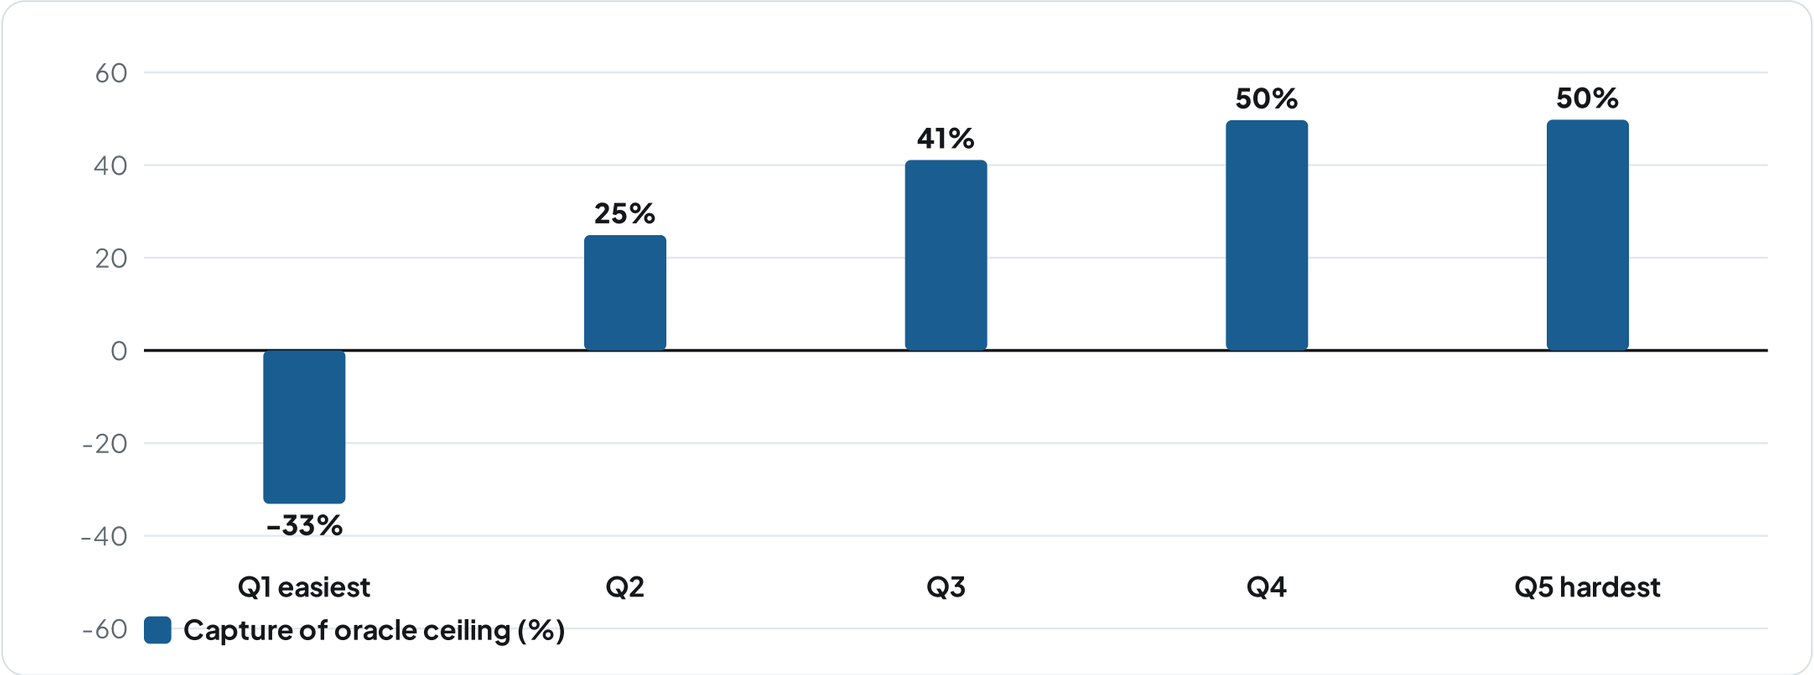

Windows sorted by baseline error, K = 8, Branch 2. Translation error rises 5.81% in Q1. Confidence gating does not help, because the score gap has a correlation of -0.002 with baseline error. A state-change-targeted windowing removes most of the reversal.

Four retraining attempts, the same collapse

RUN	KL WEIGHT	CYCLICAL KL	OBSERVATION DROPOUT	FREE BITS	PAIRWISE DIFFERENCE
v1	10	no	0%	no	indistinguishable from zero
v2	100	no	0%	no	indistinguishable from zero
v3	100	yes	30%	no	indistinguishable from zero
v4	100	yes	0%	0.5 nats/dim	indistinguishable from zero

Collapse is seed-dependent. Under the default configuration 1 of 3 seeds collapsed, and 7 of 12 checkpoints collapsed across all configurations. EgoDex observations are informative enough that the decoder finds a loss minimum that ignores the latent. A repair would need an architectural change such as discrete latents or a diversity head.

How results were measured

ERROR METRICS

- Translation, root-mean-square per axis, not Euclidean distance
- Rotation, mean geodesic angle in degrees
- Both averaged over the full 16-step chunk
- Change reported relative to candidate 0

STATISTICS

- 95% episode-clustered bootstrap, 2,000 resamples, pooled over seeds
- Oracle ceiling, best candidate in the same pool
- Ranking-validity gate, per-window Spearman correlation
- Win, tie, loss against candidate 0

Test windows are fixed, candidate pools frozen, future-goal access blocked, and scorer support restricted to training data.

What is disclosed about test-set use

- The Branch 2 margin threshold's final value came from a disjoint validation split.
- An earlier, superseded calibration touched the test set directly. This is stated as a named limitation and is reassuring, not a full defence.
- The LeWM gate was tuned on a small diagnostic split and failed to generalise to the full test set. It was reported, not re-tuned.
- Earlier stronger-looking results relying on shortcuts, transductive support or oracle access were corrected rather than reported.


Objective achievement

OBJ.	STATUS	BASIS
1	Fully	Three-branch benchmark implemented as designed and used for every family reported
2	Partly	Local exposure matched, externally pretrained backbones carry an advantage not equalised
3	Within tested configurations	Whether and when selection helps determined for every combination, one positive, a likely explanation for each other

Objectives 4 and 5 are in the Conclusion chapter's objective table. Every non-positive-route explanation is the study's own interpretation, not independently proven.

THE PREDICTION UNIT

A world model predicts what happens next, and a scorer turns that into a choice

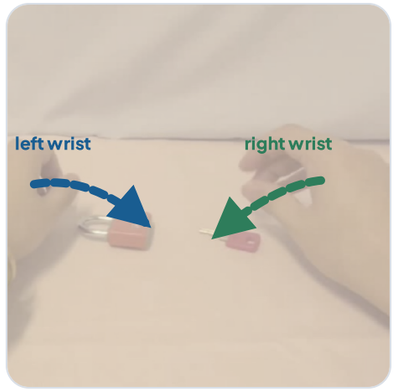

Input: the scene and one candidate motion

→ **World model** →



Predicted scene afterwards

→ **Scorer** rates this candidate

The world model does not decide what to do. A prediction is not a decision, so a scorer must turn each predicted future into a score. Illustrative frames: the real prediction is made in a compact latent space, not in pixels.

References cited in this deck

- Assran et al. (2025). V-JEPA 2: Self-Supervised Video Models Enable Understanding, Prediction and Planning.
- Chandra et al. (2025). DiWA: Diffusion Policy Adaptation with World Models. CoRL.
- Chi et al. (2023). Diffusion Policy: Visuomotor Policy Learning via Action Diffusion. RSS.
- Fu et al. (2019). Cyclical Annealing Schedule: A Simple Approach to Mitigating KL Vanishing. NAACL.
- Goswami et al. (2025). World Models for Learning Dexterous Hand-Object Interactions from Human Videos.
- Hansen et al. (2024). TD-MPC2: Scalable, Robust World Models for Continuous Control. ICLR.
- Hoque et al. (2026). EgoDex: Learning Dexterous Manipulation from Large-Scale Egocentric Video. ICLR.
- Huang et al. (2026). PointWorld: Scaling 3D World Models for In-The-Wild Robotic Manipulation. CVPR.
- Kingma and Welling (2014). Auto-Encoding Variational Bayes. ICLR.
- LeCun (2022). A Path Towards Autonomous Machine Intelligence, v0.9.2.
- Maes et al. (2026). LeWorldModel: Stable End-to-End Joint-Embedding Predictive Architecture from Pixels.
- Mees et al. (2022). CALVIN: A Benchmark for Language-Conditioned Policy Learning for Long-Horizon Robot Manipulation. RA-L.
- Rubinstein and Kroese (2004). The Cross-Entropy Method.
- Song et al. (2021). Denoising Diffusion Implicit Models. ICLR.
- Terver et al. (2026). What Drives Success in Physical Planning with Joint-Embedding Predictive World Models?
- Welch Labs (2026). Yann LeCun's $1B Bet Against LLMs. Video essay.
- Zhao et al. (2023). Learning Fine-Grained Bimanual Manipulation with Low-Cost Hardware (ACT). RSS.
- Zhou et al. (2025). DINO-WM: World Models on Pre-Trained Visual Features Enable Zero-Shot Planning. ICML.