

class13

AUTHOR

Grant Reeves

##Class 13: RNA-Seq analysis mini-project

#Section 1. Differential Expression Analysis

First we will load our data into

```
library(DESeq2)
```

Loading required package: S4Vectors

Loading required package: stats4

Loading required package: BiocGenerics

Attaching package: 'BiocGenerics'

The following objects are masked from 'package:stats':

IQR, mad, sd, var, xtabs

The following objects are masked from 'package:base':

anyDuplicated, aperm, append, as.data.frame, basename, cbind,
colnames, dirname, do.call, duplicated, eval, evalq, Filter, Find,
get, grep, grepl, intersect, is.unsorted, lapply, Map, mapply,
match, mget, order, paste, pmax, pmax.int, pmin, pmin.int,
Position, rank, rbind, Reduce, rownames, sapply, setdiff, sort,
table, tapply, union, unique, unsplit, which.max, which.min

Attaching package: 'S4Vectors'

The following objects are masked from 'package:base':

expand.grid, I, unname

Loading required package: IRanges

Attaching package: 'IRanges'

The following object is masked from 'package:grDevices':

windows

Loading required package: GenomicRanges

Loading required package: GenomeInfoDb

Loading required package: SummarizedExperiment

Loading required package: MatrixGenerics

Loading required package: matrixStats

Attaching package: 'MatrixGenerics'

The following objects are masked from 'package:matrixStats':

colAlls, colAnyNAs, colAnys, colAvgPerRowSet, colCollapse,
colCounts, colCummaxs, colCummins, colCumprods, colCumsums,
colDiffs, colIQRDiffs, colIQRs, colLogSumExps, colMadDiffs,
colMads, colMaxs, colMeans2, colMedians, colMins, colOrderStats,
colProds, colQuantiles, colRanges, colRanks, colSdDiffs, colSds,
colSums2, colTabulates, colVarDiffs, colVars, colWeightedMads,
colWeightedMeans, colWeightedMedians, colWeightedSds,
colWeightedVars, rowAlls, rowAnyNAs, rowAnys, rowAvgPerColSet,
rowCollapse, rowCounts, rowCummaxs, rowCummins, rowCumprods,
rowCumsums, rowDiffs, rowIQRDiffs, rowIQRs, rowLogSumExps,
rowMadDiffs, rowMads, rowMaxs, rowMeans2, rowMedians, rowMins,
rowOrderStats, rowProds, rowQuantiles, rowRanges, rowRanks,
rowSdDiffs, rowSds, rowSums2, rowTabulates, rowVarDiffs, rowVars,
rowWeightedMads, rowWeightedMeans, rowWeightedMedians,
rowWeightedSds, rowWeightedVars

Loading required package: Biobase

Welcome to Bioconductor

Vignettes contain introductory material; view with
'browseVignettes()'. To cite Bioconductor, see
'citation("Biobase")', and for packages 'citation("pkgname")'.

Attaching package: 'Biobase'

The following object is masked from 'package:MatrixGenerics':

rowMedians

The following objects are masked from 'package:matrixStats':

anyMissing, rowMedians

load our data

```
metaFile <- "GSE37704_metadata.csv"
countFile <- "GSE37704_featurecounts.csv"
```

```
# Import metadata and take a peak
colData = read.csv(metaFile, row.names=1)
head(colData)
```

```
      condition
SRR493366 control_sirna
SRR493367 control_sirna
SRR493368 control_sirna
SRR493369      hoxa1_kd
SRR493370      hoxa1_kd
SRR493371      hoxa1_kd
```

```
# Import countdata
countData = read.csv(countFile, row.names=1)
head(countData)
```

```
      length SRR493366 SRR493367 SRR493368 SRR493369 SRR493370
ENSG00000186092    918         0         0         0         0         0
ENSG00000279928    718         0         0         0         0         0
ENSG00000279457   1982        23        28        29        29        28
ENSG00000278566    939         0         0         0         0         0
ENSG00000273547    939         0         0         0         0         0
ENSG00000187634   3214       124       123       205       207       212

      SRR493371
ENSG00000186092         0
ENSG00000279928         0
ENSG00000279457        46
ENSG00000278566         0
ENSG00000273547         0
ENSG00000187634       258
```

First we need to remove that not useful first column

```
# Note we need to remove the odd first $length col
countData <- as.matrix(countData[,-1])
head(countData)
```

```
      SRR493366 SRR493367 SRR493368 SRR493369 SRR493370 SRR493371
ENSG00000186092         0         0         0         0         0         0
ENSG00000279928         0         0         0         0         0         0
ENSG00000279457        23        28        29        29        28        46
ENSG00000278566         0         0         0         0         0         0
ENSG00000273547         0         0         0         0         0         0
ENSG00000187634       124       123       205       207       212       258
```

```
# Filter count data where you have 0 read count across all samples.
zero_counts <- rowSums(countData) == 0

newcountData = countData[!zero_counts, ]
head(newcountData)
```

	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370	SRR493371
ENSG00000279457	23	28	29	29	28	46
ENSG00000187634	124	123	205	207	212	258
ENSG00000188976	1637	1831	2383	1226	1326	1504
ENSG00000187961	120	153	180	236	255	357
ENSG00000187583	24	48	65	44	48	64
ENSG00000187642	4	9	16	14	16	16

How many genes do we have left over after excluding all the ones that are=0? 15975

```
nrow(newcountData)
```

```
[1] 15975
```

if they are=0 that means that the genes aren't expressed so we aren't interested in them currently.

#Running DESeq2

```
dds = DESeqDataSetFromMatrix(countData=newcountData,
                              colData=colData,
                              design=~condition)
```

Warning in DESeqDataSet(se, design = design, ignoreRank): some variables in design formula are characters, converting to factors

```
dds = DESeq(dds)
```

estimating size factors

estimating dispersions

gene-wise dispersion estimates

mean-dispersion relationship

final dispersion estimates

fitting model and testing

```
res <- results(dds)
res
```

log2 fold change (MLE): condition hoxa1 kd vs control sirna

Wald test p-value: condition hoxa1 kd vs control sirna

DataFrame with 15975 rows and 6 columns

	baseMean	log2FoldChange	lfcSE	stat	pvalue
	<numeric>	<numeric>	<numeric>	<numeric>	<numeric>
ENSG00000279457	29.9136	0.1792571	0.3248216	0.551863	5.81042e-01
ENSG00000187634	183.2296	0.4264571	0.1402658	3.040350	2.36304e-03
ENSG00000188976	1651.1881	-0.6927205	0.0548465	-12.630158	1.43990e-36
ENSG00000187961	209.6379	0.7297556	0.1318599	5.534326	3.12428e-08
ENSG00000187583	47.2551	0.0405765	0.2718928	0.149237	8.81366e-01
...
ENSG00000273748	35.30265	0.674387	0.303666	2.220817	2.63633e-02
ENSG00000278817	2.42302	-0.388988	1.130394	-0.344117	7.30758e-01
ENSG00000278384	1.10180	0.332991	1.660261	0.200565	8.41039e-01
ENSG00000276345	73.64496	-0.356181	0.207716	-1.714752	8.63908e-02
ENSG00000271254	181.59590	-0.609667	0.141320	-4.314071	1.60276e-05
	padj				
	<numeric>				
ENSG00000279457	6.86555e-01				
ENSG00000187634	5.15718e-03				
ENSG00000188976	1.76549e-35				
ENSG00000187961	1.13413e-07				
ENSG00000187583	9.19031e-01				
...	...				
ENSG00000273748	4.79091e-02				
ENSG00000278817	8.09772e-01				
ENSG00000278384	8.92654e-01				
ENSG00000276345	1.39762e-01				
ENSG00000271254	4.53648e-05				

#Adding Gene Annotations

```
library("AnnotationDbi")
library("org.Hs.eg.db")
```

```
columns(org.Hs.eg.db)
```

```
[1] "ACCNUM"      "ALIAS"       "ENSEMBL"     "ENSEMBLPROT" "ENSEMBLTRANS"
[6] "ENTREZID"    "ENZYME"      "EVIDENCE"    "EVIDENCEALL"  "GENENAME"
[11] "GENETYPE"    "GO"          "GOALL"       "IPI"           "MAP"
[16] "OMIM"        "ONTOLOGY"    "ONTOLOGYALL" "PATH"          "PFAM"
[21] "PMID"        "PROSITE"     "REFSEQ"      "SYMBOL"        "UCSCKG"
[26] "UNIPROT"
```

```
res$entrez = mapIds(org.Hs.eg.db,
                    keys=row.names(res),
                    keytype="ENSEMBL",
```

```
column="ENTREZID",
multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
res$symbol = mapIds(org.Hs.eg.db,
  keys=row.names(res),
  keytype="ENSEMBL",
  column="SYMBOL",
  multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
head(res, 10)
```

log2 fold change (MLE): condition hoxa1 kd vs control sirna

Wald test p-value: condition hoxa1 kd vs control sirna

DataFrame with 10 rows and 8 columns


	baseMean	log2FoldChange	lfcSE	stat	pvalue
	<numeric>	<numeric>	<numeric>	<numeric>	<numeric>
ENSG00000279457	29.913579	0.1792571	0.3248216	0.551863	5.81042e-01
ENSG00000187634	183.229650	0.4264571	0.1402658	3.040350	2.36304e-03
ENSG00000188976	1651.188076	-0.6927205	0.0548465	-12.630158	1.43990e-36
ENSG00000187961	209.637938	0.7297556	0.1318599	5.534326	3.12428e-08
ENSG00000187583	47.255123	0.0405765	0.2718928	0.149237	8.81366e-01
ENSG00000187642	11.979750	0.5428105	0.5215598	1.040744	2.97994e-01
ENSG00000188290	108.922128	2.0570638	0.1969053	10.446970	1.51282e-25
ENSG00000187608	350.716868	0.2573837	0.1027266	2.505522	1.22271e-02
ENSG00000188157	9128.439422	0.3899088	0.0467163	8.346304	7.04321e-17
ENSG00000237330	0.158192	0.7859552	4.0804729	0.192614	8.47261e-01
	padj	entrez	symbol		
	<numeric>	<character>	<character>		
ENSG00000279457	6.86555e-01	NA	NA		
ENSG00000187634	5.15718e-03	148398	SAMD11		
ENSG00000188976	1.76549e-35	26155	NOC2L		
ENSG00000187961	1.13413e-07	339451	KLHL17		
ENSG00000187583	9.19031e-01	84069	PLEKHN1		
ENSG00000187642	4.03379e-01	84808	PERM1		
ENSG00000188290	1.30538e-24	57801	HES4		
ENSG00000187608	2.37452e-02	9636	ISG15		
ENSG00000188157	4.21963e-16	375790	AGRN		
ENSG00000237330	NA	401934	RNF223		

#Now lets save these results as a csv file

```
res = res[order(res$pvalue),]
write.csv(res, file="deseq_results.csv")
```

#Making a Volcano plot with this data

```
plot( res$log2FoldChange, -log(res$padj) )
```

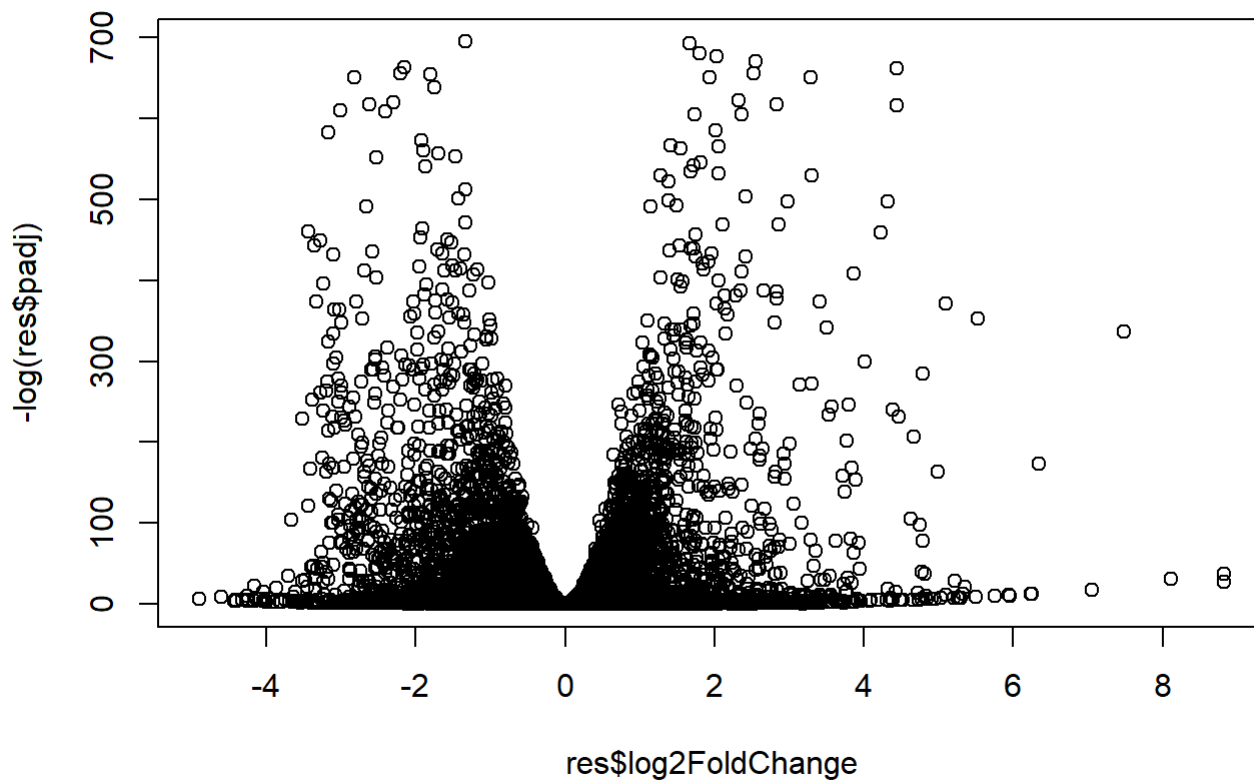


#Now I will improve the plot by making it colorful

```
# Make a color vector for all genes
mycols <- rep("gray", nrow(res) )

# Color red the genes with absolute fold change above 2
mycols[ abs(res$log2FoldChange) > 2 ] <- "red"

# Color blue those with adjusted p-value less than 0.01
# and absolute fold change more than 2
inds <- (abs(res$padj) < 0.01) & (abs(res$log2FoldChange) > 2 )
mycols[ inds ] <- "blue"

plot( res$log2FoldChange, -log(res$padj), col=mycols, xlab="Log2(FoldChange)", ylab="-Log(P-value"
```

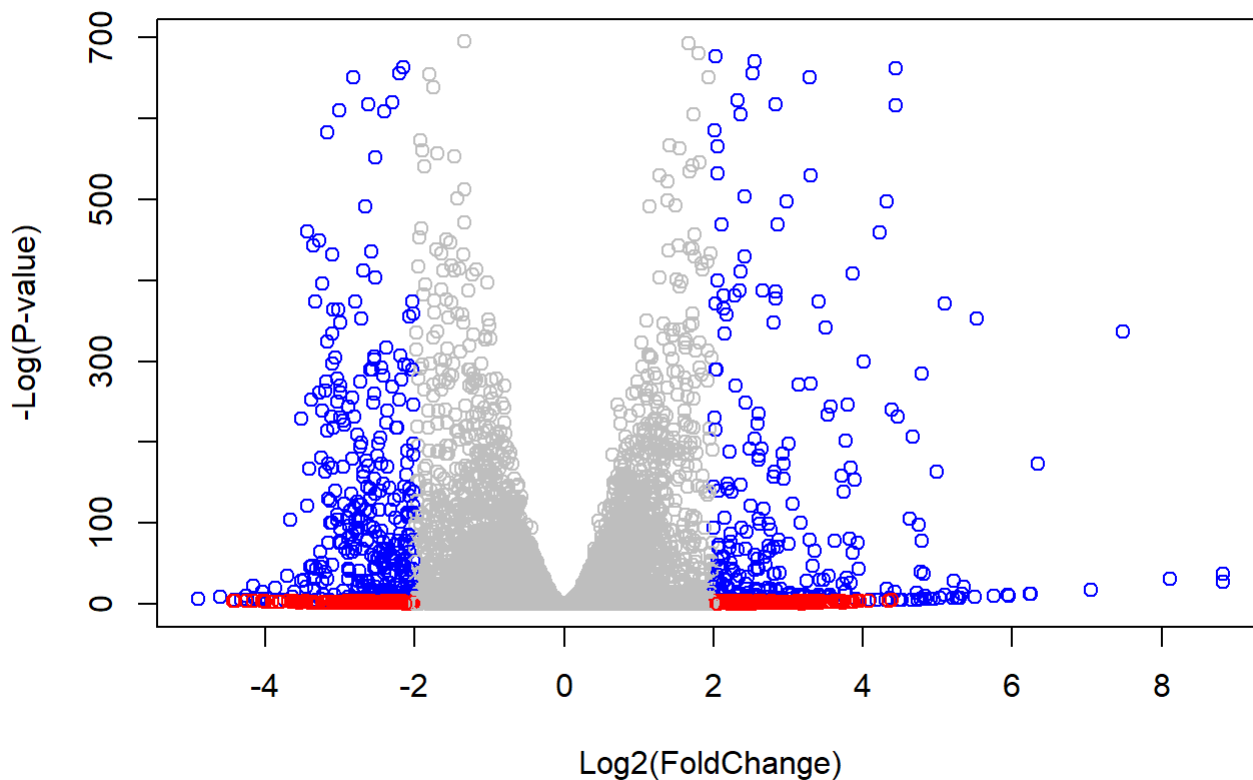

##Section 2:Pathway Analysis

```
library(pathview)
```


 Pathview is an open source software package distributed under GNU General Public License version 3 (GPLv3). Details of GPLv3 is available at <http://www.gnu.org/licenses/gpl-3.0.html>. Particullary, users are required to formally cite the original Pathview paper (not just mention it) in publications or products. For details, do citation("pathview") within R.

The pathview downloads and uses KEGG data. Non-academic uses may require a KEGG license agreement (details at <http://www.kegg.jp/kegg/legal.html>).

#####

```
library(gage)
```

```
library(gageData)
```

```
data(kegg.sets.hs)
data(sigmet.idx.hs)
```



```
# Focus on signaling and metabolic pathways only
```

```
kegg.sets.hs = kegg.sets.hs[sigmet.idx.hs]
```

```
# Examine the first 3 pathways
```

```
head(kegg.sets.hs, 3)
```

```
$`hsa00232 Caffeine metabolism`
```

```
[1] "10" "1544" "1548" "1549" "1553" "7498" "9"
```

```
$`hsa00983 Drug metabolism - other enzymes`
```

```
[1] "10" "1066" "10720" "10941" "151531" "1548" "1549" "1551"  
[9] "1553" "1576" "1577" "1806" "1807" "1890" "221223" "2990"  
[17] "3251" "3614" "3615" "3704" "51733" "54490" "54575" "54576"  
[25] "54577" "54578" "54579" "54600" "54657" "54658" "54659" "54963"  
[33] "574537" "64816" "7083" "7084" "7172" "7363" "7364" "7365"  
[41] "7366" "7367" "7371" "7372" "7378" "7498" "79799" "83549"  
[49] "8824" "8833" "9" "978"
```

```
$`hsa00230 Purine metabolism`
```

```
[1] "100" "10201" "10606" "10621" "10622" "10623" "107" "10714"  
[9] "108" "10846" "109" "111" "11128" "11164" "112" "113"  
[17] "114" "115" "122481" "122622" "124583" "132" "158" "159"  
[25] "1633" "171568" "1716" "196883" "203" "204" "205" "221823"  
[33] "2272" "22978" "23649" "246721" "25885" "2618" "26289" "270"  
[41] "271" "27115" "272" "2766" "2977" "2982" "2983" "2984"  
[49] "2986" "2987" "29922" "3000" "30833" "30834" "318" "3251"  
[57] "353" "3614" "3615" "3704" "377841" "471" "4830" "4831"  
[65] "4832" "4833" "4860" "4881" "4882" "4907" "50484" "50940"  
[73] "51082" "51251" "51292" "5136" "5137" "5138" "5139" "5140"  
[81] "5141" "5142" "5143" "5144" "5145" "5146" "5147" "5148"  
[89] "5149" "5150" "5151" "5152" "5153" "5158" "5167" "5169"  
[97] "51728" "5198" "5236" "5313" "5315" "53343" "54107" "5422"  
[105] "5424" "5425" "5426" "5427" "5430" "5431" "5432" "5433"  
[113] "5434" "5435" "5436" "5437" "5438" "5439" "5440" "5441"  
[121] "5471" "548644" "55276" "5557" "5558" "55703" "55811" "55821"  
[129] "5631" "5634" "56655" "56953" "56985" "57804" "58497" "6240"  
[137] "6241" "64425" "646625" "654364" "661" "7498" "8382" "84172"  
[145] "84265" "84284" "84618" "8622" "8654" "87178" "8833" "9060"  
[153] "9061" "93034" "953" "9533" "954" "955" "956" "957"  
[161] "9583" "9615"
```

```
foldchanges = res$log2FoldChange
```

```
names(foldchanges) = res$entrez
```

```
head(foldchanges)
```

```
1266 54855 1465 51232 2034 2317  
-2.422719 3.201955 -2.313738 -2.059631 -1.888019 -1.649792
```

```
# Get the results
keggres = gage(foldchanges, gsets=kegg.sets.hs)
attributes(keggres)
```

```
$names
[1] "greater" "less"    "stats"
```

```
head(keggres$less)
```

	p.geomean	stat.mean	p.val
hsa04110 Cell cycle	8.995727e-06	-4.378644	8.995727e-06
hsa03030 DNA replication	9.424076e-05	-3.951803	9.424076e-05
hsa03013 RNA transport	1.375901e-03	-3.028500	1.375901e-03
hsa03440 Homologous recombination	3.066756e-03	-2.852899	3.066756e-03
hsa04114 Oocyte meiosis	3.784520e-03	-2.698128	3.784520e-03
hsa00010 Glycolysis / Gluconeogenesis	8.961413e-03	-2.405398	8.961413e-03


	q.val	set.size	exp1
hsa04110 Cell cycle	0.001448312	121	8.995727e-06
hsa03030 DNA replication	0.007586381	36	9.424076e-05
hsa03013 RNA transport	0.073840037	144	1.375901e-03
hsa03440 Homologous recombination	0.121861535	28	3.066756e-03
hsa04114 Oocyte meiosis	0.121861535	102	3.784520e-03
hsa00010 Glycolysis / Gluconeogenesis	0.212222694	53	8.961413e-03

```
pathview(gene.data=foldchanges, pathway.id="hsa04110")
```

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory C:/Users/Owner/Documents/UCSD Classes/BIMM 143/BIMM 143 Assignment PDFs/class 13 stuff

Info: Writing image file hsa04110.pathview.png

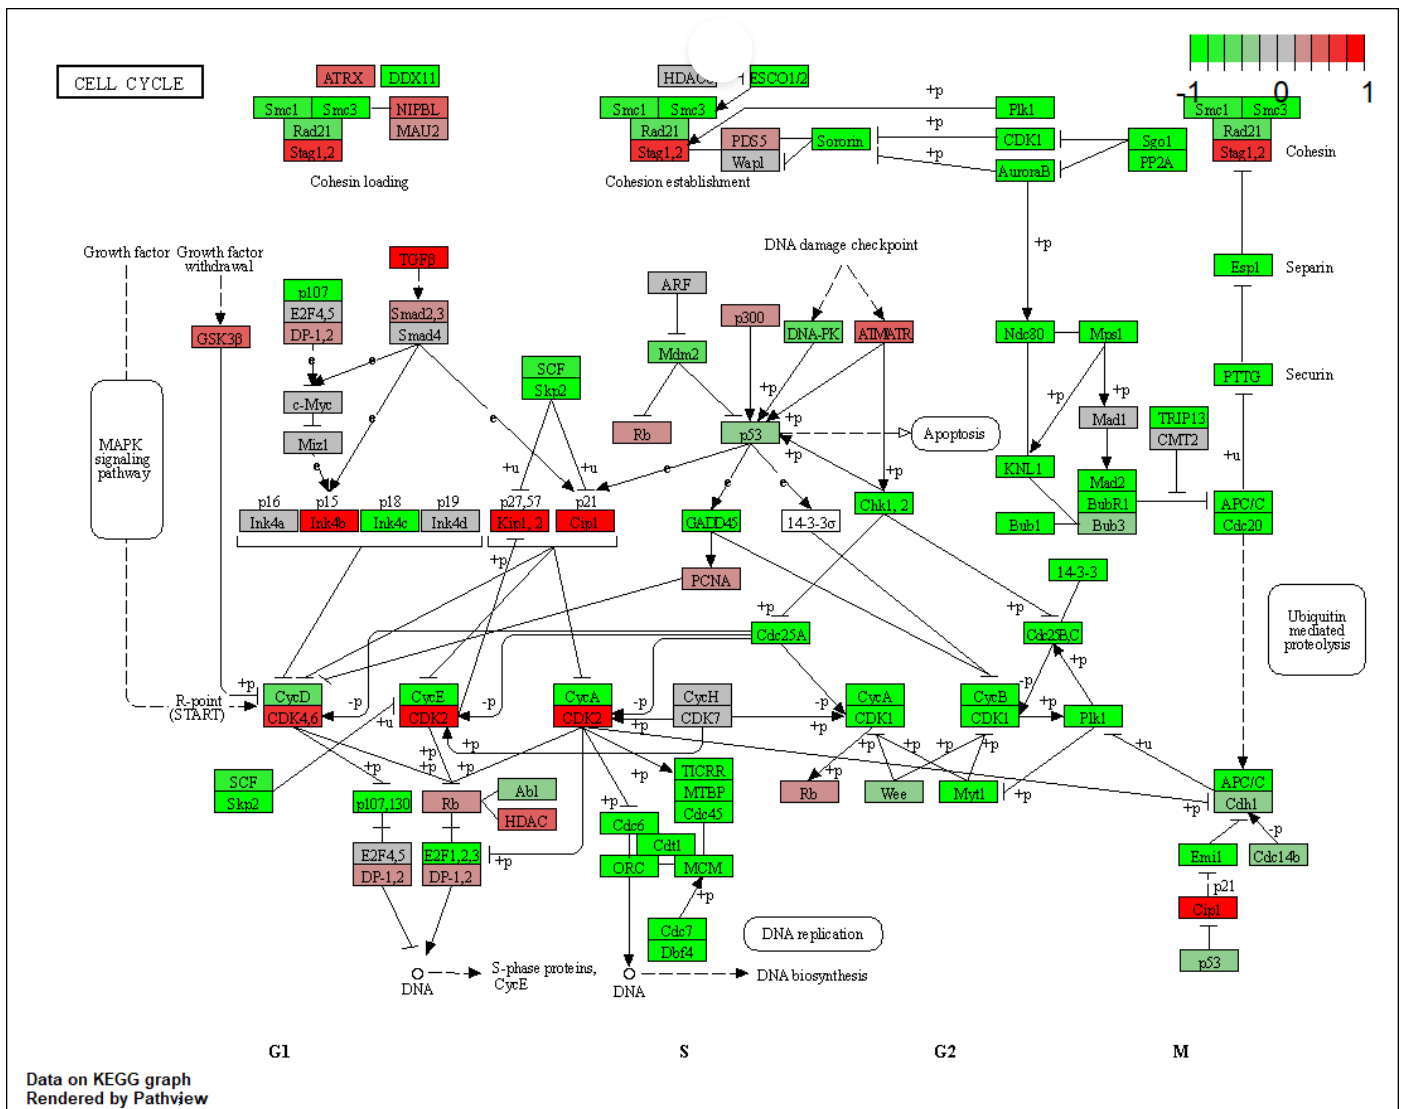

Cell Cycle Up and Down Regulated Gened