

String passed to `file_tree.sh`:
`file_tree -i "folder" -0 "FileTrees/tree_3.tex" "./"`

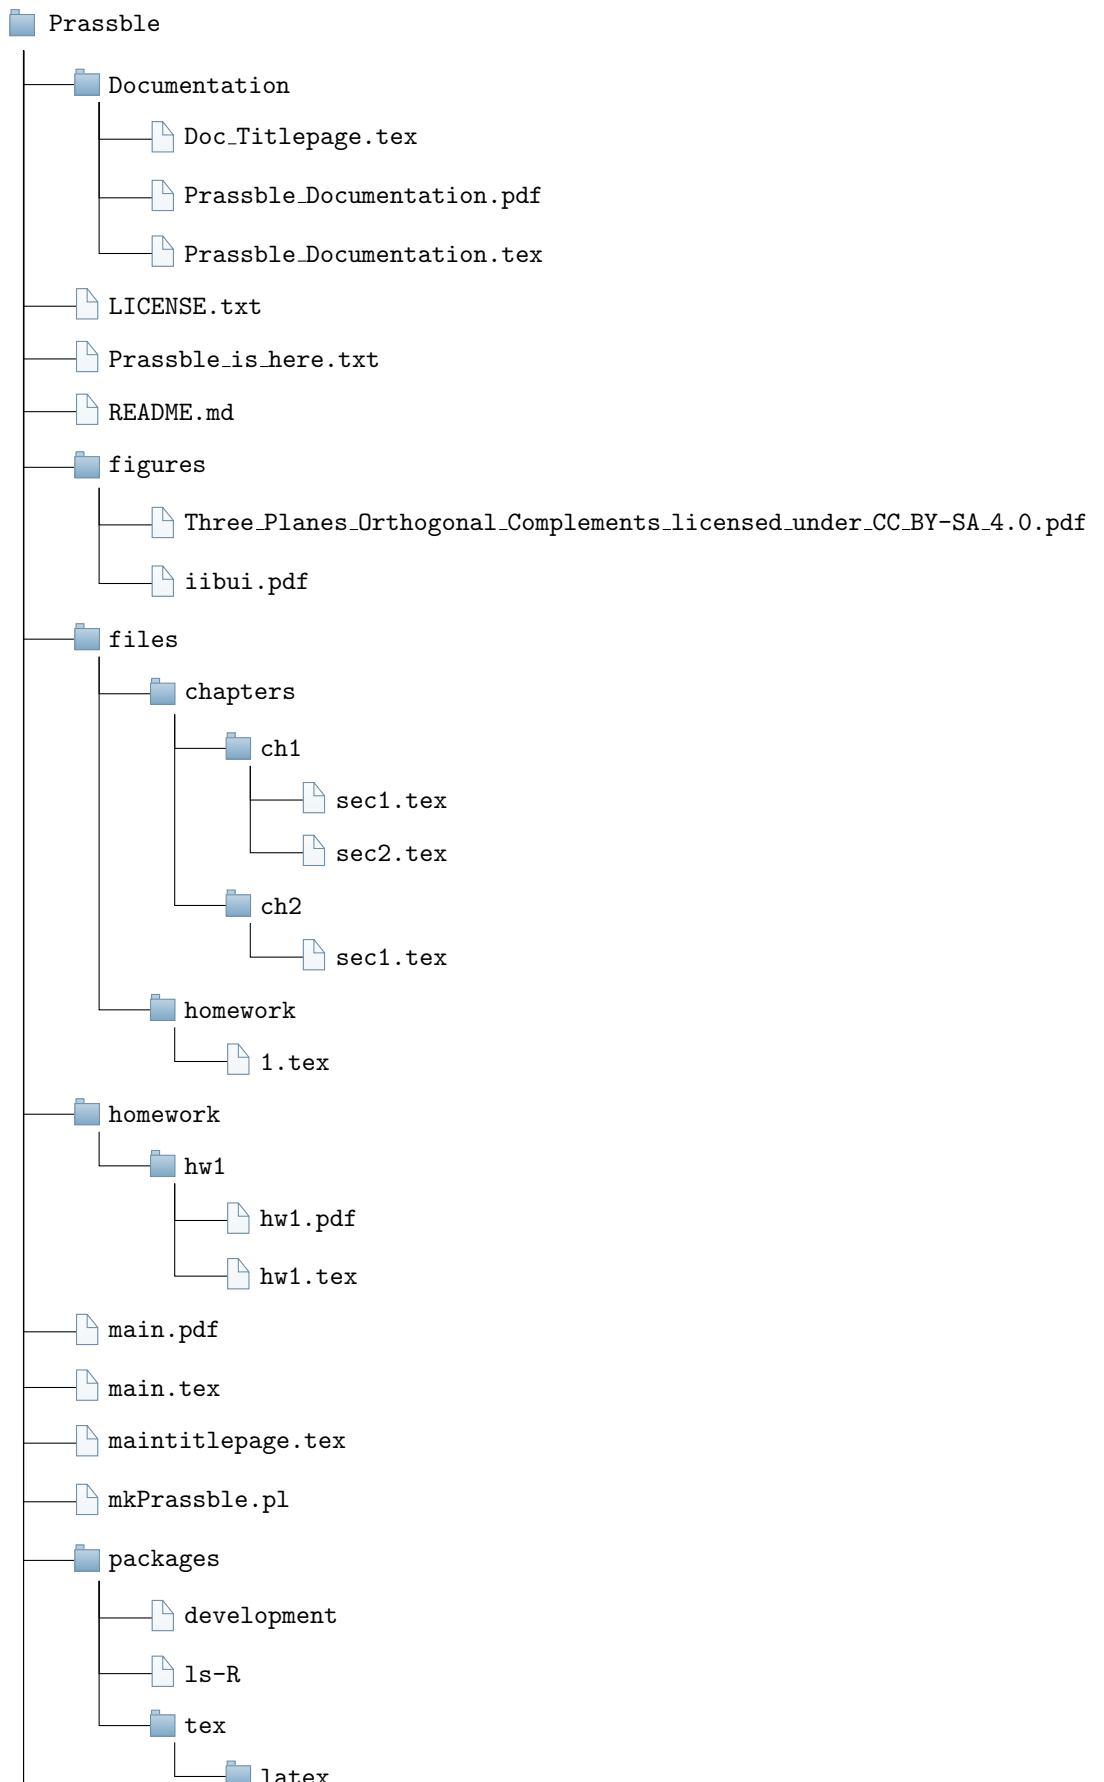


String passed to file_tree.sh:
file_tree -i "*.sty" -O "FileTrees/tree_4.tex" "./"


```

tree
├── $&#\ |_*~%<>{}~+ -=:;''!?.
├── FileTrees_IncludeThis
├── a_file_with_[
├── a_file_with_]
├── a_file_with_] [-[_] -[[[
├── a_file_with_{
├── a_file_with_}
├── a_file_with_{}-{_-}-{{{{
├── a_folder_with_'_and_"_yes
├── another_folder
├── basename
├── bash.pdf
├── bash.tex
├── bash_test.tex
├── folder
├── hello.sh
├── include_this
│   ├── folder1
│   └── include_this.tex
├── some_folder
│   └── tmp.tex

```

This should include all files, be it `.aux`, `.log`, etc.

```
String passed to file_tree.sh:  
file_tree -I "*.tex" -O "FileTrees/tree_6.tex" "./"
```




Here: what



Yay this now works correctly: `../../preamble/commands/modified`commands/../../../files/chapters`

`../../preamble/commands/modified`commands/../../../files/chapters/foo`

`../../preamble/commands/modified`commands/../../../files/chapters`