



some_folder


tmp.tex

```
String passed to file_tree.sh:
bash file_tree.sh -i "folder" -0 "FileTrees/tree_3.tex" "./"
```

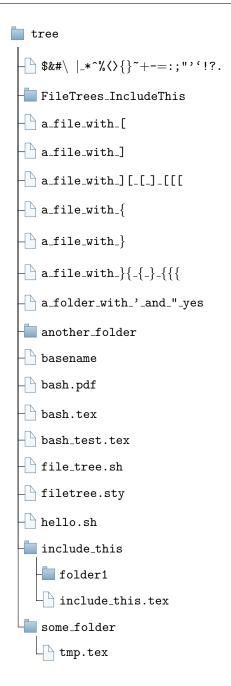

```
String passed to file_tree.sh:
bash file_tree.sh -i "*.sty" -0 "FileTrees/tree_4.tex" "./"
```

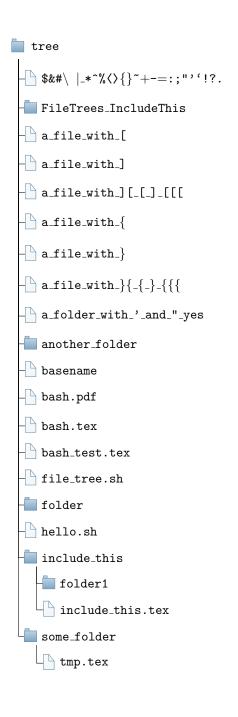

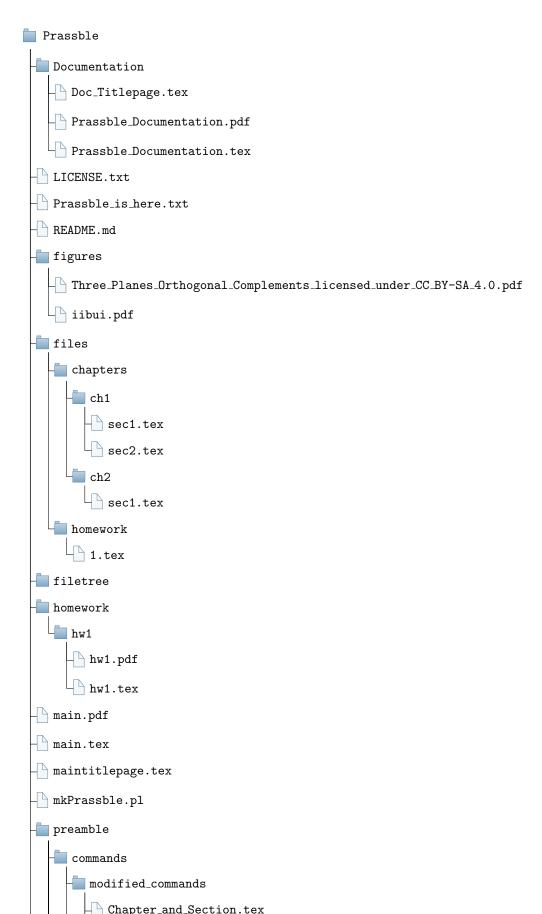

This should include all files, be it .aux, .log, etc.

String passed to file_tree.sh:
bash file_tree.sh -I "*.tex" -O "FileTrees/tree_6.tex" "./"

```
tree
 $&#\ |_*^%\\}~+-=:;"''!?.
 FileTrees
 FileTrees_IncludeThis
 a_file_with_[
 - a_file_with_]
 - a_file_with_\{
 a_file_with_}
 - a_file_with_\{ -\{ -\} -\{ \{ \{ \} \} \} \}
 a_folder_with_'and_"_yes
 another_folder
 basename
 bash.aux
 bash.log
 bash.pdf
 bash.synctex(busy)
 bash.synctex.gz
 file_tree.sh
 filetree.sty
 - filetree.tmp
 folder 📗
 hello.sh
 ignore_this.log
 \stackrel{-}{=} include_this
   folder1
 some_folder
 tst.tmp
```

Here: what



Yay this now works correctly: .../../preamble/commands/modified commands/.../../files/chapters

../../preamble/commands/modified commands/../../files/chapters/foo

../../preamble/commands/modified `commands/../../../files/chapters