


Addition of ground point

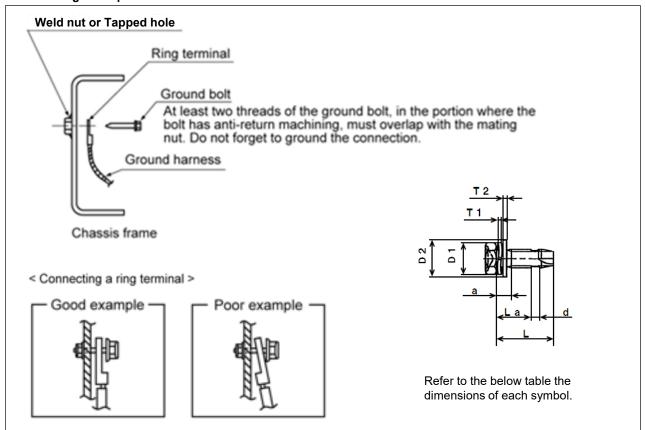

Ground bolt part list

Part No.	Nominal Diameter	Pitch	a (Max) mm	Length L mm	Spring washer T1 × D1	Plane washer T2 × D2	Lock length d mm	Lock position La mm	Tightening torque N•m {kgf•m}
898164-8360	M6	1	2.6	14	None	1.6 × 12	4	5	$7.8\pm2.0 \{0.8\pm0.2\}$
897086-8220	M6	1	3.9	14	1.2×11.3	1.6 × 12	3.5	6	$7.8\pm2.0 \{0.8\pm0.2\}$
897086-8230	M6	1	5.4	16	1.2 × 11.3	1.6 × 12	4	7.5	$7.8\pm2.0 \{0.8\pm0.2\}$
897086-8240	M6	1	5.4	20	1.2 × 11.3	1.6 × 12	4	10	7.8±2.0 {0.8±0.2}
897087-2010	M6	1	5.4	25	1.2 × 11.3	1.6 × 12	4	16.5	7.8±2.0 {0.8±0.2}
897087-6170	M6	1	5.4	40	1.2 × 11.3	1.6 × 12	4	31	$7.8\pm2.0 \{0.8\pm0.2\}$
897119-4790	M6	1	3.9	14	1.2 × 11.3	1.6 × 12	3.5	6	7.8±2.0 {0.8±0.2}
897206-4070	M6	1	3.9	14	1.2 × 11.3	1.6 × 12	3.5	6	$7.8\pm2.0 \{0.8\pm0.2\}$
898164-8370	M8	1.25	3	14	None	1.6 × 16	4	5	18.6±4.9 {1.9±0.5}
898141-2550	M8	1.25	3	18.5	None	1.6×16	6.5	6	18.6±4.9 {1.9±0.5}
897086-8250	M8	1.25	6.5	20	1.6 × 14.3	1.6 × 16	4	10	18.6±4.9 {1.9±0.5}
898141-2561	M8	1.25	3	24	None	1.6 × 16	10	7	18.6±4.9 {1.9±0.5}
897087-0550	M8	1.25	4.7	16	1.6×14.3	1.6 × 16	4	6	18.6±4.9 {1.9±0.5}
897087-2030	M8	1.25	6.5	25	1.6 × 14.3	1.6 × 16	4	15	18.6±4.9 {1.9±0.5}
897087-2040	M8	1.25	6.5	30	1.6 × 14.3	1.6 × 16	4	20	18.6±4.9 {1.9±0.5}
897264-7660	M8	1.25	2	23	None	None (flange diameter 16mm)	5	4	18.6±4.9 {1.9±0.5}
898164-8380	M10	1.25	4.5	20	None	2×20	6.5	6	40.2±5.9 {4.1±0.6}
897087-2050	M10	1.25	5.9	25	1.8 × 17.4	2×20	5	10	40.2±5.9 {4.1±0.6}
897087-2060	M10	1.25	7.2	30	1.8 × 17.4	2×20	5	17.5	40.2±5.9 {4.1±0.6}