





Chapter 4: Resiliency

Ticket: Principle of Least Privilege

Sack to the Question

To complete this ticket, you had to create a user that only has **readWrite** access to the **mflix** database only.

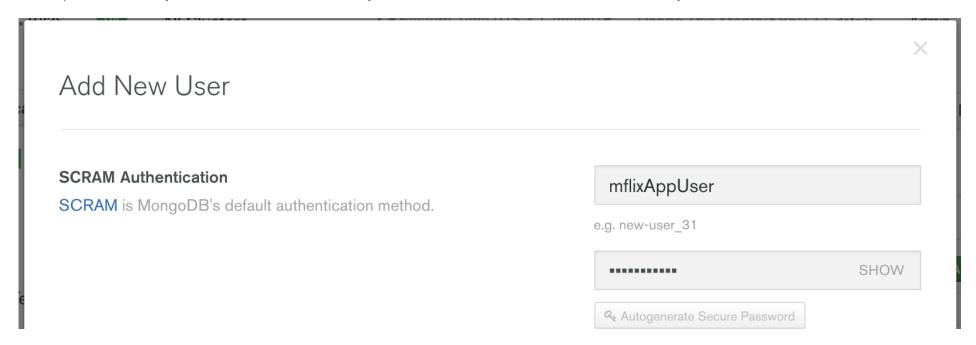

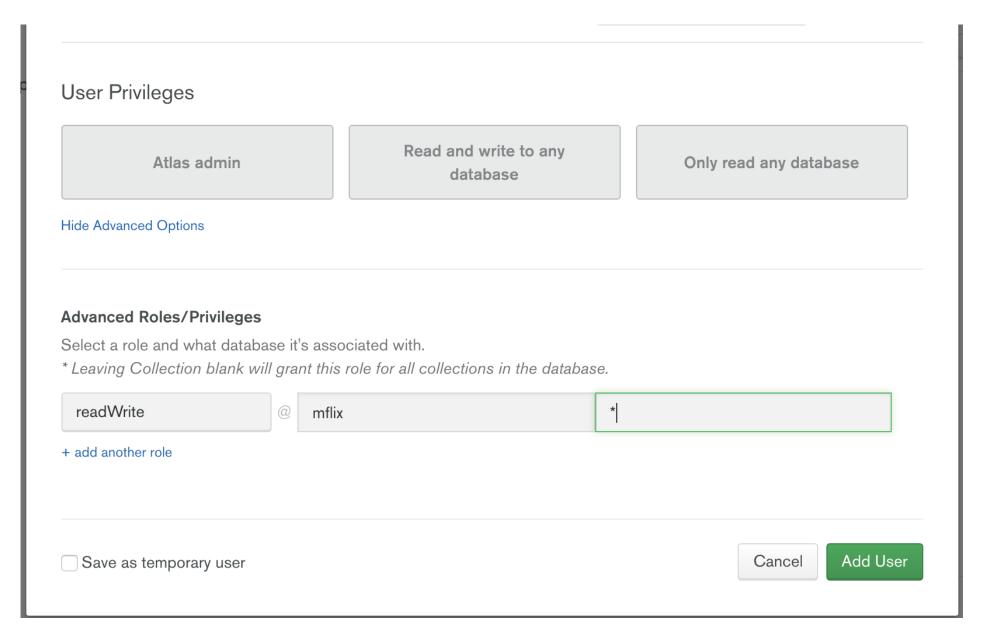

Then replace the authentication credentials, with this new user ones, in the MongoDB URI SRV string in your configuration file:

mongodb+srv://mflixAppUser:mflixAppPwd@<YOUR_CLUSTER_HOST>/admin

Proceed to next section