

Shop database

Schema reference for 8 selected tables

Database sample
Engine sqlite 3.45.1
Generated 2026-09-27 14:52

8

tables

37

columns

8

relationships

4

indexes

Tables

Table	Columns	Foreign keys	Indexes	Comment
addresses	6	1	1	
audit_log	4	0	0	
categories	3	1	0	
customers	4	0	0	
order_items	4	2	0	
orders	5	2	1	
payments	5	1	0	
products	6	1	2	

Relationships

Table (foreign key)	Refers to	Cardinality	Constraint
addresses (customer_id)	customers (id)	Many to exactly one	
categories (parent_id)	categories (id)	Many to zero or one	
order_items (product_id)	products (id)	Many to exactly one	
order_items (order_id)	orders (id)	Many to exactly one	
orders (shipping_address_id)	addresses (id)	Many to zero or one	
orders (customer_id)	customers (id)	Many to exactly one	
payments (order_id)	orders (id)	One to exactly one	
products (category_id)	categories (id)	Many to zero or one	

Entity relationship diagram

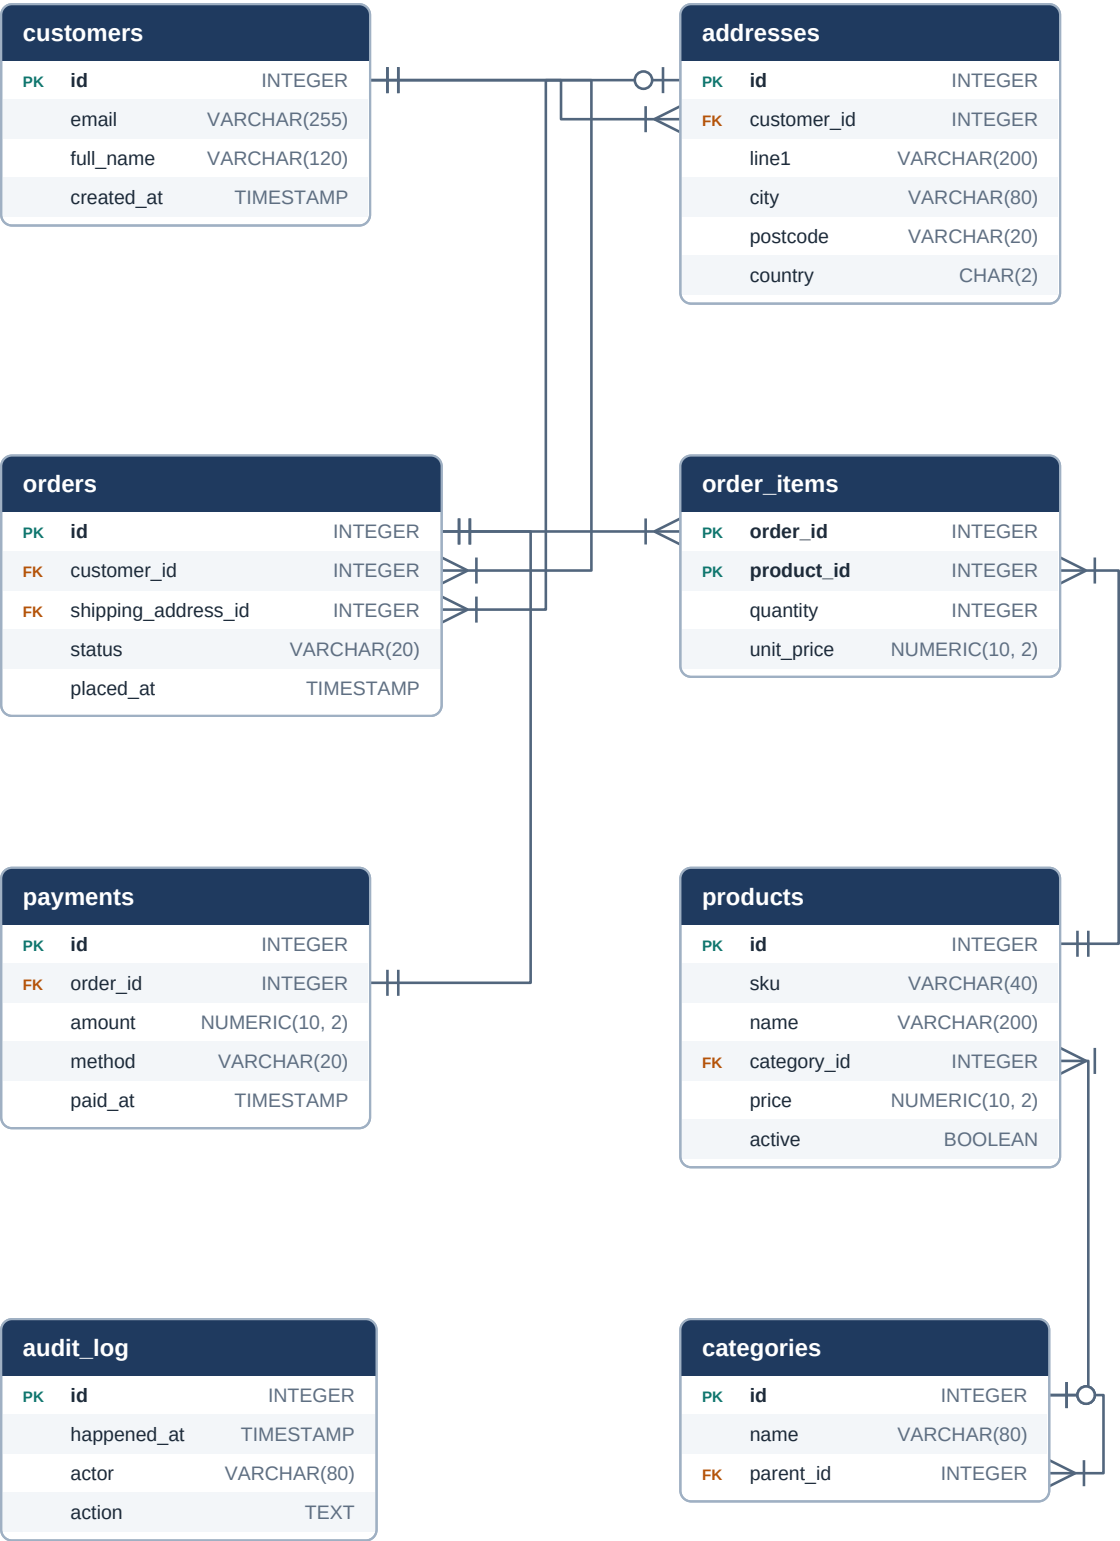


Table details

addresses

6 columns

Columns

#	Column	Type	Null	Default	Keys	References
1	id	INTEGER	No		PK	
2	customer_id	INTEGER	No		FK	customers.id
3	line1	VARCHAR(200)	No			
4	city	VARCHAR(80)	No			
5	postcode	VARCHAR(20)	Yes			
6	country	CHAR(2)	No	'US'		

Primary key

id

Foreign keys

Name	Columns	References	Rules
(unnamed)	customer_id	customers (id)	

Indexes

Name	Columns	Type
ix_addresses_customer	customer_id	Non-unique

audit_log

4 columns

Columns

#	Column	Type	Null	Default	Keys	References
1	id	INTEGER	No		PK	
2	happened_at	TIMESTAMP	No			
3	actor	VARCHAR(80)	Yes			
4	action	TEXT	No			

Primary key

id

Foreign keys

No foreign keys.

Indexes

No secondary indexes.

categories

3 columns

Columns

#	Column	Type	Null	Default	Keys	References
1	id	INTEGER	No		PK	
2	name	VARCHAR(80)	No			
3	parent_id	INTEGER	Yes		FK	categories.id

Primary key

id

Foreign keys

Name	Columns	References	Rules
(unnamed)	parent_id	categories (id)	

Indexes

No secondary indexes.

customers

4 columns

Columns

#	Column	Type	Null	Default	Keys	References
1	id	INTEGER	No		PK	
2	email	VARCHAR(255)	No			
3	full_name	VARCHAR(120)	No			
4	created_at	TIMESTAMP	No	CURRENT_TIMEST AMP		

Primary key

id

Foreign keys

No foreign keys.

Indexes

No secondary indexes.

order_items

4 columns

Columns

#	Column	Type	Null	Default	Keys	References
1	order_id	INTEGER	No		PK FK	orders.id
2	product_id	INTEGER	No		PK FK	products.id
3	quantity	INTEGER	No	1		
4	unit_price	NUMERIC(10, 2)	No			

Primary key

order_id, product_id

Foreign keys

Name	Columns	References	Rules
(unnamed)	product_id	products (id)	
(unnamed)	order_id	orders (id)	

Indexes

No secondary indexes.

orders

5 columns

Columns

#	Column	Type	Null	Default	Keys	References
1	id	INTEGER	No		PK	
2	customer_id	INTEGER	No		FK	customers.id
3	shipping_address_id	INTEGER	Yes		FK	addresses.id
4	status	VARCHAR(20)	No	'pending'		
5	placed_at	TIMESTAMP	No			

Primary key

id

Foreign keys

Name	Columns	References	Rules
(unnamed)	shipping_address_id	addresses (id)	
(unnamed)	customer_id	customers (id)	

Indexes

Name	Columns	Type
ix_orders_customer_placed	customer_id, placed_at	Non-unique

payments

5 columns

Columns

#	Column	Type	Null	Default	Keys	References
1	id	INTEGER	No		PK	
2	order_id	INTEGER	No		FK UQ	orders.id
3	amount	NUMERIC(10, 2)	No			
4	method	VARCHAR(20)	No			
5	paid_at	TIMESTAMP	Yes			

Primary key

id

Foreign keys

Name	Columns	References	Rules
(unnamed)	order_id	orders (id)	

Indexes

No secondary indexes.

Unique constraints

Name	Columns
(unnamed)	order_id

products

6 columns

Columns

#	Column	Type	Null	Default	Keys	References
1	id	INTEGER	No		PK	
2	sku	VARCHAR(40)	No		UQ	
3	name	VARCHAR(200)	No			
4	category_id	INTEGER	Yes		FK	categories.id
5	price	NUMERIC(10, 2)	No			
6	active	BOOLEAN	No	1		

Primary key

id

Foreign keys

Name	Columns	References	Rules
(unnamed)	category_id	categories (id)	

Indexes

Name	Columns	Type
ix_products_category	category_id, active	Non-unique
ux_products_sku	sku	Unique