Shop

Schema reference for 8 selected tables

Database	sample
Engine	sqlite 3.49.1
Generated	2026-10-23 10:20

8	37	8	5
tables	columns	relationships	indexes

Tables

Table	Columns	Foreign keys	Indexes
customers	4	0	0
addresses	6	1	1
categories	3	1	0
products	6	1	2
orders	5	2	1
order_items	4	2	0
payments	5	1	1
audit_log	4	0	0

Relationships

Table (foreign key)	Refers to	Cardinality
addresses (customer_id)	customers (id)	Many to exactly one
categories (parent_id)	categories (id)	Many to zero or one
products (category_id)	categories (id)	Many to zero or one
orders (shipping_address_id)	addresses (id)	Many to zero or one
orders (customer_id)	customers (id)	Many to exactly one
order_items (product_id)	products (id)	Many to exactly one
order_items (order_id)	orders (id)	Many to exactly one
payments (order_id)	orders (id)	One to exactly one

Entity relationship diagram

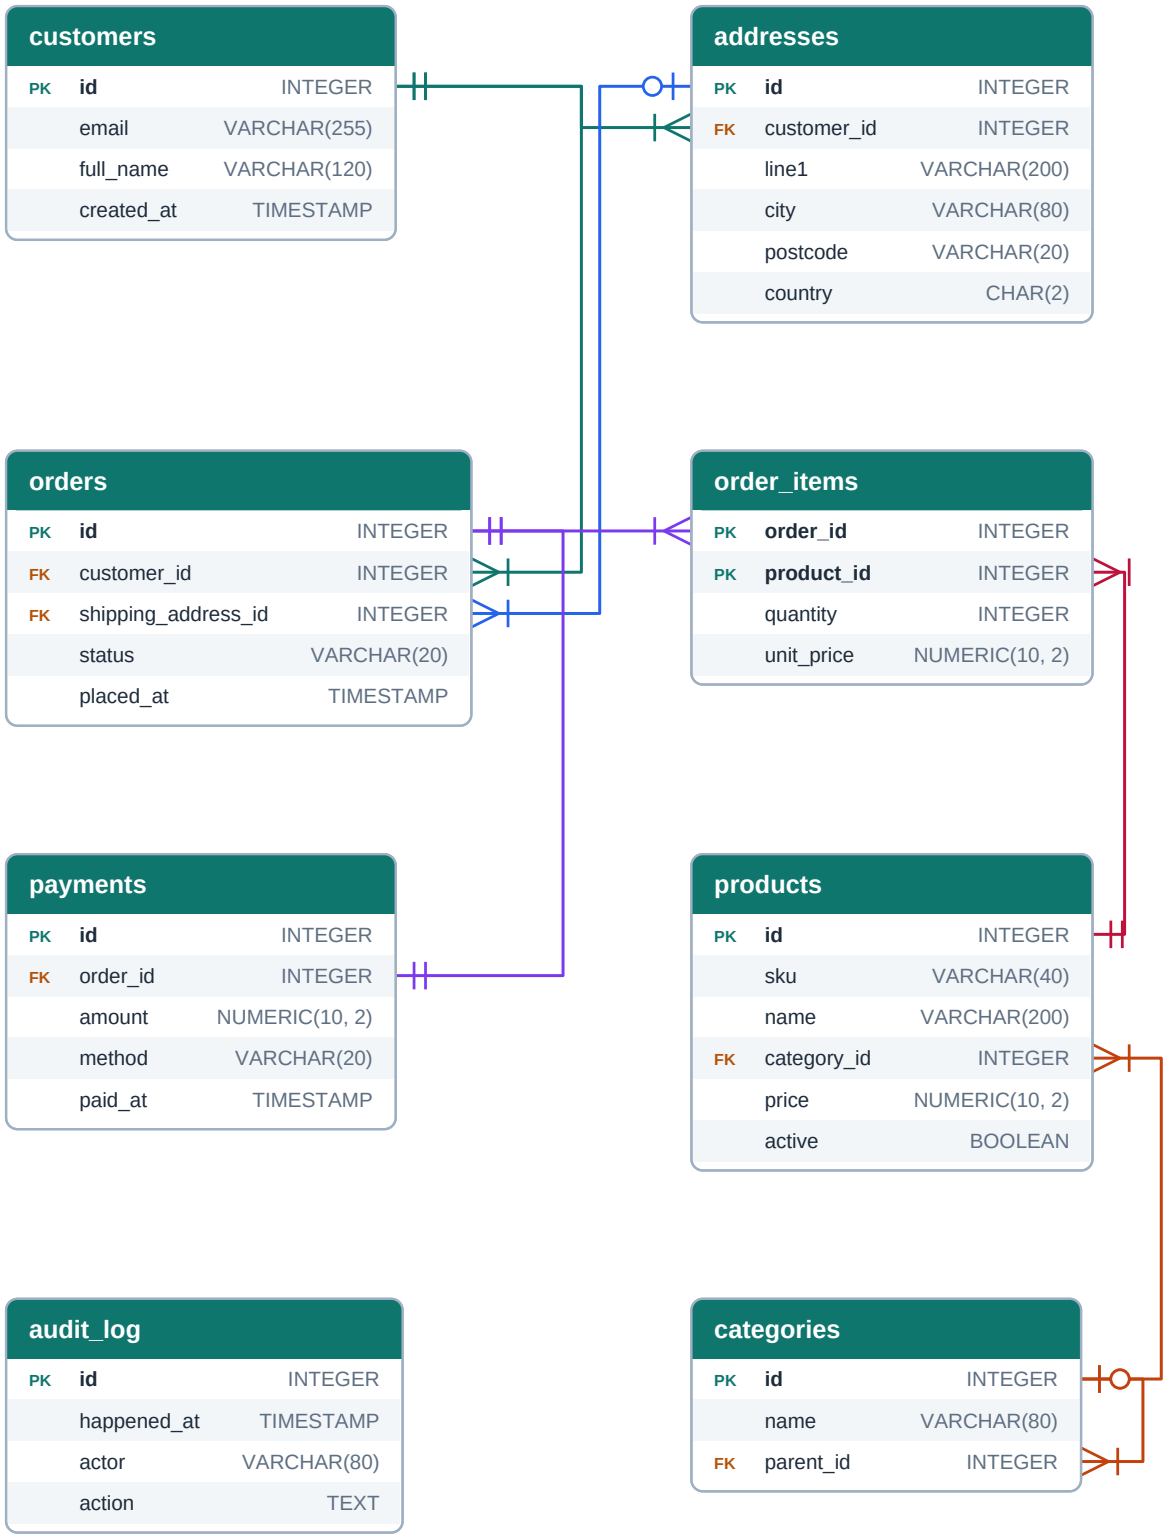

Table details

customers

4 columns

#	Column	Type	Null	Default	Keys	References
1	**id**	INTEGER	No		PK	
2	email	VARCHAR(255)	No			
3	full_name	VARCHAR(120)	No			
4	created_at	TIMESTAMP	No	CURRENT_TIMESTAMP		

Indexes

None.

addresses

6 columns

#	Column	Type	Null	Default	Keys	References
1	**id**	INTEGER	No		PK	
2	customer_id	INTEGER	No		FK	customers.id
3	line1	VARCHAR(200)	No			
4	city	VARCHAR(80)	No			
5	postcode	VARCHAR(20)	Yes			
6	country	CHAR(2)	No	'US'		

Indexes

(customer_id)

categories

3 columns

#	Column	Type	Null	Keys	References
1	**id**	INTEGER	No	PK	
2	name	VARCHAR(80)	No		
3	parent_id	INTEGER	Yes	FK	categories.id

Indexes

None.

products

6 columns

#	Column	Type	Null	Default	Keys	References
1	**id**	INTEGER	No		PK	
2	sku	VARCHAR(40)	No		UQ	
3	name	VARCHAR(200)	No			
4	category_id	INTEGER	Yes		FK	categories.id
5	price	NUMERIC(10, 2)	No			
6	active	BOOLEAN	No	1		

Indexes

(category_id, active) · (sku) **unique**

orders

5 columns

#	Column	Type	Null	Default	Keys	References
1	**id**	INTEGER	No		PK	
2	customer_id	INTEGER	No		FK	customers.id
3	shipping_address_id	INTEGER	Yes		FK	addresses.id
4	status	VARCHAR(20)	No	'pending'		
5	placed_at	TIMESTAMP	No			

Indexes

(customer_id, placed_at)

order_items

4 columns

#	Column	Type	Null	Default	Keys	References
1	**order_id**	INTEGER	No		PK FK	orders.id
2	**product_id**	INTEGER	No		PK FK	products.id
3	quantity	INTEGER	No	1		
4	unit_price	NUMERIC(10, 2)	No			

Indexes

None.

payments

5 columns

#	Column	Type	Null	Keys	References
1	**id**	INTEGER	No	PK	
2	order_id	INTEGER	No	FK UQ	orders.id
3	amount	NUMERIC(10, 2)	No		
4	method	VARCHAR(20)	No		
5	paid_at	TIMESTAMP	Yes		

Indexes

(order_id) **unique**

audit_log

4 columns

#	Column	Type	Null	Keys	References
1	**id**	INTEGER	No	PK	
2	happened_at	TIMESTAMP	No		
3	actor	VARCHAR(80)	Yes		
4	action	TEXT	No		

Indexes

None.