

Operációs Rendszerek 8 gyakorlat

Kovács Sándor Gergő

COOKSI

1. Feladat:

Az alarm.c, alarm_ado.c és alarmra_var.c bemutatása

```
mint@mint: ~  
File Edit View Search Terminal Help  
mint@mint:~$ ./alarm  
1 varok de meddig?  
2 varok de meddig?  
3 varok de meddig?  
4 varok de meddig?  
5 varok de meddig?  
6 varok de meddig?  
7 varok de meddig?  
mint@mint:~$
```

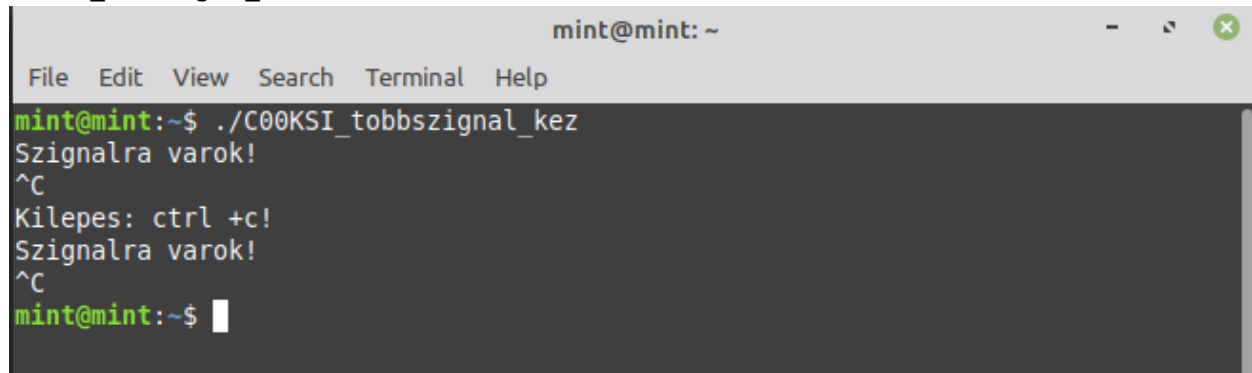
```
mint@mint: ~  
File Edit View Search Terminal Help  
mint@mint:~$ ./alarm  
1 varok de meddig?  
2 varok de meddig?  
3 varok de meddig?  
^C int jott 4 varok de meddig?  
5 varok de meddig?  
6 varok de meddig?  
7 varok de meddig?  
^Cmint@mint:~$
```

```
mint@mint: ~  
File Edit View Search Terminal Help  
mint@mint:~$ ./alarm  
1 varok de meddig?  
2 varok de meddig?  
3 varok de meddig?  
4 varok de meddig?  
5 varok de meddig?  
6 varok de meddig?  
7 varok de meddig?  
mint@mint:~$ ./alarmado  
Segmentation fault (core dumped)  
mint@mint:~$ ./alarmravar  
-663223760 varok de meddig?  

```

2. Feladat:

COOKSI_Tobbszignal_kez.c

A terminal window titled 'mint@mint: ~' with a menu bar containing 'File', 'Edit', 'View', 'Search', 'Terminal', and 'Help'. The terminal shows the execution of the program './COOKSI_tobbszignal_kez'. The output consists of two identical cycles: 'Szignalra varok!' followed by '^C' and 'Kilepes: ctrl +c!'. The prompt 'mint@mint:~\$' is shown at the end of the second cycle with a cursor.

```
mint@mint:~$ ./COOKSI_tobbszignal_kez
Szignalra varok!
^C
Kilepes: ctrl +c!
Szignalra varok!
^C
mint@mint:~$
```