Environment Deployment Process

> **Approval Required for Deployments**
>
> **Please ensure that you get approval from Thiago/Mahender before deploying any changes to the E2E (SIT1) or higher environments.**

- 1. Deployment Process using Bamboo
  - Build the component:
  - Deploy the component:
- 2. Deployment process using CLI
  - Build using Mesh tools:
  - Deploy using Mesh tools:
- 3. Deployment process using VS Code Tasks
- 4. Others
  - Deploy build to UAT and SVP(NFT) without the signature check:

1. Deployment Process using Bamboo

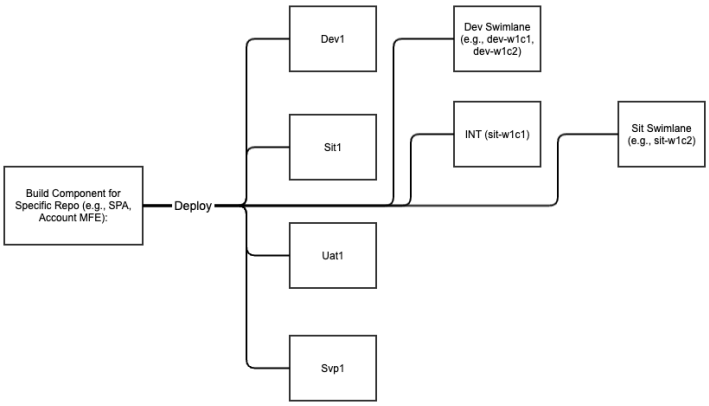

Build the component:

1. **Access the Bamboo Build Plan page:**

- SPA: https://bamboo-wdp.srv.westpac.com.au/browse/WDPBUILDSPA-ID2014
- Dashboard MFE: https://bamboo-wdp.srv.westpac.com.au/browse/WDPBUILDMFE-ID2017
- Account MFE: https://bamboo-wdp.srv.westpac.com.au/browse/WDPBUILDMFE-ID2015/
- Payment MFE: https://bamboo-wdp.srv.westpac.com.au/browse/WDPBUILDMFE-ID2016
- Beneficiary MFE: https://bamboo-wdp.srv.westpac.com.au/browse/WDPBUILDMFE-ID20TL
- MakerChecker Widget: https://bamboo-wdp.srv.westpac.com.au/browse/WDPBUILDWIDGET-ID20XN

2. **Run Customized Build Plan:**

Make sure to log in to Bamboo to find the "Run customized..." option as shown in the screenshot below.

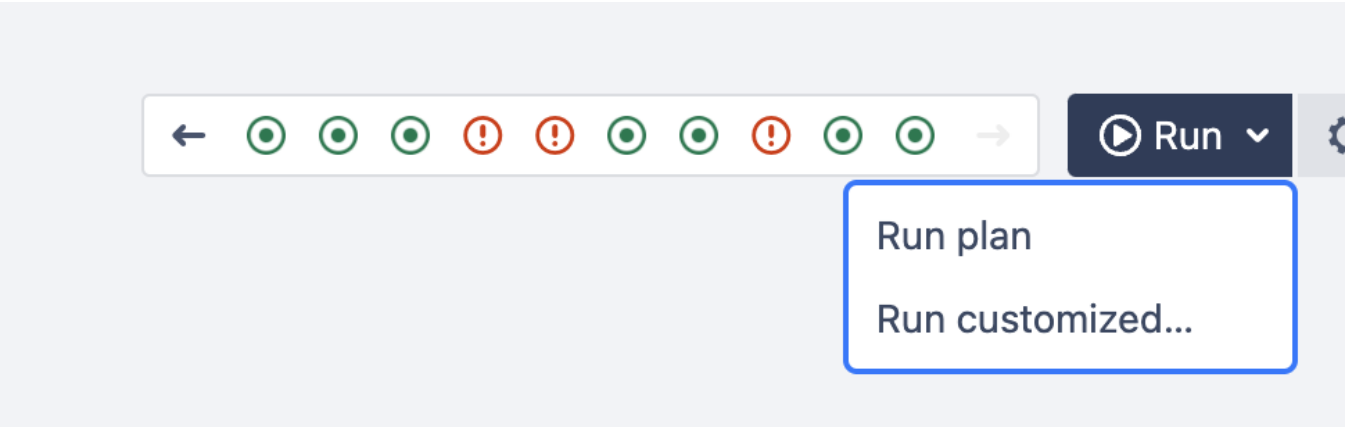

3. **Run Customized Build with Branch Name:**
   Change the value of Revision to the branch you want to build, then click the Run button.

> *pipeline will look for latest commit in the branch provided in revision feild, auto triggered build from PR will trigger the same, however it is observed that triggering new build with branch name in revision may resolve deployment bulild context missing error in* Determine Pipeline Variables *phase.*

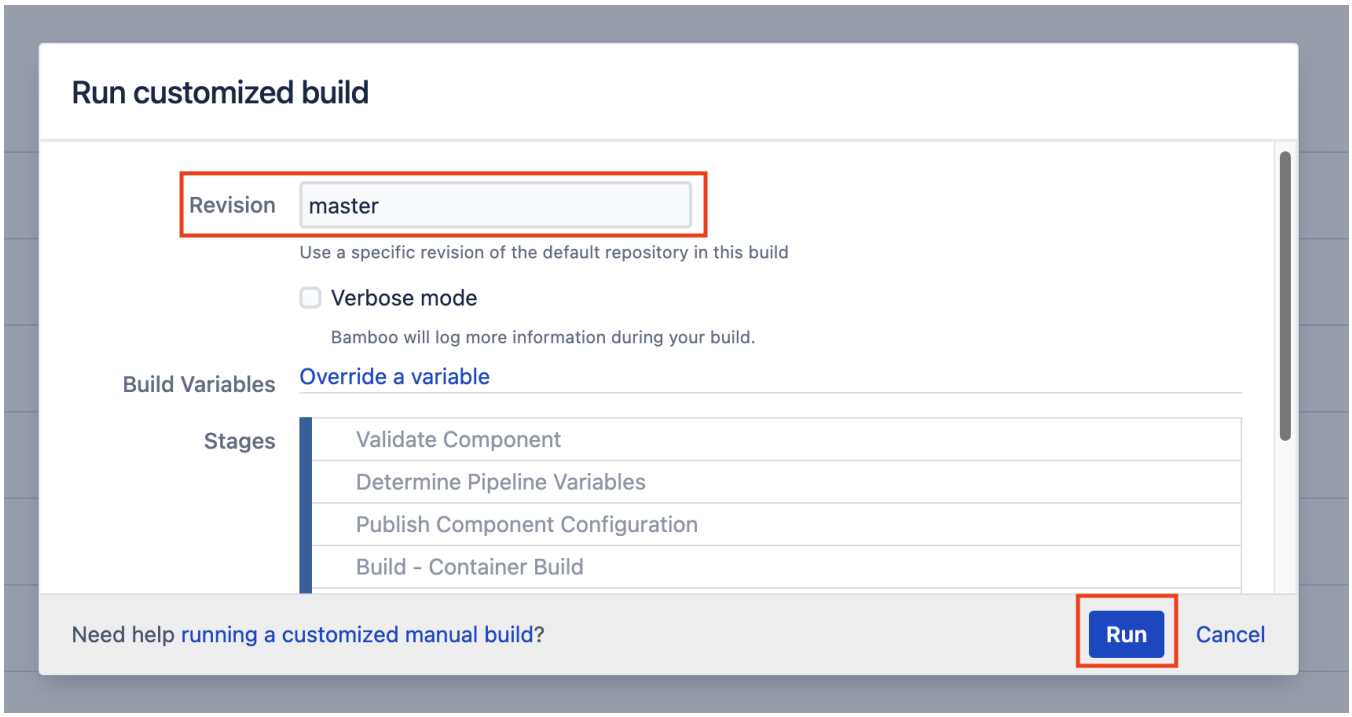

4. **Get the Build Number:**

   After the build is successfully completed, get the build number from the recent history. We'll use this build number to deploy the build to a specific environment.

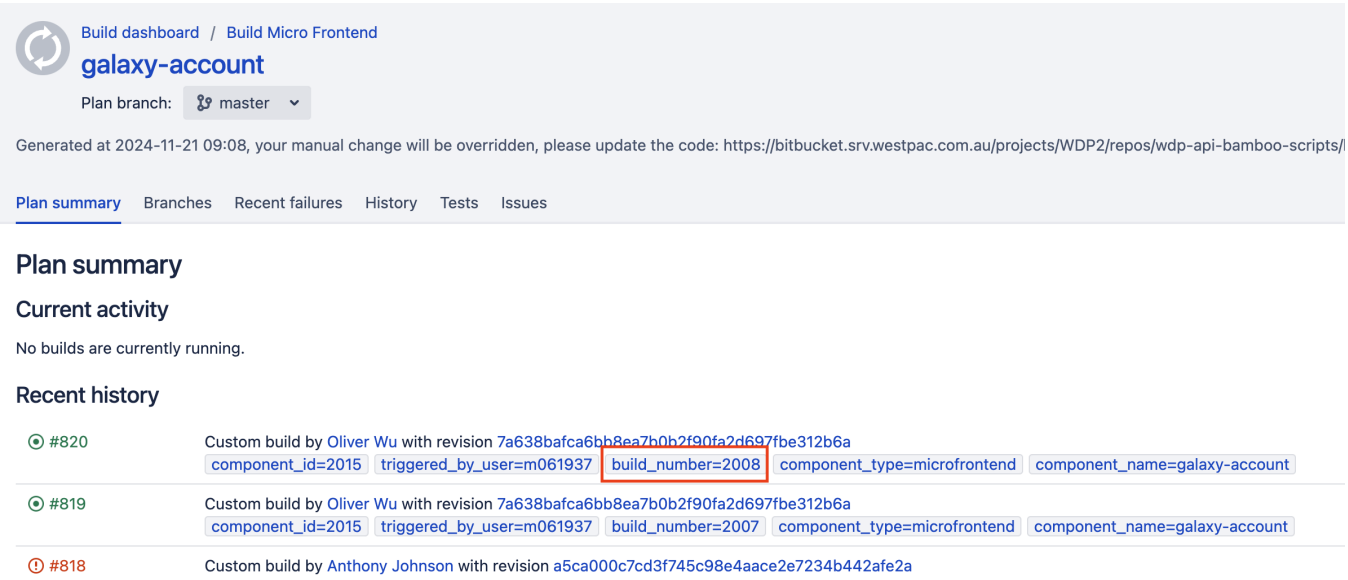

Deploy the component:

1. **Access the Bamboo Deploy Plan page:**

   For SPA:

   - Dev: https://bamboo-wdp.srv.westpac.com.au/browse/WDPDEPLOYSPADEV1-SPADEPLOYDEV1
   - SIT: https://bamboo-wdp.srv.westpac.com.au/browse/WDPDEPLOYSPASIT1-SPADEPLOYSIT1
   - UAT: https://bamboo-wdp.srv.westpac.com.au/browse/WDPDEPLOYSPAUAT1-SPADEPLOYUAT1
   - SVP: https://bamboo-wdp.srv.westpac.com.au/browse/WDPDEPLOYSPASVP1-SPADEPLOYSVP1

   For MFE:

   - Dev: https://bamboo-wdp.srv.westpac.com.au/browse/WDPDEPLOYMFEDEV1-MFEDEPLOYDEV1
   - SIT: https://bamboo-wdp.srv.westpac.com.au/browse/WDPDEPLOYMFESIT1-MFEDEPLOYSIT1
   - UAT: https://bamboo-wdp.srv.westpac.com.au/browse/WDPDEPLOYMFEUAT1-MFEDEPLOYUAT1
   - SVP: https://bamboo-wdp.srv.westpac.com.au/browse/WDPDEPLOYMFESVP1-MFEDEPLOYSVP1

   For Widget:

   - Dev: https://bamboo-wdp.srv.westpac.com.au/browse/WDPDEPLOYWIDGETDEV1-WIDGETDEPLOYDEV1
   - SIT: https://bamboo-wdp.srv.westpac.com.au/browse/WDPDEPLOYWIDGETSIT1-WIDGETDEPLOYSIT1
   - UAT:
   - SVP:

2. **Run Customized Build Plan:**

   Make sure to log in to Bamboo to find the "Run customized..." option as shown in the screenshot below.

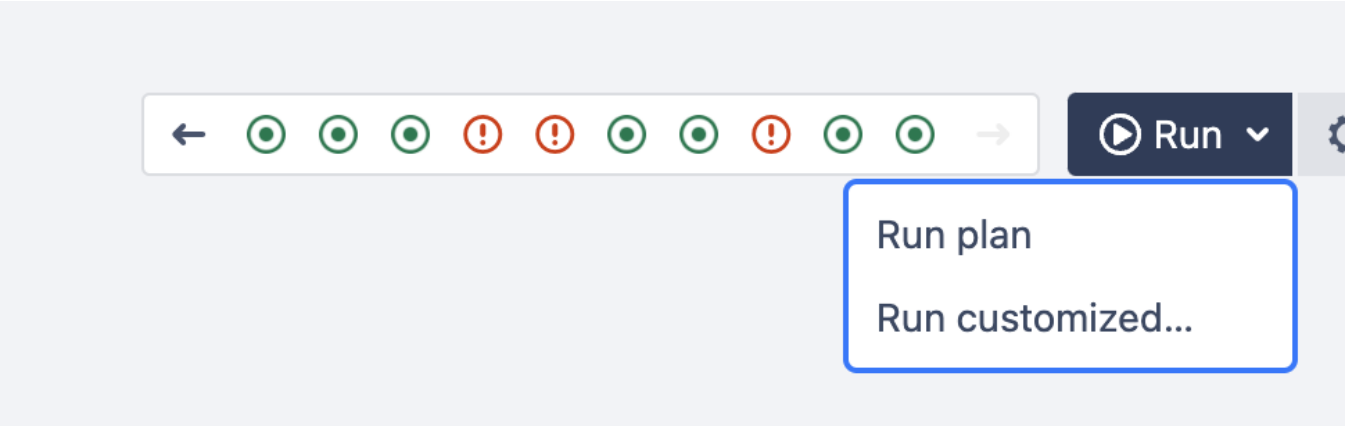

3. **Run Customized Build with Branch Name:**

   - Click the **"Override a variable"** button to override build variables.
   - **REPO_NAME** and **BUILD_NUMBER** are mandatory for a customized deploy.
     - **REPO_NAME** can be found in Bitbucket.
     - **BUILD_NUMBER** can be found on the build recent history page (refer to the above section).
   - **SWIMLANE** is optional. If not provided, it will deploy to the main lane. The value of SWIMLANE won't include the environment, like w1c1, w1c2.
     - Click the **"Run"** button to start the deployment.

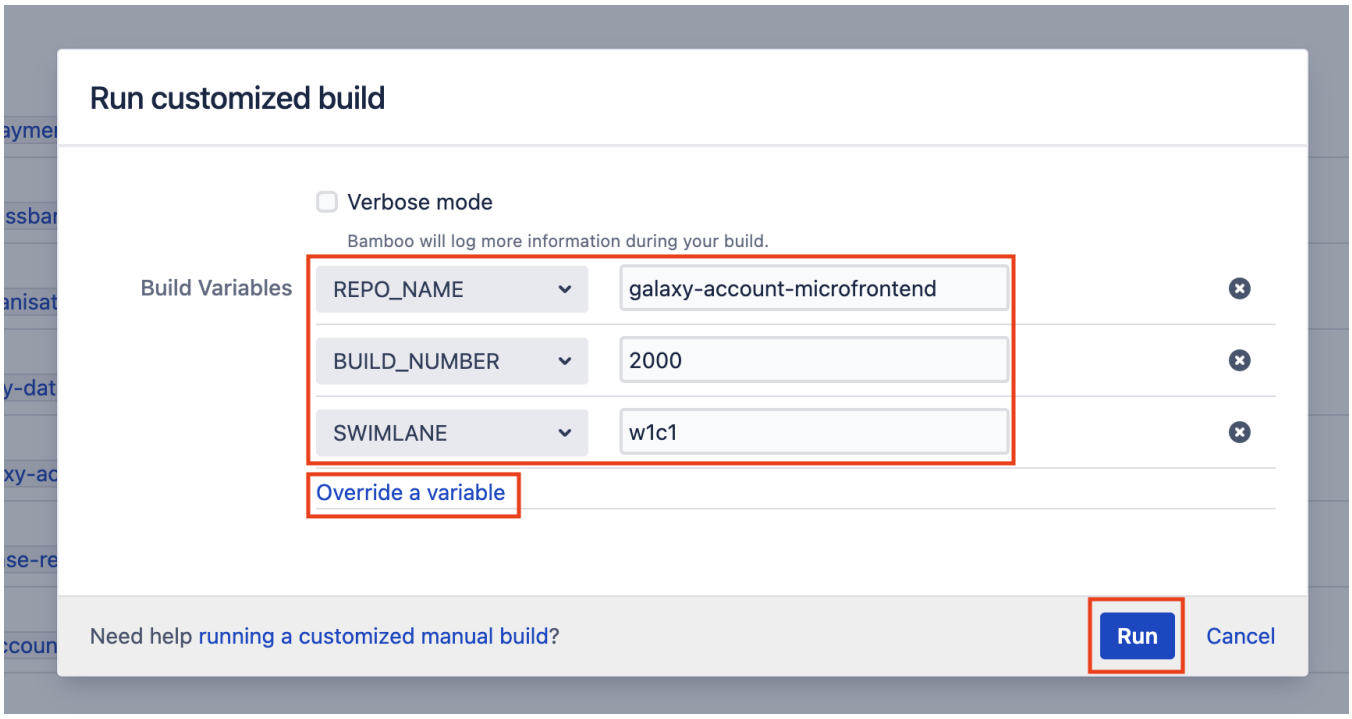

Repo Names:

Component	REPO_NAME
SPA	galaxy-singlepageapplication
Dashboard MFE	galaxy-dashboard-microfrontend
Account MFE	galaxy-account-microfrontend
Payment MFE	galaxy-payment-microfrontend
Beneficiary MFE	galaxy-beneficiary-microfrontend
Entitlements MFE	galaxy-entitlements-microfrontend
Macker Checker Widget	galaxymakerchecker-v1-widget

2. Deployment process using CLI

Prerequisites:

- Install Mesh-dev-tools

Build using Mesh tools:

```
mesh build --component_name <COMPONENT_NAME> --revision <BRANCH_NAME>
```

- **<COMPONENT_NAME>**: Replace this with the name of the component you want to build.
- **<BRANCH_NAME>**: Replace this with the name of the branch you want to build (e.g., master, feature/Feb-2025-ERM).

Example:

```
mesh build --component_name galaxy-account --revision master
```

Deploy using Mesh tools:

```
mesh deploy --component_name <COMPONENT_NAME> --environment <ENVIRONMENT> --swimlane <SWIMLANE> --build_number
<BUILD_NUMBER> --wait
```

- **<COMPONENT_NAME>**: Replace this with the name of the component you want to deploy (e.g., galaxy-dashboard).
- **<ENVIRONMENT>**: Replace this with the target environment (e.g., dev1).

- **<SWIMLANE>**: Replace this with the swimlane if needed (e.g., dev-w1c2). This is optional.
- **<BUILD_NUMBER>**: Replace this with the build number you want to deploy (e.g., 198).

Example with swimlane:

```
mesh deploy --component_name galaxy-account --environment sit1 --swimlane sit-w1c1 --build_number 123 --wait
```

Example without swimlane:

```
mesh deploy --component_name galaxy-account --environment sit1 --build_number 777 --wait
```

Component Names:

Component	COMPONENT_NAME
SPA	galaxy
Dashboard MFE	galaxy-dashboard
Account MFE	galaxy-account
Payment MFE	galaxy-payment
Macker Checker Widget	galaxymakerchecker-v1

Environments:

ENVIRONMENT
dev1
sit1
uat1
svp1

Swimlanes:

SWIMLANE
dev-w1c1
dev-w1c2
sit-w1c1
sit-w1c2

3. Deployment process using VS Code Tasks

Prerequisites:

- Install Mesh-dev-tools

1 Use Command/Ctrl + Shift + B to open the VS Code Tasks panel and select the option **"Mesh Build and Deploy"**.

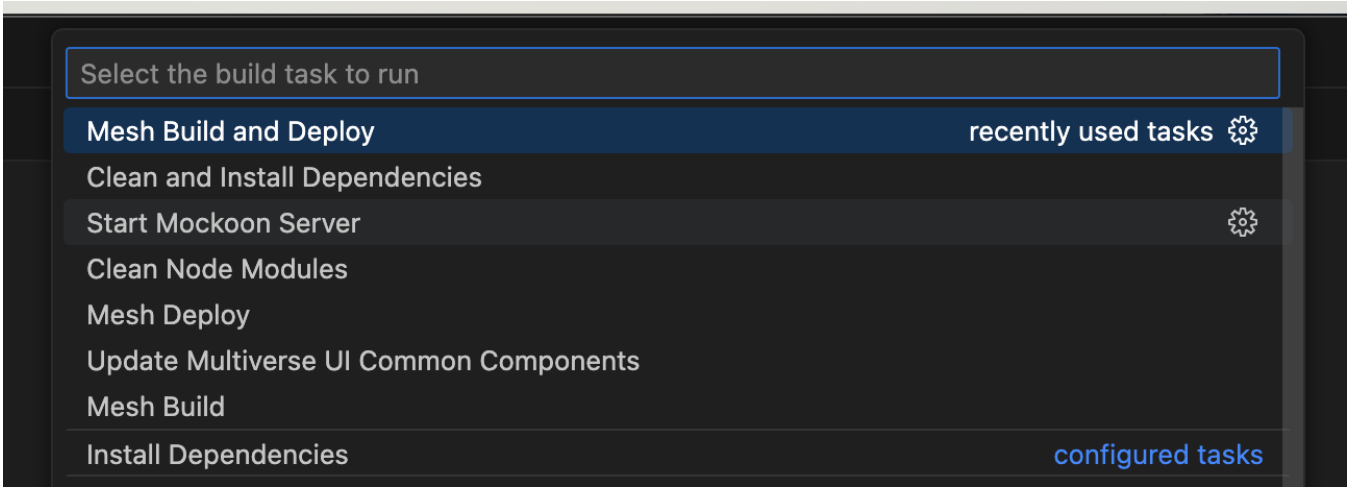

2. Select the environment you want to deploy to.

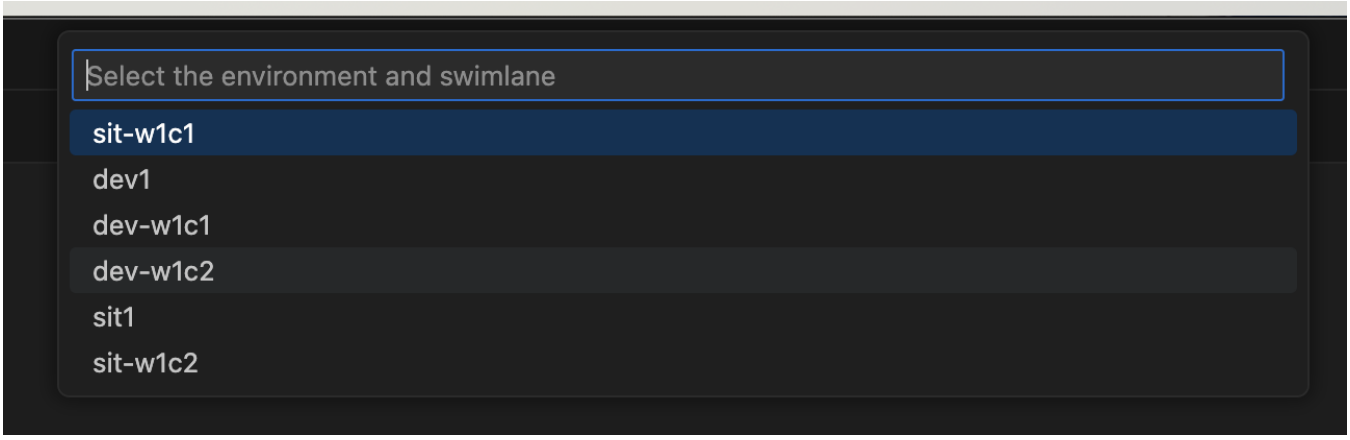

3. Type the branch you want to deploy. If you leave this field empty, it will detect and use your current branch.

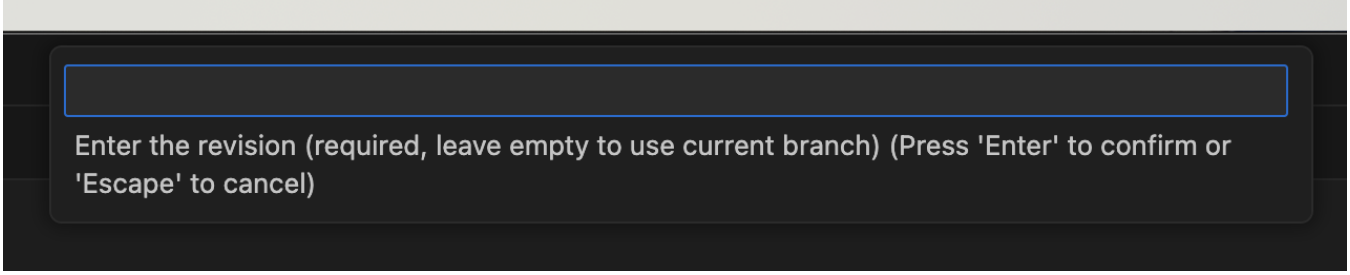

4. Others

Deploy build to UAT and SVP(NFT) without the signature check:

The deployment to UAT and SVP environments will fail if the Swagger is not endorsed by the chapter leader. We can use the following configuration to bypass this check temporarily.
However, please ensure the Swagger endorsement is completed on time.

With Bamboo:

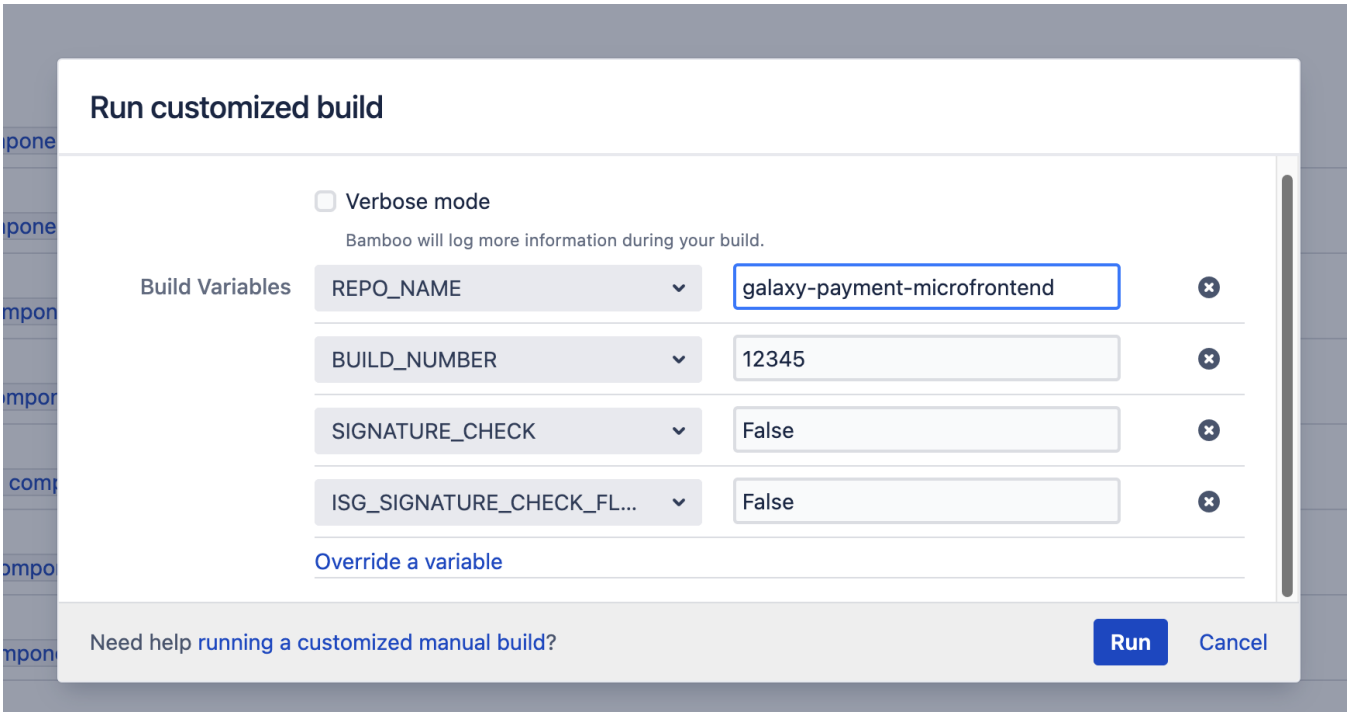

With Mesh Dev Tools:

```
mesh deploy --component_name <COMPONENT_NAME> --environment <ENVIRONMENT> --build_number <BUILD_NUMBER> --wait -x
SIGNATURE_CHECK=False -x ISG_SIGNATURE_CHECK_FLAG=False
```

Example:

```
mesh deploy --component_name  galaxy-payment --environment uat1 --build_number 12345 --wait -x
SIGNATURE_CHECK=False -x ISG_SIGNATURE_CHECK_FLAG=False

mesh deploy --component_name  galaxy-payment --environment svp1 --build_number 12345 --wait -x
SIGNATURE_CHECK=False -x ISG_SIGNATURE_CHECK_FLAG=False
```