Load: cold conversion against a warm reconnect

Warm reopens what the cold run wrote to disk. One repeat each, run straight after the cold run.

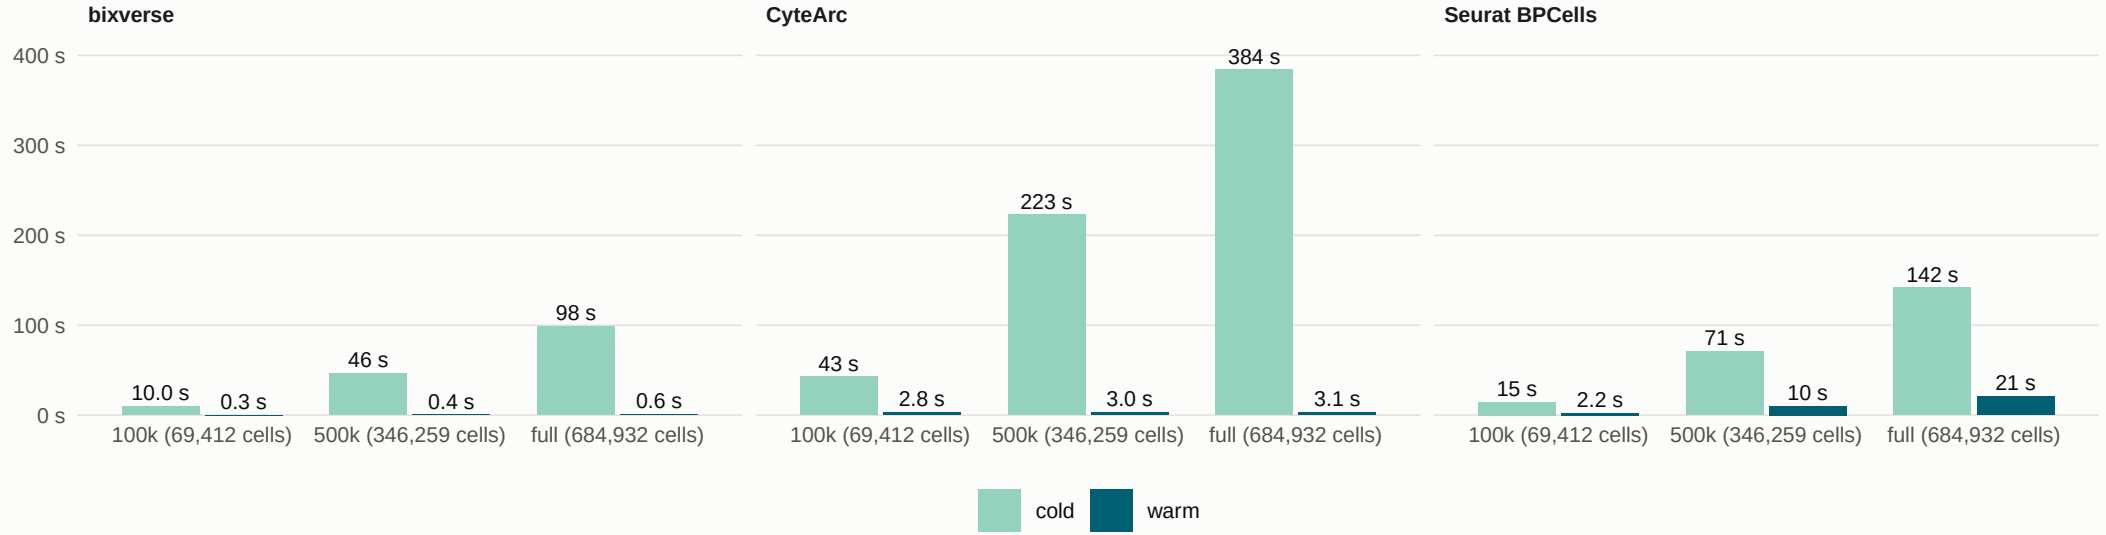

Cold load from mtx. BPCells warm reopens the pre−filtered, pre−QC matrix; CyteArc warm reopens its store.