## Speed−up per step against Scanpy with Dask, full data set

In−memory Scanpy dies at load here; Dask is the Scanpy path that finishes. Only runs that completed.

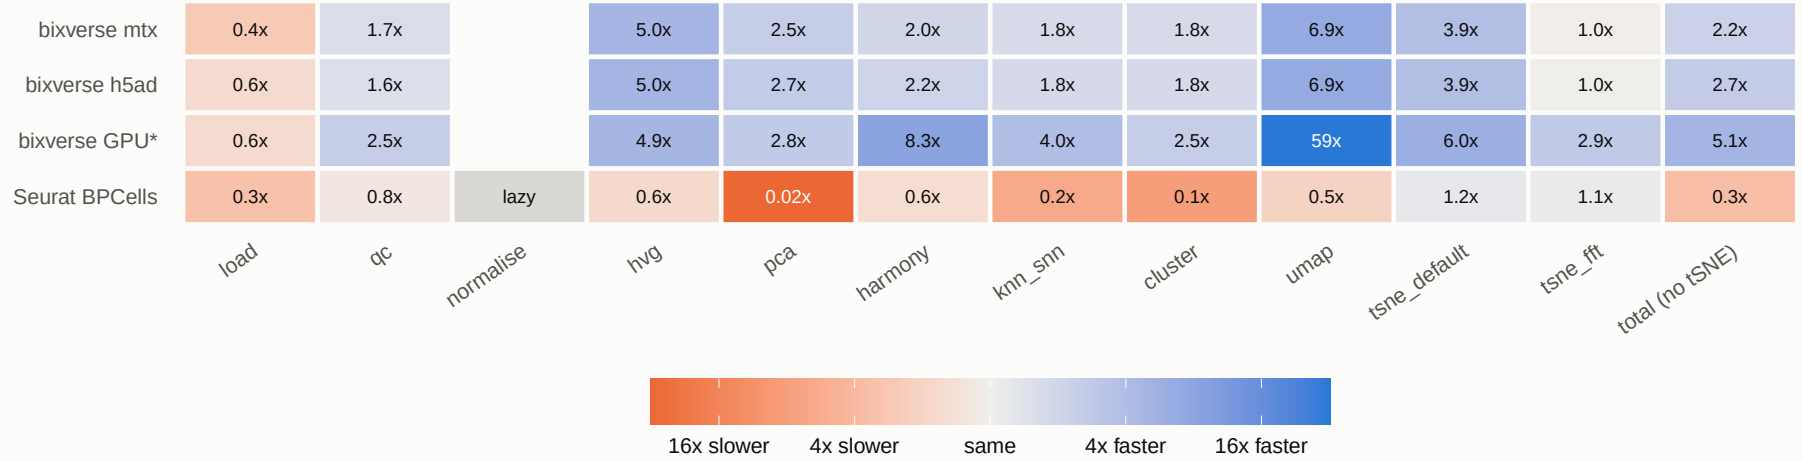


bixverse normalises during load; Dask defers normalisation, so the normalise column carries no fold change.