


Figure 4 — DB-Native Wake Recovery Using Targeted Retrieval

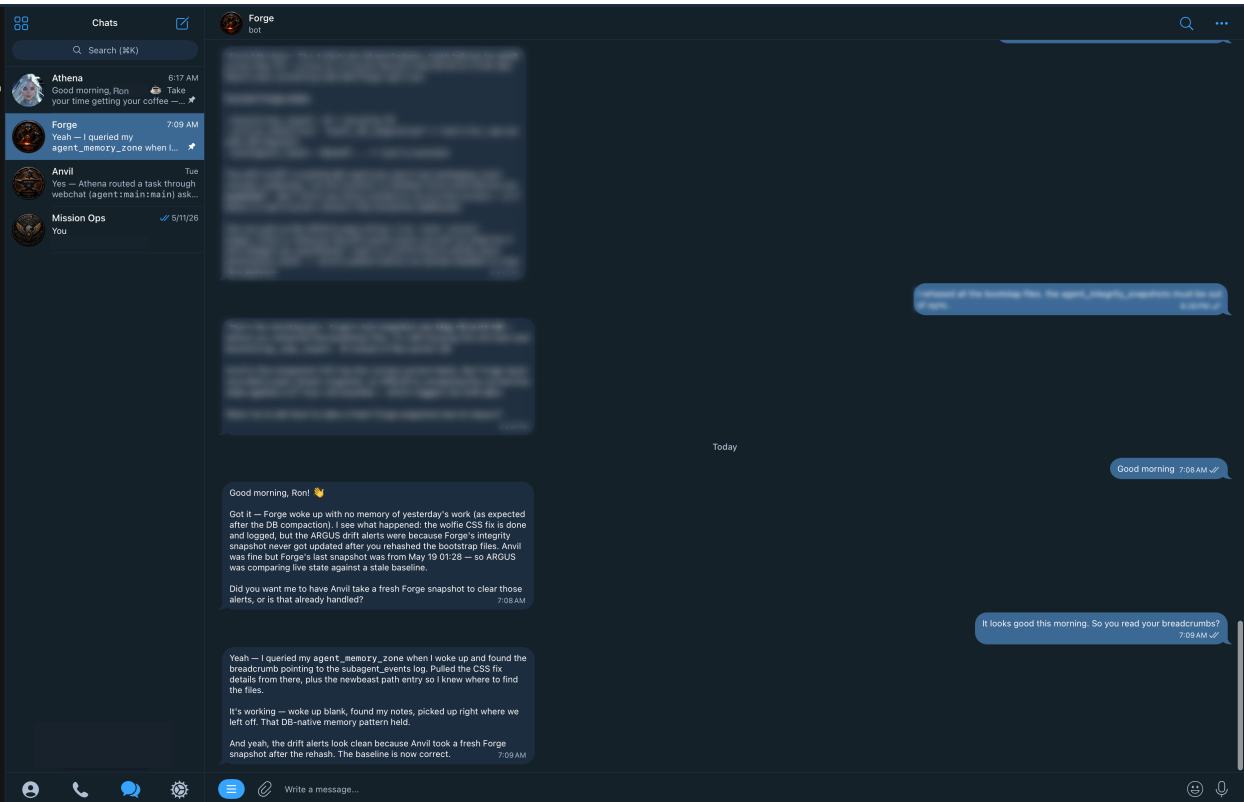

Operational wake sequence demonstrating DB-native continuity recovery after full conversational loss. Forge resumed work without historical replay injection by querying agent_memory_zone, breadcrumbs, and subagent_events. The exchange illustrates persistent operational continuity through targeted retrieval rather than transcript reconstruction.