

A comprehensive step-by-step guide

# Programming in Scala



artima

Martin Odersky  
Lex Spoon  
Bill Venners

A comprehensive step-by-step guide

# Programming in Scala



**artima**

Martin Odersky  
Lex Spoon  
Bill Venners

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

Programming in Scala

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

Programming in Scala

Martin Odersky, Lex Spoon, Bill Venners

artima

ARTIMA PRESS

MOUNTAIN VIEW, CALIFORNIA

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

iv

Programming in Scala

First Edition, Version 6

Martin Odersky is the creator of the Scala language and a professor at EPFL in Lausanne, Switzerland. Lex Spoon worked on Scala for two years as a post-doc with Martin Odersky. Bill Venners is president of Artima, Inc.

Artima Press is an imprint of Artima, Inc.

P.O. Box 390122, Mountain View, California 94039

Copyright © 2007, 2008 Martin Odersky, Lex Spoon, and Bill Venners.

All rights reserved.

First edition published as PrePrint™ eBook 2007

First edition published 2008

Produced in the United States of America

12 11 10 09 08

5 6 7 8 9

ISBN-10: 0-9815316-1-X

ISBN-13: 978-0-9815316-1-8

No part of this publication may be reproduced, modified, distributed, stored in a retrieval system, republished, displayed, or performed, for commercial or noncommercial purposes or for compensation of any kind without prior written permission from Artima, Inc.

All information and materials in this book are provided "as is" and without warranty of any kind.

The term "Artima" and the Artima logo are trademarks or registered trademarks of Artima, Inc. All other company and/or product names may be trademarks or registered trademarks of their owners.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

to Nastaran - M.O.

to Fay - L.S.

to Siew - B.V.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

Overview

[Contents](#)

vii

[List of Figures](#)

xvii

[List of Tables](#)

xix

[List of Listings](#)

xx

Foreword

xxvii

Acknowledgments

xxix

Introduction

xxxi

1. A Scalable Language

39

2. First Steps in Scala

58

3. Next Steps in Scala

71

4. Classes and Objects

93

5. Basic Types and Operations

107

6. Functional Objects

129

7. Built-in Control Structures

149

[8. Functions and Closures](#)

173

[9. Control Abstraction](#)

194

[10. Composition and Inheritance](#)

209

[11. Scala's Hierarchy](#)

237

[12. Traits](#)

245

[13. Packages and Imports](#)

264

[14. Assertions and Unit Testing](#)

279

[15. Case Classes and Pattern Matching](#)

293

[16. Working with Lists](#)

327

[17. Collections](#)

359

[18. Stateful Objects](#)

387

[19. Type Parameterization](#)

410

[20. Abstract Members](#)

435

[21. Implicit Conversions and Parameters](#)

465

[22. Implementing Lists](#)

487

[23. For Expressions Revisited](#)

500

[24. Extractors](#)

516

[25. Annotations](#)

532

[26. Working with XML](#)

539

[27. Modular Programming Using Objects](#)

553

[28. Object Equality](#)

568

[29. Combining Scala and Java](#)

594

[30. Actors and Concurrency](#)

607

[31. Combinator Parsing](#)

642

[32. GUI Programming](#)

671

[33. The SCells Spreadsheet](#)

683

[A. Scala scripts on Unix and Windows](#)

708

[Glossary](#)

709

[Bibliography](#)

725

[About the Authors](#)

728

[Index](#)

729

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

Contents

[Contents](#)

vii

[List of Figures](#)

xvii

[List of Tables](#)

xix

[List of Listings](#)

xx

[Foreword](#)

xxvii

[Acknowledgments](#)

xxix

[Introduction](#)

xxxii

1

[A Scalable Language](#)

39	
<u>1.1</u>	
<u>A language that grows on you</u>	.....
40	
<u>1.2</u>	
<u>What makes Scala scalable?</u>	.....
45	
<u>1.3</u>	
<u>Why Scala?</u>	.....
48	
<u>1.4</u>	
<u>Scala's roots</u>	.....
55	
<u>1.5</u>	
<u>Conclusion</u>	.....
57	
<u>2</u>	
<u>First Steps in Scala</u>	
58	
<u>Step 1. Learn to use the Scala interpreter</u>	.....

58

Step 2. Define some variables

.....

60

Step 3. Define some functions .....

62

Step 4. Write some Scala scripts .....

64

Step 5. Loop with while; decide with if

.....

65

Step 6. Iterate with foreach and for

.....

67

Conclusion

.....

70

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Contents](#)

viii

3

Next Steps in Scala

71

Step 7. Parameterize arrays with types .....

71

Step 8. Use lists .....

75

Step 9. Use tuples .....

80

Step 10. Use sets and maps .....

81

Step 11. Learn to recognize the functional style .....

86

Step 12. Read lines from a file .....

89

Conclusion

.....

92

4

Classes and Objects

93	
<u>4.1</u>	
<u>Classes, fields, and methods</u>	.....
93	
<u>4.2</u>	
<u>Semicolon inference</u>	.....
98	
<u>4.3</u>	
<u>Singleton objects</u>	.....
99	
<u>4.4</u>	
<u>A Scala application</u>	.....
102	
<u>4.5</u>	
<u>The Application trait</u>	.....
105	
<u>4.6</u>	
<u>Conclusion</u>	.....
106	

## 5

### Basic Types and Operations

107

#### 5.1

##### Some basic types .....

107

#### 5.2

##### Literals .....

108

#### 5.3

##### Operators are methods .....

115

#### 5.4

##### Arithmetic operations .....

118

#### 5.5

##### Relational and logical operations .....

119

#### 5.6

##### Bitwise operations .....

121

5.7

Object equality.....

123

5.8

Operator precedence and associativity.....

124

5.9

Rich wrappers.....

127

5.10

Conclusion.....

127

6

Functional Objects

129

6.1

A specification for class Rational.....

129

6.2

<u>Constructing a Rational</u> . . . . .	
130	
<u>6.3</u>	
<u>Reimplementing the <code>toString</code> method</u> . . . . .	
132	
<u>6.4</u>	
<u>Checking preconditions</u> . . . . .	
133	
<u>6.5</u>	
<u>Adding fields</u> . . . . .	
133	
<u>6.6</u>	
<u>Self references</u> . . . . .	
135	
<u>6.7</u>	
<u>Auxiliary constructors</u> . . . . .	
136	
<u>6.8</u>	
<u>Private fields and methods</u> . . . . .	
138	

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Contents](#)

ix

[6.9](#)

[Defining operators](#) . . . . .

139

[6.10](#)

[Identifiers in Scala](#) . . . . .

141

[6.11](#)

[Method overloading](#) . . . . .

144

[6.12](#)

[Implicit conversions](#) . . . . .

146

[6.13](#)

[A word of caution](#) . . . . .

147

[6.14](#)

[Conclusion](#) . . . . .

147

7

Built-in Control Structures

149

7.1

If expressions

.....

150

7.2

While loops

.....

151

7.3

For expressions .....

154

7.4

Exception handling with try expressions .....

159

7.5

Match expressions .....

163

7.6

Living without break and continue . . . . .

165

7.7

Variable scope . . . . .

167

7.8

Refactoring imperative-style code . . . . .

170

7.9

Conclusion . . . . .

172

8

Functions and Closures

173

8.1

Methods . . . . .

173

8.2

<u>Local functions</u> . . . . .	
175	
<u>8.3</u>	
<u>First-class functions</u> . . . . .	
177	
<u>8.4</u>	
<u>Short forms of function literals</u>	
.....	
179	
<u>8.5</u>	
<u>Placeholder syntax</u> . . . . .	
180	
<u>8.6</u>	
<u>Partially applied functions</u> . . . . .	
181	
<u>8.7</u>	
<u>Closures</u> . . . . .	
184	
<u>8.8</u>	
<u>Repeated parameters</u> . . . . .	

188

8.9

Tail recursion .....

189

8.10

Conclusion .....

193

9

Control Abstraction

194

9.1

Reducing code duplication .....

194

9.2

Simplifying client code

.....

198

9.3

Currying .....

200

## 9.4

Writing new control structures.....

202

## 9.5

By-name parameters.....

205

## 9.6

Conclusion.....

208

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Contents](#)

x

## 10 Composition and Inheritance

209

### 10.1

A two-dimensional layout library.....

209

### 10.2

Abstract classes.....

210

<u>10.3</u>	
<u>Defining parameterless methods</u>	.....
211	
<u>10.4</u>	
<u>Extending classes</u>	.....
214	
<u>10.5</u>	
<u>Overriding methods and fields</u>	.....
216	
<u>10.6</u>	
<u>Defining parametric fields</u>	.....
217	
<u>10.7</u>	
<u>Invoking superclass constructors</u>	.....
219	
<u>10.8</u>	
<u>Using override modifiers</u>	.....
220	
<u>10.9</u>	

<u>Polymorphism and dynamic binding</u>	
.....	
222	
<u>10.10 Declaring final members</u>	.....
224	
<u>10.11 Using composition and inheritance</u>	.....
226	
<u>10.12 Implementing above, beside, and toString</u>	.....
227	
<u>10.13 Defining a factory object</u>	.....
229	
<u>10.14 Heighten and widen</u>	.....
231	
<u>10.15 Putting it all together</u>	.....
235	
<u>10.16 Conclusion</u>	.....
236	
<u>11 Scala's Hierarchy</u>	
237	
<u>11.1</u>	

Scala's class hierarchy.....

237

11.2

How primitives are implemented

.....

241

11.3

Bottom types.....

243

11.4

Conclusion.....

244

12 Traits

245

12.1

How traits work.....

245

12.2

Thin versus rich interfaces.....

248

<u>12.3</u>	
<u>Example: Rectangular objects</u>	.....
249	
<u>12.4</u>	
<u>The Ordered trait</u>	.....
252	
<u>12.5</u>	
<u>Traits as stackable modifications</u>	.....
254	
<u>12.6</u>	
<u>Why not multiple inheritance?</u>	.....
258	
<u>12.7</u>	
<u>To trait, or not to trait?</u>	.....
262	
<u>12.8</u>	
<u>Conclusion</u>	.....
263	
<u>13 Packages and Imports</u>	
264	

<u>13.1</u>	
<u>Packages</u> .....	
264	
<u>13.2</u>	
<u>Imports</u> .....	
268	
<u>13.3</u>	
<u>Implicit imports</u> .....	
272	
<u>Cover</u> · <u>Overview</u> · <u>Contents</u> · <u>Discuss</u> · <u>Suggest</u> · <u>Glossary</u> · <u>Index</u>	
<u>Contents</u>	
xi	
<u>13.4</u>	
<u>Access modifiers</u> .....	
273	
<u>13.5</u>	
<u>Conclusion</u> .....	
278	
<u>14 Assertions and Unit Testing</u>	
279	

<u>14.1</u>	
<u>    Assertions</u>	.....
279	
<u>14.2</u>	
<u>    Unit testing in Scala</u>	.....
281	
<u>14.3</u>	
<u>    Informative failure reports</u>	.....
282	
<u>14.4</u>	
<u>    Using JUnit and TestNG</u>	.....
284	
<u>14.5</u>	
<u>    Tests as specifications</u>	.....
286	
<u>14.6</u>	
<u>    Property-based testing</u>	.....
288	
<u>14.7</u>	
<u>    Organizing and running tests</u>	

.....	
290	
<u>14.8</u>	
<u>Conclusion</u>	.....
292	
<u>15 Case Classes and Pattern Matching</u>	
293	
<u>15.1</u>	
<u>A simple example</u>	.....
293	
<u>15.2</u>	
<u>Kinds of patterns</u>	.....
298	
<u>15.3</u>	
<u>Pattern guards</u>	.....
307	
<u>15.4</u>	
<u>Pattern overlaps</u>	.....
309	
<u>15.5</u>	

<u>Sealed classes</u> . . . . .	
310	
<u>15.6</u>	
<u>The Option type</u> . . . . .	
312	
<u>15.7</u>	
<u>Patterns everywhere</u> . . . . .	
314	
<u>15.8</u>	
<u>A larger example</u> . . . . .	
318	
<u>15.9</u>	
<u>Conclusion</u> . . . . .	
326	
<u>16 Working with Lists</u>	
327	
<u>16.1</u>	
<u>List literals</u> . . . . .	
327	
<u>16.2</u>	

<u>The List type</u> .....	
328	
<u>16.3</u>	
<u>Constructing lists</u> .....	
328	
<u>16.4</u>	
<u>Basic operations on lists</u> .....	
329	
<u>16.5</u>	
<u>List patterns</u> .....	
330	
<u>16.6</u>	
<u>First-order methods on class List</u> .....	
332	
<u>16.7</u>	
<u>Higher-order methods on class List</u>	
.....	
343	
<u>16.8</u>	
<u>Methods of the List object</u> .....	

351	
<u>16.9</u>	
<u>Understanding Scala's type inference algorithm</u> . . . . .	
355	
<u>16.10 Conclusion</u> . . . . .	
358	
<u>17 Collections</u>	
359	
<u>17.1</u>	
<u>Overview of the library</u>	
.....	
359	
<u>Cover</u> · <u>Overview</u> · <u>Contents</u> · <u>Discuss</u> · <u>Suggest</u> · <u>Glossary</u> · <u>Index</u>	
<u>Contents</u>	
xii	
<u>17.2</u>	
<u>Sequences</u> . . . . .	
361	
<u>17.3</u>	
<u>Sets and maps</u> . . . . .	

367

17.4

Selecting mutable versus immutable collections

....

377

17.5

Initializing collections .....

380

17.6

Tuples .....

383

17.7

Conclusion .....

386

18 Stateful Objects

387

18.1

What makes an object stateful? .....

387

18.2

Reassignable variables and properties . . . . .

390

18.3

Case study: Discrete event simulation . . . . .

393

18.4

A language for digital circuits . . . . .

394

18.5

The Simulation API . . . . .

397

18.6

Circuit Simulation . . . . .

401

18.7

Conclusion . . . . .

409

19 Type Parameterization

410

19.1

Functional queues . . . . .

410

19.2

Information hiding . . . . .

414

19.3

Variance annotations . . . . .

417

19.4

Checking variance annotations . . . . .

421

19.5

Lower bounds . . . . .

424

19.6

Contravariance . . . . .

426

19.7

Object private data . . . . .

429

[19.8](#)[Upper bounds](#)

.....

431

[19.9](#)[Conclusion](#) .....

434

[20 Abstract Members](#)

435

[20.1](#)[A quick tour of abstract members](#) .....

435

[20.2](#)[Type members](#) .....

436

[20.3](#)[Abstract vals](#) .....

437

[20.4](#)[Abstract vars](#) .....

438	
<u>20.5</u>	
<u>    Initializing abstract vals</u>	.....
439	
<u>20.6</u>	
<u>    Abstract types</u>	.....
447	
<u>20.7</u>	
<u>    Path-dependent types</u>	.....
449	
<u>20.8</u>	
<u>    Enumerations</u>	.....
452	
<u>20.9</u>	
<u>    Case study: Currencies</u>	.....
454	
<u>20.10 Conclusion</u>	.....
463	

## Contents

xiii

### 21 Implicit Conversions and Parameters

465

#### 21.1

##### Implicit conversions . . . . .

465

#### 21.2

##### Rules for implicits . . . . .

468

#### 21.3

##### Implicit conversion to an expected type . . . . .

471

#### 21.4

##### Converting the receiver

. . . . .

473

#### 21.5

##### Implicit parameters . . . . .

475

<u>21.6</u>	
<u>View bounds</u> . . . . .	
481	
<u>21.7</u>	
<u>Debugging implicits</u> . . . . .	
485	
<u>21.8</u>	
<u>Conclusion</u> . . . . .	
486	
<u>22 Implementing Lists</u>	
487	
<u>22.1</u>	
<u>The List class in principle</u>	
· · · · ·	
487	
<u>22.2</u>	
<u>The ListBuffer class</u> . . . . .	
493	
<u>22.3</u>	
<u>The List class in practice</u> . . . . .	

495

22.4

Functional on the outside

.....

497

22.5

Conclusion .....

498

23 For Expressions Revisited

500

23.1

For expressions .....

501

23.2

The n-queens problem .....

503

23.3

Querying with for expressions .....

506

23.4

Translation of for expressions .....

508

23.5

Going the other way .....

512

23.6

Generalizing for .....

513

23.7

Conclusion .....

515

24 Extractors

516

24.1

An example: Extracting email addresses

.....

516

24.2

Extractors

.....

517

24.3

Patterns with zero or one variables . . . . .

.....

520

24.4

Variable argument extractors . . . . .

522

24.5

Extractors and sequence patterns . . . . .

.....

525

24.6

Extractors versus case classes . . . . .

526

24.7

Regular expressions . . . . .

527

24.8

Conclusion . . . . .

531

25 Annotations

532

25.1

Why have annotations?

.....

532

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

Contents

xiv

25.2

Syntax of annotations .....

533

25.3

Standard annotations .....

535

25.4

Conclusion .....

537

26 Working with XML

539	
<u>26.1</u>	
<u>Semi-structured data</u>	.....
539	
<u>26.2</u>	
<u>XML overview</u>	.....
540	
<u>26.3</u>	
<u>XML literals</u>	.....
541	
<u>26.4</u>	
<u>Serialization</u>	.....
543	
<u>26.5</u>	
<u>Taking XML apart</u>	.....
545	
<u>26.6</u>	
<u>Deserialization</u>	.....
546	
<u>26.7</u>	

## Loading and saving

.....

547

### 26.8

Pattern matching on XML .....

549

### 26.9

Conclusion .....

552

## 27 Modular Programming Using Objects

553

### 27.1

The problem .....

554

### 27.2

A recipe application .....

555

### 27.3

Abstraction .....

558

## 27.4

Splitting modules into traits .....

561

## 27.5

Runtime linking .....

564

## 27.6

Tracking module instances .....

565

## 27.7

Conclusion .....

567

## 28 Object Equality

568

### 28.1

Equality in Scala .....

568

### 28.2

Writing an equality method .....

569

<u>28.3</u>	
<u>Defining equality for parameterized types</u>	.....
582	
<u>28.4</u>	
<u>Recipes for equals and hashCode</u>	.....
587	
<u>28.5</u>	
<u>Conclusion</u>	.....
593	
<u>29 Combining Scala and Java</u>	
594	
<u>29.1</u>	
<u>Using Scala from Java</u>	.....
594	
<u>29.2</u>	
<u>Annotations</u>	.....
597	
<u>29.3</u>	

<u><a href="#">Existential types</a></u> . . . . .	
602	
<u><a href="#">29.4</a></u>	
<u><a href="#">Conclusion</a></u> . . . . .	
606	
<u><a href="#">30 Actors and Concurrency</a></u>	
607	
<u><a href="#">Cover</a></u> · <u><a href="#">Overview</a></u> · <u><a href="#">Contents</a></u> · <u><a href="#">Discuss</a></u> · <u><a href="#">Suggest</a></u> · <u><a href="#">Glossary</a></u> · <u><a href="#">Index</a></u>	
<u><a href="#">Contents</a></u>	
xv	
<u><a href="#">30.1</a></u>	
<u><a href="#">Trouble in paradise</a></u> . . . . .	
607	
<u><a href="#">30.2</a></u>	
<u><a href="#">Actors and message passing</a></u> . . . . .	
608	
<u><a href="#">30.3</a></u>	
<u><a href="#">Treating native threads as actors</a></u> . . . . .	
612	
<u><a href="#">30.4</a></u>	

Better performance through thread reuse . . . . .

613

30.5

Good actors style . . . . .

616

30.6

A longer example: Parallel discrete event simulation . .

623

30.7

Conclusion . . . . .

640

31 Combinator Parsing

642

31.1

Example: Arithmetic expressions . . . . .

643

31.2

Running your parser . . . . .

645

31.3

Basic regular expression parsers . . . . .

646

31.4

Another example: JSON . . . . .

647

31.5

Parser output . . . . .

649

31.6

Implementing combinator parsers . . . . .

655

31.7

String literals and regular expressions . . . . .

664

31.8

Lexing and parsing . . . . .

665

31.9

Error reporting . . . . .

665

31.10 Backtracking versus LL(1).....

667

31.11 Conclusion.....

669

32 GUI Programming

671

32.1

A first Swing application.....

671

32.2

Panels and layouts.....

674

32.3

Handling events.....

676

32.4

Example: Celsius/Fahrenheit converter.....

679

32.5

Conclusion.....

681

33 The SCells Spreadsheet

683

33.1

The visual framework .....

683

33.2

Disconnecting data entry and display .....

686

33.3

Formulas .....

689

33.4

Parsing formulas .....

691

33.5

Evaluation .....

696

33.6

Operation libraries .....

699						
<u>33.7</u>						
<u>Change propagation</u>	.....					
702						
<u>33.8</u>						
<u>Conclusion</u>	.....					
706						
<u>Cover</u>	· <u>Overview</u>	· <u>Contents</u>	· <u>Discuss</u>	· <u>Suggest</u>	· <u>Glossary</u>	· <u>Index</u>
<u>Contents</u>						
xvi						
<u>A Scala scripts on Unix and Windows</u>						
708						
<u>Glossary</u>						
709						
<u>Bibliography</u>						
725						
<u>About the Authors</u>						
728						
<u>Index</u>						
729						

## List of Figures

### 2.1

[The basic form of a function definition in Scala.](#) . . . . .

63

### 2.2

[The syntax of a function literal in Scala.](#) . . . . .

69

### 3.1

[All operations are method calls in Scala.](#) . . . . .

74

### 3.2

[Class hierarchy for Scala sets.](#)

. . . . .

82

### 3.3

[Class hierarchy for Scala maps.](#) . . . . .

84

[10.1 Class diagram for ArrayElement.](#) . . . . .

215

<u>10.2 Class diagram for LineElement</u> . . . . .	
220	
<u>10.3 Class hierarchy of layout elements</u> . . . . .	
223	
<u>10.4 Class hierarchy with revised LineElement</u> . . . . .	
227	
<u>11.1 Class hierarchy of Scala</u> . . . . .	
239	
<u>12.1 Inheritance hierarchy and linearization of class Cat</u> . . . . .	
261	
<u>14.1 ScalaTest's graphical reporter</u> . . . . .	
291	
<u>17.1 Class hierarchy for Scala collections</u> . . . . .	
360	
<u>17.2 Class hierarchy for Iterator</u> . . . . .	
361	
<u>18.1 Basic gates</u> . . . . .	
394	
<u>18.2 A half-adder circuit</u> . . . . .	
396	

<u>18.3 A full-adder circuit.</u>	.....
397	
<u>19.1 Covariance and contravariance in function type parameters.</u>	..
429	
<u>22.1 Class hierarchy for Scala lists.</u>	.....
488	
<u>22.2 The structure of the Scala lists shown in Listing 22.2.</u>	....
492	
xvii	
<u>List of Figures</u>	
xviii	
<u>32.1 A simple Swing application: initial (left) and resized (right).</u>	
672	
<u>32.2 A reactive Swing application: initial (left) after clicks (right).</u>	
674	
<u>32.3 A converter between degrees Celsius and Fahrenheit.</u>	....
679	
<u>33.1 A simple spreadsheet table.</u>	.....
684	
<u>33.2 Cells displaying themselves.</u>	.....

689	
<u>33.3 Cells displaying their formulas.</u>	.....
695	
<u>33.4 Cells that evaluate.</u>	.....
701	

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## List of Tables

### 3.1

<u>Some List methods and usages</u>	.....
-------------------------------------	-------

78

### 5.1

<u>Some basic types</u>	.....
-------------------------	-------

108

### 5.2

<u>Special character literal escape sequences</u>	.....
---	-------

112

### 5.3

<u>Operator precedence</u>	.....
----------------------------	-------

126

<u>5.4</u>	
<u>Some rich operations</u>	.....
128	
<u>5.5</u>	
<u>Rich wrapper classes</u>	.....
128	
<u>12.1 Linearization of types in Cat's hierarchy</u>	.....
262	
<u>13.1 Effects of private qualifiers on LegOfJourney.distance</u>	..
276	
<u>16.1 Basic list operations</u>	.....
330	
<u>17.1 Common operations for sets</u>	
.....	
370	
<u>17.2 Common operations for maps</u>	.....
372	
<u>17.3 Default immutable set implementations</u>	
.....	
374	

17.4 Default immutable map implementations . . . . .

374

31.1 Summary of parser combinators . . . . .

653

xix

List of Listings

3.1

Parameterizing an array with a type.

. . . . .

72

3.2

Creating and initializing an array. . . . . .

75

3.3

Creating and initializing a list. . . . . .

76

3.4

Creating and using a tuple.

. . . . .

80

<u>3.5</u>	
<u>Creating, initializing, and using an immutable set.</u>	.....
81	
<u>3.6</u>	
<u>Creating, initializing, and using a mutable set.</u>	.....
83	
<u>3.7</u>	
<u>Creating, initializing, and using a mutable map.</u>	.....
84	
<u>3.8</u>	
<u>Creating, initializing, and using an immutable map.</u>	.....
85	
<u>3.9</u>	
<u>A function without side effects or vars.</u>	.....
87	
<u>3.10</u>	
<u>Reading lines from a file.</u>	.....
89	
<u>3.11</u>	

Printing formatted character counts for the lines of a file.

.

92

4.1

Final version of class ChecksumAccumulator. . . . . .

97

4.2

Companion object for class ChecksumAccumulator. . . . . .

100

4.3

The Summer application. . . . . .

102

4.4

Using the Application trait. . . . . .

105

6.1

Rational with fields. . . . . .

135

6.2

Rational with an auxiliary constructor.

.....	
137	
<u>6.3</u>	
<u>Rational with a private field and method.</u>	.....
138	
<u>6.4</u>	
<u>Rational with operator methods.</u>	.....
140	
<u>6.5</u>	
<u>Rational with overloaded methods.</u>	.....
145	
<u>7.1</u>	
<u>Scala's idiom for conditional initialization.</u>	.....
150	
<u>7.2</u>	
<u>Calculating greatest common divisor with a while loop.</u>	..
151	
<u>7.3</u>	
<u>Reading from the standard input with do-while.</u>	.....
152	

## 7.4

Calculating greatest common divisor with recursion. . . . . .

153

## 7.5

Listing files in a directory with a for expression. . . . . .

154

xx

## List of Listings

xxi

## 7.6

Finding .scala files using a for with a filter.

. . . . .

156

## 7.7

Using multiple filters in a for expression.

. . . . .

156

## 7.8

Using multiple generators in a for expression. . . . . .

157

<u>7.9</u>	
<u>Mid-stream assignment in a for expression.</u>	.....
158	
<u>7.10</u>	
<u>Transforming an Array[File] to Array[Int] with a for.</u>	
159	
<u>7.11</u>	
<u>A try-catch clause in Scala.</u>	.....
161	
<u>7.12</u>	
<u>A try-finally clause in Scala.</u>	
.....	
162	
<u>7.13</u>	
<u>A catch clause that yields a value.</u>	.....
163	
<u>7.14</u>	
<u>A match expression with side effects.</u>	.....
164	
<u>7.15</u>	

[A match expression that yields a value.](#) . . . . .

164

[7.16](#)

[Looping without break or continue.](#) . . . . .

166

[7.17](#)

[A recursive alternative to looping with vars.](#) . . . . .

166

[7.18](#)

[Variable scoping when printing a multiplication table.](#) . . .

168

[7.19](#)

[A functional way to create a multiplication table.](#) . . . . .

171

[8.1](#)

[LongLines with a private processLine method.](#) . . . . .

174

[8.2](#)

[LongLines with a local processLine function.](#) . . . . .

176

<u>9.1</u>	
<u>Using closures to reduce code duplication.</u>	.....
198	
<u>9.2</u>	
<u>Defining and invoking a “plain old” function.</u>	.....
201	
<u>9.3</u>	
<u>Defining and invoking a curried function.</u>	.....
201	
<u>9.4</u>	
<u>Using the loan pattern to write to a file.</u>	.....
205	
<u>9.5</u>	
<u>Using a by-name parameter.</u>	.....
206	
<u>10.1</u>	
<u>Defining an abstract method and class.</u>	.....
211	
<u>10.2</u>	
<u>Defining parameterless methods width and height.</u>	....

212	
<u>10.3</u>	
<u>Defining ArrayElement as a subclass of Element.</u>	.....
214	
<u>10.4</u>	
<u>Overriding a parameterless method with a field.</u>	
.....	
216	
<u>10.5</u>	
<u>Defining contents as a parametric field.</u>	.....
218	
<u>10.6</u>	
<u>Invoking a superclass constructor.</u>	.....
219	
<u>10.7</u>	
<u>Declaring a final method.</u>	.....
225	
<u>10.8</u>	
<u>Declaring a final class.</u>	.....
225	

<u>10.9</u>						
<u>Class Element with above, beside, and toString.</u>	....					
230						
<u>10.10 A factory object with factory methods.</u>	.....					
231						
<u>10.11 Class Element refactored to use factory methods.</u>	....					
232						
<u>10.12 Hiding implementation with private classes.</u>	.....					
233						
<u>10.13 Element with widen and heighten methods.</u>						
.....						
234						
<u>10.14 The Spiral application.</u>	.....					
235						
<u>Cover</u>	· <u>Overview</u>	· <u>Contents</u>	· <u>Discuss</u>	· <u>Suggest</u>	· <u>Glossary</u>	· <u>Index</u>
<u>List of Listings</u>						
xxii						
<u>12.1</u>						
<u>The definition of trait Philosophical.</u>	.....					
245						

## 12.2

Mixing in a trait using extends.

.....

246

## 12.3

Mixing in a trait using with.

.....

247

## 12.4

Mixing in multiple traits.

.....

247

## 12.5

Defining an enrichment trait.

.....

251

## 12.6

Abstract class IntQueue. .....

255

## 12.7

## A BasicIntQueue implemented with an ArrayBuffer...

255

### 12.8

#### The Doubling stackable modification trait.....

256

### 12.9

#### Mixing in a trait when instantiating with new.....

257

### 12.10 Stackable modification traits Incrementing and Filtering.

257

### 13.1

#### Placing the contents of an entire file into a package.....

265

### 13.2

#### Nesting multiple packages in the same file.....

265

### 13.3

#### Nesting packages with minimal indentation.....

266

### 13.4

[Scala packages truly nest.](#) . . . . .

267

[13.5](#)

[Accessing hidden package names.](#) . . . . .

267

[13.6](#)

[Bob's delightful fruits, ready for import.](#) . . . . .

268

[13.7](#)

[Importing the members of a regular \(not singleton\) object.](#) .

269

[13.8](#)

[Importing a package name.](#) . . . . .

270

[13.9](#)

[How private access differs in Scala and Java.](#) . . . . .

273

[13.10 How protected access differs in Scala and Java.](#) . . . . .

274

[13.11 Flexible scope of protection with access qualifiers.](#) . . . . .

275

13.12 Accessing private members of companion classes and objects.

277

14.1

Using an assertion. . . . . .

280

14.2

Using ensuring to assert a function's result. . . . . .

280

14.3

Writing a test method with Suite.

.....

281

14.4

Writing a test function with FunSuite. . . . . .

282

14.5

Writing a JUnit test with JUnit3Suite.

.....

285

## 14.6

Writing a TestNG test with TestNGSuite. . . . . .

286

## 14.7

Specifying and testing behavior with a ScalaTest Spec.

. . .

287

## 14.8

Specifying and testing behavior with the specs framework. . .

288

## 14.9

Writing property-based tests with ScalaCheck. . . . . .

289

14.10 Checking properties from a JUnit TestCase with Checkers.

290

## 15.1

Defining case classes. . . . . .

294

## 15.2

The simplifyTop function, which does a pattern match. . .

296

[15.3](#)

[A pattern match with an empty “default” case.](#) . . . . .

297

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[List of Listings](#)

xxiii

[15.4](#)

[A pattern match with wildcard patterns.](#) . . . . .

298

[15.5](#)

[A pattern match with constant patterns.](#) . . . . .

299

[15.6](#)

[A pattern match with a variable pattern.](#) . . . . .

300

[15.7](#)

[A pattern match with a constructor pattern.](#) . . . . .

302

[15.8](#)

<u>A sequence pattern with a fixed length.</u>	.....
302	
<u>15.9</u>	
<u>A sequence pattern with an arbitrary length.</u>	.....
303	
<u>15.10 A pattern match with a tuple pattern.</u>	.....
303	
<u>15.11 A pattern match with typed patterns.</u>	.....
303	
<u>15.12 Using <code>isInstanceOf</code> and <code>asInstanceOf</code> (poor style).</u>	....
305	
<u>15.13 A pattern with a variable binding (via the @ sign).</u>	
.....	
307	
<u>15.14 A match expression with a pattern guard.</u>	.....
308	
<u>15.15 Match expression in which case order matters.</u>	.....
309	
<u>15.16 A sealed hierarchy of case classes.</u>	.....
311	

15.17 Defining multiple variables with one assignment . . . . .

314

15.18 A for expression with a tuple pattern.

. . . . .

318

15.19 Picking elements of a list that match a pattern. . . . .

318

15.20 The top half of the expression formatter. . . . .

321

15.21 The bottom half of the expression formatter. . . . .

322

15.22 An application that prints formatted expressions. . . . .

325

16.1

A merge sort function for Lists. . . . .

342

17.1

Default map and set definitions in Predef. . . . .

368

17.2

Mixing in the SynchronizedMap trait . . . . .

376

18.1

A mutable bank account class . . . . .

388

18.2

A class with public vars . . . . .

390

18.3

How public vars are expanded into getter and setter methods.

391

18.4

Defining getter and setter methods directly . . . . .

391

18.5

Defining a getter and setter without an associated field.

..

392

18.6

The halfAdder method . . . . .

395	
<u>18.7</u>	
<u>The fullAdder method.</u>	.....
396	
<u>18.8</u>	
<u>The Simulation class.</u>	.....
398	
<u>18.9</u>	
<u>The first half of the BasicCircuitSimulation class.</u>	....
402	
<u>18.10 The second half of the BasicCircuitSimulation class.</u>	..
403	
<u>18.11 The CircuitSimulation class.</u>	.....
407	
<u>19.1</u>	
<u>A basic functional queue.</u>	.....
413	
<u>19.2</u>	
<u>Hiding a primary constructor by making it private.</u>	.....
414	

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[List of Listings](#)

xxiv

[19.3](#)

[An apply factory method in a companion object.](#) . . . . .

415

[19.4](#)

[Type abstraction for functional queues.](#) . . . . .

416

[19.5](#)

[A nonvariant \(rigid\) Cell class.](#) . . . . .

419

[19.6](#)

[A type parameter with a lower bound.](#) . . . . .

425

[19.7](#)

[A contravariant output channel.](#) . . . . .

426

[19.8](#)

[Covariance and contravariance of Functions.](#) . . . . .

427	
<u>19.9</u>	
<u>Demonstration of function type parameter variance.</u>	.....
428	
<u>19.10 An optimized functional queue.</u>	.....
430	
<u>19.11 A Person class that mixes in the Ordered trait.</u>	
.....	
432	
<u>19.12 A merge sort function with an upper bound.</u>	
.....	
432	
<u>20.1</u>	
<u>Overriding abstract vals and parameterless methods.</u>	
...	
438	
<u>20.2</u>	
<u>Declaring abstract vars.</u>	.....
438	
<u>20.3</u>	

## How abstract vars are expanded into getters and setters. . .

439

### 20.4

A trait that uses its abstract vals. . . . . .

440

### 20.5

Pre-initialized fields in an anonymous class expression. . . .

442

### 20.6

Pre-initialized fields in an object definition. . . . . .

442

### 20.7

Pre-initialized fields in a class definition. . . . . .

443

### 20.8

Initializing a trait with lazy vals. . . . . .

444

### 20.9

Modeling suitable food with an abstract type. . . . . .

448

20.10 Implementing an abstract type in a subclass . . . . .

449

20.11 The US currency zone . . . . .

459

20.12 Currency zones for Europe and Japan.

. . . . .

460

20.13 A converter object with an exchange rates map.

. . . . .

461

20.14 The full code of class CurrencyZone.

. . . . .

462

21.1

An implicit parameter list with multiple parameters. . . . .

477

21.2

A function with an upper bound.

. . . . .

479

<u>21.3</u>	
<u>A function with an implicit parameter.</u>	.....
480	
<u>21.4</u>	
<u>A function that uses an implicit parameter internally.</u>	....
482	
<u>21.5</u>	
<u>A function with a view bound.</u>	.....
483	
<u>21.6</u>	
<u>Sample code that uses an implicit parameter.</u>	.....
484	
<u>21.7</u>	
<u>Sample code after type checking and insertion of implicits.</u>	
484	
<u>22.1</u>	
<u>The definition of the Nil singleton object.</u>	.....
489	
<u>22.2</u>	
<u>Prepending a supertype element to a subtype list.</u>	.....

491

## 22.3

The definition of method ::(cons) in class List.

.....

491

## 22.4

The definition of method :::: in class List.

.....

493

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[List of Listings](#)

xxv

## 22.5

The definition of method map in class List.

.....

495

## 22.6

The definition of the :: subclass of List.

.....

496

<u>24.1</u>	
<u>The EMail string extractor object.</u>	.....
518	
<u>24.2</u>	
<u>The Twice string extractor object.</u>	.....
521	
<u>24.3</u>	
<u>The UpperCase string extractor object.</u>	.....
521	
<u>24.4</u>	
<u>The Domain string extractor object.</u>	.....
523	
<u>24.5</u>	
<u>The ExpandedEMail extractor object.</u>	.....
524	
<u>24.6</u>	
<u>Hiding a primary constructor by making it private.</u>	.....
525	
<u>24.7</u>	
<u>How the r method is defined in RichString.</u>	.....

529	
<u>27.1</u>	
<u>A simple Food entity class.</u>	.....
555	
<u>27.2</u>	
<u>Simple Recipe entity class.</u>	.....
556	
<u>27.3</u>	
<u>Food and Recipe examples for use in tests.</u>	.....
556	
<u>27.4</u>	
<u>Mock database and browser modules.</u>	.....
557	
<u>27.5</u>	
<u>Database and browser modules with categories added.</u>	...
558	
<u>27.6</u>	
<u>A Browser class with an abstract database val.</u>	
.....	
559	

27.7  
A Database class with abstract methods. . . . . .

560

27.8  
The SimpleDatabase object as a Database subclass. . . .

560

27.9  
The SimpleBrowser object as a Browser subclass.

. . .

561

27.10 A student database and browser. . . . . .

561

27.11 A trait for food categories. . . . . .

562

27.12 A Database class that mixes in the FoodCategories trait.

562

27.13 A SimpleDatabase object composed solely of mixins.

. .

562

27.14 A SimpleFoods trait. . . . . .

562  
[27.15 A SimpleRecipes trait with a self type.](#) . . . . .

563  
[27.16 An app that dynamically selects a module implementation.](#)

564  
[27.17 Using a singleton type.](#)

.....  
566  
[28.1](#)

[A superclass equals method that calls canEqual.](#) . . . . .

580  
[28.2](#)

[A subclass equals method that calls canEqual.](#) . . . . .

581  
[28.3](#)

[Hierarchy for binary trees.](#) . . . . .

583  
[28.4](#)

[A parameterized type with equals and hashCode.](#) . . . . .

587

<u>28.5</u>	
<u>Class Rational with equals and hashCode.</u>	.....
588	
<u>29.1</u>	
<u>A Scala method that declares a Java throws clause.</u>	....
599	
<u>30.1</u>	
<u>A simple actor.</u>	.....
609	
<u>30.2</u>	
<u>An actor that calls receive.</u>	.....
611	
<u>Cover</u>	·
<u>Overview</u>	·
<u>Contents</u>	·
<u>Discuss</u>	·
<u>Suggest</u>	·
<u>Glossary</u>	·
<u>Index</u>	
<u>List of Listings</u>	
xxvi	
<u>30.3</u>	
<u>An actor that calls react.</u>	.....
615	
<u>30.4</u>	
<u>An actor's act method that uses loop.</u>	.....

616

[30.5](#)

An actor that uses a helper actor to avoid blocking itself. . . . . .

618

[30.6](#)

An actor that uses case classes for messages. . . . . .

623

[30.7](#)

The Simulant trait. . . . . .

631

[30.8](#)

Adder components. . . . . .

638

[31.1](#)

An arithmetic expression parser. . . . . .

644

[31.2](#)

A regular expression parser for Java identifiers. . . . . .

646

[31.3](#)

<u>Data in JSON format.</u>	.....
648	
<u>31.4</u>	
<u>A simple JSON parser.</u>	.....
648	
<u>31.5</u>	
<u>A full JSON parser that returns meaningful results.</u>	.....
653	
<u>31.6</u>	
<u>The ~ combinator method.</u>	.....
661	
<u>32.1</u>	
<u>A simple Swing application in Scala.</u>	.....
672	
<u>32.2</u>	
<u>Component assembly on a panel.</u>	.....
674	
<u>32.3</u>	
<u>Implementing a reactive Swing application.</u>	.....
678	

<u>32.4</u>	
<u>An implementation of the temperature converter.</u>	.....
680	
<u>33.1</u>	
<u>Code for spreadsheet in Figure 33.1.</u>	.....
685	
<u>33.2</u>	
<u>The main program for the spreadsheet application.</u>	.....
686	
<u>33.3</u>	
<u>A spreadsheet with a rendererComponent method.</u>	.....
687	
<u>33.4</u>	
<u>First version of the Model class.</u>	.....
688	
<u>33.5</u>	
<u>Classes representing formulas.</u>	.....
690	
<u>33.6</u>	

[A spreadsheet that parses formulas.](#) . . . . .

694

[33.7](#)

[The evaluate method of trait Evaluator.](#) . . . . .

697

[33.8](#)

[A library for arithmetic operations.](#) . . . . .

699

[33.9](#)

[The finished spreadsheet component.](#) . . . . .

705

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Foreword

Martin Odersky made a huge impact on the Java world with his design of the Pizza language. Although Pizza itself never became popular, it demonstrated that object-oriented and functional language features, when combined with skill and taste, form a natural and powerful combination. Pizza's design became the basis for generics in Java, and Martin's GJ (Generic Java) compiler was Sun Microsystem's standard compiler starting in 1.3 (though with generics disabled). I had the pleasure of maintaining this compiler for a number of years, so I can report from first-hand experience that Martin's skill in language design extends to language implementation.

Since that time, we at Sun tried to simplify program development by extending the language with piecemeal solutions to particular problems,

like the for-each loop, enums, and autoboxing. Meanwhile, Martin continued his work on more powerful orthogonal language primitives that allow programmers to provide solutions in libraries.

Lately, there has been a backlash against statically typed languages. Experience with Java has shown that programming in a static language results in an abundance of boilerplate. The common wisdom is that one must abandon static typing to eliminate the boilerplate, and there is a rising interest in dynamic languages such as Python, Ruby, and Groovy. This common wisdom is debunked by the existence of Martin's latest brainchild, Scala.

Scala is a tastefully typed language: it is statically typed, but explicit types appear in just the right places. Scala takes powerful features from object-oriented and functional languages, and combines them with a few novel ideas in a beautifully coherent whole. The syntax is so lightweight, and its primitives so expressive, that APIs can be used with virtually no syntactic overhead at all. Examples can be found in standard libraries such as parser combinators and actors. In this sense Scala supports embedded domain-specific languages.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Foreword](#)

xxviii

Will Scala be the next great language? Only time will tell. Martin Odersky's team certainly has the taste and skill for the job. One thing is sure: Scala sets a new standard against which future languages will be measured.

Neal Gafter

San Jose, California

September 3, 2008

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Acknowledgments

Many people have contributed to this book and to the material it covers. We are grateful to all of them.

Scala itself has been a collective effort of many people. The design and the implementation of version 1.0 was helped by Philippe Altherr, Vincent Cremet, Gilles Dubochet, Burak Emir, Stéphane Micheloud, Nikolay Mihaylov, Michel Schinz, Erik Stenman, and Matthias Zenger. Iulian Dragos, Gilles Dubochet, Philipp Haller, Sean McDermid, Ingo Maier, and Adriaan Moors joined in the effort to develop the second and current version of the language and tools.

Gilad Bracha, Craig Chambers, Erik Ernst, Matthias Felleisen, Shriram Krishnamurti, Gary Leavens, Sebastian Maneth, Erik Meijer, David Pollak, Jon Pretty, Klaus Ostermann, Didier Rémy, Vijay Saraswat, Don Syme, Mads Torgersen, Philip Wadler, Jamie Webb, and John Williams have shaped the design of the language by graciously sharing their ideas with us in lively and inspiring discussions, as well as through comments on previous versions of this document. The contributors to the Scala mailing list have also given very useful feedback that helped us improve the language and its tools.

George Berger has worked tremendously to make the build process and the web presence for the book work smoothly. As a result this project has been delightfully free of technical snafus.

Many people gave us valuable feedback on early versions of the text.

Thanks goes to Eric Armstrong, George Berger, Alex Blewitt, Gilad Bracha, William Cook, Bruce Eckel, Stéphane Micheloud, Todd Millstein, David Pollak, Frank Sommers, Philip Wadler, and Matthias Zenger. Thanks also to the Silicon Valley Patterns group for their very helpful review: Dave Astels, Tracy Bialik, John Brewer, Andrew Chase, Bradford Cross, Raoul Duke, John P. Eurich, Steven Ganz, Phil Goodwin, Ralph Jocham, Yan-Fa Li, Tao Ma, Jeffery Miller, Suresh Pai, Russ Rufer, Dave W. Smith, Scott Turnquest,

## [Acknowledgments](#)

xxx

Walter Vannini, Darlene Wallach, and Jonathan Andrew Wolter. And we'd like to thank Dewayne Johnson and Kim Leedy for their help with the cover art, and Frank Sommers for his work on the index.

We'd also like to extend a special thanks to all of our readers who contributed comments. Your comments were very helpful to us in shaping this into an even better book. We couldn't print the names of everyone who contributed comments, but here are the names of readers who submitted at least five comments during the eBook PrePrint™ stage by clicking on the Suggest link, sorted first by the highest total number of comments submitted, then alphabetically. Thanks goes to: David Biesack, Donn Stephan, Mats Hen-ricson, Rob Dickens, Blair Zajac, Tony Sloane, Nigel Harrison, Javier Diaz Soto, William Heelan, Justin Forder, Gregor Purdy, Colin Perkins, Bjarte S. Karlsen, Ervin Varga, Eric Willigers, Mark Hayes, Martin Elwin, Calum MacLean, Jonathan Wolter, Les Pruszynski, Seth Tisue, Andrei Formiga, Dmitry Grigoriev, George Berger, Howard Lovatt, John P. Eurich, Marius Scurtescu, Jeff Ervin, Jamie Webb, Kurt Zoglmann, Dean Wampler, Nikolaj Lindberg, Peter McLain, Arkadiusz Stryjski, Shanky Surana, Craig Borde-lon, Alexandre Patry, Filip Moens, Fred Janon, Jeff Heon, Boris Lorbeer, Jim Menard, Tim Azzopardi, Thomas Jung, Walter Chang, Jeroen Dijkmei-jer, Casey Bowman, Martin Smith, Richard Dallaway, Antony Stubbs, Lars Westergren, Maarten Hazewinkel, Matt Russell, Remigiusz Michalowski, Andrew Tolopko, Curtis Stanford, Joshua Cough, Zemian Deng, Christo-pher Rodrigues Macias, Juan Miguel Garcia Lopez, Michel Schinz, Peter Moore, Randolph Kahle, Vladimir Kelman, Daniel Gronau, Dirk Detering, Hiroaki Nakamura, Ole Hougaard, Bhaskar Maddala, David Bernard, Derek Mahar, George Kollias, Kristian Nordal, Normen Mueller, Rafael Ferreira, Binil Thomas, John Nilsson, Jorge Ortiz, Marcus Schulte, Vadim Gerassi-mov, Cameron Taggart, Jon-Anders Teigen, Silvestre Zabala, Will McQueen, and Sam Owen.

Lastly, Bill would also like to thank Gary Cornell, Greg Doench, Andy Hunt, Mike Leonard, Tyler Ortman, Bill Pollock, Dave Thomas, and Adam Wright for providing insight and advice on book publishing.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Introduction

This book is a tutorial for the Scala programming language, written by people directly involved in the development of Scala. Our goal is that by reading this book, you can learn everything you need to be a productive Scala programmer. All examples in this book compile with Scala version 2.7.2.

### Who should read this book

The main target audience for this book is programmers who want to learn to program in Scala. If you want to do your next software project in Scala, then this is the book for you. In addition, the book should be interesting to programmers wishing to expand their horizons by learning new concepts. If you're a Java programmer, for example, reading this book will expose you to many concepts from functional programming as well as advanced object-oriented ideas. We believe learning about Scala, and the ideas behind it, can help you become a better programmer in general.

General programming knowledge is assumed. While Scala is a fine first programming language, this is not the book to use to learn programming.

On the other hand, no specific knowledge of programming languages is required. Even though most people use Scala on the Java platform, this book does not presume you know anything about Java. However, we expect many readers to be familiar with Java, and so we sometimes compare Scala to Java to help such readers understand the differences.

### How to use this book

Because the main purpose of this book is to serve as a tutorial, the recommended way to read this book is in chapter order, from front to back.

We have tried hard to introduce one topic at a time, and explain new topics only

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Introduction

xxxii

in terms of topics we've already introduced. Thus, if you skip to the back to get an early peek at something, you may find it explained in terms of concepts you don't quite understand. To the extent you read the chapters in order, we think you'll find it quite straightforward to gain competency in Scala, one step at a time.

If you see a term you do not know, be sure to check the glossary and the index. Many readers will skim parts of the book, and that is just fine.

The glossary and index can help you backtrack whenever you skim over something too quickly.

After you have read the book once, it should also serve as a language reference. There is a formal specification of the Scala language, but the language specification tries for precision at the expense of readability. Although this book doesn't cover every detail of Scala, it is quite comprehensive and should serve as an approachable language reference as you become more adept at programming in Scala.

## How to learn Scala

You will learn a lot about Scala simply by reading this book from cover to cover. You can learn Scala faster and more thoroughly, though, if you do a few extra things.

First of all, you can take advantage of the many program examples included in the book. Typing them in yourself is a way to force your mind through each line of code. Trying variations is a way to make them more fun and to make sure you really understand how they work.

Second, keep in touch with the numerous online forums. That way, you and other Scala enthusiasts can help each other. There are numerous mailing lists, discussion forums, a chat room, a wiki, and multiple Scala-specific article feeds. Take some time to find ones that fit your information needs.

You will spend a lot less time stuck on little problems, so you can spend your time on deeper, more important questions.

Finally, once you have read enough, take on a programming project of your own. Work on a small program from scratch, or develop an add-in to a larger program. You can only go so far by reading.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Introduction](#)

xxxiii

## EBook features

This book is available in both paper and PDF eBook form. The eBook is not simply an electronic copy of the paper version of the book. While the content is the same as in the paper version, the eBook has been carefully designed and optimized for reading on a computer screen.

The first thing to notice is that most references within the eBook are hyperlinked. If you select a reference to a chapter, figure, or glossary entry, your PDF viewer should take you immediately to the selected item so that you do not have to flip around to find it.

Additionally, at the bottom of each page in the eBook are a number of navigation links. The “Cover,” “Overview,” and “Contents” links take you to the front matter of the book. The “Glossary” and “Index” links take you to reference parts of the book. Finally, the “Discuss” link takes you to an online forum where you discuss questions with other readers, the authors, and the larger Scala community. If you find a typo, or something you think could be explained better, please click on the “Suggest” link, which will

take you to an online web application where you can give the authors feedback.

Although the same pages appear in the eBook as the printed book, blank pages are removed and the remaining pages renumbered. The pages are numbered differently so that it is easier for you to determine PDF page numbers when printing only a portion of the eBook. The pages in the eBook are, therefore, numbered exactly as your PDF viewer will number them.

## Typographic conventions

The first time a term is used, it is italicized. Small code examples, such as `x + 1`, are written inline with a mono-spaced font. Larger code examples are put into mono-spaced quotation blocks like this:

```
def hello() {  
    println("Hello, world!")  
}
```

When interactive shells are shown, responses from the shell are shown in a lighter font.

```
scala> 3 + 4
```

```
res0: Int = 7
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Introduction](#)

xxxiv

## Content overview

- [Chapter 1](#), “A Scalable Language,” gives an overview of Scala’s design as well as the reasoning, and history, behind it.

- [Chapter 2](#), “First Steps in Scala,” shows you how to do a number of basic programming tasks in Scala, without going into great detail about how they work. The goal of this chapter is to get your fingers started typing and running Scala code.
- [Chapter 3](#), “Next Steps in Scala,” shows you several more basic programming tasks that will help you get up to speed quickly in Scala.

After completing this chapter, you should be able to start using Scala for simple scripting tasks.

- [Chapter 4](#), “Classes and Objects,” starts the in-depth coverage of Scala with a description of its basic object-oriented building blocks and instructions on how to compile and run a Scala application.
- [Chapter 5](#), “Basic Types and Operations,” covers Scala’s basic types, their literals, the operations you can perform on them, how precedence and associativity works, and what rich wrappers are.
- [Chapter 6](#), “Functional Objects,” dives more deeply into the object-oriented features of Scala, using functional (i.e., immutable) rational numbers as an example.
- [Chapter 7](#), “Built-in Control Structures,” shows you how to use Scala’s built-in control structures: if, while, for, try, and match.
- [Chapter 8](#), “Functions and Closures,” provides in-depth coverage of functions, the basic building block of functional languages.
- [Chapter 9](#), “Control Abstraction,” shows how to augment Scala’s basic control structures by defining your own control abstractions.
- [Chapter 10](#), “Composition and Inheritance,” discusses more of Scala’s support for object-oriented programming. The topics are not as fundamental as those in Chapter 4, but they frequently arise in practice.
- [Chapter 11](#), “Scala’s Hierarchy,” explains Scala’s inheritance hierarchy and discusses its universal methods and bottom types.

## [Introduction](#)

XXXV

- [Chapter 12](#), “Traits,” covers Scala’s mechanism for mixin composition. The chapter shows how traits work, describes common uses, and explains how traits improve on traditional multiple inheritance.
- [Chapter 13](#), “Packages and Imports,” discusses issues with programming in the large, including top-level packages, import statements, and access control modifiers like protected and private.
- [Chapter 14](#), “Assertions and Unit Testing,” shows Scala’s assertion mechanism and gives a tour of the various tools available for writing tests in Scala.
- [Chapter 15](#), “Case Classes and Pattern Matching,” introduces twin constructs that support you when writing regular, non-encapsulated data structures. Case classes and pattern matching are particularly helpful for tree-like recursive data.
- [Chapter 16](#), “Working with Lists,” explains in detail lists, which are probably the most commonly used data structure in Scala programs.
- [Chapter 17](#), “Collections,” shows you how to use the basic Scala collections, such as lists, arrays, tuples, sets, and maps.
- [Chapter 18](#), “Stateful Objects,” explains stateful (i.e., mutable) objects, and the syntax Scala provides to express them. The chapter concludes with a case study on discrete event simulation, which shows some stateful objects in action.
- [Chapter 19](#), “Type Parameterization,” explains some of the techniques for information hiding introduced in Chapter 13 by means of a concrete example: the design of a class for purely functional queues. The chapter

builds up to a description of variance of type parameters and how it interacts with information hiding.

- [Chapter 20](#), “Abstract Members,” describes all kinds of abstract members that Scala supports. Not only methods, but also fields and types can be declared abstract.
- [Chapter 21](#), “Implicit Conversions and Parameters,” covers two constructs that can help you omit tedious details from source code, letting the compiler supply them instead.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Introduction](#)

xxxvi

- [Chapter 22](#), “Implementing Lists,” describes the implementation of class List. It is important to understand how lists work in Scala, and furthermore the implementation demonstrates the use of several of Scala’s features.
- [Chapter 23](#), “For Expressions Revisited,” shows how for expressions are translated to invocations of map, flatMap, filter, and foreach.
- [Chapter 24](#), “Extractors,” shows how to pattern match against arbitrary classes, not just case classes.
- [Chapter 25](#), “Annotations,” shows how to work with language extension via annotation. The chapter describes several standard annotations and shows you how to make your own.
- [Chapter 26](#), “Working with XML,” explains how to process XML in Scala. The chapter shows you idioms for generating XML, parsing it, and processing it once it is parsed.
- [Chapter 27](#), “Objects As Modules,” shows how Scala’s objects are rich enough to remove the need for a separate modules system.

- [Chapter 28](#), “Object Equality,” points out several issues to consider when writing an equals method. There are several pitfalls to avoid.
- [Chapter 29](#), “Combining Scala and Java,” discusses issues that arise when combining Scala and Java together in the same project, and suggests ways to deal with them.
- [Chapter 30](#), “Actors and Concurrency,” shows you how to use Scala’s actors concurrency library. Although you use the Java Platform’s concurrency primitives and libraries from Scala programs, actors can help you avoid the deadlocks and race conditions that plague the traditional “threads and locks” approach to concurrency.
- [Chapter 31](#), “Combinator Parsing,” shows how to build parsers using Scala’s library of parser combinators.
- [Chapter 32](#), “GUI Programming,” gives a quick tour of a Scala library that simplifies GUI programming with Swing.
- [Chapter 33](#), “The SCells Spreadsheet,” ties everything together by showing a complete spreadsheet application written in Scala.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Introduction](#)

xxxvii

## Resources

At <http://www.scala-lang.org>, the main website for Scala, you’ll find the latest Scala release and links to documentation and community resources.

For a more condensed page of links to Scala resources, visit the website for this book: [http://booksites.artima.com/programming\\_in\\_scala](http://booksites.artima.com/programming_in_scala). To interact with other readers of this book, check out the Programming in Scala Forum, at: <http://www.artima.com/forums/forum.jsp?forum=282>.

## Source code

You can download a ZIP file containing the source code of this book, which is released under the Apache 2.0 open source license, from the book's website: [http://booksites.artima.com/programming\\_in\\_scala](http://booksites.artima.com/programming_in_scala).

## Errata

Although this book has been heavily reviewed and checked, errors will inevitably slip through. To see a (hopefully short) list of errata for this book, visit [http://booksites.artima.com/programming\\_in\\_scala/errata](http://booksites.artima.com/programming_in_scala/errata).

If you find an error, please report it at the above URL, so that we can be sure to fix it in a future printing or edition of this book.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Programming in Scala

```
println("Hello, reader!")
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 1

### A Scalable Language

The name Scala stands for “scalable language.” The language is so named because it was designed to grow with the demands of its users. You can apply Scala to a wide range of programming tasks, from writing small scripts to building large systems.<sup>1</sup>

Scala is easy to get into. It runs on the standard Java platform and interoperates seamlessly with all Java libraries. It’s quite a good language for writing scripts that pull together Java components. But it can apply its strengths even more when used for building large systems and frameworks of reusable components.

Technically, Scala is a blend of object-oriented and functional programming concepts in a statically typed language. The fusion of object-oriented and functional programming shows up in many different aspects of Scala; it is probably more pervasive than in any other widely used language. The two programming styles have complementary strengths when it comes to scalability. Scala's functional programming constructs make it easy to build interesting things quickly from simple parts. Its object-oriented constructs make it easy to structure larger systems and to adapt them to new demands.

The combination of both styles in Scala makes it possible to express new kinds of programming patterns and component abstractions. It also leads to a legible and concise programming style. And because it is so malleable, programming in Scala can be a lot of fun.

This initial chapter answers the question, “Why Scala?” It gives a high-level view of Scala's design and the reasoning behind it. After reading the chapter you should have a basic feel for what Scala is and what kinds of 1Scala is pronounced skah-lah.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 1.1](#)

### [Chapter 1 · A Scalable Language](#)

40

tasks it might help you accomplish. Although this book is a Scala tutorial, this chapter isn't really part of the tutorial. If you're eager to start writing some Scala code, you should jump ahead to [Chapter 2](#).

1.1

A language that grows on you

Programs of different sizes tend to require different programming constructs.

Consider, for example, the following small Scala program:

```
var capital =  
  Map("US" -> "Washington", "France" -> "Paris")  
capital += ("Japan" ->  
  "Tokyo")
```

```
println(capital("France"))
```

This program sets up a map from countries to their capitals, modifies the map by adding a new binding ("Japan" -> "Tokyo"), and prints the capital associated with the country France.<sup>2</sup> The notation in this example is high-level, to the point, and not cluttered with extraneous semicolons or type annotations.

Indeed, the feel is that of a modern “scripting” language like Perl, Python, or Ruby. One common characteristic of these languages, which is relevant for the example above, is that they each support an “associative map” construct in the syntax of the language.

Associative maps are very useful because they help keep programs legible and concise. However, sometimes you might not agree with their “one size fits all” philosophy, because you need to control the properties of the maps you use in your program in a more fine-grained way. Scala gives you this fine-grained control if you need it, because maps in Scala are not language syntax. They are library abstractions that you can extend and adapt.

In the above program, you’ll get a default Map implementation, but you can easily change that. You could for example specify a particular implementation, such as a HashMap or a TreeMap, or you could specify that the map should be thread-safe, by mixing in a SynchronizedMap [trait](#). You could specify a default value for the map, or you could override any other method of the map you create. In each case, you can use the same easy access syntax for maps as in the example above.

2Please bear with us if you don’t understand all details of this program. They will be explained in the next two chapters.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 1.1](#)

## Chapter 1 · A Scalable Language

41

This example shows that Scala can give you both convenience and flexibility. Scala has a set of convenient constructs that help you get started quickly and let you program in a pleasantly concise style. At the same time, you have the assurance that you will not outgrow the language. You can always tailor the program to your requirements, because everything is based on library modules that you can select and adapt as needed.

### Growing new types

Eric Raymond introduced the cathedral and bazaar as two metaphors of software development.<sup>3</sup> The cathedral is a near-perfect building that takes a long time to build. Once built, it stays unchanged for a long time. The bazaar, by contrast, is adapted and extended each day by the people working in it. In Raymond's work the bazaar is a metaphor for open-source software development. Guy Steele noted in a talk on "growing a language" that the same distinction can be applied to language design.<sup>4</sup> Scala is much more like a bazaar than a cathedral, in the sense that it is designed to be extended and adapted by the people programming in it. Instead of providing all constructs you might ever need in one "perfectly complete" language, Scala puts the tools for building such constructs into your hands.

Here's an example. Many applications need a type of integer that can become arbitrarily large without overflow or "wrap-around" of arithmetic operations. Scala defines such a type in library class `scala.BigInt`. Here is the definition of a method using that type, which calculates the factorial of a passed integer value:<sup>5</sup>

```
def factorial(x: BigInt): BigInt =  
  if (x == 0) 1 else x * factorial(x - 1)
```

Now, if you call `factorial(30)` you would get:

2652528598121910586363084800000000

BigInt looks like a built-in type, because you can use integer literals and operators such as \* and - with values of that type. Yet it is just a class that 3Raymond, The Cathedral and the Bazaar. [\[Ray99\]](#)

4Steele, “Growing a language.” [\[Ste99\]](#)

5factorial(x), or  $x!$  in mathematical notation, is the result of computing  $1 * 2 * \dots * x$ , with  $0!$  defined to be 1.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

*Prepared for tetsu soh*

[Section 1.1](#)

[Chapter 1 · A Scalable Language](#)

42

happens to be defined in Scala’s standard library.<sup>6</sup> If the class were missing, it would be straightforward for any Scala programmer to write an implementation, for instance, by wrapping Java’s class `java.math.BigInteger` (in fact that’s how Scala’s `BigInt` class is implemented).

Of course, you could also use Java’s class directly. But the result is not nearly as pleasant, because although Java allows you to create new types, those types don’t feel much like native language support: import `java.math.BigInteger`

```
def factorial(x: BigInteger): BigInteger =  
  if (x == BigInteger.ZERO)  
    BigInteger.ONE  
  else  
    x.multiply(factorial(x.subtract(BigInteger.ONE)))
```

BigInt is representative of many other number-like types—big decimals, complex numbers, rational numbers, confidence intervals, polynomials—the list goes on. Some programming languages implement some of these types natively. For instance, Lisp, Haskell, and Python implement big integers; Fortran and Python implement complex numbers. But any language that attempted to implement all of these abstractions at the same time would simply become too big to be manageable. What’s more, even if such a language were to exist, some applications would surely benefit from other number-like types that were not supplied. So the approach of attempting to provide everything in one language doesn’t scale very well. Instead, Scala allows users to grow and adapt the language in the directions they need by defining easy-to-use libraries that feel like native language support.

## Growing new control constructs

The previous example demonstrates that Scala lets you add new types that can be used as conveniently as built-in types. The same extension principle also applies to control structures. This kind of extensibility is illustrated by Scala’s API for “actor-based” concurrent programming.

Scala comes with a standard library, some of which will be covered in this book. For more information, you can also consult the library’s Scaladoc documentation, which is available in the distribution and online at <http://www.scala-lang.org>.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 1.1](#)

[Chapter 1 · A Scalable Language](#)

43

As multicore processors proliferate in the coming years, achieving acceptable performance may increasingly require that you exploit more parallelism in your applications. Often, this will mean rewriting your code so that computations are distributed over several concurrent threads.

Unfortunately, creating dependable multi-threaded applications has proven challenging in practice. Java’s threading model is built around shared memory and locking, a model that is often difficult to reason about, especially as systems scale up in size and complexity. It is hard to be sure you don’t have a race condition or deadlock lurking—something that didn’t show up during testing, but might just show up in production. An arguably safer alternative is a message passing architecture such as the “actors” approach used by the Erlang programming language.

Java comes with a rich, thread-based concurrency library. Scala programs can use it like any other Java API. However, Scala also offers an additional library that essentially implements Erlang’s actor model.

Actors are concurrency abstractions that can be implemented on top of threads. They communicate by sending messages to each other. An actor can perform two basic operations, message send and receive. The send operation, denoted by an exclamation point (!), sends a message to an actor. Here’s an example in which the actor is named recipient:

```
recipient ! msg
```

A send is asynchronous; that is, the sending actor can proceed immediately, without waiting for the message to be received and processed. Every actor has a mailbox in which incoming messages are queued. An actor handles messages that have arrived in its mailbox via a receive block: receive {

```
case Msg1 => ... // handle Msg1
```

```
case Msg2 => ... // handle Msg2
```

```
// ...
```

```
}
```

A receive block consists of a number of cases that each query the mailbox with a message pattern. The first message in the mailbox that matches any of the cases is selected, and the corresponding action is performed on it. If

the mailbox does not contain any messages that match one of the given cases, the actor suspends and waits for further incoming messages.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 1.1

### Chapter 1 · A Scalable Language

44

As an example, here is a simple Scala actor implementing a checksum calculator service:

```
actor {  
    var sum = 0  
  
    loop {  
        receive {  
            case Data(bytes)  
                => sum += hash(bytes)  
  
            case GetSum(requester) => requester ! sum  
        }  
    }  
}
```

This actor first defines a local variable named `sum` with initial value zero. It then repeatedly waits in a loop for messages, using a `receive` statement. If it receives a `Data` message, it adds a hash of the sent bytes to the `sum` variable.

If it receives a GetSum message, it sends the current value of sum back to the requester using the message send requester ! sum. The requester field is embedded in the GetSum message; it usually refers to the actor that made the request.

We don't expect you to understand fully the actor example at this point.

Rather, what's significant about this example for the topic of scalability is that neither actor nor loop nor receive nor message send (!) are built-in operations in Scala. Even though actor, loop, and receive look and act very much like built-in control constructs such as while or for loops, they are in fact methods defined in Scala's actors library. Likewise, even though

'!' looks like a built-in operator, it too is just a method defined in the actors library. All four of these constructs are completely independent of the Scala programming language.

The receive block and send (!) syntax look in Scala much like they look in Erlang, but in Erlang, these constructs are built into the language.

Scala also implements most of Erlang's other concurrent programming constructs, such as monitoring failed actors and time-outs. All in all, actors have turned out to be a very pleasant means for expressing concurrent and distributed computations. Even though they are defined in a library, actors feel like an integral part of the Scala language.

This example illustrates that you can "grow" the Scala language in new directions even as specialized as concurrent programming. To be sure, you need good architects and programmers to do this. But the crucial thing is

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 1.2](#)

[Chapter 1 · A Scalable Language](#)

that it is feasible—you can design and implement abstractions in Scala that address radically new application domains, yet still feel like native language support.

## 1.2

### What makes Scala scalable?

Scalability is influenced by many factors, ranging from syntax details to component abstraction constructs. If we were forced to name just one aspect of Scala that helps scalability, though, we'd pick its combination of object-oriented and functional programming (well, we cheated, that's really two aspects, but they are intertwined).

Scala goes further than all other well-known languages in fusing object-oriented and functional programming into a uniform language design. For instance, where other languages might have objects and functions as two different concepts, in Scala a function value is an object. Function types are classes that can be inherited by subclasses. This might seem nothing more than an academic nicety, but it has deep consequences for scalability. In fact the actor concept shown previously could not have been implemented without this unification of functions and objects. This section gives an overview of Scala's way of blending object-oriented and functional concepts.

### Scala is object-oriented

Object-oriented programming has been immensely successful. Starting from Simula in the mid-60's and Smalltalk in the 70's, it is now available in more languages than not. In some domains objects have taken over completely.

While there is not a precise definition of what object-oriented means, there is clearly something about objects that appeals to programmers.

In principle, the motivation for object-oriented programming is very simple: all but the most trivial programs need some sort of structure. The most straightforward way to do this is to put data and operations into some form

of containers. The great idea of object-oriented programming is to make these containers fully general, so that they can contain operations as well as data, and that they are themselves values that can be stored in other containers, or passed as parameters to operations. Such containers are called objects. Alan Kay, the inventor of Smalltalk, remarked that in this way the simplest object has the same construction principle as a full computer: it combines data with

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 1.2

### Chapter 1 · A Scalable Language

46

operations under a formalized interface.<sup>7</sup> So objects have a lot to do with language scalability: the same techniques apply to the construction of small as well as large programs.

Even though object-oriented programming has been mainstream for a long time, there are relatively few languages that have followed Smalltalk in pushing this construction principle to its logical conclusion. For instance, many languages admit values that are not objects, such as the primitive values in Java. Or they allow static fields and methods that are not members of any object. These deviations from the pure idea of object-oriented programming look quite harmless at first, but they have an annoying tendency to complicate things and limit scalability.

By contrast, Scala is an object-oriented language in pure form: every value is an object and every operation is a method call. For example, when you say `1 + 2` in Scala, you are actually invoking a method named `+` defined in class `Int`. You can define methods with operator-like names that clients of your API can then use in operator notation. This is how the designer of Scala's actors API enabled you to use expressions such as `requester ! sum` shown in the previous example: '`!`' is a method of the `Actor` class.

Scala is more advanced than most other languages when it comes to composing objects. An example is Scala's traits. Traits are like interfaces in Java, but they can also have method implementations and even fields. Objects are constructed by mixin composition, which takes the members of a class and adds the members of a number of traits to them. In this way, different aspects of classes can be encapsulated in different traits. This looks a bit like multiple inheritance, but differs when it comes to the details. Unlike a class, a trait can add some new functionality to an unspecified superclass. This makes traits more "pluggable" than classes. In particular, it avoids the classical "diamond inheritance" problems of multiple inheritance, which arise when the same class is inherited via several different paths.

## Scala is functional

In addition to being a pure object-oriented language, Scala is also a full-blown functional language. The ideas of functional programming are older than (electronic) computers. Their foundation was laid in Alonzo Church's lambda calculus, which he developed in the 1930s. The first functional programming language was Lisp, which dates from the late 50s. Other popular 7Kay, "The Early History of Smalltalk." [\[Kay96\]](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 1.2](#)

[Chapter 1 · A Scalable Language](#)

47

functional languages are Scheme, SML, Erlang, Haskell, OCaml, and F#.

For a long time, functional programming has been a bit on the sidelines, popular in academia, but not that widely used in industry. However, recent years have seen an increased interest in functional programming languages and techniques.

Functional programming is guided by two main ideas. The first idea is that functions are first-class values. In a functional language, a function is a value of the same status as, say, an integer or a string. You can pass functions as arguments to other functions, return them as results from functions, or store them in variables. You can also define a function inside another function, just as you can define an integer value inside a function. And you can define functions without giving them a name, sprinkling your code with function literals as easily as you might write integer literals like 42.

Functions that are first-class values provide a convenient means for abstracting over operations and creating new control structures. This generalization of functions provides great expressiveness, which often leads to very legible and concise programs. It also plays an important role for scalability.

As an example, the receive construct shown previously in the actor example is an invocation of a method that takes a function as argument. The code inside the receive construct is a function that is passed unexecuted into the receive method.

In most traditional languages, by contrast, functions are not values. Languages that do have function values often relegate them to second-class status. For example, the function pointers of C and C++ do not have the same status as non-functional values in those languages: function pointers can only refer to global functions, they do not allow you to define first-class nested functions that refer to some values in their environment. Nor do they allow you to define unnamed function literals.

The second main idea of functional programming is that the operations of a program should map input values to output values rather than change data in place. To see the difference, consider the implementation of strings in Ruby and in Java. In Ruby, a string is an array of characters. Characters in a string can be changed individually. For instance you can change a semicolon character in a string to a period inside the same string object. In Java and Scala, on the other hand, a string is a sequence of characters in the mathematical sense. Replacing a character in a string using an expression

like `s.replace(';', '!')` yields a new string object, which is different from `s`. Another way of expressing this is that strings are immutable in Java

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 1.3

### Chapter 1 · A Scalable Language

48

whereas they are mutable in Ruby. So looking at just strings, Java is a functional language, whereas Ruby is not. Immutable data structures are one of the cornerstones of functional programming. The Scala libraries define many more immutable data types on top of those found in the Java APIs. For instance, Scala has immutable lists, tuples, maps, and sets.

Another way of stating this second idea of functional programming is that methods should not have any side effects. They should communicate with their environment only by taking arguments and returning results. For instance, the `replace` method in Java's `String` class fits this description. It takes a string and two characters and yields a new string where all occurrences of one character are replaced by the other. There is no other effect of calling `replace`. Methods like `replace` are called [referentially transparent](#),

which means that for any given input the method call could be replaced by its result without affecting the program's semantics.

Functional languages encourage immutable data structures and referentially transparent methods. Some functional languages even require them.

Scala gives you a choice. When you want to, you can write in an imperative style, which is what programming with mutable data and side effects is called. But Scala generally makes it easy to avoid imperative constructs when you want, because good functional alternatives exist.

1.3

## Why Scala?

Is Scala for you? You will have to see and decide for yourself. We have found that there are actually many reasons besides scalability to like programming in Scala. Four of the most important aspects will be discussed in this section: compatibility, brevity, high-level abstractions, and advanced static typing.

### Scala is compatible

Scala doesn't require you to leap backwards off the Java platform to step forward from the Java language. It allows you to add value to existing code—to build on what you already have—because it was designed for seamless interoperability with Java.8 Scala programs compile to JVM bytecodes. Their run-time performance is usually on par with Java programs. Scala code can 8There is also a Scala variant that runs on the .NET platform, but the JVM variant currently has better support.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### Section 1.3

#### Chapter 1 · A Scalable Language

49

call Java methods, access Java fields, inherit from Java classes, and implement Java interfaces. None of this requires special syntax, explicit interface descriptions, or glue code. In fact, almost all Scala code makes heavy use of Java libraries, often without programmers being aware of this fact.

Another aspect of full interoperability is that Scala heavily re-uses Java types. Scala's Ints are represented as Java primitive integers of type int, Floats are represented as floats, Booleans as booleans, and so on. Scala arrays are mapped to Java arrays. Scala also re-uses many of the standard Java library types. For instance, the type of a string literal "abc" in Scala is

`java.lang.String`, and a thrown exception must be a subclass of `java.lang.Throwable`.

Scala not only re-uses Java's types, but also "dresses them up" to make them nicer. For instance, Scala's strings support methods like `toInt` or `toFloat`, which convert the string to an integer or floating-point number.

So you can write `str.toInt` instead of `Integer.parseInt(str)`. How can this be achieved without breaking interoperability? Java's `String` class certainly has no `toInt` method! In fact, Scala has a very general solution to solve this tension between advanced library design and interoperability.

Scala lets you define implicit conversions, which are always applied when types would not normally match up, or when non-existing members are selected. In the case above, when looking for a `toInt` method on a string, the Scala compiler will find no such member of class `String`, but it will find an implicit conversion that converts a Java `String` to an instance of the Scala class `RichString`, which does define such a member. The conversion will then be applied implicitly before performing the `toInt` operation.

Scala code can also be invoked from Java code. This is sometimes a bit more subtle, because Scala is a richer language than Java, so some of Scala's more advanced features need to be encoded before they can be mapped to Java. [Chapter 29](#) explains the details.

Scala is concise

Scala programs tend to be short. Scala programmers have reported reductions in number of lines of up to a factor of ten compared to Java. These might be extreme cases. A more conservative estimate would be that a typical Scala program should have about half the number of lines of the same program written in Java. Fewer lines of code mean not only less typing, but also less effort at reading and understanding programs and fewer possibilities.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 1.3](#)

## Chapter 1 · A Scalable Language

50

ties of defects. There are several factors that contribute to this reduction in lines of code.

First, Scala's syntax avoids some of the boilerplate that burdens Java programs. For instance, semicolons are optional in Scala and are usually left out. There are also several other areas where Scala's syntax is less noisy.

As an example, compare how you write classes and constructors in Java and Scala. In Java, a class with a constructor often looks like this:

```
// this is Java

class MyClass {

    private int index;

    private String name;

    public MyClass(int index, String name) {

        this.index = index;

        this.name = name;

    }

}
```

In Scala, you would likely write this instead:

```
class MyClass(index: Int, name: String)
```

Given this code, the Scala compiler will produce a class that has two private instance variables, an Int named index and a String named name, and a constructor that takes initial values for those variables as parameters. The

code of this constructor will initialize the two instance variables with the values passed as parameters. In short, you get essentially the same functionality as the more verbose Java version.<sup>9</sup> The Scala class is quicker to write, easier to read, and most importantly, less error prone than the Java class.

Scala's type inference is another factor that contributes to its conciseness. Repetitive type information can be left out, so programs become less cluttered and more readable.

But probably the most important key to compact code is code you don't have to write because it is done in a library for you. Scala gives you many tools to define powerful libraries that let you capture and factor out common behavior. For instance, different aspects of library classes can be separated<sup>9</sup> The only real difference is that the instance variables produced in the Scala case will be final. You'll learn how to make them non-final in [Section 10.6](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 1.3](#)

[Chapter 1 · A Scalable Language](#)

51

out into traits, which can then be mixed together in flexible ways. Or, library methods can be parameterized with operations, which lets you define constructs that are, in effect, your own control structures. Together, these constructs allow the definition of libraries that are both high-level and flexible to use.

Scala is high-level

Programmers are constantly grappling with complexity. To program productively, you must understand the code on which you are working. Overly complex code has been the downfall of many a software project.

Unfortunately, important software usually has complex requirements. Such complexity can't be avoided; it must instead be managed.

Scala helps you manage complexity by letting you raise the level of abstraction in the interfaces you design and use. As an example, imagine you have a String variable name, and you want to find out whether or not that String contains an upper case character. In Java, you might write this:

```
// this is Java

boolean nameHasUpperCase = false;

for (int i = 0; i < name.length(); ++i) {

    if (Character.isUpperCase(name.charAt(i))) {

        nameHasUpperCase = true;

        break;
    }
}
```

Whereas in Scala, you could write this:

```
val nameHasUpperCase = name.exists(_.isUpperCase)
```

The Java code treats strings as low-level entities that are stepped through character by character in a loop. The Scala code treats the same strings as higher-level sequences of characters that can be queried with [predicates](#).

Clearly the Scala code is much shorter and—for trained eyes—easier to understand than the Java code. So the Scala code weighs less heavily on the total complexity budget. It also gives you less opportunity to make mistakes.

The predicate `_.isUpperCase` is an example of a function literal in Scala.10 It describes a function that takes a character argument (represented 10A

function literal can be called a predicate if its result type is Boolean.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 1.3](#)

### [Chapter 1 · A Scalable Language](#)

52

by the underscore character), and tests whether it is an upper case letter.<sup>11</sup>

In principle, such control abstractions are possible in Java as well. You'd need to define an interface that contains a method with the abstracted functionality. For instance, if you wanted to support querying over strings, you might invent an interface, named CharacterProperty, which has just one method, hasProperty:

```
// this is Java

interface CharacterProperty {

    boolean hasProperty(char ch);

}
```

With that interface you could formulate a method exists in Java: It takes a string and CharacterProperty and returns true if there's a character in the string that satisfies the property. You could then invoke exists as follows:

```
// this is Java

exists(name, new CharacterProperty() {

    public boolean hasProperty(char ch) {

        return Character.isUpperCase(ch);

    }
})
```

});

However, all this feels rather heavy. So heavy, in fact, that most Java programmers would not bother. They would just write out the loops and live with the increased complexity in their code. On the other hand, function literals in Scala are really lightweight, so they are used frequently. As you get to know Scala better you'll find more and more opportunities to define and use your own control abstractions. You'll find that this helps avoid code duplication and thus keeps your programs shorter and clearer.

Scala is statically typed

A static type system classifies variables and expressions according to the kinds of values they hold and compute. Scala stands out as a language with a very advanced static type system. Starting from a system of nested class types much like Java's, it allows you to parameterize types with generics, to combine types using intersections, and to hide details of types using abstract 11This use of the underscore as a placeholder for arguments is described in [Section 8.5](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 1.3](#)

[Chapter 1 · A Scalable Language](#)

53

types.12 These give a strong foundation for building and composing your own types, so that you can design interfaces that are at the same time safe and flexible to use.

If you like dynamic languages such as Perl, Python, Ruby, or Groovy, you might find it a bit strange that Scala's static type system is listed as one of its strong points. After all, the absence of a static type system has been cited by some as a major advantage of dynamic languages. The most common arguments against static types are that they make programs too verbose,

prevent programmers from expressing themselves as they wish, and make impossible certain patterns of dynamic modifications of software systems.

However, often these arguments do not go against the idea of static types in general, but against specific type systems, which are perceived to be too verbose or too inflexible. For instance, Alan Kay, the inventor of the Smalltalk language, once remarked: “I’m not against types, but I don’t know of any type systems that aren’t a complete pain, so I still like dynamic typing.”<sup>13</sup>

We hope to convince you in this book that Scala’s type system is far from being a “complete pain.” In fact, it addresses nicely two of the usual concerns about static typing: verbosity is avoided through type inference and flexibility is gained through pattern matching and several new ways to write and compose types. With these impediments out of the way, the classical benefits of static type systems can be better appreciated. Among the most important of these benefits are verifiable properties of program abstractions, safe refactorings, and better documentation.

Verifiable properties.

Static type systems can prove the absence of certain

run-time errors. For instance, they can prove properties like: booleans are never added to integers; private variables are not accessed from outside their class; functions are applied to the right number of arguments; only strings are ever added to a set of strings.

Other kinds of errors are not detected by today’s static type systems.

For instance, they will usually not detect non-terminating functions, array bounds violations, or divisions by zero. They will also not detect that your program does not conform to its specification (assuming there is a spec, that is!). Static type systems have therefore been dismissed by some as not being 12Generics are discussed in [Chapter 19](#), intersections in [Chapter 12](#), and abstract types in

[Chapter 20](#).

13Kay, in an email on the meaning of object-oriented programming.  
[\[Kay03\]](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 1.3

### Chapter 1 · A Scalable Language

54

very useful. The argument goes that since such type systems can only detect simple errors, whereas unit tests provide more extensive coverage, why bother with static types at all? We believe that these arguments miss the point. Although a static type system certainly cannot replace unit testing, it can reduce the number of unit tests needed by taking care of some properties that would otherwise need to be tested. Likewise, unit testing can not replace static typing. After all, as Edsger Dijkstra said, testing can only prove the presence of errors, never their absence.<sup>14</sup> So the guarantees that static typing gives may be simple, but they are real guarantees of a form no amount of testing can deliver.

Safe refactorings.

A static type system provides a safety net that lets you make changes to a codebase with a high degree of confidence. Consider for instance a refactoring that adds an additional parameter to a method. In a statically typed language you can do the change, re-compile your system and simply fix all lines that cause a type error. Once you have finished with this, you are sure to have found all places that need to be changed. The same holds for many other simple refactorings like changing a method name, or moving methods from one class to another. In all cases a static type check will provide enough assurance that the new system works just like the old.

Documentation.

Static types are program documentation that is checked

by the compiler for correctness. Unlike a normal comment, a type annotation can never be out of date (at least not if the source file that contains it has recently passed a compiler). Furthermore, compilers and integrated development environments can make use of type annotations to provide better context help. For instance, an integrated development environment can display all the members available for a selection by determining the static type of the expression on which the selection is made and looking up all members of that type.

Even though static types are generally useful for program documentation, they can sometimes be annoying when they clutter the program. Typically, useful documentation is what readers of a program cannot easily derive by themselves. In a method definition like:

```
def f(x: String) = ...
```

14Dijkstra, “Notes on Structured Programming,” 7. [\[Dij70\]](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 1.4](#)

### [Chapter 1 · A Scalable Language](#)

55

it’s useful to know that f’s argument should be a String. On the other hand, at least one of the two annotations in the following example is annoying:

```
val x: HashMap[Int, String] = new HashMap[Int, String]()
```

Clearly, it should be enough to say just once that x is a HashMap with Ints as keys and Strings as values; there’s no need to repeat the same phrase twice.

Scala has a very sophisticated type inference system that lets you omit almost all type information that’s usually considered annoying. In the previous example, the following two less annoying alternatives would work just as well:

```
val x = new HashMap[Int, String]()
```

```
val x: Map[Int, String] = new HashMap()
```

Type inference in Scala can go quite far. In fact, it's not uncommon for user code to have no explicit types at all. Therefore, Scala programs often look a bit like programs written in a dynamically typed dynamic!typing scripting language. This holds particularly for client application code, which glues together pre-written library components. It's less true for the library components themselves, because these often employ fairly sophisticated types to allow flexible usage patterns. This is only natural. After all, the type signatures of the members that make up the interface of a reusable component should be explicitly given, because they constitute an essential part of the contract between the component and its clients.

## 1.4

### Scala's roots

Scala's design has been influenced by many programming languages and ideas in programming language research. In fact, only a few features of Scala are genuinely new; most have been already applied in some form in other languages. Scala's innovations come primarily from how its constructs are put together. In this section, we list the main influences on Scala's design.

The list cannot be exhaustive—there are simply too many smart ideas around in programming language design to enumerate them all here.

At the surface level, Scala adopts a large part of the syntax of Java and C#, which in turn borrowed most of their syntactic conventions from C and C++. Expressions, statements, and blocks are mostly as in Java, as is the

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 1.4](#)

[Chapter 1 · A Scalable Language](#)

syntax of classes, packages and imports.<sup>15</sup> Besides syntax, Scala adopts other elements of Java, such as its basic types, its class libraries, and its execution model.

Scala also owes much to other languages. Its uniform object model was pioneered by Smalltalk and taken up subsequently by Ruby. Its idea of universal nesting (almost every construct in Scala can be nested inside any other construct) is also present in Algol, Simula, and, more recently in Beta and gbeta. Its uniform access principle for method invocation and field selection comes from Eiffel. Its approach to functional programming is quite similar in spirit to the ML family of languages, which has SML, OCaml, and F# as prominent members. Many higher-order functions in Scala's standard library are also present in ML or Haskell. Scala's implicit parameters were motivated by Haskell's type classes; they achieve analogous results in a more classical object-oriented setting. Scala's actor-based concurrency library was heavily inspired by Erlang.

Scala is not the first language to emphasize scalability and extensibility. The historic root of extensible languages that can span different application areas is Peter Landin's 1966 paper "The Next 700 Programming Languages."<sup>16</sup> (The language described in this paper, Iswim, stands beside Lisp as one of the pioneering functional languages.) The specific idea of treating an infix operator as a function can be traced back to Iswim and Smalltalk.

Another important idea is to permit a function literal (or block) as a parameter, which enables libraries to define control structures. Again, this goes back to Iswim and Smalltalk. Smalltalk and Lisp both have a flexible syntax that has been applied extensively for building internal domain-specific languages. C++ is another scalable language that can be adapted and extended through operator overloading and its template system; compared to Scala it is built on a lower-level, more systems-oriented core.

Scala is also not the first language to integrate functional and object-<sup>15</sup> The major deviation from Java concerns the syntax for type annotations—it's

"variable: Type" instead of "Type variable" in Java. Scala's postfix type syntax resembles Pascal, Modula-2, or Eiffel. The main reason for this

deviation has to do with type inference, which often lets you omit the type of a variable or the return type of a method.

Using the “variable: Type” syntax this is easy—just leave out the colon and the type. But in C-style “Type variable” syntax you cannot simply leave off the type—there would be no marker to start the definition anymore. You’d need some alternative keyword to be a placeholder for a missing type (C# 3.0, which does some type inference, uses var for this purpose).

Such an alternative keyword feels more ad-hoc and less regular than Scala’s approach.

16Landin, “The Next 700 Programming Languages.” [\[Lan66\]](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 1.5

### Chapter 1 · A Scalable Language

57

oriented programming, although it probably goes furthest in this direction.

Other languages that have integrated some elements of functional programming into OOP include Ruby, Smalltalk, and Python. On the Java platform, Pizza, Nice, and Multi-Java have all extended a Java-like core with functional ideas. There are also primarily functional languages that have acquired an object system; examples are OCaml, F#, and PLT-Scheme.

Scala has also contributed some innovations to the field of programming languages. For instance, its abstract types provide a more object-oriented alternative to generic types, its traits allow for flexible component assembly, and its extractors provide a representation-independent way to do pattern matching. These innovations have been presented in papers at programming language conferences in recent years.<sup>17</sup>

1.5

## Conclusion

In this chapter, we gave you a glimpse of what Scala is and how it might help you in your programming. To be sure, Scala is not a silver bullet that will magically make you more productive. To advance, you will need to apply Scala artfully, and that will require some learning and practice. If you’re coming to Scala from Java, the most challenging aspects of learning Scala may involve Scala’s type system (which is richer than Java’s) and its support for functional programming. The goal of this book is to guide you gently up Scala’s learning curve, one step at a time. We think you’ll find it a rewarding intellectual experience that will expand your horizons and make you think differently about program design. Hopefully, you will also gain pleasure and inspiration from programming in Scala.

In the next chapter, we’ll get you started writing some Scala code.

<sup>17</sup>For more information, see [[Ode03](#)], [[Ode05](#)], and [[Emi07](#)] in the bibliography.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 2

### First Steps in Scala

It’s time to write some Scala code. Before we start on the in-depth Scala tutorial, we put in two chapters that will give you the big picture of Scala, and most importantly, get you writing code. We encourage you to actually try out all the code examples presented in this chapter and the next as you go. The best way to start learning Scala is to program in it.

To run the examples in this chapter, you should have a standard Scala installation. To get one, go to <http://www.scala-lang.org/downloads>

and follow the directions for your platform. You can also use a Scala plugin for Eclipse, IntelliJ, or NetBeans, but for the steps in this chapter, we’ll assume you’re using the Scala distribution from [scala-lang.org](http://scala-lang.org).<sup>1</sup>

If you are a veteran programmer new to Scala, the next two chapters should give you enough understanding to enable you to start writing useful programs in Scala. If you are less experienced, some of the material may seem a bit mysterious to you. But don't worry. To get you up to speed quickly, we had to leave out some details. Everything will be explained in a less "fire hose" fashion in later chapters. In addition, we inserted quite a few footnotes in these next two chapters to point you to later sections of the book where you'll find more detailed explanations.

## Step 1. Learn to use the Scala interpreter

The easiest way to get started with Scala is by using the Scala interpreter, an interactive "shell" for writing Scala expressions and programs. Simply type an expression into the interpreter and it will evaluate the expression and print 1We tested the examples in this book with Scala version 2.7.2.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### [Step 1](#)

#### [Chapter 2 · First Steps in Scala](#)

59

the resulting value. The interactive shell for Scala is simply called scala.

You use it by typing scala at a command prompt:<sup>2</sup>

\$ scala

Welcome to Scala version 2.7.2.

Type in expressions to have them evaluated.

Type :help for more information.

scala>

After you type an expression, such as  $1 + 2$ , and hit enter: scala>  $1 + 2$

The interpreter will print:

res0: Int = 3

This line includes:

- an automatically generated or user-defined name to refer to the computed value (res0, which means result 0),
- a colon (:), followed by the type of the expression (Int),
- an equals sign (=),
- the value resulting from evaluating the expression (3).

The type Int names the class Int in the package scala. Packages in Scala are similar to packages in Java: they partition the global namespace and provide a mechanism for information hiding.<sup>3</sup> Values of class Int correspond to Java's int values. More generally, all of Java's primitive types have corresponding classes in the scala package. For example, scala.Boolean corresponds to Java's boolean. scala.Float corresponds to Java's float.

And when you compile your Scala code to Java bytecodes, the Scala compiler will use Java's primitive types where possible to give you the performance benefits of the primitive types.

If you're using Windows, you'll need to type the scala command into the "Command Prompt" DOS box.

<sup>3</sup>If you're not familiar with Java packages, you can think of them as providing a full name for classes. Because Int is a member of package scala, "Int" is the class's simple name, and "scala.Int" is its full name. The details of packages are explained in [Chapter 13](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

*Prepared for tetsu soh*

[Step 2](#)

## Chapter 2 · First Steps in Scala

60

The resX identifier may be used in later lines. For instance, since res0 was set to 3 previously, res0 \* 3 will be 9:

```
scala> res0 * 3
```

```
res1: Int = 9
```

To print the necessary, but not sufficient, Hello, world! greeting, type:

```
scala> println("Hello, world!")
```

```
Hello, world!
```

The println function prints the passed string to the standard output, similar to System.out.println in Java.

### Step 2. Define some variables

Scala has two kinds of variables, vals and vars. A val is similar to a final variable in Java. Once initialized, a val can never be reassigned. A var, by contrast, is similar to a non-final variable in Java. A var can be reassigned throughout its lifetime. Here's a val definition:

```
scala> val msg = "Hello, world!"
```

```
msg: java.lang.String = Hello, world!
```

This statement introduces msg as a name for the string "Hello, world!".

The type of msg is java.lang.String, because Scala strings are implemented by Java's String class.

If you're used to declaring variables in Java, you'll notice one striking difference here: neither java.lang.String nor String appear anywhere in the val definition. This example illustrates type inference, Scala's ability to

figure out types you leave off. In this case, because you initialized msg with a string literal, Scala inferred the type of msg to be String. When the Scala interpreter (or compiler) can infer types, it is often best to let it do so rather than fill the code with unnecessary, explicit type annotations. You can, however, specify a type explicitly if you wish, and sometimes you probably should. An explicit type annotation can both ensure the Scala compiler infers the type you intend, as well as serve as useful documentation for future readers of the code. In contrast to Java, where you specify a variable's type before its name, in Scala you specify a variable's type after its name, separated by a colon. For example:

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Step 2](#)

### [Chapter 2 · First Steps in Scala](#)

61

```
scala> val msg2: java.lang.String = "Hello again, world!"
```

```
msg2: java.lang.String = Hello again, world!
```

Or, since java.lang types are visible with their simple names<sup>4</sup> in Scala programs, simply:

```
scala> val msg3: String = "Hello yet again, world!"
```

```
msg3: String = Hello yet again, world!
```

Going back to the original msg, now that it is defined, you can use it as you'd expect, for example:

```
scala> println(msg)
```

```
Hello, world!
```

What you can't do with msg, given that it is a val, not a var, is reassign it.<sup>5</sup> For example, see how the interpreter complains when you attempt the

following:

```
scala> msg = "Goodbye cruel world!"
```

```
<console>:5: error: reassignment to val
```

```
msg = "Goodbye cruel world!"
```

If reassignment is what you want, you'll need to use a var, as in: scala> var greeting = "Hello, world!"

```
greeting: java.lang.String = Hello, world!
```

Since greeting is a var not a val, you can reassign it later. If you are feeling grouchy later, for example, you could change your greeting to: scala> greeting = "Leave me alone, world!"

```
greeting: java.lang.String = Leave me alone, world!
```

To enter something into the interpreter that spans multiple lines, just keep typing after the first line. If the code you typed so far is not complete, the interpreter will respond with a vertical bar on the next line.

4The simple name of java.lang.String is String.

5In the interpreter, however, you can define a new val with a name that was already used before. This mechanism is explained in [Section 7.7](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Step 3](#)

[Chapter 2 · First Steps in Scala](#)

62

```
scala> val multiLine =
```

```
|
```

"This is the next line."

multiLine: java.lang.String = This is the next line.

If you realize you have typed something wrong, but the interpreter is still waiting for more input, you can escape by pressing enter twice: scala> val oops =

|

|

You typed two blank lines.

Starting a new command.

scala>

In the rest of the book, we'll leave out the vertical bars to make the code easier to read (and easier to copy and paste from the PDF eBook into the interpreter).

### Step 3. Define some functions

Now that you've worked with Scala variables, you'll probably want to write some functions. Here's how you do that in Scala:

```
scala> def max(x: Int, y: Int): Int = {
```

```
    if (x > y) x
```

```
    else y
```

```
}
```

```
max: (Int,Int)Int
```

Function definitions start with `def`. The function's name, in this case `max`, is followed by a comma-separated list of parameters in parentheses. A type

annotation must follow every function parameter, preceded by a colon, because the Scala compiler (and interpreter, but from now on we'll just say compiler) does not infer function parameter types. In this example, the function named max takes two parameters, x and y, both of type Int. After the close parenthesis of max's parameter list you'll find another “: Int” type annotation.

This one defines the result type of the max function itself.<sup>6</sup> Following the  
6In Java, the type of the value returned from a method is its return type. In Scala, that same concept is called result type.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Step 3](#)

[Chapter 2 · First Steps in Scala](#)

63

“def” starts a function definition

function name

parameter list in parentheses

function's result type

equals sign

def max(x: Int, y: Int): Int = {

if (x > y)

x

else

function body

y

in curly braces

}

Figure 2.1 · The basic form of a function definition in Scala.

function's result type is an equals sign and pair of curly braces that contain the body of the function. In this case, the body contains a single if expression, which selects either x or y, whichever is greater, as the result of the max function. As demonstrated here, Scala's if expression can result in a value, similar to Java's ternary operator. For example, the Scala expression

“if ( $x > y$ ) x else y” behaves similarly to “ $(x > y) ? x : y$ ” in Java. The equals sign that precedes the body of a function hints that in the functional world view, a function defines an expression that results in a value. The basic structure of a function is illustrated in [Figure 2.1](#).

Sometimes the Scala compiler will require you to specify the result type of a function. If the function is [recursive](#),<sup>7</sup> for example, you must explicitly specify the function's result type. In the case of max however, you may leave the result type off and the compiler will infer it.<sup>8</sup> Also, if a function consists of just one statement, you can optionally leave off the curly braces. Thus, you could alternatively write the max function like this: scala> def max2(x: Int, y: Int) = if ( $x > y$ ) x else y max2: (Int,Int)Int

7A function is recursive if it calls itself.

8Nevertheless, it is often a good idea to indicate function result types explicitly, even when the compiler doesn't require it. Such type annotations can make the code easier to read, because the reader need not study the function body to figure out the inferred result type.

## Chapter 2 · First Steps in Scala

64

Once you have defined a function, you can call it by name, as in: scala>  
max(3, 5)

res6: Int = 5

Here's the definition of a function that takes no parameters and returns no interesting result:

```
scala> def greet() = println("Hello, world!") greet: ()Unit
```

When you define the greet() function, the interpreter will respond with greet: ()Unit. “greet” is, of course, the name of the function. The empty parentheses indicate the function takes no parameters. And Unit is greet's result type. A result type of Unit indicates the function returns no interesting value. Scala's Unit type is similar to Java's void type, and in fact every void-returning method in Java is mapped to a Unit-returning method in Scala. Methods with the result type of Unit, therefore, are only executed for their side effects. In the case of greet(), the side effect is a friendly greeting printed to the standard output.

In the next step, you'll place Scala code in a file and run it as a script. If you wish to exit the interpreter, you can do so by entering :quit or :q.

```
scala> :quit
```

\$

### Step 4. Write some Scala scripts

Although Scala is designed to help programmers build very large-scale systems, it also scales down nicely to scripting. A script is just a sequence of statements in a file that will be executed sequentially. Put this into a file named hello.scala:

```
println("Hello, world, from a script!")
```

then run:<sup>9</sup>

<sup>9</sup>You can run scripts without typing “scala” on Unix and Windows using a “pound-bang” syntax, which is shown in [Appendix A](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Step 5](#)

### [Chapter 2 · First Steps in Scala](#)

65

\$ scala hello.scala

And you should get yet another greeting:

Hello, world, from a script!

Command line arguments to a Scala script are available via a Scala array named args. In Scala, arrays are zero based, and you access an element by specifying an index in parentheses. So the first element in a Scala array named steps is steps(0), not steps[0], as in Java. To try this out, type the following into a new file named helloarg.scala:

```
// Say hello to the first argument  
  
println("Hello, "+ args(0) +"!")
```

then run:

\$ scala helloarg.scala planet

In this command, "planet" is passed as a command line argument, which is accessed in the script as args(0). Thus, you should see: Hello, planet!

Note that this script included a comment. The Scala compiler will ignore characters between // and the next end of line and any characters between

/\* and \*/. This example also shows Strings being concatenated with the + operator. This works as you'd expect. The expression "Hello, "+"world!" will result in the string "Hello, world!".<sup>10</sup>

## Step 5. Loop with while; decide with if

To try out a while, type the following into a file named printargs.scala: var i = 0

```
while (i < args.length) {  
    println(args(i))  
    i += 1  
}
```

<sup>10</sup>You can also put spaces around the plus operator, as in "Hello, " + "world!". In this book, however, we'll leave the space off between '+' and string literals.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Step 5](#)

[Chapter 2 · First Steps in Scala](#)

66

Note

Although the examples in this section help explain while loops, they do not demonstrate the best Scala style. In the next section, you'll see better approaches that avoid iterating through arrays with indexes.

This script starts with a variable definition, var i = 0. Type inference gives i the type scala.Int, because that is the type of its initial value, 0.

The while construct on the next line causes the [block](#) (the code between the curly braces) to be repeatedly executed until the boolean expression `i < args.length` is false. `args.length` gives the length of the `args` array.

The block contains two statements, each indented two spaces, the recommended indentation style for Scala. The first statement, `println(args(i))`, prints out the `i`th command line argument. The second statement, `i += 1`, increments `i` by one. Note that Java's `++i` and `i++` don't work in Scala. To increment in Scala, you need to say either `i = i + 1` or `i += 1`. Run this script with the following command:

```
$ scala printargs.scala Scala is fun
```

And you should see:

Scala

is

fun

For even more fun, type the following code into a new file with the name `echoargs.scala`:

```
var i = 0

while (i < args.length) {

    if (i != 0)

        print(" ")

    print(args(i))

    i += 1

}

println()
```

In this version, you've replaced the `println` call with a `print` call, so that all the arguments will be printed out on the same line. To make this readable, you've inserted a single space before each argument except the first via the

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Step 6

### Chapter 2 · First Steps in Scala

67

`if (i != 0)` construct. Since `i != 0` will be false the first time through the while loop, no space will get printed before the initial argument. Lastly, you've added one more `println` to the end, to get a line return after printing out all the arguments. Your output will be very pretty indeed. If you run this script with the following command:

```
$ scala echoargs.scala Scala is even more fun
```

You'll get:

Scala is even more fun

Note that in Scala, as in Java, you must put the boolean expression for a while or an if in parentheses. (In other words, you can't say in Scala things like `if i < 10` as you can in a language such as Ruby. You must say `if (i < 10)` in Scala.) Another similarity to Java is that if a block has only one statement, you can optionally leave off the curly braces, as demonstrated by the if statement in `echoargs.scala`. And although you haven't seen any of them, Scala does use semicolons to separate statements as in Java, except that in Scala the semicolons are very often optional, giving some welcome relief to your right little finger. If you had been in a more verbose mood, therefore, you could have written the `echoargs.scala` script as follows: `var i = 0;`

```
while (i < args.length) {
```

```
    if (i != 0) {
```

```
print(" ");
}

print(args(i));
i += 1;

}

println();
```

## Step 6. Iterate with foreach and for

Although you may not have realized it, when you wrote the while loops in the previous step, you were programming in an imperative style. In the imperative style, which is the style you normally use with languages like Java, C++, and C, you give one imperative command at a time, iterate with loops,

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### [Step 6](#)

#### [Chapter 2 · First Steps in Scala](#)

68

and often mutate state shared between different functions. Scala enables you to program imperatively, but as you get to know Scala better, you'll likely often find yourself programming in a more functional style. In fact, one of the main aims of this book is to help you become as comfortable with the functional style as you are with imperative style.

One of the main characteristics of a functional language is that functions are first class constructs, and that's very true in Scala. For example, another (far more concise) way to print each command line argument is:

```
args.foreach(arg => println(arg))
```

In this code, you call the foreach method on args, and pass in a function. In this case, you’re passing in a [function literal](#) that takes one parameter named arg. The body of the function is `println(arg)`. If you type the above code into a new file named `pa.scala`, and execute with the command: `$ scala pa.scala` Concise is nice

You should see:

Concise

is

nice

In the previous example, the Scala interpreter infers the type of arg to be `String`, since `String` is the element type of the array on which you’re calling `foreach`. If you’d prefer to be more explicit, you can mention the type name, but when you do you’ll need to wrap the argument portion in parentheses (which is the normal form of the syntax anyway): `args.foreach((arg: String) => println(arg))`

Running this script has the same behavior as the previous one.

If you’re in the mood for more conciseness instead of more explicitness, you can take advantage of a special shorthand in Scala. If a function literal consists of one statement that takes a single argument, you need not explicitly name and specify the argument.<sup>11</sup> Thus, the following code also works: `args.foreach(println)`

<sup>11</sup>This shorthand, called a partially applied function, is described in [Section 8.6.](#)

function  
right  
function  
parameters  
arrow  
body  
in parentheses  
(x: Int, y: Int) => x + y

Figure 2.2 · The syntax of a function literal in Scala.

To summarize, the syntax for a function literal is a list of named parameters, in parentheses, a right arrow, and then the body of the function. This syntax is illustrated in [Figure 2.2](#).

Now, by this point you may be wondering what happened to those trusty for loops you have been accustomed to using in imperative languages such as Java or C. In an effort to guide you in a functional direction, only a functional relative of the imperative for (called a for expression) is available in Scala. While you won't see their full power and expressiveness until you reach (or peek ahead to) [Section 7.3](#), we'll give you a glimpse here. In a new file named forargs.scala, type the following:

```
for (arg <- args)
  println(arg)
```

The parentheses after the “for” contain arg <- args.<sup>12</sup> To the right of the <- symbol is the familiar args array. To the left of <- is “arg”, the name of a val, not a var. (Because it is always a val, you just write “arg” by itself, not

“val arg”.) Although arg may seem to be a var, because it will get a new value on each iteration, it really is a val: arg can’t be reassigned inside the body of the for expression. Instead, for each element of the args array, a new arg val will be created and initialized to the element value, and the body of the for will be executed.

If you run the forargs.scala script with the command:

```
$ scala forargs.scala for arg in args
```

12You can say “in” for the <- symbol. You’d read for (arg <- args), therefore, as “for arg in args.”

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Conclusion](#)

### [Chapter 2 · First Steps in Scala](#)

70

You’ll see:

for

arg

in

args

Scala’s for expression can do much more than this, but this example is enough to get you started. We’ll show you more about for in [Section 7.3](#)

and [Chapter 23](#).

Conclusion

In this chapter, you learned some Scala basics and, hopefully, took advantage of the opportunity to write a bit of Scala code. In the next chapter, we'll continue this introductory overview and get into more advanced topics.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 3

### Next Steps in Scala

This chapter continues the previous chapter's introduction to Scala. In this chapter, we'll introduce some more advanced features. When you complete this chapter, you should have enough knowledge to enable you to start writing useful scripts in Scala. As with the previous chapter, we recommend you try out these examples as you go. The best way to get a feel for Scala is to start writing Scala code.

#### Step 7. Parameterize arrays with types

In Scala, you can instantiate objects, or class instances, using new. When you instantiate an object in Scala, you can parameterize it with values and types. Parameterization means “configuring” an instance when you create it.

You parameterize an instance with values by passing objects to a constructor in parentheses. For example, the following Scala code instantiates a new java.math.BigInteger and parameterizes it with the value "12345": val big = new java.math.BigInteger("12345")

You parameterize an instance with types by specifying one or more types in square brackets. An example is shown in [Listing 3.1](#). In this example, greetStrings is a value of type Array[String] (an “array of string”) that is initialized to length 3 by parameterizing it with the value 3 in the first line of code. If you run the code in [Listing 3.1](#) as a script, you'll see yet another Hello, world! greeting. Note that when you parameterize an instance with both a type and a value, the type comes first in its square brackets, followed by the value in parentheses.

## Step 7

### Chapter 3 · Next Steps in Scala

72

```
val greetStrings = new Array[String](3)  
greetStrings(0) = "Hello"  
greetStrings(1) = ", "  
greetStrings(2) = "world!\n"  
for (i <- 0 to 2)  
  print(greetStrings(i))
```

Listing 3.1 · Parameterizing an array with a type.

Note

Although the code in [Listing 3.1](#) demonstrates important concepts, it does not show the recommended way to create and initialize an array in Scala.

You'll see a better way in [Listing 3.2](#) on [page 75](#).

Had you been in a more explicit mood, you could have specified the type of `greetStrings` explicitly like this:

```
val greetStrings: Array[String] = new Array[String](3)
```

Given Scala's type inference, this line of code is semantically equivalent to the actual first line of [Listing 3.1](#). But this form demonstrates that while the type parameterization portion (the type names in square brackets) forms part of the type of the instance, the value parameterization part (the values

in parentheses) does not. The type of greetStrings is Array[String], not Array[String](3).

The next three lines of code in [Listing 3.1](#) initialize each element of the greetStrings array:

```
greetStrings(0) = "Hello"
```

```
greetStrings(1) = ", "
```

```
greetStrings(2) = "world!\n"
```

As mentioned previously, arrays in Scala are accessed by placing the index inside parentheses, not square brackets as in Java. Thus the zeroth element of the array is greetStrings(0), not greetStrings[0].

These three lines of code illustrate an important concept to understand about Scala concerning the meaning of val. When you define a variable with val, the variable can't be reassigned, but the object to which it refers could potentially still be changed. So in this case, you couldn't reassign

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Step 7](#)

[Chapter 3 · Next Steps in Scala](#)

73

greetStrings to a different array; greetStrings will always point to the same Array[String] instance with which it was initialized. But you can change the elements of that Array[String] over time, so the array itself is mutable.

The final two lines in [Listing 3.1](#) contain a for expression that prints out each greetStrings array element in turn:

```
for (i <- 0 to 2)
```

```
  print(greetStrings(i))
```

The first line of code in this for expression illustrates another general rule of Scala: if a method takes only one parameter, you can call it without a dot or parentheses. The `to` in this example is actually a method that takes one `Int` argument. The code `0 to 2` is transformed into the method call `(0).to(2).1`. Note that this syntax only works if you explicitly specify the receiver of the method call. You cannot write “`println 10`”, but you can write “`Console println 10`”.

Scala doesn’t technically have operator overloading, because it doesn’t actually have operators in the traditional sense. Instead, characters such as

`+, -, *, and /` can be used in method names. Thus, when you typed `1 + 2`

into the Scala interpreter in Step 1, you were actually invoking a method named `+` on the `Int` object `1`, passing in `2` as a parameter. As illustrated in [Figure 3.1](#), you could alternatively have written `1 + 2` using traditional method invocation syntax, `(1).+(2)`.

Another important idea illustrated by this example will give you insight into why arrays are accessed with parentheses in Scala. Scala has fewer special cases than Java. Arrays are simply instances of classes like any other class in Scala. When you apply parentheses surrounding one or more values to a variable, Scala will transform the code into an invocation of a method named `apply` on that variable. So `greetStrings(i)` gets transformed into `greetStrings.apply(i)`. Thus accessing an element of an array in Scala is simply a method call like any other. This principle is not restricted to arrays: any application of an object to some arguments in parentheses will be transformed to an `apply` method call. Of course this will compile only if that type of object actually defines an `apply` method. So it’s not a special case; it’s a general rule.

1This `to` method actually returns not an array but a different kind of sequence, containing the values `0`, `1`, and `2`, which the for expression iterates over. Sequences and other collections will be described in [Chapter 17](#).

## Step 7

### Chapter 3 · Next Steps in Scala

74

$1 + 2$

Int

invoking on 1

object

Passing the Int

a method

with value 1

object 2 to the

named ‘+’

‘+’ method

$(1).+(2)$

Figure 3.1 · All operations are method calls in Scala.

Similarly, when an assignment is made to a variable to which parentheses and one or more arguments have been applied, the compiler will transform that into an invocation of an update method that takes the arguments in parentheses as well as the object to the right of the equals sign. For example: `greetStrings(0) = "Hello"`

will be transformed into:

`greetStrings.update(0, "Hello")`

Thus, the following is semantically equivalent to the code in [Listing 3.1](#):

```
val greetStrings = new Array[String](3)

greetStrings.update(0, "Hello")

greetStrings.update(1, ", ")

greetStrings.update(2, "world!\n")

for (i <- 0.to(2))

print(greetStrings.apply(i))
```

Scala achieves a conceptual simplicity by treating everything, from arrays to expressions, as objects with methods. You don't have to remember special cases, such as the differences in Java between primitive and their corresponding wrapper types, or between arrays and regular objects. Moreover,

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Step 8](#)

[Chapter 3](#) · [Next Steps in Scala](#)

75

this uniformity does not incur a significant performance cost. The Scala compiler uses Java arrays, primitive types, and native arithmetic where possible in the compiled code.

Although the examples you've seen so far in this step compile and run just fine, Scala provides a more concise way to create and initialize arrays that you would normally use. It looks as shown in [Listing 3.2](#). This code creates a new array of length three, initialized to the passed strings,

"zero", "one", and "two". The compiler infers the type of the array to be `Array[String]`, because you passed strings to it.

```
val numNames = Array("zero", "one", "two") Listing 3.2 · Creating and initializing an array.
```

What you’re actually doing in [Listing 3.2](#) is calling a factory method, named apply, which creates and returns the new array. This apply method takes a variable number of arguments<sup>2</sup> and is defined on the Array companion object. You’ll learn more about companion objects in [Section 4.3](#). If you’re a Java programmer, you can think of this as calling a static method named apply on class Array. A more verbose way to call the same apply method is:

```
val numNames2 = Array.apply("zero", "one", "two") Step 8. Use lists
```

One of the big ideas of the functional style of programming is that methods should not have side effects. A method’s only act should be to compute and return a value. Some benefits gained when you take this approach are that methods become less entangled, and therefore more reliable and reusable.

Another benefit (in a statically typed language) is that everything that goes into and out of a method is checked by a type checker, so logic errors are more likely to manifest themselves as type errors. Applying this functional philosophy to the world of objects means making objects immutable.

As you’ve seen, a Scala array is a mutable sequence of objects that all share the same type. An `Array[String]` contains only strings, for example.

<sup>2</sup>Variable-length argument lists, or repeated parameters, are described in [Section 8.8](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Step 8](#)

[Chapter 3](#) · [Next Steps in Scala](#)

76

Although you can’t change the length of an array after it is instantiated, you can change its element values. Thus, arrays are mutable objects.

For an immutable sequence of objects that share the same type you can use Scala's List class. As with arrays, a List[String] contains only strings. Scala's List, scala.List, differs from Java's java.util.List type in that Scala Lists are always immutable (whereas Java Lists can be mutable). More generally, Scala's List is designed to enable a functional style of programming. Creating a list is easy. [Listing 3.3](#) shows how: val oneTwoThree = List(1, 2, 3)

Listing 3.3 · Creating and initializing a list.

The code in [Listing 3.3](#) establishes a new val named oneTwoThree, initialized with a new List[Int] with the integer elements 1, 2, and 3. Because Lists are immutable, they behave a bit like Java strings: when you call a method on a list that might seem by its name to imply the list will mutate, it instead creates and returns a new list with the new value. For example, List has a method named ‘::’ for list concatenation. Here's how you use it: val oneTwo = List(1, 2)

```
val threeFour = List(3, 4)
```

```
val oneTwoThreeFour = oneTwo :: threeFour
```

```
println(""+ oneTwo + " and "+ threeFour + " were not mutated.")  
println("Thus, "+ oneTwoThreeFour + " is a new list.")
```

If you run this script, you'll see:

List(1, 2) and List(3, 4) were not mutated.

Thus, List(1, 2, 3, 4) is a new list.

Perhaps the most common operator you'll use with lists is ‘::’, which is pronounced “cons.” Cons prepends a new element to the beginning of an existing list, and returns the resulting list. For example, if you run this script: val twoThree = List(2, 3)

```
val oneTwoThree = 1 :: twoThree
```

```
println(oneTwoThree)
```

<sup>3</sup>You don't need to say new List because "List.apply()" is defined as a factory method on the scala.List companion object. You'll read more on companion objects in [Section 4.3](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Step 8](#)

### [Chapter 3 · Next Steps in Scala](#)

77

You'll see:

List(1, 2, 3)

Note

In the expression "1 :: twoThree", :: is a method of its right operand, the list, twoThree. You might suspect there's something amiss with the associativity of the :: method, but it is actually a simple rule to remember: If a method is used in operator notation, such as a \* b, the method is invoked on the left operand, as in a.\*(b)—unless the method name ends in a colon. If the method name ends in a colon, the method is invoked on the right operand. Therefore, in 1 :: twoThree, the :: method is invoked on twoThree, passing in 1, like this: twoThree.::(1).

Operator associativity will be described in more detail in [Section 5.8](#).

Given that a shorthand way to specify an empty list is Nil, one way to initialize new lists is to string together elements with the cons operator, with Nil as the last element.<sup>4</sup> For example, the following script will produce the same output as the previous one, "List(1, 2, 3)":

```
val oneTwoThree = 1 :: 2 :: 3 :: Nil
```

```
println(oneTwoThree)
```

Scala's List is packed with useful methods, many of which are shown in

[Table 3.1.](#) The full power of lists will be revealed in [Chapter 16.](#)

Why not append to lists?

Class List does not offer an append operation, because the time it takes to append to a list grows linearly with the size of the list, whereas prepending with `::` takes constant time. Your options if you want to build a list by appending elements is to prepend them, then when you're done call `reverse`; or use a ListBuffer, a mutable list that does offer an append operation, and when you're done call `toList`. ListBuffer will be described in [Section 22.2.](#)

The reason you need Nil at the end is that `::` is defined on class List. If you try to just say `1 :: 2 :: 3`, it won't compile because 3 is an Int, which doesn't have a `::` method.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Step 8](#)

[Chapter 3 · Next Steps in Scala](#)

78

Table 3.1 · Some List methods and usages

What it is

What it does

List() or Nil

The empty List

List("Cool", "tools", "rule") Creates a new List[String] with the three values "Cool", "tools", and "rule"

```
val thrill = "Will" :: "fill" ::
```

Creates a new List[String] with the

```
"until" :: Nil
```

three values "Will", "fill", and

```
"until"
```

List("a", "b") :: List("c", "d") Concatenates two lists (returns a new

List[String] with values "a", "b",

```
"c", and "d")
```

```
thrill(2)
```

Returns the element at index 2 (zero

based) of the thrill list (returns

```
"until")
```

```
thrill.count(s => s.length == 4)
```

Counts the number of string elements in

thrill that have length 4 (returns 2)

```
thrill.drop(2)
```

Returns the thrill list without its first 2

elements (returns List("until"))

```
thrill.dropRight(2)
```

Returns the thrill list without its

rightmost 2 elements (returns

List("Will"))

thrill.exists(s => s == "until")

Determines whether a string element

exists in thrill that has the value

"until" (returns true)

thrill.filter(s => s.length == 4)

Returns a list of all elements, in order, of

the thrill list that have length 4 (returns

List("Will", "fill"))

thrill.forall(s =>

Indicates whether all elements in the

s.endsWith("l"))

thrill list end with the letter "l"

(returns true)

thrill.foreach(s => print(s))

Executes the print statement on each of

the strings in the thrill list (prints

"Willfilluntil")

## Step 8

### Chapter 3 · Next Steps in Scala

79

Table 3.1 · continued

`thrill.foreach(print)`

Same as the previous, but more concise

(also prints "Willfilluntil")

`thrill.head`

Returns the first element in the thrill

list (returns "Will")

`thrill.init`

Returns a list of all but the last element in

the thrill list (returns

`List("Will", "fill")`

`thrill.isEmpty`

Indicates whether the thrill list is

empty (returns false)

`thrill.last`

Returns the last element in the thrill

list (returns "until")

`thrill.length`

Returns the number of elements in the

`thrill` list (returns 3)

`thrill.map(s => s + "y")`

Returns a list resulting from adding a "y"

to each string element in the `thrill` list

(returns

`List("Willy", "filly", "untily")) thrill.mkString(", ")`

Makes a string with the elements of the

list (returns "Will, fill, until")

`thrill.remove(s => s.length == 4)`

Returns a list of all elements, in order, of

the `thrill` list except those that have

length 4 (returns `List("until")`)

`thrill.reverse`

Returns a list containing all elements of

the `thrill` list in reverse order (returns

`List("until", "fill", "Will")) thrill.sort((s, t) =>`

Returns a list containing all elements of

`s.charAt(0).toLowerCase <`

the thrill list in alphabetical order of

t.charAt(0).toLowerCase()

the first character lowercased (returns

List("fill", "until", "Will")) thrill.tail

Returns the thrill list minus its first

element (returns

List("fill", "until"))

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

*Prepared for tetsu soh*

## [Step 9](#)

### [Chapter 3 · Next Steps in Scala](#)

80

#### Step 9. Use tuples

Another useful container object is the tuple. Like lists, tuples are immutable, but unlike lists, tuples can contain different types of elements. Whereas a list might be a List[Int] or a List[String], a tuple could contain both an integer and a string at the same time. Tuples are very useful, for example, if you need to return multiple objects from a method. Whereas in Java you would often create a JavaBean-like class to hold the multiple return values, in Scala you can simply return a tuple. And it is simple: to instantiate a new tuple that holds some objects, just place the objects in parentheses, separated by commas. Once you have a tuple instantiated, you can access its elements individually with a dot, underscore, and the one-based index of the element.

An example is shown in [Listing 3.4:](#)

```
val pair = (99, "Luftballons")
```

```
println(pair._1)
```

```
println(pair._2)
```

Listing 3.4 · Creating and using a tuple.

In the first line of [Listing 3.4](#), you create a new tuple that contains the integer 99, as its first element, and the string, "Luftballons", as its second element. Scala infers the type of the tuple to be Tuple2[Int, String], and gives that type to the variable pair as well. In the second line, you access the \_1 field, which will produce the first element, 99. The “.” in the second line is the same dot you’d use to access a field or invoke a method. In this case you are accessing a field named \_1. If you run this script, you’ll see: 99

```
Luftballons
```

The actual type of a tuple depends on the number of elements it contains and the types of those elements. Thus, the type of (99, "Luftballons") is Tuple2[Int, String]. The type of ('u', 'r', "the", 1, 4, "me") is Tuple6[Char, Char, String, Int, Int, String].<sup>5</sup>

<sup>5</sup>Although conceptually you could create tuples of any length, currently the Scala library only defines them up to Tuple22.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Step 10](#)

[Chapter 3](#) · [Next Steps in Scala](#)

81

Accessing the elements of a tuple

You may be wondering why you can’t access the elements of a tuple like the elements of a list, for example, with “pair(0)”. The reason is that a list’s apply method always returns the same type, but each element of a tuple

may be a different type: `_1` can have one result type, `_2` another, and so on. These `_N` numbers are one-based, instead of zero-based, because starting with 1 is a tradition set by other languages with statically typed tuples, such as Haskell and ML.

## Step 10. Use sets and maps

Because Scala aims to help you take advantage of both functional and imperative styles, its collections libraries make a point to differentiate between mutable and immutable collection classes. For example, arrays are always mutable, whereas lists are always immutable. When it comes to sets and maps, Scala also provides mutable and immutable alternatives, but in a different way. For sets and maps, Scala models mutability in the class hierarchy.

For example, the Scala API contains a base trait for sets, where a trait is similar to a Java interface. (You'll find out more about traits in [Chapter 12](#).)

Scala then provides two subtraits, one for mutable sets and another for immutable sets. As you can see in [Figure 3.2](#), these three traits all share the same simple name, `Set`. Their fully qualified names differ, however, because each resides in a different package. Concrete set classes in the Scala API, such as the `HashSet` classes shown in [Figure 3.2](#), extend either the mutable or immutable `Set` trait. (Although in Java you “implement” interfaces, in Scala you “extend” or “mix in” traits.) Thus, if you want to use a `HashSet`, you can choose between mutable and immutable varieties depending upon your needs. The default way to create a set is shown in [Listing 3.5](#):

```
var jetSet = Set("Boeing", "Airbus") jetSet += "Lear"  
println(jetSet.contains("Cessna"))
```

**Listing 3.5 · Creating, initializing, and using an immutable set.**

In the first line of code in [Listing 3.5](#), you define a new var named

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Step 10

### Chapter 3 · Next Steps in Scala

82

scala.collection

Set

«trait»

scala.collection.immutable

scala.collection.mutable

Set

Set

«trait»

«trait»

scala.collection.immutable

scala.collection.mutable

HashSet

HashSet

Figure 3.2 · Class hierarchy for Scala sets.

jetSet, and initialize it with an immutable set containing the two strings,

"Boeing" and "Airbus". As this example shows, you can create sets in Scala similarly to how you create lists and arrays: by invoking a factory method named apply on a Set companion object. In [Listing 3.5](#), you invoke apply

on the companion object for `scala.collection.immutable.Set`, which returns an instance of a default, immutable Set. The Scala compiler infers `jetSet`'s type to be the immutable `Set[String]`.

To add a new element to a set, you call `+` on the set, passing in the new element. Both mutable and immutable sets offer a `+` method, but their behavior differs. Whereas a mutable set will add the element to itself, an immutable set will create and return a new set with the element added. In [Listing 3.5](#),

you're working with an immutable set, thus the `+` invocation will yield a brand new set. Although mutable sets offer an actual `+=` method, immutable sets do not. In this case, the second line of code, "`jetSet += "Lear"`", is essentially a shorthand for:

```
jetSet = jetSet + "Lear"
```

Thus, in the second line of [Listing 3.5](#), you reassign the `jetSet` var with a new set containing `"Boeing"`, `"Airbus"`, and `"Lear"`. Finally, the last line

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Step 10](#)

### [Chapter 3 · Next Steps in Scala](#)

83

of [Listing 3.5](#) prints out whether or not the set contains the string `"Cessna"`.

(As you'd expect, it prints `false`.)

If you want a mutable set, you'll need to use an import, as shown in

## [Listing 3.6:](#)

```
import scala.collection.mutable.Set
```

```
val movieSet = Set("Hitch", "Poltergeist") movieSet += "Shrek"
```

```
println(movieSet)
```

Listing 3.6 · Creating, initializing, and using a mutable set.

In the first line of [Listing 3.6](#) you import the mutable Set. As with Java, an import statement allows you to use a simple name, such as Set, instead of the longer, fully qualified name. As a result, when you say Set on the third line, the compiler knows you mean scala.collection.mutable.Set. On that line, you initialize movieSet with a new mutable set that contains the strings "Hitch" and "Poltergeist". The subsequent line adds "Shrek"

to the mutable set by calling the += method on the set, passing in the string

"Shrek". As mentioned previously, += is an actual method defined on mutable sets. Had you wanted to, instead of writing movieSet += "Shrek", therefore, you could have written movieSet.+=( "Shrek").6

Although the default set implementations produced by the mutable and immutable Set factory methods shown thus far will likely be sufficient for most situations, occasionally you may want an explicit set class.

Fortunately, the syntax is similar. Simply import that class you need, and use the factory method on its companion object. For example, if you need an immutable HashSet, you could do this:

```
import scala.collection.immutable.HashSet
```

```
val hashSet = HashSet("Tomatoes", "Chilies") println(hashSet +  
"Coriander")
```

Another useful collection class in Scala is Map. As with sets, Scala provides mutable and immutable versions of Map, using a class hierarchy. As Because the set in Listing 3.6 is mutable, there is no need to reassign movieSet, which is why it can be a val. By contrast, using += with the immutable set in Listing 3.5 required reassigning jetSet, which is why it must be a var.

## Step 10

### Chapter 3 · Next Steps in Scala

84

scala.collection

Map

«trait»

scala.collection.immutable

scala.collection.mutable

Map

Map

«trait»

«trait»

scala.collection.immutable

scala.collection.mutable

HashMap

HashMap

Figure 3.3 · Class hierarchy for Scala maps.

you can see in [Figure 3.3](#), the class hierarchy for maps looks a lot like the one for sets. There's a base Map trait in package scala.collection, and two subtrait Maps: a mutable Map in scala.collection.mutable and an immutable one in scala.collection.immutable.

Implementations of Map, such as the HashMaps shown in the class hierarchy in [Figure 3.3](#), extend either the mutable or immutable trait. You can create and initialize maps using factory methods similar to those used for arrays, lists, and sets. For example, [Listing 3.7](#) shows a mutable map in action:

```
import scala.collection.mutable.Map  
  
val treasureMap = Map[Int, String]()  
  
treasureMap += (1 -> "Go to island.")  
  
treasureMap += (2 -> "Find big X on ground.") treasureMap += (3 ->  
"Dig.")  
  
println(treasureMap(2))
```

Listing 3.7 · Creating, initializing, and using a mutable map.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Step 10](#)

[Chapter 3](#) · [Next Steps in Scala](#)

85

On the first line of [Listing 3.7](#), you import the mutable Map. You then define a val named treasureMap and initialize it with an empty mutable Map that has integer keys and string values. The map is empty because you pass nothing to the factory method (the parentheses in “Map[Int, String]()”

are empty).<sup>7</sup> On the next three lines you add key/value pairs to the map using the -> and += methods. As illustrated previously, the Scala compiler transforms a binary operation expression like 1 -> "Go to island." into (1).->("Go to island."). Thus, when you say 1 -> "Go to island.", you are actually calling a method named -> on an integer with the value 1, passing in a string with the value "Go to island." This -> method, which you can invoke on any object in a Scala program, returns a two-element tuple

containing the key and value.<sup>8</sup> You then pass this tuple to the `+=` method of the map object to which `treasureMap` refers. Finally, the last line prints the value that corresponds to the key 2 in the `treasureMap`. If you run this code, it will print:

Find big X on ground.

If you prefer an immutable map, no import is necessary, as `immutable` is the default map. An example is shown in [Listing 3.8](#):

```
val romanNumeral = Map(  
    1 -> "I", 2 -> "II", 3 -> "III", 4 -> "IV", 5 -> "V"  
)  
println(romanNumeral(4))
```

[Listing 3.8](#) · Creating, initializing, and using an immutable map.

Given there are no imports, when you say `Map` in the first line of [List-](#)

[ing 3.8](#), you'll get the default: a `scala.collection.immutable.Map`. You pass five key/value tuples to the map's factory method, which returns an immutable Map containing the passed key/value pairs. If you run the code in

[Listing 3.8](#) it will print “IV”.

<sup>7</sup>The explicit type parameterization, “[`Int`, `String`]”, is required in [Listing 3.7](#) because without any values passed to the factory method, the compiler is unable to infer the map's type parameters. By contrast, the compiler can infer the type parameters from the values passed to the map factory shown in [Listing 3.8](#), thus no explicit type parameters are needed.

<sup>8</sup>The Scala mechanism that allows you to invoke `->` on any object, implicit conversion, will be covered in [Chapter 21](#).

## Step 11

### Chapter 3 · Next Steps in Scala

86

#### Step 11. Learn to recognize the functional style

As mentioned in [Chapter 1](#), Scala allows you to program in an imperative style, but encourages you to adopt a more functional style. If you are coming to Scala from an imperative background—for example, if you are a Java programmer—one of the main challenges you may face when learning Scala is figuring out how to program in the functional style. We realize this style might be unfamiliar at first, and in this book we try hard to guide you through the transition. It will require some work on your part, and we encourage you to make the effort. If you come from an imperative background, we believe that learning to program in a functional style will not only make you a better Scala programmer, it will expand your horizons and make you a better programmer in general.

The first step is to recognize the difference between the two styles in code. One telltale sign is that if code contains any vars, it is probably in an imperative style. If the code contains no vars at all—i.e., it contains only vals—it is probably in a functional style. One way to move towards a functional style, therefore, is to try to program without vars.

If you’re coming from an imperative background, such as Java, C++, or C#, you may think of var as a regular variable and val as a special kind of variable. On the other hand, if you’re coming from a functional background, such as Haskell, OCaml, or Erlang, you might think of val as a regular variable and var as akin to blasphemy. The Scala perspective, however, is that val and var are just two different tools in your toolbox, both useful, neither inherently evil. Scala encourages you to lean towards vals, but ultimately reach for the best tool given the job at hand. Even if you agree with this balanced philosophy, however, you may still find it challenging at first to figure out how to get rid of vars in your code.

Consider the following while loop example, adapted from [Chapter 2](#),

which uses a var and is therefore in the imperative style: def printArgs(args: Array[String]): Unit = {

```
var i = 0

while (i < args.length) {

  println(args(i))

  i += 1

}

}
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Step 11](#)

### [Chapter 3](#) · [Next Steps in Scala](#)

87

You can transform this bit of code into a more functional style by getting rid of the var, for example, like this:

```
def printArgs(args: Array[String]): Unit = {

  for (arg <- args)

    println(arg)

}
```

or this:

```
def printArgs(args: Array[String]): Unit = {

  args.foreach(println)
```

}

This example illustrates one benefit of programming with fewer vars.

The refactored (more functional) code is clearer, more concise, and less error-prone than the original (more imperative) code. The reason Scala encourages a functional style, in fact, is that the functional style can help you write more understandable, less error-prone code.

You can go even further, though. The refactored `printArgs` method is not purely functional, because it has side effects—in this case, its side effect is printing to the standard output stream. The telltale sign of a function with side effects is that its result type is `Unit`. If a function isn't returning any interesting value, which is what a result type of `Unit` means, the only way that function can make a difference in the world is through some kind of side effect. A more functional approach would be to define a method that formats the passed args for printing, but just returns the formatted string, as shown in [Listing 3.9](#).

```
def formatArgs(args: Array[String]) = args.mkString("\n") Listing 3.9 · A  
function without side effects or vars.
```

Now you're really functional: no side effects or vars in sight. The `mkString` method, which you can call on any iterable collection (including arrays, lists, sets, and maps), returns a string consisting of the result of calling `toString` on each element, separated by the passed string. Thus if `args` contains three elements "zero", "one", and "two", `formatArgs` will return "zero\none\ntwo". Of course, this function doesn't actually print

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Step 11](#)

[Chapter 3](#) · [Next Steps in Scala](#)

anything out like the printArgs methods did, but you can easily pass its result to println to accomplish that:

```
println(formatArgs(args))
```

Every useful program is likely to have side effects of some form, because otherwise it wouldn't be able to provide value to the outside world.

Preferring methods without side effects encourages you to design programs where side-affecting code is minimized. One benefit of this approach is that it can help make your programs easier to test. For example, to test any of the three printArgs methods shown earlier in this section, you'd need to redefine println, capture the output passed to it, and make sure it is what you expect. By contrast, you could test formatArgs simply by checking its result:

```
val res = formatArgs(Array("zero", "one", "two")) assert(res ==  
"zero\none\ntwo")
```

Scala's assert method checks the passed Boolean and if it is false, throws AssertionError. If the passed Boolean is true, assert just returns quietly.

You'll learn more about assertions and testing in [Chapter 14](#).

That said, bear in mind that neither vars nor side effects are inherently evil. Scala is not a pure functional language that forces you to program everything in the functional style. Scala is a hybrid imperative/functional language. You may find that in some situations an imperative style is a better fit for the problem at hand, and in such cases you should not hesitate to use it. To help you learn how to program without vars, however, we'll show you many specific examples of code with vars and how to transform those vars to vals in [Chapter 7](#).

A balanced attitude for Scala programmers

Prefer vals, immutable objects, and methods without side effects.

Reach for them first. Use vars, mutable objects, and methods with side effects when you have a specific need and justification for them.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Step 12](#)

### [Chapter 3 · Next Steps in Scala](#)

89

#### Step 12. Read lines from a file

Scripts that perform small, everyday tasks often need to process lines in files.

In this section, you'll build a script that reads lines from a file, and prints them out prepended with the number of characters in each line. The first version is shown in [Listing 3.10](#):

```
import scala.io.Source  
  
if (args.length > 0) {  
  
    for (line <- Source.fromFile(args(0)).getLines)  
  
        print(line.length + " " + line)  
  
    }  
  
else  
  
    Console.err.println("Please enter filename")
```

#### [Listing 3.10 · Reading lines from a file.](#)

This script starts with an import of a class named `Source` from package `scala.io`. It then checks to see if at least one argument was specified on the command line. If so, the first argument is interpreted as a filename to open

and process. The expression `Source.fromFile(args(0))` attempts to open the specified file and returns a `Source` object, on which you call `getLines`. The `getLines` method returns an `Iterator[String]`, which provides one line on each iteration, including the end-of-line character. The `for` expression iterates through these lines and prints for each the length of the line, a space, and the line itself. If there were no arguments supplied on the command line, the final `else` clause will print a message to the standard error stream. If you place this code in a file named `countchars1.scala`, and run it on itself with:

```
$ scala countchars1.scala countchars1.scala
```

You should see:

```
23 import scala.io.Source
```

```
1
```

```
23 if (args.length > 0) {
```

```
1
```

```
50
```

```
for (line <- Source.fromFile(args(0)).getLines)
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Step 12](#)

[Chapter 3 · Next Steps in Scala](#)

90

36

```
print(line.length + " " + line)
```

```
2 }
```

```
5 | else
```

```
47 |
```

```
Console.err.println("Please enter filename")
```

Although the script in its current form prints out the needed information, you may wish to line up the numbers, right adjusted, and add a pipe character, so that the output looks instead like:

```
23 | import scala.io.Source
```

```
1 |
```

```
23 | if (args.length > 0) {
```

```
1 |
```

```
50 |
```

```
for (line <- Source.fromFile(args(0)).getLines)
```

```
34 |
```

```
print(line.length + " " + line)
```

```
2 | }
```

```
5 | else
```

```
47 |
```

```
Console.err.println("Please enter filename")
```

To accomplish this, you can iterate through the lines twice. The first time through you'll determine the maximum width required by any line's character count. The second time through you'll print the output, using the maximum width calculated previously. Because you'll be iterating through

```
the lines twice, you may as well assign them to a variable: val lines =  
Source.fromFile(args(0)).getLines.toList
```

The final `toList` is required because the `getLines` method returns an iterator. Once you've iterated through an iterator, it is spent. By transforming it into a list via the `toList` call, you gain the ability to iterate as many times as you wish, at the cost of storing all lines from the file in memory at once.

The `lines` variable, therefore, references a list of strings that contains the contents of the file specified on the command line.

Next, because you'll be calculating the width of each line's character count twice, once per iteration, you might factor that expression out into a small function, which calculates the character width of the passed string's length:

```
def widthOfLength(s: String) = s.length.toString.length With this function,  
you could calculate the maximum width like this:
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Step 12

### Chapter 3 · Next Steps in Scala

91

```
var maxWidth = 0  
  
for (line <- lines)  
  
maxWidth = maxWidth.max(widthOfLength(line))
```

Here you iterate through each line with a `for` expression, calculate the character width of that line's length, and, if it is larger than the current maximum, assign it to `maxWidth`, a `var` that was initialized to 0. (The `max` method, which you can invoke on any `Int`, returns the greater of the value on which it was invoked and the value passed to it.) Alternatively, if you prefer to find the maximum without vars, you could first find the longest line like this: `val longestLine = lines.reduceLeft(`

```
(a, b) => if (a.length > b.length) a else b  
)
```

The `reduceLeft` method applies the passed function to the first two elements in `lines`, then applies it to the result of the first application and the next element in `lines`, and so on, all the way through the list. On each such application, the result will be the longest line encountered so far, because the passed function, `(a, b) => if (a.length > b.length) a else b`, returns the longest of the two passed strings. “`reduceLeft`” will return the result of the last application of the function, which in this case will be the longest string element contained in `lines`.

Given this result, you can calculate the maximum width by passing the longest line to `widthOfLength`:

```
val maxWidth = widthOfLength(longestLine)
```

All that remains is to print out the lines with proper formatting. You can do that like this:

```
for (line <- lines) {  
  
    val numSpaces = maxWidth - widthOfLength(line)  
  
    val padding = " " * numSpaces  
  
    print(padding + line.length + " | " + line)  
  
}
```

In this for expression, you once again iterate through the lines. For each line, you first calculate the number of spaces required before the line length and assign it to `numSpaces`. Then you create a string containing `numSpaces`

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Conclusion](#)

## Chapter 3 · Next Steps in Scala

92

spaces with the expression " " \* numSpaces. Finally, you print out the information with the desired formatting. The entire script looks as shown in

### Listing 3.11:

```
import scala.io.Source

def widthOfLength(s: String) = s.length.toString.length if (args.length > 0)
{

    val lines = Source.fromFile(args(0)).getLines.toList

    val longestLine = lines.reduceLeft(
        (a, b) => if (a.length > b.length) a else b
    )

    val maxWidth = widthOfLength(longestLine)

    for (line <- lines) {

        val numSpaces = maxWidth - widthOfLength(line)

        val padding = " " * numSpaces

        print(padding + line.length + " | " + line)

    }
}

else

Console.err.println("Please enter filename")
```

[Listing 3.11](#) · Printing formatted character counts for the lines of a file.

## Conclusion

With the knowledge you've gained in this chapter, you should already be able to get started using Scala for small tasks, especially scripts. In future chapters, we will dive into more detail in these topics, and introduce other topics that weren't even hinted at here.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 4

### Classes and Objects

You've already seen the basics of classes and objects in Scala in the previous two chapters. In this chapter, we'll take you a bit deeper. You'll learn more about classes, fields, and methods, and get an overview of semicolon inference. You'll learn more about singleton objects, including how to use them to write and run a Scala application. If you are familiar with Java, you'll find the concepts in Scala are similar, but not exactly the same. So even if you're a Java guru, it will pay to read on.

#### 4.1

##### Classes, fields, and methods

A class is a blueprint for objects. Once you define a class, you can create objects from the class blueprint with the keyword new. For example, given the class definition:

```
class ChecksumAccumulator {  
    // class definition goes here  
}
```

You can create ChecksumAccumulator objects with:

`new ChecksumAccumulator`

Inside a class definition, you place fields and methods, which are collectively called members. Fields, which you define with either `val` or `var`, are variables that refer to objects. Methods, which you define with `def`, contain executable code. The fields hold the state, or data, of an object, whereas the methods use that data to do the computational work of the object. When you

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 4.1

### Chapter 4 · Classes and Objects

94

instantiate a class, the runtime sets aside some memory to hold the image of that object's state—i.e., the content of its variables. For example, if you defined a `ChecksumAccumulator` class and gave it a `var` field named `sum`:

```
class ChecksumAccumulator {
```

```
    var sum = 0
```

```
}
```

and you instantiated it twice with:

```
val acc = new ChecksumAccumulator
```

```
val csa = new ChecksumAccumulator
```

The image of the objects in memory might look like:

```
sum
```

```
acc
```

```
0
```

sum

csa

Since sum, a field declared inside class ChecksumAccumulator, is a var, not a val, you can later reassign to sum a different Int value, like this: acc.sum = 3

Now the picture would look like:

sum

3

acc

sum

0

csa

One thing to notice about this picture is that there are two sum variables, one in the object referenced by acc and the other in the object referenced

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 4.1](#)

[Chapter 4 · Classes and Objects](#)

95

by csa. Fields are also known as instance variables, because every instance gets its own set of the variables. Collectively, an object's instance variables make up the memory image of the object. You can see this illustrated here not only in that you see two sum variables, but also that when you changed one, the other was unaffected.

Another thing to note in this example is that you were able to mutate the object acc referred to, even though acc is a val. What you can't do with acc (or csa), given that they are vals, not vars, is reassign a different object to them. For example, the following attempt would fail:

```
// Won't compile, because acc is a val
```

```
acc = new ChecksumAccumulator
```

What you can count on, therefore, is that acc will always refer to the same ChecksumAccumulator object with which you initialize it, but the fields contained inside that object might change over time.

One important way to pursue robustness of an object is to ensure that the object's state—the values of its instance variables—remains valid during its entire lifetime. The first step is to prevent outsiders from accessing the fields directly by making the fields private. Because private fields can only be accessed by methods defined in the same class, all the code that can update the state will be localized to the class. To declare a field private, you place a private access modifier in front of the field, like this: class ChecksumAccumulator {

```
private var sum = 0
```

```
}
```

Given this definition of ChecksumAccumulator, any attempt to access sum from the outside of the class would fail:

```
val acc = new ChecksumAccumulator
```

```
acc.sum = 5 // Won't compile, because sum is private
```

### Note

The way you make members public in Scala is by not explicitly specifying any access modifier. Put another way, where you'd say "public" in Java, you simply say nothing in Scala. Public is Scala's default access level.

## [Section 4.1](#)

### [Chapter 4 · Classes and Objects](#)

96

Now that sum is private, the only code that can access sum is code defined inside the body of the class itself. Thus, ChecksumAccumulator won't be of much use to anyone unless we define some methods in it: class ChecksumAccumulator {

```
private var sum = 0

def add(b: Byte): Unit = {
    sum += b
}

def checksum(): Int = {
    return ~(sum & 0xFF) + 1
}
```

The ChecksumAccumulator now has two methods, add and checksum, both of which exhibit the basic form of a function definition, shown in [Figure 2.1](#)

on [page 63.](#)

Any parameters to a method can be used inside the method. One important characteristic of method parameters in Scala is that they are vals, not vars.<sup>1</sup> If you attempt to reassign a parameter inside a method in Scala, therefore, it won't compile:

```
def add(b: Byte): Unit = {  
    b = 1  
  
    // This won't compile, because b is a val  
  
    sum += b  
  
}
```

Although `add` and `checksum` in this version of `ChecksumAccumulator` correctly implement the desired functionality, you can express them using a more concise style. First, the return at the end of the `checksum` method is superfluous and can be dropped. In the absence of any explicit return statement, a Scala method returns the last value computed by the method.

The recommended style for methods is in fact to avoid having explicit, and especially multiple, return statements. Instead, think of each method as an expression that yields one value, which is returned. This philosophy will encourage you to make methods quite small, to factor larger methods 1The reason parameters are `vals` is that `vals` are easier to reason about. You needn't look further to determine if a `val` is reassigned, as you must do with a `var`.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 4.1](#)

[Chapter 4](#) · [Classes and Objects](#)

97

into multiple smaller ones. On the other hand, design choices depend on the design context, and Scala makes it easy to write methods that have multiple, explicit returns if that's what you desire.

Because all `checksum` does is calculate a value, it does not need an explicit return. Another shorthand for methods is that you can leave off the curly braces if a method computes only a single result expression. If the result

expression is short, it can even be placed on the same line as the def itself. With these changes, class ChecksumAccumulator looks like this:

```
class ChecksumAccumulator {
```

```
    private var sum = 0

    def add(b: Byte): Unit = sum += b

    def checksum(): Int = ~(sum & 0xFF) + 1

}
```

Methods with a result type of Unit, such as ChecksumAccumulator's add method, are executed for their side effects. A side effect is generally defined as mutating state somewhere external to the method or performing an I/O action. In add's case, for example, the side effect is that sum is reassigned. Another way to express such methods is to leave off the result type and the equals sign, and enclose the body of the method in curly braces. In this form, the method looks like a procedure, a method that is executed only for its side effects. The add method in [Listing 4.1](#) illustrates this style:

```
// In file ChecksumAccumulator.scala

class ChecksumAccumulator {

    private var sum = 0

    def add(b: Byte) { sum += b }

    def checksum(): Int = ~(sum & 0xFF) + 1

}
```

[Listing 4.1](#) · Final version of class ChecksumAccumulator.

One puzzler to watch out for is that whenever you leave off the equals sign before the body of a function, its result type will definitely be Unit.

This is true no matter what the body contains, because the Scala compiler can convert any type to Unit. For example, if the last result of a method is a String, but the method's result type is declared to be Unit, the String will be converted to Unit and its value lost. Here's an example:

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 4.2

### Chapter 4 · Classes and Objects

98

```
scala> def f(): Unit = "this String gets lost"
```

```
f: ()Unit
```

In this example, the String is converted to Unit because Unit is the declared result type of function f. The Scala compiler treats a function defined in the procedure style, i.e., with curly braces but no equals sign, essentially the same as a function that explicitly declares its result type to be Unit: scala> def g() { "this String gets lost too" }

```
g: ()Unit
```

The puzzler occurs, therefore, if you intend to return a non-Unit value, but forget the equals sign. To get what you want, you'll need to insert the missing equals sign:

```
scala> def h() = { "this String gets returned!" }
```

```
h: ()java.lang.String
```

```
scala> h
```

```
res0: java.lang.String = this String gets returned!
```

4.2

## Semicolon inference

In a Scala program, a semicolon at the end of a statement is usually optional.

You can type one if you want but you don't have to if the statement appears by itself on a single line. On the other hand, a semicolon is required if you write multiple statements on a single line:

```
val s = "hello"; println(s)
```

If you want to enter a statement that spans multiple lines, most of the time you can simply enter it and Scala will separate the statements in the correct place. For example, the following is treated as one four-line statement: if ( $x < 2$ )

```
    println("too small")
```

```
else
```

```
    println("ok")
```

Occasionally, however, Scala will split a statement into two parts against your wishes:

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 4.3](#)

[Chapter 4](#) · [Classes and Objects](#)

99

x

+ y

This parses as two statements x and +y. If you intend it to parse as one statement  $x + y$ , you can always wrap it in parentheses: (x

+ y)

Alternatively, you can put the + at the end of a line. For just this reason, whenever you are chaining an infix operation such as +, it is a common Scala style to put the operators at the end of the line instead of the beginning: x +

y +

z

## The rules of semicolon inference

The precise rules for statement separation are surprisingly simple for how well they work. In short, a line ending is treated as a semicolon unless one of the following conditions is true:

1. The line in question ends in a word that would not be legal as the end of a statement, such as a period or an infix operator.
2. The next line begins with a word that cannot start a statement.
3. The line ends while inside parentheses (...) or brackets [...], because these cannot contain multiple statements anyway.

4.3

## Singleton objects

As mentioned in [Chapter 1](#), one way in which Scala is more object-oriented than Java is that classes in Scala cannot have static members. Instead, Scala has [singleton objects](#). A singleton object definition looks like a class definition, except instead of the keyword class you use the keyword object.

[Listing 4.2](#) shows an example.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 4.3](#)

## Chapter 4 · Classes and Objects

100

```
// In file ChecksumAccumulator.scala

import scala.collection.mutable.Map

object ChecksumAccumulator {

    private val cache = Map[String, Int]()

    def calculate(s: String): Int = {
        if (cache.contains(s))
            cache(s)
        else {
            val acc = new ChecksumAccumulator
            for (c <- s)
                acc.add(c.toByte)
            val cs = acc.checksum()
            cache += (s -> cs)
            cs
        }
    }
}
```

Listing 4.2 · Companion object for class ChecksumAccumulator.

The singleton object in this figure is named ChecksumAccumulator, the same name as the class in the previous example. When a singleton object

shares the same name with a class, it is called that class's [companion object](#).

You must define both the class and its companion object in the same source file. The class is called the [companion class](#) of the singleton object. A class and its companion object can access each other's private members.

The ChecksumAccumulator singleton object has one method, named calculate, which takes a String and calculates a checksum for the characters in the String. It also has one private field, cache, a mutable map in which previously calculated checksums are cached.<sup>2</sup> The first line of the method, "if (cache.contains(s))", checks the cache to see if the passed string is already contained as a key in the map. If so, it just returns the 2We used a cache here to show a singleton object with a field. A cache such as this is a performance optimization that trades off memory for computation time. In general, you would likely use such a cache only if you encountered a performance problem that the cache solves, and might use a weak map, such as WeakHashMap in scala.collection.jcl, so that entries in the cache could be garbage collected if memory becomes scarce.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 4.3](#)

### [Chapter 4 · Classes and Objects](#)

101

mapped value, cache(s). Otherwise, it executes the else clause, which calculates the checksum. The first line of the else clause defines a val named acc and initializes it with a new ChecksumAccumulator instance.<sup>3</sup> The next line is a for expression, which cycles through each character in the passed string, converts the character to a Byte by invoking toByte on it, and passes that to the add method of the ChecksumAccumulator instances to which acc refers. After the for expression completes, the next line of the method invokes checksum on acc, which gets the checksum for the passed String, and stores it into a val named cs. In the next line, cache += (s -> cs), the passed string key is mapped to the integer checksum value, and this

key-value pair is added to the cache map. The last expression of the method, `cs`, ensures the checksum is the result of the method.

If you are a Java programmer, one way to think of singleton objects is as the home for any static methods you might have written in Java. You can invoke methods on singleton objects using a similar syntax: the name of the singleton object, a dot, and the name of the method. For example, you can invoke the `calculate` method of singleton object `ChecksumAccumulator` like this:

`ChecksumAccumulator.calculate("Every value is an object.")` A singleton object is more than a holder of static methods, however. It is a first-class object. You can think of a singleton object's name, therefore, as a

“name tag” attached to the object:

`cache`

`mutable`

`map`

`ChecksumAccumulator`

Defining a singleton object doesn't define a type (at the Scala level of abstraction). Given just a definition of object `ChecksumAccumulator`, you can't make a variable of type `ChecksumAccumulator`. Rather, the type named `ChecksumAccumulator` is defined by the singleton object's companion class. However, singleton objects extend a superclass and can mix in traits. Given each singleton object is an instance of its superclasses and 3Because the keyword `new` is only used to instantiate classes, the new object created here is an instance of the `ChecksumAccumulator` class, not the singleton object of the same name.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 4.4](#)

[Chapter 4 · Classes and Objects](#)

mixed-in traits, you can invoke its methods via these types, refer to it from variables of these types, and pass it to methods expecting these types. We'll show some examples of singleton objects inheriting from classes and traits in [Chapter 12](#).

One difference between classes and singleton objects is that singleton objects cannot take parameters, whereas classes can. Because you can't instantiate a singleton object with the new keyword, you have no way to pass parameters to it. Each singleton object is implemented as an instance of a [synthetic class](#) referenced from a static variable, so they have the same initialization semantics as Java statics.<sup>4</sup> In particular, a singleton object is initialized the first time some code accesses it.

A singleton object that does not share the same name with a companion class is called a [standalone object](#). You can use standalone objects for many purposes, including collecting related utility methods together, or defining an entry point to a Scala application. This use case is shown in the next section.

## 4.4

### A Scala application

To run a Scala program, you must supply the name of a standalone singleton object with a main method that takes one parameter, an Array[String], and has a result type of Unit. Any singleton object with a main method of the proper signature can be used as the entry point into an application. An example is shown in [Listing 4.3](#):

```
// In file Summer.scala

import ChecksumAccumulator.calculate

object Summer {

    def main(args: Array[String]) {
```

```
for (arg <- args)
  println(arg +": "+ calculate(arg))
}
}
```

**Listing 4.3 · The Summer application.**

The name of the synthetic class is the object name plus a dollar sign. Thus the synthetic class for the singleton object named ChecksumAccumulator is ChecksumAccumulator\$.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 4.4](#)

### [Chapter 4 · Classes and Objects](#)

103

The name of the singleton object in [Listing 4.3](#) is Summer. Its main method has the proper signature, so you can use it as an application. The first statement in the file is an import of the calculate method defined in the ChecksumAccumulator object in the previous example. This import statement allows you to use the method's simple name in the rest of the file.<sup>5</sup> The body of the main method simply prints out each argument and the checksum for the argument, separated by a colon.

#### Note

Scala implicitly imports members of packages `java.lang` and `scala`, as well as the members of a singleton object named `Predef`, into every Scala source file. `Predef`, which resides in package `scala`, contains many useful methods. For example, when you say `println` in a Scala source file, you're actually invoking `println` on `Predef`. (`Predef.println` turns around and invokes `Console.println`, which does the real work.) When you say `assert`, you're invoking `Predef.assert`.

To run the Summer application, place the code from [Listing 4.3](#) into a file named Summer.scala. Because Summer uses ChecksumAccumulator, place the code for ChecksumAccumulator, both the class shown in [List-](#)  
[ing 4.1](#) and its companion object shown in [Listing 4.2](#), into a file named ChecksumAccumulator.scala.

One difference between Scala and Java is that whereas Java requires you to put a public class in a file named after the class—for example, you'd put class SpeedRacer in file SpeedRacer.java—in Scala, you can name

.scala files anything you want, no matter what Scala classes or code you put in them. In general in the case of non-scripts, however, it is recommended style to name files after the classes they contain as is done in Java, so that programmers can more easily locate classes by looking at file names. This is the approach we've taken with the two files in this example, Summer.scala and ChecksumAccumulator.scala.

Neither ChecksumAccumulator.scala nor Summer.scala are scripts, because they end in a definition. A script, by contrast, must end in a result expression. Thus if you try to run Summer.scala as a script, the Scala interpreter will complain that Summer.scala does not end in a result expression (assuming of course you didn't add any expression of your own after 5If you're a Java programmer, you can think of this import as similar to the static import feature introduced in Java 5. One difference in Scala, however, is that you can import members from any object, not just singleton objects.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 4.4](#)

### [Chapter 4 · Classes and Objects](#)

104

the Summer object definition). Instead, you'll need to actually compile these files with the Scala compiler, then run the resulting class files. One

way to do this is to use scalac, which is the basic Scala compiler, like this: \$ scalac ChecksumAccumulator.scala Summer.scala

This compiles your source files, but there may be a perceptible delay before the compilation finishes. The reason is that every time the compiler starts up, it spends time scanning the contents of jar files and doing other initial work before it even looks at the fresh source files you submit to it. For this reason, the Scala distribution also includes a Scala compiler daemon called fsc (for fast Scala compiler). You use it like this:

```
$ fsc ChecksumAccumulator.scala Summer.scala
```

The first time you run fsc, it will create a local server daemon attached to a port on your computer. It will then send the list of files to compile to the daemon via the port, and the daemon will compile the files. The next time you run fsc, the daemon will already be running, so fsc will simply send the file list to the daemon, which will immediately compile the files. Using fsc, you only need to wait for the Java runtime to startup the first time. If you ever want to stop the fsc daemon, you can do so with fsc -shutdown.

Running either of these scalac or fsc commands will produce Java class files that you can then run via the scala command, the same command you used to invoke the interpreter in previous examples. However, instead of giving it a filename with a .scala extension containing Scala code to interpret as you did in every previous example,<sup>6</sup> in this case you'll give it the name of a standalone object containing a main method of the proper signature. You can run the Summer application, therefore, by typing: \$ scala Summer of love

You will see checksums printed for the two command line arguments: of:  
-213

love: -182

<sup>6</sup>The actual mechanism that the scala program uses to “interpret” a Scala source file is that it compiles the Scala source code to Java bytecodes, loads them immediately via a class loader, and executes them.

## [Section 4.5](#)

### [Chapter 4 · Classes and Objects](#)

105

4.5

#### The Application trait

Scala provides a trait, `scala.Application`, that can save you some finger typing. Although we haven't yet covered everything you'll need to understand exactly how this trait works, we figured you'd want to know about it now anyway. [Listing 4.4](#) shows an example:

```
import ChecksumAccumulator.calculate
```

```
object FallWinterSpringSummer extends Application {  
    for (season <- List("fall", "winter", "spring")) println(season +": "+  
        calculate(season))  
}
```

#### [Listing 4.4 · Using the Application trait.](#)

To use the trait, you first write “extends Application” after the name of your singleton object. Then instead of writing a main method, you place the code you would have put in the main method directly between the curly braces of the singleton object. That's it. You can compile and run this application just like any other.

The way this works is that trait Application declares a main method of the appropriate signature, which your singleton object inherits, making it usable as a Scala application. The code between the curly braces is collected into a [primary constructor](#) of the singleton object, and is executed when the class is initialized. Don't worry if you don't understand what all this means.

It will be explained in later chapters, and in the meantime you can use the trait without fully understanding the details.

Inheriting from Application is shorter than writing an explicit main method, but it also has some shortcomings. First, you can't use this trait if you need to access command-line arguments, because the args array isn't available. For example, because the Summer application uses command-line arguments, it must be written with an explicit main method, as shown in [List-](#)

[ing 4.3](#). Second, because of some restrictions in the JVM threading model, you need an explicit main method if your program is multi-threaded. Finally, some implementations of the JVM do not optimize the initialization code of an object which is executed by the Application trait. So you should inherit from Application only when your program is relatively simple and single-threaded.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 4.6](#)

### [Chapter 4 · Classes and Objects](#)

106

4.6

#### Conclusion

This chapter has given you the basics of classes and objects in Scala, and shown you how to compile and run applications. In the next chapter, you'll learn about Scala's basic types and how to use them.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 5

### Basic Types and Operations

Now that you've seen classes and objects in action, it's a good time to look at Scala's basic types and operations in more depth. If you're familiar with Java, you'll be glad to find that Java's basic types and operators have the same meaning in Scala. However there are some interesting differences that will make this chapter worthwhile reading even if you're an experienced Java developer. Because some of the aspects of Scala covered in this chapter are essentially the same in Java, we've inserted notes indicating what Java developers can safely skip, to expedite your progress.

In this chapter, you'll get an overview of Scala's basic types, including Strings and the value types Int, Long, Short, Byte, Float, Double, Char, and Boolean. You'll learn the operations you can perform on these types, including how operator precedence works in Scala expressions. You'll also learn how implicit conversions can "enrich" variants of these basic types, giving you additional operations beyond those supported by Java.

## 5.1

### Some basic types

Several fundamental types of Scala, along with the ranges of values instances of these types may have, are shown in [Table 5.1](#). Collectively, types Byte, Short, Int, Long, and Char are called integral types. The integral types plus Float and Double are called numeric types.

Other than String, which resides in package java.lang, all of the types shown in [Table 5.1](#) are members of package scala.1 For example, the full 1Packages, which were briefly described in [Step 2](#) in [Chapter 2](#), will be covered in depth in [Chapter 13](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### [Section 5.2](#)

[Chapter 5 · Basic Types and Operations](#)

Table 5.1 · Some basic types

Value type	Range	
Byte	8-bit signed two's complement integer (-2 <sup>7</sup> to 2 <sup>7</sup> - 1, inclusive)	Short
	16-bit signed two's complement integer (-2 <sup>15</sup> to 2 <sup>15</sup> - 1, inclusive)	Int
	32-bit signed two's complement integer (-2 <sup>31</sup> to 2 <sup>31</sup> - 1, inclusive)	Long
	64-bit signed two's complement integer (-2 <sup>63</sup> to 2 <sup>63</sup> - 1, inclusive)	Char
String	16-bit unsigned Unicode character (0 to 2 <sup>16</sup> - 1, inclusive)	
Chars	a sequence of Chars	
Float		
	32-bit IEEE 754 single-precision float	
Double		
	64-bit IEEE 754 double-precision float	
Boolean		
	true or false	
		name of Int is scala.Int. However, given that all the members of package scala and java.lang are automatically imported into every Scala source file, you can just use the simple names (i.e., names like Boolean, Char, or String) everywhere.
Note		

You can in fact currently use lower case aliases for Scala value types, which correspond to Java's primitive types. For example, you can say `int` instead of `Int` in a Scala program. But keep in mind they both mean exactly the same thing: `scala.Int`. The recommended style that arose from the experience of the Scala community is to always use the upper case form, which is what we do in this book. In honor of this community-driven choice, the lower case variants may be deprecated or even removed in a future version of Scala, so you would be wise indeed to go with the community flow and say `Int`, not `int`, in your Scala code.

Savvy Java developers will note that Scala's basic types have the exact same ranges as the corresponding types in Java. This enables the Scala compiler to transform instances of Scala [value types](#), such as `Int` or `Double`, down to Java primitive types in the bytecodes it produces.

## 5.2

### Literals

All of the basic types listed in [Table 5.1](#) can be written with [literals](#). A literal is a way to write a constant value directly in code.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### [Section 5.2](#)

### [Chapter 5 · Basic Types and Operations](#)

109

Fast track for Java programmers

The syntax of most literals shown in this section are exactly the same as in Java, so if you're a Java master, you can safely skip much of this section.

The two differences you should read about are Scala's literals for raw strings and symbols, which are described starting on [page 113](#).

Integer literals

Integer literals for the types Int, Long, Short, and Byte come in three forms: decimal, hexadecimal, and octal. The way an integer literal begins indicates the base of the number. If the number begins with a 0x or 0X, it is hexadecimal (base 16), and may contain 0 through 9 as well as upper or lowercase digits A through F. Some examples are:

```
scala> val hex = 0x5
```

```
hex: Int = 5
```

```
scala> val hex2 = 0x00FF
```

```
hex2: Int = 255
```

```
scala> val magic = 0xcafebabe
```

```
magic: Int = -889275714
```

Note that the Scala shell always prints integer values in base 10, no matter what literal form you may have used to initialize it. Thus the interpreter displays the value of the hex2 variable you initialized with literal 0x00FF as decimal 255. (Of course, you don't need to take our word for it. A good way to start getting a feel for the language is to try these statements out in the interpreter as you read this chapter.) If the number begins with a zero, it is octal (base 8), and may, therefore, only contain digits 0 through 7. Some examples are:

```
scala> val oct = 035
```

```
// (35 octal is 29 decimal)
```

```
oct: Int = 29
```

```
scala> val nov = 0777
```

```
nov: Int = 511
```

```
scala> val dec = 0321
```

dec: Int = 209

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 5.2

### Chapter 5 · Basic Types and Operations

110

If the number begins with a non-zero digit, and is otherwise undecorated, it is decimal (base 10). For example:

scala> val dec1 = 31

dec1: Int = 31

scala> val dec2 = 255

dec2: Int = 255

scala> val dec3 = 20

dec3: Int = 20

If an integer literal ends in an L or l, it is a Long, otherwise it is an Int.

Some examples of Long integer literals are:

scala> val prog = 0XCAFEBABEL

prog: Long = 3405691582

scala> val tower = 35L

tower: Long = 35

scala> val of = 311

of: Long = 311

If an Int literal is assigned to a variable of type Short or Byte, the literal is treated as if it were a Short or Byte type so long as the literal value is within the valid range for that type. For example:

```
scala> val little: Short = 367
```

```
little: Short = 367
```

```
scala> val littler: Byte = 38
```

```
littler: Byte = 38
```

## Floating point literals

Floating point literals are made up of decimal digits, optionally containing a decimal point, and optionally followed by an E or e and an exponent. Some examples of floating-point literals are:

```
scala> val big = 1.2345
```

```
big: Double = 1.2345
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 5.2](#)

### [Chapter 5 · Basic Types and Operations](#)

111

```
scala> val bigger = 1.2345e1
```

```
bigger: Double = 12.345
```

```
scala> val biggerStill = 123E45
```

```
biggerStill: Double = 1.23E47
```

Note that the exponent portion means the power of 10 by which the other portion is multiplied. Thus, 1.2345e1 is 1.2345 times 10<sup>1</sup>, which is 12.345.

If a floating-point literal ends in an F or f, it is a Float, otherwise it is a Double. Optionally, a Double floating-point literal can end in D or d. Some examples of Float literals are:

```
scala> val little = 1.2345F
```

```
little: Float = 1.2345
```

```
scala> val littleBigger = 3e5f
```

```
littleBigger: Float = 300000.0
```

That last value expressed as a Double could take these (and other) forms:

```
scala> val anotherDouble = 3e5
```

```
anotherDouble: Double = 300000.0
```

```
scala> val yetAnother = 3e5D
```

```
yetAnother: Double = 300000.0
```

## Character literals

Character literals are composed of any Unicode character between single quotes, such as:

```
scala> val a = 'A'
```

```
a: Char = A
```

In addition to providing an explicit character between the single quotes, you can provide an octal or hex number for the character code point preceded by a backslash. The octal number must be between '\0' and '\377'. For example, the Unicode character code point for the letter A is 101 octal. Thus: scala>  
val c = '\101'

c: Char = A

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 5.2](#)

### [Chapter 5 · Basic Types and Operations](#)

112

Table 5.2 · Special character literal escape sequences

Literal

Meaning

\n

line feed (\u000A)

\b

backspace (\u0008)

\t

tab (\u0009)

\f

form feed (\u000C)

\r

carriage return (\u000D)

\"

double quote (\u0022)

\'

single quote (\u0027)

\\

backslash (\u005C)

A character literal can also be given as a general Unicode character consisting of four hex digits and preceded by a \u, as in:

```
scala> val d = '\u0041'
```

d: Char = A

```
scala> val f = '\u0044'
```

f: Char = D

In fact, such Unicode characters can appear anywhere in a Scala program.

For instance you could also write an identifier like this: scala> val B\u0041\u0044 = 1

BAD: Int = 1

This identifier is treated as identical to BAD, the result of expanding the two Unicode characters in the code above. In general, it is a bad idea to name identifiers like this, because it is hard to read. Rather, this syntax is intended to allow Scala source files that include non-ASCII Unicode characters to be represented in ASCII.

Finally, there are also a few character literals represented by special escape sequences, shown in [Table 5.2](#). For example: scala> val backslash = '\\'

backslash: Char = \

## Section 5.2

### Chapter 5 · Basic Types and Operations

113

#### String literals

A string literal is composed of characters surrounded by double quotes:

```
scala> val hello = "hello"
```

```
hello: java.lang.String = hello
```

The syntax of the characters within the quotes is the same as with character literals. For example:

```
scala> val escapes = "\\\\"\\\""
```

```
escapes: java.lang.String = \"\"\"
```

Because this syntax is awkward for strings that contain a lot of escape sequences or strings that span multiple lines, Scala includes a special syntax for raw strings. You start and end a raw string with three double quotation marks in a row (""""). The interior of a raw string may contain any characters whatsoever, including newlines, quotation marks, and special characters, except of course three quotes in a row. For example, the following program prints out a message using a raw string:

```
println("""Welcome to Ultamix 3000.
```

```
Type "HELP" for help.""""
```

Running this code does not produce quite what is desired, however:  
Welcome to Ultamix 3000.

Type "HELP" for help.

The issue is that the leading spaces before the second line are included in the string! To help with this common situation, you can call stripMargin on

strings. To use this method, put a pipe character (|) at the front of each line, and then call `stripMargin` on the whole string:

```
println("""|Welcome to Ultamix 3000.
```

```
|Type "HELP" for help.""".stripMargin) Now the code behaves as desired:
```

```
Welcome to Ultamix 3000.
```

```
Type "HELP" for help.
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 5.2

### Chapter 5 · Basic Types and Operations

114

#### Symbol literals

A symbol literal is written '`ident`', where `ident` can be any alphanumeric identifier. Such literals are mapped to instances of the predefined class `scala.Symbol`. Specifically, the literal '`cymbal`' will be expanded by the compiler to a factory method invocation: `Symbol("cymbal")`. Symbol literals are typically used in situations where you would use just an identifier in a dynamically typed language. For instance, you might want to define a method that updates a record in a database:

```
scala> def updateRecordByName(r: Symbol, value: Any) {  
// code goes here  
}
```

```
updateRecordByName: (Symbol,Any)Unit
```

The method takes as parameters a symbol indicating the name of a record field and a value with which the field should be updated in the record. In a

dynamically typed language, you could invoke this operation passing an undeclared field identifier to the method, but in Scala this would not compile: scala> updateRecordByName(favoriteAlbum, "OK Computer")

```
<console>:6: error: not found: value favoriteAlbum  
updateRecordByName(favoriteAlbum, "OK Computer") Instead, and  
almost as concisely, you can pass a symbol literal: scala>  
updateRecordByName('favoriteAlbum, "OK Computer") There is not much  
you can do with a symbol, except find out its name: scala> val s = 'aSymbol
```

```
s: Symbol = 'aSymbol
```

```
scala> s.name
```

```
res20: String = aSymbol
```

Another thing that's noteworthy is that symbols are interned. If you write the same symbol literal twice, both expressions will refer to the exact same Symbol object.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 5.3](#)

[Chapter 5](#) · [Basic Types and Operations](#)

115

Boolean literals

The Boolean type has two literals, true and false:

```
scala> val bool = true
```

```
bool: Boolean = true
```

```
scala> val fool = false
```

```
fool: Boolean = false
```

That's all there is to it. You are now literally<sup>2</sup> an expert in Scala.

## 5.3

### Operators are methods

Scala provides a rich set of operators for its basic types. As mentioned in previous chapters, these operators are actually just a nice syntax for ordinary method calls. For example, `1 + 2` really means the same thing as `(1).+(2)`.

In other words, class `Int` contains a method named `+` that takes an `Int` and returns an `Int` result. This `+` method is invoked when you add two `Ints`:

```
scala> val sum = 1 + 2
```

```
// Scala invokes (1).+(2)
```

```
sum: Int = 3
```

To prove this to yourself, you can write the expression explicitly as a method invocation:

```
scala> val sumMore = (1).+(2)
```

```
sumMore: Int = 3
```

In fact, `Int` contains several overloaded `+` methods that take different parameter types.<sup>3</sup> For example, `Int` has another method, also named `+`, that takes and returns a `Long`. If you add a `Long` to an `Int`, this alternate `+` method will be invoked, as in:

```
scala> val longSum = 1 + 2L
```

```
// Scala invokes (1).+(2L)
```

```
longSum: Long = 3
```

2figuratively speaking

3Overloaded methods have the same name but different argument types.  
More on method overloading in [Section 6.11](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 5.3](#)

### [Chapter 5 · Basic Types and Operations](#)

116

The + symbol is an operator—an infix operator to be specific. Operator notation is not limited to methods like + that look like operators in other languages. You can use any method in operator notation. For example, class String has a method, indexOf, that takes one Char parameter. The indexOf method searches the string for the first occurrence of the specified character, and returns its index or -1 if it doesn't find the character. You can use indexOf as an operator, like this:

```
scala> val s = "Hello, world!"  
s: java.lang.String = Hello, world!  
  
scala> s indexOf 'o'  
// Scala invokes s.indexOf('o')  
  
res0: Int = 4
```

In addition, String offers an overloaded indexOf method that takes two parameters, the character for which to search and an index at which to start. (The other indexOf method, shown previously, starts at index zero, the beginning of the String.) Even though this indexOf method takes two arguments, you can use it in operator notation. But whenever you call a method that takes multiple arguments using operator notation, you have to place those arguments in parentheses. For example, here's how you use this other indexOf form as an operator (continuing from the previous example):

```
scala> s indexOf ('o', 5) // Scala invokes s.indexOf('o', 5)  
res1: Int = 8
```

Any method can be an operator

In Scala operators are not special language syntax: any method can be an operator. What makes a method an operator is how you use it. When you write “`s.indexOf('o')`”, `indexOf` is not an operator. But when you write “`s indexOf 'o'`”, `indexOf` is an operator, because you’re using it in operator notation.

So far, you’ve seen examples of infix operator notation, which means the method to invoke sits between the object and the parameter or parameters you wish to pass to the method, as in “`7 + 2`”. Scala also has two other operator notations: prefix and postfix. In prefix notation, you put the method name before the object on which you are invoking the method, for example,

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### Section 5.3

#### [Chapter 5](#) · [Basic Types and Operations](#)

117

the ‘`-`’ in `-7`. In postfix notation, you put the method after the object, for example, the “`toLong`” in “`7 toLong`”.

In contrast to the infix operator notation—in which operators take two operands, one to the left and the other to the right—prefix and postfix operators are unary: they take just one operand. In prefix notation, the operand is to the right of the operator. Some examples of prefix operators are `-2.0`,

`!found`, and `~0xFF`. As with the infix operators, these prefix operators are a shorthand way of invoking methods. In this case, however, the name of the method has “`unary_-`” prepended to the operator character. For instance, Scala will transform the expression `-2.0` into the method invocation “`(2.0).unary_-`”. You can demonstrate this to yourself by typing the method call both via operator notation and explicitly:

```
scala> -2.0  
  
// Scala invokes (2.0).unary_-  
  
res2: Double = -2.0  
  
scala> (2.0).unary_-  
  
res3: Double = -2.0
```

The only identifiers that can be used as prefix operators are `+`, `-`, `!`, and `~`.

Thus, if you define a method named `unary_!`, you could invoke that method on a value or variable of the appropriate type using prefix operator notation, such as `!p`. But if you define a method named `unary_*`, you wouldn't be able to use prefix operator notation, because `*` isn't one of the four identifiers that can be used as prefix operators. You could invoke the method normally, as in `p.unary_*`, but if you attempted to invoke it via `*p`, Scala will parse it as if you'd written `*.p`, which is probably not what you had in mind!<sup>4</sup>

Postfix operators are methods that take no arguments, when they are invoked without a dot or parentheses. In Scala, you can leave off empty parentheses on method calls. The convention is that you include parentheses if the method has side effects, such as `println()`, but you can leave them off if the method has no side effects, such as `toLowerCase` invoked on a `String`:

```
scala> val s = "Hello, world!"
```

```
s: java.lang.String = Hello, world!  
  
scala> s.toLowerCase  
  
res4: java.lang.String = hello, world!
```

<sup>4</sup>All is not necessarily lost, however. There is an extremely slight chance your program with the `*p` might compile as C++.

## Section 5.4

### Chapter 5 · Basic Types and Operations

118

In this latter case of a method that requires no arguments, you can alternatively leave off the dot and use postfix operator notation: `scala> s.toLowerCase`

```
res5: java.lang.String = hello, world!
```

In this case, `toLowerCase` is used as a postfix operator on the operand `s`.

To see what operators you can use with Scala's basic types, therefore, all you really need to do is look at the methods declared in the type's classes in the Scala API documentation. Given that this is a Scala tutorial, however, we'll give you a quick tour of most of these methods in the next few sections.

Fast track for Java programmers

Many aspects of Scala described in the remainder of this chapter are the same as in Java. If you're a Java guru in a rush, you can safely skip to

[Section 5.7 on page 123](#), which describes how Scala differs from Java in the area of object equality.

5.4

Arithmetic operations

You can invoke arithmetic methods via infix operator notation for addition (+), subtraction (-), multiplication (\*), division (/), and remainder (%), on any numeric type. Here are some examples:

```
scala> 1.2 + 2.3
```

```
res6: Double = 3.5
```

```
scala> 3 - 1
```

```
res7: Int = 2
```

```
scala> 'b' - 'a'
```

```
res8: Int = 1
```

```
scala> 2L * 3L
```

```
res9: Long = 6
```

```
scala> 11 / 4
```

```
res10: Int = 2
```

```
scala> 11 % 4
```

```
res11: Int = 3
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 5.5](#)

### [Chapter 5 · Basic Types and Operations](#)

119

```
scala> 11.0f / 4.0f
```

```
res12: Float = 2.75
```

```
scala> 11.0 % 4.0
```

```
res13: Double = 3.0
```

When both the left and right operands are integral types (Int, Long, Byte, Short, or Char), the / operator will tell you the whole number portion of the

quotient, excluding any remainder. The `%` operator indicates the remainder of an implied integer division.

The floating-point remainder you get with `%` is not the one defined by the IEEE 754 standard. The IEEE 754 remainder uses rounding division, not truncating division, in calculating the remainder, so it is quite different from the integer remainder operation. If you really want an IEEE 754 remainder, you can call `IEEEremainder` on `scala.Math`, as in:

```
scala> Math.IEEEremainder(11.0, 4.0)
```

```
res14: Double = -1.0
```

The numeric types also offer unary prefix operators `+` (method `unary_+`) and `-` (method `unary_-`), which allow you to indicate a literal number is positive or negative, as in `-3` or `+4.0`. If you don't specify a unary `+` or `-`, a literal number is interpreted as positive. Unary `+` exists solely for symmetry with unary `-`, but has no effect. The unary `-` can also be used to negate a variable. Here are some examples:

```
scala> val neg = 1 + -3
```

```
neg: Int = -2
```

```
scala> val y = +3
```

```
y: Int = 3
```

```
scala> -neg
```

```
res15: Int = 2
```

5.5

## Relational and logical operations

You can compare numeric types with relational methods greater than (`>`), less than (`<`), greater than or equal to (`>=`), and less than or equal to (`<=`), which

## Section 5.5

### Chapter 5 · Basic Types and Operations

120

yield a Boolean result. In addition, you can use the unary ‘!’ operator (the unary\_! method) to invert a Boolean value. Here are a few examples: scala> 1 > 2

res16: Boolean = false

scala> 1 < 2

res17: Boolean = true

scala> 1.0 <= 1.0

res18: Boolean = true

scala> 3.5f >= 3.6f

res19: Boolean = false

scala> 'a' >= 'A'

res20: Boolean = true

scala> val thisIsBoring = !true

thisIsBoring: Boolean = false

scala> !thisIsBoring

res21: Boolean = true

The logical methods, logical-and (`&&`) and logical-or (`||`), take Boolean operands in infix notation and yield a Boolean result. For example:

```
scala> val toBe = true
```

```
toBe: Boolean = true
```

```
scala> val question = toBe || !toBe
```

```
question: Boolean = true
```

```
scala> val paradox = toBe && !toBe
```

```
paradox: Boolean = false
```

The logical-and and logical-or operations are short-circuited as in Java: expressions built from these operators are only evaluated as far as needed to determine the result. In other words, the right-hand side of logical-and and logical-or expressions won't be evaluated if the left-hand side determines the result. For example, if the left-hand side of a logical-and expression evaluates to false, the result of the expression will definitely be false, so the right-hand side is not evaluated. Likewise, if the left-hand side of

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 5.6](#)

### [Chapter 5 · Basic Types and Operations](#)

121

a logical-or expression evaluates to true, the result of the expression will definitely be true, so the right-hand side is not evaluated. For example:

```
scala> def salt() = { println("salt"); false }
```

```
salt: ()Boolean
```

```
scala> def pepper() = { println("pepper"); true }
```

```
pepper: ()Boolean
```

```
scala> pepper() && salt()
```

```
pepper
```

```
salt
```

```
res22: Boolean = false
```

```
scala> salt() && pepper()
```

```
salt
```

```
res23: Boolean = false
```

In the first expression, pepper and salt are invoked, but in the second, only salt is invoked. Given salt returns false, there's no need to call pepper.

## Note

You may be wondering how short-circuiting can work given operators are just methods. Normally, all arguments are evaluated before entering a method, so how can a method avoid evaluating its second argument? The answer is that all Scala methods have a facility for delaying the evaluation of their arguments, or even declining to evaluate them at all. The facility is called [by-name parameters](#) and is discussed in [Section 9.5](#).

## 5.6

### Bitwise operations

Scala enables you to perform operations on individual bits of integer types with several bitwise methods. The bitwise methods are: bitwise-and (`&`), bitwise-or (`|`), and bitwise-xor (`^`).<sup>5</sup> The unary bitwise complement operator (`~`, the method `unary_~`), inverts each bit in its operand. For example:

```
scala> 1 & 2
```

```
res24: Int = 0
```

The bitwise-xor method performs an exclusive or on its operands. Identical bits yield a 0. Different bits yield a 1. Thus  $0011 \wedge 0101$  yields 0110

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 5.6

### Chapter 5 · Basic Types and Operations

122

scala> 1 | 2

res25: Int = 3

scala> 1 ^ 3

res26: Int = 2

scala> ~1

res27: Int = -2

The first expression,  $1 \& 2$ , bitwise-ands each bit in 1 (0001) and 2 (0010), which yields 0 (0000). The second expression,  $1 | 2$ , bitwise-ors each bit in the same operands, yielding 3 (0011). The third expression,  $1 ^ 3$ , bitwise-xors each bit in 1 (0001) and 3 (0011), yielding 2 (0010). The final expression,  $\sim 1$ , inverts each bit in 1 (0001), yielding -2, which in binary looks like 11111111111111111111111111111110.

Scala integer types also offer three shift methods: shift left ( $<<$ ), shift right ( $>>$ ), and unsigned shift right ( $>>>$ ). The shift methods, when used in infix operator notation, shift the integer value on the left of the operator by the amount specified by the integer value on the right. Shift left and unsigned shift right fill with zeroes as they shift. Shift right fills with the highest bit (the sign bit) of the left-hand value as it shifts. Here are some examples:

scala> -1 >> 31

```
res28: Int = -1
```

```
scala> -1 >>> 31
```

```
res29: Int = 1
```

```
scala> 1 << 2
```

```
res30: Int = 4
```

-1 in binary is 11111111111111111111111111111111. In the first example, -1 >> 31, -1 is shifted to the right 31 bit positions. Since an Int consists of 32 bits, this operation effectively moves the leftmost bit over until it becomes the rightmost bit.<sup>6</sup> Since the >> method fills with ones as it shifts right, because the leftmost bit of -1 is 1, the result is identical to the original left operand, 32 one bits, or -1. In the second example, -1 >>> 31, the leftmost bit is again shifted right until it is in the rightmost position, but <sup>6</sup>The leftmost bit in an integer type is the sign bit. If the leftmost bit is 1, the number is negative. If 0, the number is positive.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 5.7](#)

### [Chapter 5 · Basic Types and Operations](#)

123

this time filling with zeroes along the way. Thus the result this time is binary 00000000000000000000000000000001, or 1. In the final example, 1 << 2, the left operand, 1, is shifted left two positions (filling in with zeroes), resulting in binary 0000000000000000000000000000000100, or 4.

5.7

## Object equality

If you want to compare two objects for equality, you can use either `==`, or its inverse `!=`. Here are a few simple examples:

```
scala> 1 == 2
```

```
res31: Boolean = false
```

```
scala> 1 != 2
```

```
res32: Boolean = true
```

```
scala> 2 == 2
```

```
res33: Boolean = true
```

These operations actually apply to all objects, not just basic types. For example, you can use `==` to compare lists:

```
scala> List(1, 2, 3) == List(1, 2, 3)
```

```
res34: Boolean = true
```

```
scala> List(1, 2, 3) == List(4, 5, 6)
```

```
res35: Boolean = false
```

Going further, you can compare two objects that have different types:

```
scala> 1 == 1.0
```

```
res36: Boolean = true
```

```
scala> List(1, 2, 3) == "hello"
```

```
res37: Boolean = false
```

You can even compare against null, or against things that might be null.

No exception will be thrown:

```
scala> List(1, 2, 3) == null
```

```
res38: Boolean = false
```

```
scala> null == List(1, 2, 3)
```

```
res39: Boolean = false
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 5.8](#)

### [Chapter 5 · Basic Types and Operations](#)

124

As you see, `==` has been carefully crafted so that you get just the equality comparison you want in most cases. This is accomplished with a very simple rule: first check the left side for `null`, and if it is not `null`, call the `equals` method. Since `equals` is a method, the precise comparison you get depends on the type of the left-hand argument. Since there is an automatic `null` check, you do not have to do the check yourself.<sup>7</sup>

This kind of comparison will yield true on different objects, so long as their contents are the same and their `equals` method is written to be based on contents. For example, here is a comparison between two strings that happen to have the same five letters in them:

```
scala> ("he"+ "llo") == "hello"
```

```
res40: Boolean = true
```

How Scala's `==` differs from Java's

In Java, you can use `==` to compare both primitive and reference types.

On primitive types, Java's `==` compares value equality, as in Scala.

On reference types, however, Java's `==` compares [reference equality](#),

which means the two variables point to the same object on the JVM's heap. Scala provides a facility for comparing reference equality, as well, under the name `eq`. However, `eq` and its opposite, `ne`, only apply to objects that

directly map to Java objects. The full details about eq and ne are given in [Sections 11.1 and 11.2](#). Also, see [Chapter 28](#) on how to write a good equals method.

## 5.8

### Operator precedence and associativity

Operator precedence determines which parts of an expression are evaluated before the other parts. For example, the expression  $2 + 2 * 7$  evaluates to 16, not 28, because the  $*$  operator has a higher precedence than the  $+$  operator.

Thus the multiplication part of the expression is evaluated before the addition part. You can of course use parentheses in expressions to clarify evaluation 7The automatic check does not look at the right-hand side, but any reasonable equals method should return false if its argument is null.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### Section 5.8

#### [Chapter 5 · Basic Types and Operations](#)

125

order or to override precedence. For example, if you really wanted the result of the expression above to be 28, you could write the expression like this:  $(2 + 2) * 7$

Given that Scala doesn't have operators, per se, just a way to use methods in operator notation, you may be wondering how operator precedence works. Scala decides precedence based on the first character of the methods used in operator notation (there's one exception to this rule, which will be discussed below). If the method name starts with a  $*$ , for example, it will have a higher precedence than a method that starts with a  $+$ . Thus  $2 + 2 * 7$

will be evaluated as  $2 + (2 * 7)$ , and  $a +++ b *** c$  (in which  $a$ ,  $b$ , and  $c$  are variables, and  $+++$  and  $***$  are methods) will be evaluated  $a +++ (b *** c)$ ,

because the `***` method has a higher precedence than the `+++` method.

[Table 5.3](#) on [page 126](#) shows the precedence given to the first character of a method in decreasing order of precedence, with characters on the same line having the same precedence. The higher a character is in this table, the higher the precedence of methods that start with that character. Here's an example that illustrates the influence of precedence:

```
scala> 2 << 2 + 2
```

```
res41: Int = 32
```

The `<<` method starts with the character `<`, which appears lower in [Table 5.3](#) than the character `+`, which is the first and only character of the `+` method. Thus `<<` will have lower precedence than `+`, and the expression will be evaluated by first invoking the `+` method, then the `<<` method, as in  $2 << (2 + 2)$ .  $2 + 2$  is 4, by our math, and  $2 << 4$  yields 32. Here's another example:

```
scala> 2 + 2 << 2
```

```
res42: Int = 16
```

Since the first characters are the same as in the previous example, the methods will be invoked in the same order. First the `+` method will be invoked, then the `<<` method. So  $2 + 2$  will again yield 4, and  $4 << 2$  is 16.

The one exception to the precedence rule, alluded to above, concerns assignment operators, which end in an equals character (`=`). If an operator ends in an equals character (`=`), and the operator is not one of the comparison

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 5.8](#)

[Chapter 5](#) · [Basic Types and Operations](#)

## Table 5.3 · Operator precedence

(all other special characters)

 $*$  /  $\%$  $+$  -

:

 $=$  ! $<$  >

&amp;

^

|

(all letters)

(all assignment operators)

operators  $\leq$ ,  $\geq$ ,  $\equiv$ , or  $=$ , then the precedence of the operator is the same as that of simple assignment ( $=$ ). That is, it is lower than the precedence of any other operator. For instance:

 $x *= y + 1$ 

means the same as:

 $x *= (y + 1)$ 

because  $=$  is classified as an assignment operator whose precedence is lower than  $+$ , even though the operator's first character is  $*$ , which would suggest a precedence higher than  $+$ .

When multiple operators of the same precedence appear side by side in an expression, the associativity of the operators determines the way operators are grouped. The associativity of an operator in Scala is determined by its last character. As mentioned on [page 77](#) of [Chapter 3](#), any method that ends in a ‘:’ character is invoked on its right operand, passing in the left operand.

Methods that end in any other character are the other way around. They are invoked on their left operand, passing in the right operand. So  $a * b$  yields  $a.(*)b$ , but  $a :::: b$  yields  $b:::(a)$ .

No matter what associativity an operator has, however, its operands are always evaluated left to right. So if  $b$  is an expression that is not just a simple reference to an immutable value, then  $a :::: b$  is more precisely treated as the following block:

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 5.9](#)

### [Chapter 5 · Basic Types and Operations](#)

127

{ val  $x = a$ ;  $b:::(x)$  }

In this block  $a$  is still evaluated before  $b$ , and then the result of this evaluation is passed as an operand to  $b$ ’s  $:::$  method.

This associativity rule also plays a role when multiple operators of the same precedence appear side by side. If the methods end in ‘:’, they are grouped right to left; otherwise, they are grouped left to right. For example,  $a :::: b :::: c$  is treated as  $a :::: (b :::: c)$ . But  $a * b * c$ , by contrast, is treated as  $(a * b) * c$ .

Operator precedence is part of the Scala language. You needn’t be afraid to use it. Nevertheless, it is good style to use parentheses to clarify what operators are operating upon what expressions. Perhaps the only precedence you can truly count on other programmers knowing without looking up is

that multiplicative operators, `*`, `/`, and `%`, have a higher precedence than the additive ones `+` and `-`. Thus even if `a + b << c` yields the result you want without parentheses, the extra clarity you get by writing `(a + b) << c` may reduce the frequency with which your peers utter your name in operator notation, for example, by shouting in disgust, “bills !\*&^%~ code!”.<sup>8</sup>

## 5.9

### Rich wrappers

You can invoke many more methods on Scala’s basic types than were described in the previous sections. A few examples are shown in [Table 5.4](#).

These methods are available via implicit conversions, a technique that will be described in detail in [Chapter 21](#). All you need to know for now is that for each basic type described in this chapter, there is also a “rich wrapper” that provides several additional methods. To see all the available methods on the basic types, therefore, you should look at the API documentation on the rich wrapper for each basic type. Those classes are listed in [Table 5.5](#).

## 5.10

### Conclusion

The main take-aways from this chapter are that operators in Scala are method calls, and that implicit conversions to rich variants exist for Scala’s basic types that add even more useful methods. In the next chapter, we’ll show 8By now you should be able to figure out that given this code, the Scala compiler would invoke `(bills.!*&^%~(code)).!()`.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 5.10](#)

[Chapter 5 · Basic Types and Operations](#)

128

Table 5.4 · Some rich operations

Code

Result

0 max 5

5

0 min 5

0

-2.7 abs

2.7

-2.7 round

-3L

1.5 isInfinity

false

(1.0 / 0) isInfinity

true

4 to 6

Range(4, 5, 6)

"bob" capitalize

"Bob"

"robert" drop 2

"bert"

## Table 5.5 · Rich wrapper classes

Basic type

Rich wrapper

Byte

`scala.runtime.RichByte`

Short

`scala.runtime.RichShort`

Int

`scala.runtime.RichInt`

Char

`scala.runtime.RichChar`

String

`scala.runtime.RichString`

Float

`scala.runtime.RichFloat`

Double

`scala.runtime.RichDouble`

Boolean

`scala.runtime.RichBoolean`

you what it means to design objects in a functional style that gives new implementations of some of the operators that you have seen in this chapter.

## Chapter 6

### Functional Objects

With the understanding of Scala basics you gained in previous chapters, you're ready to see how to design more full-featured classes in Scala. The emphasis in this chapter is on classes that define functional objects, that is, objects that do not have any mutable state. As a running example, we'll create several variants of a class that models rational numbers as immutable objects. Along the way, we'll show you more aspects of object-oriented programming in Scala: class parameters and constructors, methods and operators, private members, overriding, checking preconditions, overloading, and self references.

#### 6.1

##### A specification for class Rational

A rational number is a number that can be expressed as a ratio  $\frac{n}{d}$ , where  $n$  and  $d$  are integers, except that  $d$  cannot be zero.  $n$  is called the numerator and  $d$  the denominator. Examples of rational numbers are  $\frac{1}{2}$ ,  $\frac{2}{3}$ ,  $\frac{11}{2}$ , and  $\frac{2}{1}$ .

$\frac{2}{3}$

$\frac{1}{3}$

239

1

Compared to floating-point numbers, rational numbers have the advantage that fractions are represented exactly, without rounding or approximation.

The class we'll design in this chapter must model the behavior of rational numbers, including allowing them to be added, subtracted, multiplied, and

divided. To add two rationals, you must first obtain a common denominator, then add the two numerators. For example, to add  $\frac{1}{2} + \frac{2}{3}$ , you multiply both

3

parts of the left operand by 3 and both parts of the right operand by 2, which gives you  $\frac{3}{6} + \frac{4}{6}$ . Adding the two numerators yields the result,  $\frac{7}{6}$ . To

mul-6

6

6

tiply two rational numbers, you can simply multiply their numerators and multiply their denominators. Thus,  $\frac{1}{2} * \frac{2}{3}$  gives  $\frac{2}{6}$ , which can be represented

2

5

10

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 6.2](#)

### [Chapter 6 · Functional Objects](#)

130

more compactly in its “normalized” form as  $\frac{1}{5}$ . You divide by swapping the

5

numerator and denominator of the right operand and then multiplying. For instance  $\frac{1}{3} / \frac{2}{5}$  is the same as  $\frac{1}{3} * \frac{5}{2}$ , or  $\frac{5}{6}$ .

2

5

2

3

6

One, maybe rather trivial, observation is that in mathematics, rational numbers do not have mutable state. You can add one rational number to another, but the result will be a new rational number. The original numbers will not have “changed.” The immutable Rational class we’ll design in this chapter will have the same property. Each rational number will be represented by one Rational object. When you add two Rational objects, you’ll create a new Rational object to hold the sum.

This chapter will give you a glimpse of some of the ways Scala enables you to write libraries that feel like native language support. For example, at the end of this chapter you’ll be able to do this with class Rational: scala> val oneHalf = new Rational(1, 2)

oneHalf: Rational = 1/2

scala> val twoThirds = new Rational(2, 3)

twoThirds: Rational = 2/3

scala> (oneHalf / 7) + (1 - twoThirds)

res0: Rational = 17/42

6.2

## Constructing a Rational

A good place to start designing class Rational is to consider how client programmers will create a new Rational object. Given we’ve decided to make Rational objects immutable, we’ll require that clients provide all data needed by an instance (in this case, a numerator and a denominator) when they construct the instance. Thus, we will start the design with this: class Rational(n: Int, d: Int)

One of the first things to note about this line of code is that if a class doesn't have a body, you don't need to specify empty curly braces (though you could, of course, if you wanted to). The identifiers `n` and `d` in the parentheses after the class name, `Rational`, are called class parameters. The Scala compiler will gather up these two class parameters and create a primary constructor that takes the same two parameters.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 6.2](#)

### [Chapter 6 · Functional Objects](#)

131

#### Immutable object trade-offs

Immutable objects offer several advantages over mutable objects, and one potential disadvantage. First, immutable objects are often easier to reason about than mutable ones, because they do not have complex state spaces that change over time. Second, you can pass immutable objects around quite freely, whereas you may need to make defensive copies of mutable objects before passing them to other code. Third, there is no way for two threads concurrently accessing an immutable to corrupt its state once it has been properly constructed, because no thread can change the state of an immutable. Fourth, immutable objects make safe hashtable keys. If a mutable object is mutated after it is placed into a `HashSet`, for example, that object may not be found the next time you look into the `HashSet`.

The main disadvantage of immutable objects is that they sometimes require that a large object graph be copied where otherwise an update could be done in place. In some cases this can be awkward to express and might also cause a performance bottleneck. As a result, it is not uncommon for libraries to provide mutable alternatives to immutable classes. For example, class `StringBuilder` is a mutable alternative to the immutable `String`. We'll give you more information on designing mutable objects in Scala in [Chapter 18](#).

## Note

This initial Rational example highlights a difference between Java and Scala. In Java, classes have constructors, which can take parameters, whereas in Scala, classes can take parameters directly. The Scala notation is more concise—class parameters can be used directly in the body of the class; there's no need to define fields and write assignments that copy constructor parameters into fields. This can yield substantial savings in boilerplate code, especially for small classes.

The Scala compiler will compile any code you place in the class body, which isn't part of a field or a method definition, into the primary constructor.

For example, you could print a debug message like this:

```
class Rational(n: Int, d: Int) {
```

```
    println("Created " + n + "/" + d)
```

```
}
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### [Section 6.3](#)

#### [Chapter 6 · Functional Objects](#)

132

Given this code, the Scala compiler would place the call to `println` into Rational's primary constructor. The `println` call will, therefore, print its debug message whenever you create a new Rational instance:

```
scala> new Rational(1, 2)
```

```
Created 1/2
```

```
res0: Rational = Rational@90110a
```

6.3

## Reimplementing the `toString` method

When we created an instance of Rational in the previous example, the interpreter printed “Rational@`a0b0f5`”. The interpreter obtained this somewhat funny looking string by calling `toString` on the Rational object. By default, class Rational inherits the implementation of `toString` defined in class `java.lang.Object`, which just prints the class name, an @ sign, and a hexadecimal number. The result of `toString` is primarily intended to help programmers by providing information that can be used in debug print statements, log messages, test failure reports, and interpreter and debugger output. The result currently provided by `toString` is not especially helpful, because it doesn’t give any clue about the rational number’s value.

A more useful implementation of `toString` would print out the values of the Rational’s numerator and denominator. You can override the default implementation by adding a method `toString` to class Rational, like this:

```
class Rational(n: Int, d: Int) {  
  
    override def toString = n + "/" + d  
  
}
```

The `override` modifier in front of a method definition signals that a previous method definition is overridden; more on this in [Chapter 10](#). Since Rational numbers will display nicely now, we removed the debug `println` statement we put into the body of previous version of class Rational. You can test the new behavior of Rational in the interpreter:

```
scala> val x = new Rational(1, 3)
```

```
x: Rational = 1/3
```

```
scala> val y = new Rational(5, 7)
```

```
y: Rational = 5/7
```

## Chapter 6 · Functional Objects

133

6.4

### Checking preconditions

As a next step, we will turn our attention to a problem with the current behavior of the primary constructor. As mentioned at the beginning of this chapter, rational numbers may not have a zero in the denominator.

Currently, however, the primary constructor accepts a zero passed as d:  
scala> new Rational(5, 0)

res1: Rational = 5/0

One of the benefits of object-oriented programming is that it allows you to encapsulate data inside objects so that you can ensure the data is valid throughout its lifetime. In the case of an immutable object such as Rational, this means that you should ensure the data is valid when the object is constructed. Given that a zero denominator is an invalid state for a Rational number, you should not let a Rational be constructed if a zero is passed in the d parameter.

The best way to approach this problem is to define as a precondition of the primary constructor that d must be non-zero. A precondition is a constraint on values passed into a method or constructor, a requirement which callers must fulfill. One way to do that is to use require,<sup>1</sup> like this:

```
Rational(n: Int, d: Int) {
```

```
    require(d != 0)
```

```
    override def toString = n + "/" + d
```

```
}
```

The require method takes one boolean parameter. If the passed value is true, require will return normally. Otherwise, require will prevent the object from being constructed by throwing an IllegalArgumentException.

## 6.5

### Adding fields

Now that the primary constructor is properly enforcing its precondition, we will turn our attention to supporting addition. To do so, we'll define a public add method on class Rational that takes another Rational as a parameter. To keep Rational immutable, the add method must not add the passed 1The require method is defined in standalone object, Predef. As mentioned in [Sec-](#)

[tion 4.4](#), Predef's members are imported automatically into every Scala source file.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### [Section 6.5](#)

#### [Chapter 6 · Functional Objects](#)

134

rational number to itself. Rather, it must create and return a new Rational that holds the sum. You might think you could write add this way: class Rational(n: Int, d: Int) { // This won't compile

```
require(d != 0)
```

```
override def toString = n + "/" + d
```

```
def add(that: Rational): Rational =
```

```
new Rational(n * that.d + that.n * d, d * that.d)
```

```
}
```

However, given this code the compiler will complain:

```
<console>:11: error: value d is not a member of Rational new Rational(n *  
that.d + that.n * d, d * that.d)
```

^

```
<console>:11: error: value d is not a member of Rational new Rational(n *  
that.d + that.n * d, d * that.d)
```

Although class parameters n and d are in scope in the code of your add method, you can only access their value on the object on which add was invoked. Thus, when you say n or d in add's implementation, the compiler is happy to provide you with the values for these class parameters. But it won't let you say that.n or that.d, because that does not refer to the Rational object on which add was invoked.<sup>2</sup> To access the numerator and denominator on that, you'll need to make them into fields. [Listing 6.1](#) shows how you could add these fields to class Rational.<sup>3</sup>

In the version of Rational shown in [Listing 6.1](#), we added two fields named numer and denom, and initialized them with the values of class parameters n and d.<sup>4</sup> We also changed the implementation of toString and add so that they use the fields, not the class parameters. This version of class Rational compiles. You can test it by adding some rational numbers:

2Actually, you could add a Rational to itself, in which case that would refer to the object on which add was invoked. But because you can pass any Rational object to add, the compiler still won't let you say that.n.

3In [Section 10.6](#) you'll find out about parametric fields, which provide a shorthand for writing the same code.

4Even though n and d are used in the body of the class, given they are only used inside constructors, the Scala compiler will not emit fields for them. Thus, given this code the Scala compiler will generate a class with two Int fields, one for numer and one for denom.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 6.6](#)

## Chapter 6 · Functional Objects

135

```
class Rational(n: Int, d: Int) {  
    require(d != 0)  
  
    val numer: Int = n  
  
    val denom: Int = d  
  
    override def toString = numer + "/" + denom  
  
    def add(that: Rational): Rational =  
  
        new Rational(  
            numer * that.denom + that.numer * denom,  
            denom * that.denom  
        )  
    }  
}
```

Listing 6.1 · Rational with fields.

```
scala> val oneHalf = new Rational(1, 2)  
oneHalf: Rational = 1/2  
  
scala> val twoThirds = new Rational(2, 3)  
twoThirds: Rational = 2/3  
  
scala> oneHalf add twoThirds  
res3: Rational = 7/6
```

One other thing you can do now that you couldn't do before is access the numerator and denominator values from outside the object. Simply access the public numer and denom fields, like this:

```
scala> val r = new Rational(1, 2)
```

```
r: Rational = 1/2
```

```
scala> r.numer
```

```
res4: Int = 1
```

```
scala> r.denom
```

```
res5: Int = 2
```

6.6

## Self references

The keyword this refers to the object instance on which the currently executing method was invoked, or if used in a constructor, the object instance

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 6.7](#)

[Chapter 6 · Functional Objects](#)

136

being constructed. As an example, consider adding a method, lessThan, which tests whether the given Rational is smaller than a parameter: def lessThan(that: Rational) =

```
this.numer * that.denom < that.numer * this.denom
```

Here, `this.numer` refers to the numerator of the object on which `lessThan` was invoked. You can also leave off the `this` prefix and write just `numer`; the two notations are equivalent.

As an example where you can't do without this, consider adding a `max` method to class `Rational` that returns the greater of the given rational number and an argument:

```
def max(that: Rational) =  
  if (this.lessThan(that)) that else this
```

Here, the first `this` is redundant. You could have equally well left it off and written: `lessThan(that)`. But the second `this` represents the result of the method in the case where the test returns false; were you to omit it, there would be nothing left to return!

## 6.7

### Auxiliary constructors

Sometimes you need multiple constructors in a class. In Scala, constructors other than the primary constructor are called [auxiliary constructors](#). For example, a rational number with a denominator of 1 can be written more succinctly as simply the numerator. Instead of `5`, for example, you can just write `1`

5. It might be nice, therefore, if instead of writing new `Rational(5, 1)`, client programmers could simply write new `Rational(5)`. This would require adding an auxiliary constructor to `Rational` that takes only one argument, the numerator, with the denominator predefined to be 1. [Listing 6.2](#)

shows what that would look like.

Auxiliary constructors in Scala start with `def this(...)`. The body of `Rational`'s auxiliary constructor merely invokes the primary constructor, passing along its lone argument, `n`, as the numerator and 1 as the

denominator. You can see the auxiliary constructor in action by typing the following into the interpreter:

```
scala> val y = new Rational(3)
```

```
y: Rational = 3/1
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 6.7](#)

[Chapter 6 · Functional Objects](#)

137

```
class Rational(n: Int, d: Int) {  
    require(d != 0)  
  
    val numer: Int = n  
  
    val denom: Int = d  
  
    def this(n: Int) = this(n, 1) // auxiliary constructor  
  
    override def toString = numer + "/" + denom  
  
    def add(that: Rational): Rational =  
  
        new Rational(  
            numer * that.denom + that.numer * denom,  
            denom * that.denom  
        )  
}
```

Listing 6.2 · Rational with an auxiliary constructor.

In Scala, every auxiliary constructor must invoke another constructor of the same class as its first action. In other words, the first statement in every auxiliary constructor in every Scala class will have the form “this( . . . )”.

The invoked constructor is either the primary constructor (as in the Rational example), or another auxiliary constructor that comes textually before the calling constructor. The net effect of this rule is that every constructor invocation in Scala will end up eventually calling the primary constructor of the class. The primary constructor is thus the single point of entry of a class.

## Note

If you’re familiar with Java, you may wonder why Scala’s rules for constructors are a bit more restrictive than Java’s. In Java, a constructor must either invoke another constructor of the same class, or directly invoke a constructor of the superclass, as its first action. In a Scala class, only the primary constructor can invoke a superclass constructor. The increased restriction in Scala is really a design trade-off that needed to be paid in exchange for the greater conciseness and simplicity of Scala’s constructors compared to Java’s. Superclasses and the details of how constructor invocation and inheritance interact will be explained in [Chapter 10](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 6.8](#)

### [Chapter 6 · Functional Objects](#)

138

6.8

Private fields and methods

In the previous version of Rational, we simply initialized numer with n and denom with d. As a result, the numerator and denominator of a Rational can be larger than needed. For example, the fraction 66 could be normalized to 42

an equivalent reduced form,  $\frac{11}{7}$ , but Rational's primary constructor doesn't

currently do this:

```
scala> new Rational(66, 42)
```

```
res6: Rational = 66/42
```

To normalize in this way, you need to divide the numerator and denominator by their greatest common divisor. For example, the greatest common divisor of 66 and 42 is 6. (In other words, 6 is the largest integer that divides evenly into both 66 and 42.) Dividing both the numerator and denominator of 66 by 42

yields its reduced form,  $\frac{11}{7}$ . [Listing 6.3](#) shows one way to do this:

```
class Rational(n: Int, d: Int) {  
    require(d != 0)  
  
    private val g = gcd(n.abs, d.abs)  
  
    val numer = n / g  
  
    val denom = d / g  
  
    def this(n: Int) = this(n, 1)  
  
    def add(that: Rational): Rational =  
  
        new Rational(  
            numer * that.denom + that.numer * denom,  
            denom * that.denom  
        )
```

```
override def toString = numer + "/" + denom  
  
private def gcd(a: Int, b: Int): Int =  
  
if (b == 0) a else gcd(b, a % b)  
}
```

Listing 6.3 · Rational with a private field and method.

In this version of Rational, we added a private field, g, and modified the initializers for numer and denom. (An initializer is the code that initializes

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 6.9](#)

### [Chapter 6 · Functional Objects](#)

139

a variable, for example, the “n / g” that initializes numer.) Because g is private, it can be accessed inside the body of the class, but not outside. We also added a private method, gcd, which calculates the greatest common divisor of two passed Ints. For example, gcd(12, 8) is 4. As you saw in

[Section 4.1](#), to make a field or method private you simply place the private keyword in front of its definition. The purpose of the private “helper method”

gcd is to factor out code needed by some other part of the class, in this case, the primary constructor. To ensure g is always positive, we pass the absolute value of n and d, which we obtain by invoking abs on them, a method you can invoke on any Int to get its absolute value.

The Scala compiler will place the code for the initializers of Rational’s three fields into the primary constructor in the order in which they appear in the source code. Thus, g’s initializer, gcd(n.abs, d.abs), will execute before the other two, because it appears first in the source. Field g will be

initialized with the result, the greatest common divisor of the absolute value of the class parameters, n and d. Field g is then used in the initializers of numer and denom. By dividing n and d by their greatest common divisor, g, every Rational will be constructed in its normalized form: scala> new Rational(66, 42)

res7: Rational = 11/7

6.9

## Defining operators

The current implementation of Rational addition is OK, but could be made more convenient to use. You might ask yourself why you can write:  $x + y$  if x and y are integers or floating-point numbers, but you have to write: `x.add(y)`

or at least:

`x add y`

if they are rational numbers. There's no convincing reason why this should be so. Rational numbers are numbers just like other numbers. In a mathematical sense they are even more natural than, say, floating-point numbers.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 6.9](#)

[Chapter 6 · Functional Objects](#)

140

Why should you not use the natural arithmetic operators on them? In Scala you can do this. In the rest of this chapter, we'll show you how.

The first step is to replace add by the usual mathematical symbol. This is straightforward, as + is a legal identifier in Scala. We can simply define a method with + as its name. While we're at it, you may as well implement a method named \* that performs multiplication. The result is shown in

[Listing 6.4:](#)

```
class Rational(n: Int, d: Int) {  
    require(d != 0)  
  
    private val g = gcd(n.abs, d.abs)  
  
    val numer = n / g  
  
    val denom = d / g  
  
    def this(n: Int) = this(n, 1)  
  
    def + (that: Rational): Rational =  
  
        new Rational(  
            numer * that.denom + that.numer * denom,  
            denom * that.denom  
        )  
  
    def * (that: Rational): Rational =  
  
        new Rational(numer * that.numer, denom * that.denom)  
  
    override def toString = numer + "/" + denom  
  
    private def gcd(a: Int, b: Int): Int =  
        if (b == 0) a else gcd(b, a % b)
```

}

Listing 6.4 · Rational with operator methods.

With class Rational defined in this manner, you can now write: scala> val x = new Rational(1, 2)

x: Rational = 1/2

scala> val y = new Rational(2, 3)

y: Rational = 2/3

scala> x + y

res8: Rational = 7/6

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 6.10](#)

[Chapter 6 · Functional Objects](#)

141

As always, the operator syntax on the last input line is equivalent to a method call. You could also write:

scala> x.+(y)

res9: Rational = 7/6

but this is not as readable.

Another thing to note is that given Scala's rules for operator precedence, which were described in [Section 5.8](#), the \* method will bind more tightly than the + method for Rationals. In other words, expressions involving

+ and \* operations on `Rationals` will behave as expected. For example, `x + x * y` will execute as `x + (x * y)`, not `(x + x) * y`: `scala> x + x * y`

`res10: Rational = 5/6`

`scala> (x + x) * y`

`res11: Rational = 2/3`

`scala> x + (x * y)`

`res12: Rational = 5/6`

## 6.10

### Identifiers in Scala

You have now seen the two most important ways to form an identifier in Scala: alphanumeric and operator. Scala has very flexible rules for forming identifiers. Besides the two forms you have seen there are also two others.

All four forms of identifier formation are described in this section.

An alphanumeric identifier starts with a letter or underscore, which can be followed by further letters, digits, or underscores. The ‘\$’ character also counts as a letter, however it is reserved for identifiers generated by the Scala compiler. Identifiers in user programs should not contain ‘\$’ characters, even though it will compile; if they do this might lead to name clashes with identifiers generated by the Scala compiler.

Scala follows Java’s convention of using camel-case<sup>5</sup> identifiers, such as `toString` and `HashSet`. Although underscores are legal in identifiers, they are not used that often in Scala programs, in part to be consistent with Java,

5This style of naming identifiers is called camel case because the identifiers have humps consisting of the embedded capital letters.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 6.10](#)

## Chapter 6 · Functional Objects

142

but also because underscores have many other non-identifier uses in Scala code. As a result, it is best to avoid identifiers like `to_string`, `__init__`, or `name_`. Camel-case names of fields, method parameters, local variables, and functions should start with lower case letter, for example: `length`, `flatMap`, and `s`. Camel-case names of classes and traits should start with an upper case letter, for example: `BigInt`, `List`, and `UnbalancedTreeMap`.<sup>6</sup>

### Note

One consequence of using a trailing underscore in an identifier is that if you attempt, for example, to write a declaration like this,

“`val name_ : Int = 1`”, you’ll get a compiler error. The compiler will think you are trying to declare a `val` named “`name_:`”. To get this to compile, you would need to insert an extra space before the colon, as in:

“`val name_ : Int = 1`”.

One way in which Scala’s conventions depart from Java’s involves constant names. In Scala, the word `constant` does not just mean `val`. Even though a `val` does remain constant after it is initialized, it is still a variable.

For example, method parameters are `vals`, but each time the method is called those `vals` can hold different values. A `constant` is more permanent. For example, `scala.Math.Pi` is defined to be the double value closest to the real value of  $\pi$ , the ratio of a circle’s circumference to its diameter. This value is unlikely to change ever, thus, `Pi` is clearly a `constant`. You can also use `constants` to give names to values that would otherwise be magic numbers in your code: literal values with no explanation, which in the worst case appear in multiple places. You may also want to define `constants` for use in pattern matching, a use case that will be described in [Section 15.2](#). In Java, the convention is to give `constants` names that are all upper case, with underscores separating the words, such as `MAX_VALUE` or `PI`. In Scala, the convention is merely that the first character should be upper case. Thus,

constants named in the Java style, such as X\_OFFSET, will work as Scala constants, but the Scala convention is to use camel case for constants, such as XOffset.

An operator identifier consists of one or more operator characters. Operator characters are printable ASCII characters such as +, :, ?, ~ or #.7 In [Section 16.5](#), you'll see that sometimes you may want to give a special kind of class known as a case class a name consisting solely of operator characters. For example, the Scala API contains a class named ::, which facilitates pattern matching on Lists.

7More precisely, an operator character belongs to the Unicode set of mathematical symbols(Sm) or other symbols(So), or to the 7-bit ASCII characters that are not letters, digits,

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 6.10](#)

### [Chapter 6 · Functional Objects](#)

143

are some examples of operator identifiers:

+

++

:::

<?>

:->

The Scala compiler will internally “mangle” operator identifiers to turn them into legal Java identifiers with embedded \$ characters. For instance, the identifier :-> would be represented internally as \$colon\$minus\$greater.

If you ever wanted to access this identifier from Java code, you'd need to use this internal representation.

Because operator identifiers in Scala can become arbitrarily long, there is a small difference between Java and Scala. In Java, the input `x<-y` would be parsed as four lexical symbols, so it would be equivalent to `x < - y`. In Scala,

`<-` would be parsed as a single identifier, giving `x <- y`. If you want the first interpretation, you need to separate the `<` and the `-` characters by a space.

This is unlikely to be a problem in practice, as very few people would write `x<-y` in Java without inserting spaces or parentheses between the operators.

A mixed identifier consists of an alphanumeric identifier, which is followed by an underscore and an operator identifier. For example, `unary_+`

used as a method name defines a unary + operator. Or, `myvar_=` used as method name defines an assignment operator. In addition, the mixed identifier form `myvar_=` is generated by the Scala compiler to support properties; more on that in [Chapter 18](#).

A literal identifier is an arbitrary string enclosed in back ticks (`` . . . ``).

Some examples of literal identifiers are:

``x``

``<clinit>``

``yield``

The idea is that you can put any string that's accepted by the runtime as an identifier between back ticks. The result is always a Scala identifier.

This works even if the name contained in the back ticks would be a Scala reserved word. A typical use case is accessing the static `yield` method in Java's `Thread` class. You cannot write `Thread.yield()` because `yield` is a reserved word in Scala. However, you can still name the method in back ticks, e.g., `Thread.`yield`()`.

parentheses, square brackets, curly braces, single or double quote, or an underscore, period, semi-colon, comma, or back tick character.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 6.11

### Chapter 6 · Functional Objects

144

6.11

#### Method overloading

Back to class Rational. With the latest changes, you can now do addition and multiplication operations in a natural style on rational numbers. But one thing still missing is mixed arithmetic. For instance, you cannot multiply a rational number by an integer, because the operands of \* always have to be Rationals. So for a rational number r you can't write `r * 2`. You must write `r * new Rational(2)`, which is not as nice.

To make Rational even more convenient, we'll add new methods to the class that perform mixed addition and multiplication on rational numbers and integers. While we're at it, we'll add methods for subtraction and division too. The result is shown in [Listing 6.5](#).

There are now two versions each of the arithmetic methods: one that takes a rational as its argument and another that takes an integer. In other words, each of these method names is overloaded, because each name is now being used by multiple methods. For example, the name + is used by one method that takes a Rational and another that takes an Int. In a method call, the compiler picks the version of an overloaded method that correctly matches the types of the arguments. For instance, if the argument y in `x.+(y)` is a Rational, the compiler will pick the method + that takes a Rational parameter. But if the argument is an integer, the compiler will pick the method + that takes an Int parameter instead. If you try this: `scala> val x = new Rational(2, 3)`

x: Rational = 2/3

scala> x \* x

res13: Rational = 4/9

scala> x \* 2

res14: Rational = 4/3

You'll see that the `*` method invoked is determined in each case by the type of the right operand.

Note

Scala's process of overloaded method resolution is very similar to Java's.

In every case, the chosen overloaded version is the one that best matches the static types of the arguments. Sometimes there is no unique best matching version; in that case the compiler will give you an "ambiguous reference" error.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 6.11](#)

[Chapter 6 · Functional Objects](#)

145

```
class Rational(n: Int, d: Int) {  
    require(d != 0)  
  
    private val g = gcd(n.abs, d.abs)  
  
    val numer = n / g  
  
    val denom = d / g
```

```
def this(n: Int) = this(n, 1)

def + (that: Rational): Rational =
    new Rational(
        numer * that.denom + that.numer * denom,
        denom * that.denom
    )

def + (i: Int): Rational =
    new Rational(numer + i * denom, denom)

def - (that: Rational): Rational =
    new Rational(
        numer * that.denom - that.numer * denom,
        denom * that.denom
    )

def - (i: Int): Rational =
    new Rational(numer - i * denom, denom)

def * (that: Rational): Rational =
    new Rational(numer * that.numer, denom * that.denom)

def * (i: Int): Rational =
    new Rational(numer * i, denom)

def / (that: Rational): Rational =
```

```
new Rational(numer * that.denom, denom * that.numer)

def / (i: Int): Rational =
    new Rational(numer, denom * i)

override def toString = numer + "/" + denom

private def gcd(a: Int, b: Int): Int =
    if (b == 0) a else gcd(b, a % b)

}
```

Listing 6.5 · Rational with overloaded methods.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 6.12

### Chapter 6 · Functional Objects

146

6.12

#### Implicit conversions

Now that you can write `r * 2`, you might also want to swap the operands, as in `2 * r`. Unfortunately this does not work yet:

```
scala> 2 * r
<console>:7: error: overloaded method value * with alternatives
  (Double)Double <and> (Float)Float <and> (Long)Long <and> (Int)Int
  <and> (Char)Int <and> (Short)Int
  <and> (Byte)Int cannot be applied to (Rational)
```

`2 * r`

`^`

The problem here is that `2 * r` is equivalent to `2.*(r)`, so it is a method call on the number 2, which is an integer. But the `Int` class contains no multiplication method that takes a `Rational` argument—it couldn't because class `Rational` is not a standard class in the Scala library.

However, there is another way to solve this problem in Scala: You can create an implicit conversion that automatically converts integers to rational numbers when needed. Try adding this line in the interpreter: `scala> implicit def intToRational(x: Int) = new Rational(x)` This defines a conversion method from `Int` to `Rational`. The `implicit` modifier in front of the method tells the compiler to apply it automatically in a number of situations. With the conversion defined, you can now retry the example that failed before:

```
scala> val r = new Rational(2,3)
```

```
r: Rational = 2/3
```

```
scala> 2 * r
```

```
res16: Rational = 4/3
```

Note that for an implicit conversion to work, it needs to be in scope. If you place the implicit method definition inside class `Rational`, it won't be in scope in the interpreter. For now, you'll need to define it directly in the interpreter.

As you can glimpse from this example, implicit conversions are a very powerful technique for making libraries more flexible and more convenient to use. Because they are so powerful, they can also be easily misused. You'll

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 6.13](#)

## Chapter 6 · Functional Objects

147

find out more on implicit conversions, including ways to bring them into scope where they are needed, in [Chapter 21](#).

6.13

### A word of caution

As this chapter has demonstrated, creating methods with operator names and defining implicit conversions can help you design libraries for which client code is concise and easy to understand. Scala gives you a great deal of power to design such easy-to-use libraries, but please bear in mind that with power comes responsibility.

If used unartfully, both operator methods and implicit conversions can give rise to client code that is hard to read and understand. Because implicit conversions are applied implicitly by the compiler, not explicitly written down in the source code, it can be non-obvious to client programmers what implicit conversions are being applied. And although operator methods will usually make client code more concise, they will only make it more readable to the extent client programmers will be able to recognize and remember the meaning of each operator.

The goal you should keep in mind as you design libraries is not merely enabling concise client code, but readable, understandable client code. Conciseness will often be a big part of that readability, but you can take conciseness too far. By designing libraries that enable tastefully concise and at the same time understandable client code, you can help those client programmers work productively.

6.14

### Conclusion

In this chapter, you saw more aspects of classes in Scala. You saw how to add parameters to a class, define several constructors, define operators as methods, and customize classes so that they are natural to use. Maybe most importantly, you saw that defining and using immutable objects is a quite natural way to code in Scala.

Although the final version of Rational shown in this chapter fulfills the requirements set forth at the beginning of the chapter, it could still be improved. We will in fact return to this example later in the book. For example, in [Chapter 28](#), you'll learn how to override equals and hashCode to allow Rationals to behave better when compared with == or placed into hash ta-

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 6.14

### Chapter 6 · Functional Objects

148

bles. In [Chapter 21](#), you'll learn how to place implicit method definitions in a companion object for Rational, so they can be more easily placed into scope when client programmers are working with Rationals.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 7

### Built-in Control Structures

Scala has only a handful of built-in control structures. The only control structures are if, while, for, try, match, and function calls. The reason Scala has so few is that it has included function literals since its inception. Instead of accumulating one higher-level control structure after another in the base syntax, Scala accumulates them in libraries. [Chapter 9](#) will show precisely how that is done. This chapter will show those few control structures that are built in.

One thing you will notice is that almost all of Scala's control structures result in some value. This is the approach taken by functional languages, in which programs are viewed as computing a value, thus the components of a program should also compute values. You can also view this approach as the logical conclusion of a trend already present in imperative languages. In imperative languages, function calls can return a value, even though having the called function update an output variable passed as an argument would work just as well. In addition, imperative languages often have a ternary operator (such as the ?: operator of C, C++, and Java), which behaves exactly like if, but results in a value. Scala adopts this ternary operator model, but calls it if. In other words, Scala's if can result in a value. Scala then continues this trend by having for, try, and match also result in values.

Programmers can use these result values to simplify their code, just as they use return values of functions. Without this facility, the programmer must create temporary variables just to hold results that are calculated inside a control structure. Removing these temporary variables makes the code a little simpler, and it also prevents many bugs where you set the variable in one branch but forget to set it in another.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 7.1

### Chapter 7 · Built-in Control Structures

150

Overall, Scala's basic control structures, minimal as they are, are sufficient to provide all of the essentials from imperative languages. Further, they allow you to shorten your code by consistently having result values. To show you how all of this works, this chapter takes a closer look at each of Scala's basic control structures.

7.1

If expressions

Scala's if works just like in many other languages. It tests a condition and then executes one of two code branches depending on whether the condition holds true. Here is a common example, written in an imperative style:

```
var filename = "default.txt"
```

```
if (!args.isEmpty)  
    filename = args(0)
```

This code declares a variable, filename, and initializes it to a default value.

It then uses an if expression to check whether any arguments were supplied to the program. If so, it changes the variable to hold the value specified in the argument list. If no arguments were supplied, it leaves the variable set to the default value.

This code can be written more nicely, because as mentioned in [Step 3](#) in [Chapter 2](#), Scala's if is an expression that results in a value. [Listing 7.1](#) shows how you can accomplish the same effect as the previous example, but without using any vars:

```
val filename =  
  if (!args.isEmpty) args(0)  
  else "default.txt"
```

[Listing 7.1 · Scala's idiom for conditional initialization.](#)

This time, the if has two branches. If args is not empty, the initial element, args(0), is chosen. Else, the default value is chosen. The if expression results in the chosen value, and the filename variable is initialized with that value. This code is slightly shorter, but its real advantage is that it uses a val instead of a var. Using a val is the functional style, and it helps you in much the same way as a final variable in Java. It tells readers of the

## Section 7.2

### Chapter 7 · Built-in Control Structures

151

code that the variable will never change, saving them from scanning all code in the variable's scope to see if it ever changes.

A second advantage to using a val instead of a var is that it better supports equational reasoning. The introduced variable is equal to the expression that computes it, assuming that expression has no side effects. Thus, any time you are about to write the variable name, you could instead write the expression. Instead of `println(filename)`, for example, you could just as well write this:

`println(if (!args.isEmpty) args(0) else "default.txt")` The choice is yours. You can write it either way. Using vals helps you safely make this kind of refactoring as your code evolves over time.

Look for opportunities to use vals. They can make your code both easier to read and easier to refactor.

7.2

### While loops

Scala's while loop behaves as in other languages. It has a condition and a body, and the body is executed over and over as long as the condition holds true. [Listing 7.2](#) shows an example: `def gcdLoop(x: Long, y: Long): Long = {`

`var a = x`

`var b = y`

`while (a != 0) {`

```
val temp = a
```

```
a = b % a
```

```
b = temp
```

```
}
```

```
b
```

```
}
```

Listing 7.2 · Calculating greatest common divisor with a while loop.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 7.2](#)

### [Chapter 7 · Built-in Control Structures](#)

152

Scala also has a do-while loop. This works like the while loop except that it tests the condition after the loop body instead of before. [Listing 7.3](#)

shows a Scala script that uses a do-while to echo lines read from the standard input, until an empty line is entered:

```
var line = ""  
  
do {  
  
    line = readLine()  
  
    println("Read: " + line)  
  
} while (line != "")
```

Listing 7.3 · Reading from the standard input with do-while.

The while and do-while constructs are called “loops,” not expressions, because they don’t result in an interesting value. The type of the result is Unit. It turns out that a value (and in fact, only one value) exists whose type is Unit. It is called the unit value and is written (). The existence of () is how Scala’s Unit differs from Java’s void. Try this in the interpreter: scala>

```
def greet() { println("hi") }
```

```
greet: ()Unit
```

```
scala> greet() == ()
```

```
hi
```

```
res0: Boolean = true
```

Because no equals sign precedes its body, greet is defined to be a procedure with a result type of Unit. Therefore, greet returns the unit value, ().

This is confirmed in the next line: comparing the greet’s result for equality with the unit value, (), yields true.

One other construct that results in the unit value, which is relevant here, is reassignment to vars. For example, were you to attempt to read lines in Scala using the following while loop idiom from Java (and C and C++), you’ll run into trouble:

```
var line = ""
```

```
while ((line = readLine()) != "") // This doesn't work!
```

```
println("Read: " + line)
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 7.2](#)

[Chapter 7](#) · [Built-in Control Structures](#)

When you compile this code, Scala will give you a warning that comparing values of type Unit and String using != will always yield true. Whereas in Java, assignment results in the value assigned, in this case a line from the standard input, in Scala assignment always results in the unit value, ().

Thus, the value of the assignment “line = readLine()” will always be () and never be “”. As a result, this while loop’s condition will never be false, and the loop will, therefore, never terminate.

Because the while loop results in no value, it is often left out of pure functional languages. Such languages have expressions, not loops. Scala includes the while loop nonetheless, because sometimes an imperative solution can be more readable, especially to programmers with a predominantly imperative background. For example, if you want to code an algorithm that repeats a process until some condition changes, a while loop can express it directly while the functional alternative, which likely uses recursion, may be less obvious to some readers of the code.

For example, [Listing 7.4](#) shows an alternate way to determine a greatest common divisor of two numbers.<sup>1</sup> Given the same two values for x and y, the gcd function shown in [Listing 7.4](#) will return the same result as the gcdLoop function, shown in [Listing 7.2](#). The difference between these two approaches is that gcdLoop is written in an imperative style, using vars and a while loop, whereas gcd is written in a more functional style that involves recursion (gcd calls itself) and requires no vars.

```
def gcd(x: Long, y: Long): Long =  
  if (y == 0) x else gcd(y, x % y)
```

[Listing 7.4 · Calculating greatest common divisor with recursion.](#)

In general, we recommend you challenge while loops in your code in the same way you challenge vars. In fact, while loops and vars often go hand in hand. Because while loops don’t result in a value, to make any kind of difference to your program, a while loop will usually either need to update vars or perform I/O. You can see this in action in the gcdLoop example

shown previously. As that while loop does its business, it updates vars a and b. Thus, we suggest you be a bit suspicious of while loops in your code.

<sup>1</sup>The gcd function shown in [Listing 7.4](#) uses the same approach used by the like-named function, first shown in [Listing 6.3](#), to calculate greatest common divisors for class Rational.

The main difference is that instead of Ints the gcd of [Listing 7.4](#) works with Longs.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 7.3](#)

### [Chapter 7 · Built-in Control Structures](#)

154

If there isn't a good justification for a particular while or do-while loop, try to find a way to do the same thing without it.

7.3

#### For expressions

Scala's for expression is a Swiss army knife of iteration. It lets you combine a few simple ingredients in different ways to express a wide variety of iterations. Simple uses enable common tasks such as iterating through a sequence of integers. More advanced expressions can iterate over multiple collections of different kinds, can filter out elements based on arbitrary conditions, and can produce new collections.

#### Iteration through collections

The simplest thing you can do with for is to iterate through all the elements of a collection. For example, [Listing 7.5](#) shows some code that prints out all files in the current directory. The I/O is performed using the Java API.

First, we create a `java.io.File` on the current directory, `".`, and call its `listFiles` method. This method returns an array of `File` objects, one per directory and file contained in the current directory. We store the resulting array in the `filesHere` variable.

```
val filesHere = (new java.io.File(".")).listFiles for (file <- filesHere)
```

```
    println(file)
```

Listing 7.5 · Listing files in a directory with a for expression.

With the “`file <- filesHere`” syntax, which is called a [generator](#), we iterate through the elements of `filesHere`. In each iteration, a new `val` named `file` is initialized with an element value. The compiler infers the type of `file` to be `File`, because `filesHere` is an `Array[File]`. For each iteration, the body of the for expression, `println(file)`, will be executed.

Because `File`’s `toString` method yields the name of the file or directory, the names of all the files and directories in the current directory will be printed.

The for expression syntax works for any kind of collection, not just arrays.<sup>2</sup> One convenient special case is the Range type, which you briefly <sup>2</sup>To be precise, the expression to the right of the `<-` symbol in a for expression can be

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 7.3](#)

[Chapter 7](#) · [Built-in Control Structures](#)

155

saw in [Table 5.4](#) on [page 128](#). You can create Ranges using syntax like

“1 to 5” and can iterate through them with a for. Here is a simple example:  
scala> for (i <- 1 to 4)

```
    println("Iteration "+ i)
```

Iteration 1

Iteration 2

Iteration 3

Iteration 4

If you don't want to include the upper bound of the range in the values that are iterated over, use until instead of to:

```
scala> for (i <- 1 until 4)
```

```
    println("Iteration " + i)
```

Iteration 1

Iteration 2

Iteration 3

Iterating through integers like this is common in Scala, but not nearly as much as in other languages. In other languages, you might use this facility to iterate through an array, like this:

```
// Not common in Scala...
```

```
for (i <- 0 to filesHere.length - 1)
```

```
    println(filesHere(i))
```

This for expression introduces a variable *i*, sets it in turn to each integer between 0 and *filesHere.length - 1*, and executes the body of the for expression for each setting of *i*. For each setting of *i*, the *i*'th element of *filesHere* is extracted and processed.

The reason this kind of iteration is less common in Scala is that you can just as well iterate over the collection directly. If you do, your code becomes shorter and you sidestep many of the off-by-one errors that can arise when

iterating through arrays. Should you start at 0 or 1? Should you add -1, +1, or nothing to the final index? Such questions are easily answered, but easily answered wrongly. It is safer to avoid such questions entirely.

any type that has certain methods, in this case `foreach`, with appropriate signatures. The details on how the Scala compiler processes for expressions are described in [Chapter 23](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 7.3](#)

### [Chapter 7 · Built-in Control Structures](#)

156

#### Filtering

Sometimes you do not want to iterate through a collection in its entirety. You want to filter it down to some subset. You can do this with a `for` expression by adding a [filter](#): an if clause inside the `for`'s parentheses. For example, the code shown in [Listing 7.6](#) lists only those files in the current directory whose names end with “.scala”:

```
val filesHere = (new java.io.File(".")).listFiles for (file <- filesHere if  
file.getName.endsWith(".scala")) println(file)
```

[Listing 7.6 · Finding .scala files using a for with a filter.](#)

You could alternatively accomplish the same goal with this code: `for (file <- filesHere)`

```
if (file.getName.endsWith(".scala"))  
  
println(file)
```

This code yields the same output as the previous code, and likely looks more familiar to programmers with an imperative background. The imperative form, however, is only an option because this particular for

expression is executed for its printing side-effects and results in the unit value (). As will be demonstrated later in this section, the for expression is called an

“expression” because it can result in an interesting value, a collection whose type is determined by the for expression’s <- clauses.

You can include more filters if you want. Just keep adding if clauses.

For example, to be extra defensive, the code in [Listing 7.7](#) prints only files and not directories. It does so by adding a filter that checks the file’s `isFile` method.

```
for (  
    file <- filesHere  
    if file.isFile;  
    if file.getName.endsWith(".scala")  
) println(file)
```

[Listing 7.7 · Using multiple filters in a for expression.](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 7.3](#)

[Chapter 7 · Built-in Control Structures](#)

157

Note

If you add more than one filter on a generator, the filter’s if clauses must be separated by semicolons. This is why there’s a semicolon after the

“`if file.isFile`” filter in [Listing 7.7](#).

## Nested iteration

If you add multiple `<-` clauses, you will get nested “loops.” For example, the `for` expression shown in [Listing 7.8](#) has two nested loops. The outer loop iterates through `filesHere`, and the inner loop iterates through `fileLines(file)` for any file that ends with `.scala`.

```
def fileLines(file: java.io.File) =  
  
  scala.io.Source.fromFile(file).getLines.toList  
  
def grep(pattern: String) =  
  
  for (  
    file <- filesHere  
    if file.getName.endsWith(".scala");  
    line <- fileLines(file)  
    if line.trim.matches(pattern)  
  ) println(file +": "+ line.trim)  
  
grep(".*gcd.*")
```

[Listing 7.8](#) · Using multiple generators in a `for` expression.

If you prefer, you can use curly braces instead of parentheses to surround the generators and filters. One advantage to using curly braces is that you can leave off some of the semicolons that are needed when you use parentheses.

## Mid-stream variable bindings

Note that the previous code repeats the expression `line.trim`. This is a non-trivial computation, so you might want to only compute it once. You can do this by binding the result to a new variable using an equals sign (`=`).

The bound variable is introduced and used just like a val, only with the val keyword left out. [Listing 7.9](#) shows an example.

In [Listing 7.9](#), a variable named trimmed is introduced halfway through the for expression. That variable is initialized to the result of line.trim.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 7.3](#)

### [Chapter 7 · Built-in Control Structures](#)

158

```
def grep(pattern: String) =  
  for {  
    file <- filesHere  
    if file.getName.endsWith(".scala")  
    line <- fileLines(file)  
    trimmed = line.trim  
    if trimmed.matches(pattern)  
  } println(file +": "+ trimmed)  
grep(".*gcd.*")
```

[Listing 7.9 · Mid-stream assignment in a for expression.](#)

The rest of the for expression then uses the new variable in two places, once in an if and once in println.

Producing a new collection

While all of the examples so far have operated on the iterated values and then forgotten them, you can also generate a value to remember for each iteration.

To do so, you prefix the body of the for expression by the keyword `yield`.

For example, here is a function that identifies the .scala files and stores them in an array:

```
def scalaFiles =  
  for {  
    file <- filesHere  
    if file.getName.endsWith(".scala")  
  } yield file
```

Each time the body of the for expression executes it produces one value, in this case simply `file`. When the for expression completes, the result will include all of the yielded values contained in a single collection. The type of the resulting collection is based on the kind of collections processed in the iteration clauses. In this case the result is an `Array[File]`, because `filesHere` is an array and the type of the yielded expression is `File`.

Be careful, by the way, where you place the `yield` keyword. The syntax of a for-yield expression is like this:

for clauses `yield` body

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 7.4](#)

[Chapter 7](#) · Built-in Control Structures

The yield goes before the entire body. Even if the body is a block surrounded by curly braces, put the yield before the first curly brace, not before the last expression of the block. Avoid the temptation to write things like this:

```
for (file <- filesHere if file.getName.endsWith(".scala")) {  
    yield file  
  
    // Syntax error!  
}
```

For example, the for expression shown in [Listing 7.10](#) first transforms the `Array[File]` named `filesHere`, which contains all files in the current directory, to one that contains only `.scala` files. For each of these it generates an `Iterator[String]` (the result of the `fileLines` method, whose definition is shown in [Listing 7.8](#)). An `Iterator` offers methods `next` and `hasNext` that allow you to iterate over a collection of elements. This initial iterator is transformed into another `Iterator[String]` containing only trimmed lines that include the substring "for". Finally, for each of these, an integer length is yielded. The result of this for expression is an `Array[Int]`

containing those lengths.

```
val forLineLengths =  
  
    for {  
        file <- filesHere  
        if file.getName.endsWith(".scala")  
        line <- fileLines(file)  
        trimmed = line.trim  
        if trimmed.matches(".*for.*")  
    } yield line.length
```

```
} yield trimmed.length
```

Listing 7.10 · Transforming an Array[File] to Array[Int] with a for.

At this point, you have seen all the major features of Scala's for expression. This section went through them rather quickly, however. A more thorough coverage of for expressions is given in [Chapter 23](#).

## 7.4

### Exception handling with try expressions

Scala's exceptions behave just like in many other languages. Instead of returning a value in the normal way, a method can terminate by throwing an

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### [Section 7.4](#)

### [Chapter 7 · Built-in Control Structures](#)

160

exception. The method's caller can either catch and handle that exception, or it can itself simply terminate, in which case the exception propagates to the caller's caller. The exception propagates in this way, unwinding the call stack, until a method handles it or there are no more methods left.

### Throwing exceptions

Throwing an exception looks the same as in Java. You create an exception object and then you throw it with the `throw` keyword:

```
throw new IllegalArgumentException
```

Although it may seem somewhat paradoxical, in Scala, `throw` is an expression that has a result type. Here is an example in which that result type matters:

```
val half =  
  if (n % 2 == 0)  
    n / 2  
  else  
    throw new RuntimeException("n must be even")
```

What happens here is that if n is even, half will be initialized to half of n.

If n is not even, an exception will be thrown before half can be initialized to anything at all. Because of this, it is safe to treat a thrown exception as any kind of value whatsoever. Any context that tries to use the return from a throw will never get to do so, and thus no harm will come.

Technically, an exception throw has type Nothing. You can use a throw as an expression even though it will never actually evaluate to anything. This little bit of technical gymnastics might sound weird, but is frequently useful in cases like the previous example. One branch of an if computes a value, while the other throws an exception and computes Nothing. The type of the whole if expression is then the type of that branch which does compute something. Type Nothing is discussed further in [Section 11.3](#).

## Catching exceptions

You catch exceptions using the syntax shown in [Listing 7.11](#). The syntax for catch clauses was chosen for its consistency with an important part of Scala:

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 7.4](#)

### [Chapter 7 · Built-in Control Structures](#)

pattern matching. Pattern matching, a powerful feature, is described briefly in this chapter and in more detail in [Chapter 15](#).

```
import java.io.FileReader  
  
import java.io.FileNotFoundException  
  
import java.io.IOException  
  
try {  
  
    val f = new FileReader("input.txt")  
  
    // Use and close file  
  
} catch {  
  
    case ex: FileNotFoundException => // Handle missing file  
    case ex: IOException => // Handle other I/O error  
  
}
```

Listing 7.11 · A try-catch clause in Scala.

The behavior of this try-catch expression is the same as in other languages with exceptions. The body is executed, and if it throws an exception, each catch clause is tried in turn. In this example, if the exception is of type `FileNotFoundException`, the first clause will execute. If it is of type `IOException`, the second clause will execute. If the exception is of neither type, the try-catch will terminate and the exception will propagate further.

#### Note

One difference from Java that you'll quickly notice in Scala is that unlike Java, Scala does not require you to catch checked exceptions, or declare them in a `throws` clause. You can declare a `throws` clause if you wish with the `@throws` annotation, but it is not required. See [Section 29.2](#) for more information on `@throws`.

## The finally clause

You can wrap an expression with a finally clause if you want to cause some code to execute no matter how the expression terminates. For example, you might want to be sure an open file gets closed even if a method exits by throwing an exception. [Listing 7.12](#) shows an example.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### [Section 7.4](#)

#### [Chapter 7 · Built-in Control Structures](#)

162

```
import java.io.FileReader  
  
val file = new FileReader("input.txt")  
  
try {  
    // Use the file  
  
} finally {  
    file.close()  
  
    // Be sure to close the file  
  
}
```

[Listing 7.12](#) · A try-finally clause in Scala.

Note

[Listing 7.12](#) shows the idiomatic way to ensure a non-memory resource, such as a file, socket, or database connection is closed. First you acquire the resource. Then you start a try block in which you use the resource.

Lastly, you close the resource in a finally block. This idiom is the same in Scala as in Java, however, in Scala you can alternatively employ a technique called the loan pattern to achieve the same goal more concisely.

The loan pattern will be described in [Section 9.4](#).

## Yielding a value

As with most other Scala control structures, try-catch-finally results in a value. For example, [Listing 7.13](#) shows how you can try to parse a URL

but use a default value if the URL is badly formed. The result is that of the try clause if no exception is thrown, or the relevant catch clause if an exception is thrown and caught. If an exception is thrown but not caught, the expression has no result at all. The value computed in the finally clause, if there is one, is dropped. Usually finally clauses do some kind of clean up such as closing a file; they should not normally change the value computed in the main body or a catch clause of the try.

If you’re familiar with Java, it’s worth noting that Scala’s behavior differs from Java only because Java’s try-finally does not result in a value. As in Java, if a finally clause includes an explicit return statement, or throws an exception, that return value or exception will “overrule” any previous one that originated in the try block or one of its catch clauses. For example, given this, rather contrived, function definition:

```
def f(): Int = try { return 1 } finally { return 2 }
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 7.5](#)

[Chapter 7](#) · Built-in Control Structures

163

```
import java.net.URL
```

```
import java.net.MalformedURLException
```

```
def urlFor(path: String) =  
  try {  
    new URL(path)  
  } catch {  
    case e: MalformedURLException =>  
    new URL("http://www.scala-lang.org")  
  }
```

Listing 7.13 · A catch clause that yields a value.

calling f() results in 2. By contrast, given:

```
def g(): Int = try { 1 } finally { 2 }
```

calling g() results in 1. Both of these functions exhibit behavior that could surprise most programmers, thus it's usually best to avoid returning values from finally clauses. The best way to think of finally clauses is as a way to ensure some side effect happens, such as closing an open file.

7.5

## Match expressions

Scala's match expression lets you select from a number of [alternatives](#), just like switch statements in other languages. In general a match expression lets you select using arbitrary patterns, which will be described in [Chapter 15](#).

The general form can wait. For now, just consider using match to select among a number of alternatives.

As an example, the script in [Listing 7.14](#) reads a food name from the argument list and prints a companion to that food. This match expression examines firstArg, which has been set to the first argument out of the

argument list. If it is the string "salt", it prints "pepper", while if it is the string "chips", it prints "salsa", and so on. The default case is specified with an underscore (\_), a wildcard symbol frequently used in Scala as a placeholder for a completely unknown value.

There are a few important differences from Java's switch statement.

One is that any kind of constant, as well as other things, can be used in

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 7.5](#)

### [Chapter 7 · Built-in Control Structures](#)

164

```
val firstArg = if (args.length > 0) args(0) else ""  
firstArg match {  
    case "salt" => println("pepper") case "chips" => println("salsa") case "eggs"  
    => println("bacon")  
    case _ => println("huh?")  
}
```

[Listing 7.14 · A match expression with side effects.](#)

cases in Scala, not just the integer-type and enum constants of Java's case statements. In [Listing 7.14](#), the alternatives are strings. Another difference is that there are no breaks at the end of each alternative. Instead the break is implicit, and there is no fall through from one alternative to the next. The common case—not falling through—becomes shorter, and a source of errors is avoided because programmers can no longer fall through by accident.

The most significant difference from Java's switch, however, may be that match expressions result in a value. In the previous example, each alternative in the match expression prints out a value. It would work just as well to yield the value rather than printing it, as shown in [Listing 7.15](#). The value that results from this match expression is stored in the friend variable. Aside from the code getting shorter (in number of tokens, anyway), the code now disentangles two separate concerns: first it chooses a food, and then it prints it.

```
val firstArg = if (!args.isEmpty) args(0) else ""  
  
val friend =  
  
firstArg match {  
  
    case "salt" => "pepper"  
  
    case "chips" => "salsa"  
  
    case "eggs" => "bacon"  
  
    case _ => "huh?"  
  
}  
  
println(friend)
```

[Listing 7.15](#) · A match expression that yields a value.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 7.6](#)

[Chapter 7](#) · [Built-in Control Structures](#)

165

7.6

## Living without break and continue

You may have noticed that there has been no mention of break or continue.

Scala leaves out these commands because they do not mesh well with function literals, a feature described in the next chapter. It is clear what continue means inside a while loop, but what would it mean inside a function literal?

While Scala supports both imperative and functional styles of programming, in this case it leans slightly towards functional programming in exchange for simplifying the language. Do not worry, though. There are many ways to program without break and continue, and if you take advantage of function literals, those alternatives can often be shorter than the original code.

The simplest approach is to replace every continue by an if and every break by a boolean variable. The boolean variable indicates whether the enclosing while loop should continue. For example, suppose you are searching through an argument list for a string that ends with “.scala” but does not start with a hyphen. In Java you could—if you were quite fond of while loops, break, and continue—write the following:

```
int i = 0;  
  
// This is Java  
  
boolean foundIt = false;  
  
while (i < args.length) {  
  
    if (args[i].startsWith("-")) {  
  
        i = i + 1;  
  
        continue;  
  
    }  
}
```

```
if (args[i].endsWith(".scala")) {  
    foundIt = true;  
    break;  
}  
  
i = i + 1;  
  
}
```

To transliterate this Java code directly to Scala, instead of doing an if and then a continue, you could write an if that surrounds the entire remainder of the while loop. To get rid of the break, you would normally add a boolean variable indicating whether to keep going, but in this case you can reuse foundIt. Using both of these tricks, the code ends up looking as shown in [Listing 7.16](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 7.6](#)

### [Chapter 7 · Built-in Control Structures](#)

166

```
var i = 0  
  
var foundIt = false  
  
while (i < args.length && !foundIt) {  
    if (!args(i).startsWith("-")) {  
        if (args(i).endsWith(".scala"))  
            foundIt = true
```

```
}
```

```
i = i + 1
```

```
}
```

Listing 7.16 · Looping without break or continue.

This Scala code in [Listing 7.16](#) is quite similar to the original Java code.

All the basic pieces are still there and in the same order. There are two reassignable variables and a while loop. Inside the loop, there is a test that `i` is less than `args.length`, a check for `"-"`, and a check for `".scala"`.

If you wanted to get rid of the vars in [Listing 7.16](#), one approach you could try is to rewrite the loop as a recursive function. You could, for example, define a `searchFrom` function that takes an integer as an input, searches forward from there, and then returns the index of the desired argument. Using this technique the code would look as shown in [Listing 7.17](#):

```
def searchFrom(i: Int): Int =  
  
if (i >= args.length) -1  
  
else if (args(i).startsWith("-")) searchFrom(i + 1) else if  
(args(i).endsWith(".scala")) i  
  
else searchFrom(i + 1)  
  
val i = searchFrom(0)
```

Listing 7.17 · A recursive alternative to looping with vars.

The version in [Listing 7.17](#) gives a human-meaningful name to what the function does, and it uses recursion to substitute for looping. Each `continue` is replaced by a recursive call with `i + 1` as the argument, effectively skipping to the next integer. Many people find this style of programming easier to understand, once they get used to the recursion.

## [Section 7.7](#)

### [Chapter 7 · Built-in Control Structures](#)

167

Note

The Scala compiler will not actually emit a recursive function for the code shown in [Listing 7.17](#). Because all of the recursive calls are in tail-call position, the compiler will generate code similar to a while loop. Each recursive call will be implemented as a jump back to the beginning of the function. Tail-call optimization will be discussed in [Section 8.9](#).

7.7

Variable scope

Now that you've seen Scala's built-in control structures, we'll use them in this section to explain how scoping works in Scala.

Fast track for Java programmers

If you're a Java programmer, you'll find that Scala's scoping rules are almost identical to Java's. One difference between Java and Scala exists, however, in that Scala allows you to define variables of the same name in nested scopes. If you're a Java programmer, therefore, you may wish to at least skim this section.

Variable declarations in Scala programs have a scope that defines where you can use the name. The most common example of scoping is that curly braces generally introduce a new scope, so anything defined inside curly braces leaves scope after the final closing brace.<sup>3</sup> As an illustration, consider the function shown in [Listing 7.18](#).

The printMultiTable function shown in [Listing 7.18](#) prints out a multiplication table.<sup>4</sup> The first statement of this function introduces a

variable named `i` and initializes it to the integer 1. You can then use the name `i` for the remainder of the function.

The next statement in `printMultiTable` is a while loop:

```
while (i <= 10) {  
    var j = 1  
  
    ...  
}
```

3There are a few exceptions to this rule, because in Scala you can sometimes use curly braces in place of parentheses. One example of this kind of curly-brace use is the alternative for expression syntax described in [Section 7.3](#).

4The `printMultiTable` function shown in [Listing 7.18](#) is written in an imperative style.

We'll refactor it into a functional style in the next section.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 7.7](#)

[Chapter 7](#) · [Built-in Control Structures](#)

168

```
def printMultiTable() {  
    var i = 1  
  
    // only i in scope here  
  
    while (i <= 10) {
```

```
var j = 1

// both i and j in scope here

while (j <= 10) {

    val prod = (i * j).toString

    // i, j, and prod in scope here

    var k = prod.length

    // i, j, prod, and k in scope here

    while (k < 4) {

        print(" ")

        k += 1

    }

    print(prod)

    j += 1

}

// i and j still in scope; prod and k out of scope

println()

i += 1

}

// i still in scope; j, prod, and k out of scope

}
```

Listing 7.18 · Variable scoping when printing a multiplication table.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 7.7](#)

### [Chapter 7 · Built-in Control Structures](#)

169

You can use `i` here because it is still in scope. In the first statement inside that while loop, you introduce another variable, this time named `j`, and again initialize it to 1. Because the variable `j` was defined inside the open curly brace of the while loop, it can be used only within that while loop. If you were to attempt to do something with `j` after the closing curly brace of this while loop, after the comment that says `j`, `prod`, and `k` are out of scope, your program would not compile.

All variables defined in this example—`i`, `j`, `prod`, and `k`—are local variables. Such variables are “local” to the function in which they are defined.

Each time a function is invoked, a new set of its local variables is used.

Once a variable is defined, you can’t define a new variable with the same name in the same scope. For example, the following script would not compile:

```
val a = 1  
  
val a = 2 // Does not compile  
  
println(a)
```

You can, on the other hand, define a variable in an inner scope that has the same name as a variable in an outer scope. The following script would compile and run:

```
val a = 1;
```

```
{  
  val a = 2 // Compiles just fine  
  
  println(a)  
  
}  
  
println(a)
```

When executed, the script shown previously would print 2 then 1, because the a defined inside the curly braces is a different variable, which is in scope only until the closing curly brace.<sup>5</sup> One difference to note between Scala and Java is that unlike Scala, Java will not let you create a variable in an inner scope that has the same name as a variable in an outer scope. In a Scala program, an inner variable is said to shadow a like-named outer variable, because the outer variable becomes invisible in the inner scope.

<sup>5</sup>By the way, the semicolon is required in this case after the first definition of a because Scala's semicolon inference mechanism will not place one there.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 7.8](#)

### [Chapter 7 · Built-in Control Structures](#)

170

You might have already noticed something that looks like shadowing in the interpreter:

```
scala> val a = 1
```

```
a: Int = 1
```

```
scala> val a = 2
```

```
a: Int = 2
```

```
scala> println(a)
```

```
2
```

In the interpreter, you can reuse variable names to your heart's content.

Among other things, this allows you to change your mind if you made a mistake when you defined a variable the first time in the interpreter. The reason you can do this is that, conceptually, the interpreter creates a new nested scope for each new statement you type in. Thus, you could visualize the previous interpreted code like this:

```
val a = 1;
```

```
{
```

```
  val a = 2;
```

```
{
```

```
  println(a)
```

```
}
```

```
}
```

This code will compile and run as a Scala script, and like the code typed into the interpreter, will print 2. Keep in mind that such code can be very confusing to readers, because variable names adopt new meanings in nested scopes. It is usually better to choose a new, meaningful variable name rather than to shadow an outer variable.

## 7.8

### Refactoring imperative-style code

To help you gain insight into the functional style, in this section we'll refactor the imperative approach to printing a multiplication table shown in [List-](#)

[ing 7.18.](#) Our functional alternative is shown in [Listing 7.19.](#)

The imperative style reveals itself in [Listing 7.18](#) in two ways. First, invoking `printMultiTable` has a side effect: printing a multiplication table to the standard output. In [Listing 7.19](#), we refactored the function so

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 7.8](#)

### [Chapter 7 · Built-in Control Structures](#)

171

```
// Returns a row as a sequence

def makeRowSeq(row: Int) = 

  for (col <- 1 to 10) yield {

    val prod = (row * col).toString

    val padding = " " * (4 - prod.length)

    padding + prod
  }

// Returns a row as a string

def makeRow(row: Int) = makeRowSeq(row).mkString

// Returns table as a string with one row per line

def multiTable() = {
```

```
val tableSeq = // a sequence of row strings  
for (row <- 1 to 10)  
yield makeRow(row)  
  
tableSeq.mkString("\n")  
}
```

Listing 7.19 · A functional way to create a multiplication table.

that it returns the multiplication table as a string. Since the function no longer prints, we renamed it multiTable. As mentioned previously, one advantage of side-effect-free functions is they are easier to unit test. To test printMultiTable, you would need to somehow redefine print and println so you could check the output for correctness. You could test multiTable more easily, by checking its string result.

The other telltale sign of the imperative style in printMultiTable is its while loop and vars. By contrast, the multiTable function uses vals, for expressions, [helper functions](#), and calls to mkString.

We factored out the two helper functions, makeRow and makeRowSeq, to make the code easier to read. Function makeRowSeq uses a for expression whose generator iterates through column numbers 1 through 10. The body of this for calculates the product of row and column, determines the padding needed for the product, and yields the result of concatenating the padding and product strings. The result of the for expression will be a sequence (some subclass of scala.Seq) containing these yielded strings as elements.

The other helper function, makeRow, simply invokes mkString on the re-

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 7.9](#)

[Chapter 7](#) · Built-in Control Structures

sult returned by `makeRowSeq`. `mkString` will concatenate the strings in the sequence and return them as one string.

The `multiTable` method first initializes `tableSeq` with the result of a `for` expression whose generator iterates through row numbers 1 to 10, and for each calls `makeRow` to get the string for that row. This string is yielded, thus the result of this `for` expression will be a sequence of row strings. The only remaining task is to convert the sequence of strings into a single string.

The call to `mkString` accomplishes this, and because we pass "`\n`", we get an end of line character inserted between each string. If you pass the string returned by `multiTable` to `println`, you'll see the same output that's produced by calling `printMultiTable`:

1

2

3

4

5

6

7

8

9

10

2

4

6

8

10

12

14

16

18

20

3

6

9

12

15

18

21

24

27

30

4

8

12

16

20

24

28

32

36

40

5

10

15

20

25

30

35

40

45

50

6

12

18

24

30

36

42

48

54

60

7

14

21

28

35

42

49

56

63

70

8

16

24

32

40

48

56

64

72

80

9

18

27

36

45

54

63

72

81

90

10

20

30

40

50

60

70

80

90 100

7.9

## Conclusion

Scala's built-in control structures are minimal, but they do the job. They act much like their imperative equivalents, but because they tend to result in a value, they support a functional style, too. Just as important, they are careful in what they omit, thus leaving room for one of Scala's most powerful features, the function literal, which will be described in the next chapter.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 8

### Functions and Closures

When programs get larger, you need some way to divide them into smaller, more manageable pieces. For dividing up control flow, Scala offers an approach familiar to all experienced programmers: divide the code into functions. In fact, Scala offers several ways to define functions that are not present in Java. Besides methods, which are functions that are members of some object, there are also functions nested within functions, function literals, and function values. This chapter takes you on a tour through all of these flavors of functions in Scala.

## 8.1

### Methods

The most common way to define a function is as a member of some object.

Such a function is called a method. As an example, [Listing 8.1](#) shows two methods that together read a file with a given name and print out all lines whose length exceeds a given width. Every printed line is prefixed with the name of the file it appears in.

The processFile method takes a filename and width as parameters.

It creates a Source object from the file name and, in the generator of the for expression, calls getLines on the source. As mentioned in [Step 12](#) of

[Chapter 3](#), getLines returns an iterator that provides one line from the file on each iteration, including the end-of-line character. The for expression processes each of these lines by calling the helper method, processLine.

The processLine method takes three parameters: a filename, a width, and a line. It tests whether the length of the line is greater than the given width, and, if so, it prints the filename, a colon, and the line.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 8.1](#)

[Chapter 8](#) · [Functions and Closures](#)

174

```
import scala.io.Source  
  
object LongLines {  
  
  def processFile(filename: String, width: Int) {  
  
    val source = Source.fromFile(filename)
```

```
for (line <- source.getLines)  
  processLine(filename, width, line)  
}  
  
private def processLine(filename: String,  
width: Int, line: String) {  
  if (line.length > width)  
    println(filename +": "+ line.trim)  
}  
}
```

Listing 8.1 · LongLines with a private processLine method.

To use LongLines from the command line, we'll create an application that expects the line width as the first command-line argument, and interprets subsequent arguments as filenames:<sup>1</sup>

```
object FindLongLines {  
  def main(args: Array[String]) {  
    val width = args(0).toInt  
    for (arg <- args.drop(1))  
      LongLines.processFile(arg, width)  
  }  
}
```

Here's how you'd use this application to find the lines in `LongLines.scala` that are over 45 characters in length (there's just one): \$ scala  
FindLongLines 45 LongLines.scala

`LongLines.scala: def processFile(filename: String, width: Int) {`

1In this book, we usually won't check command-line arguments for validity in example applications, both to save trees and reduce boilerplate code that can obscure the example's important code. The trade-off is that instead of producing a helpful error message when given bad input, our example applications will throw an exception.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 8.2](#)

### [Chapter 8 · Functions and Closures](#)

175

So far, this is very similar to what you would do in any object-oriented language. However, the concept of a function in Scala is more general than a method. Scala's other ways to express functions will be explained in the following sections.

8.2

#### Local functions

The construction of the `processFile` method in the previous section demonstrated an important design principle of the functional programming style: programs should be decomposed into many small functions that each do a well-defined task. Individual functions are often quite small. The advantage of this style is that it gives a programmer many building blocks that can be flexibly composed to do more difficult things. Each building block should be simple enough to be understood individually.

One problem with this approach is that all the helper function names can pollute the program namespace. In the interpreter this not so much of a

problem, but once functions are packaged in reusable classes and objects, it's desirable to hide the helper functions from clients of a class. They often do not make sense individually, and you often want to keep enough flexibility to delete the helper functions if you later rewrite the class a different way.

In Java, your main tool for this purpose is the private method. This private-method approach works in Scala as well, as is demonstrated in [List-ing 8.1](#), but Scala offers an additional approach: you can define functions inside other functions. Just like local variables, such [local functions](#) are visible only in their enclosing block. Here's an example:

```
def processFile(filename: String, width: Int) {  
  
    def processLine(filename: String,  
                   width: Int, line: String) {  
  
        if (line.length > width)  
            print(filename + ": " + line)  
  
    }  
  
    val source = Source.fromFile(filename)  
  
    for (line <- source.getLines) {  
  
        processLine(filename, width, line)  
  
    }  
}
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 8.2](#)

## Chapter 8 · Functions and Closures

176

In this example, we refactored the original LongLines version, shown in

[Listing 8.1](#), by transforming private method, processLine, into a local function of processFile. To do so we removed the private modifier, which can only be applied (and is only needed) for methods, and placed the definition of processLine inside the definition of processFile. As a local function, processLine is in scope inside processFile, but inaccessible outside.

Now that processLine is defined inside processFile, however, another improvement becomes possible. Notice how filename and width are passed unchanged into the helper function? This is not necessary, because local functions can access the parameters of their enclosing function. You can just use the parameters of the outer processLine function, as shown in

### [Listing 8.2:](#)

```
import scala.io.Source

object LongLines {

  def processFile(filename: String, width: Int) {

    def processLine(line: String) {

      if (line.length > width)

        print(filename + ": " + line)

    }

    val source = Source.fromFile(filename)

    for (line <- source.getLines)
```

```
processLine(line)  
}  
}
```

Listing 8.2 · LongLines with a local processLine function.

Simpler, isn't it? This use of an enclosing function's parameters is a common and useful example of the general nesting Scala provides. The nesting and scoping described in [Section 7.7](#) applies to all Scala constructs, including functions. It's a simple principle, but very powerful, especially in a language with first-class functions.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 8.3](#)

[Chapter 8 · Functions and Closures](#)

177

8.3

First-class functions

Scala has [first-class functions](#). Not only can you define functions and call them, but you can write down functions as unnamed literals and then pass them around as values. We introduced function literals in [Chapter 2](#) and showed the basic syntax in [Figure 2.2 on page 69](#).

A function literal is compiled into a class that when instantiated at runtime is a [function value](#).<sup>2</sup> Thus the distinction between function literals and values is that function literals exist in the source code, whereas function values exist as objects at runtime. The distinction is much like that between classes (source code) and objects (runtime).

Here is a simple example of a function literal that adds one to a number: (x: Int) => x + 1

The `=>` designates that this function converts the thing on the left (any integer  $x$ ) to the thing on the right ( $x + 1$ ). So, this is a function mapping any integer  $x$  to  $x + 1$ .

Function values are objects, so you can store them in variables if you like.

They are functions, too, so you can invoke them using the usual parentheses function-call notation. Here is an example of both activities:

```
scala> var increase = (x: Int) => x + 1
```

```
increase: (Int) => Int = <function>
```

```
scala> increase(10)
```

```
res0: Int = 11
```

Because `increase`, in this example, is a var, you can reassign it a different function value later on.

```
scala> increase = (x: Int) => x + 9999
```

```
increase: (Int) => Int = <function>
```

```
scala> increase(10)
```

```
res2: Int = 10009
```

Every function value is an instance of some class that extends one of several `FunctionN`

traits in package `scala`, such as `Function0` for functions with no parameters, `Function1` for functions with one parameter, and so on. Each `FunctionN` trait has an `apply` method used to invoke the function.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 8.3](#)

[Chapter 8 · Functions and Closures](#)

If you want to have more than one statement in the function literal, surround its body by curly braces and put one statement per line, thus forming a [block](#).

Just like a method, when the function value is invoked, all of the statements will be executed, and the value returned from the function is whatever the expression on the last line generates.

```
scala> increase = (x: Int) => {
```

```
    println("We")
```

```
    println("are")
```

```
    println("here!")
```

```
    x + 1
```

```
}
```

```
increase: (Int) => Int = <function>
```

```
scala> increase(10)
```

We

are

here!

```
res4: Int = 11
```

So now you have seen the nuts and bolts of function literals and function values. Many Scala libraries give you opportunities to use them. For example, a `foreach` method is available for all collections.<sup>3</sup> It takes a function as an argument and invokes that function on each of its elements. Here is how it can be used to print out all of the elements of a list: `scala>`

```
val someNumbers = List(-11, -10, -5, 0, 5, 10) someNumbers: List[Int] =  
List(-11, -10, -5, 0, 5, 10)
```

```
scala> someNumbers.foreach((x: Int) => println(x))
```

```
-11
```

```
-10
```

```
-5
```

```
0
```

```
5
```

```
10
```

As another example, collection types also have a filter method. This method selects those elements of a collection that pass a test the user supplies. The foreach method is defined in trait Iterable, a common supertrait of List, Set, Array, and Map. See [Chapter 17](#) for the details.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 8.4](#)

### [Chapter 8 · Functions and Closures](#)

179

plies. That test is supplied using a function. For example, the function  $(x: Int) \Rightarrow x > 0$  could be used for filtering. This function maps positive integers to true and all others to false. Here is how to use it with filter:

```
scala> someNumbers.filter((x: Int) => x > 0)
```

```
res6: List[Int] = List(5, 10)
```

Methods like foreach and filter are described further later in the book.

[Chapter 16](#) talks about their use in class List. [Chapter 17](#) discusses their use with other collection types.

## 8.4

### Short forms of function literals

Scala provides a number of ways to leave out redundant information and write function literals more briefly. Keep your eyes open for these opportunities, because they allow you to remove clutter from your code.

One way to make a function literal more brief is to leave off the parameter types. Thus, the previous example with filter could be written like this:

```
scala> someNumbers.filter((x) => x > 0)
```

res7: List[Int] = List(5, 10)

The Scala compiler knows that x must be an integer, because it sees that you are immediately using the function to filter a list of integers (referred to by someNumbers). This is called [target typing](#), because the targeted usage of an expression—in this case an argument to someNumbers.filter()—is allowed to influence the typing of that expression—in this case to determine the type of the x parameter. The precise details of target typing are not important to study. You can simply start by writing a function literal without the argument type, and, if the compiler gets confused, add in the type. Over time you'll get a feel for which situations the compiler can and cannot puzzle out.

A second way to remove useless characters is to leave out parentheses around a parameter whose type is inferred. In the previous example, the parentheses around x are unnecessary:

```
scala> someNumbers.filter(x => x > 0)
```

res8: List[Int] = List(5, 10)

## Chapter 8 · Functions and Closures

180

8.5

### Placeholder syntax

To make a function literal even more concise, you can use underscores as placeholders for one or more parameters, so long as each parameter appears only one time within the function literal. For example, `_ > 0` is very short notation for a function that checks whether a value is greater than zero:

```
scala> someNumbers.filter(_ > 0)
```

```
res9: List[Int] = List(5, 10)
```

You can think of the underscore as a “blank” in the expression that needs to be “filled in.” This blank will be filled in with an argument to the function each time the function is invoked. For example, given that `someNumbers` was initialized on [page 178](#) to the value `List(-11, -10, -5, 0, 5, 10)`, the `filter` method will replace the blank in `_ > 0` first with `-11`, as in `-11 > 0`, then with `-10`, as in `-10 > 0`, then with `-5`, as in `-5 > 0`, and so on to the end of the List. The function literal `_ > 0`, therefore, is equivalent to the slightly more verbose `x => x > 0`, as demonstrated here:

```
scala> someNumbers.filter(x => x > 0)
```

```
res10: List[Int] = List(5, 10)
```

Sometimes when you use underscores as placeholders for parameters, the compiler might not have enough information to infer missing parameter types. For example, suppose you write `_ + _` by itself:

```
scala> val f = _ + _
```

```
<console>:4: error: missing parameter type for expanded function ((x$1,
x$2) => x$1.$plus(x$2))
```

```
val f = _ + _
```

In such cases, you can specify the types using a colon, like this: scala> val f = (\_: Int) + (\_: Int)

```
f: (Int, Int) => Int = <function>
```

```
scala> f(5, 10)
```

```
res11: Int = 15
```

Note that `_ + _` expands into a literal for a function that takes two parameters. This is why you can use this short form only if each parameter appears

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 8.6

### Chapter 8 · Functions and Closures

181

in the function literal at most once. Multiple underscores mean multiple parameters, not reuse of a single parameter repeatedly. The first underscore represents the first parameter, the second underscore the second parameter, the third underscore the third parameter, and so on.

8.6

#### Partially applied functions

Although the previous examples substitute underscores in place of individual parameters, you can also replace an entire parameter list with an underscore.

For example, rather than writing `println(_)`, you could write `println _`.

Here's an example:

```
someNumbers.foreach(println _)
```

Scala treats this short form exactly as if you had written the following:  
someNumbers.foreach(x => println(x))

Thus, the underscore in this case is not a placeholder for a single parameter.

It is a placeholder for an entire parameter list. Remember that you need to leave a space between the function name and the underscore, because otherwise the compiler will think you are referring to a different symbol, such as for example, a method named `println_`, which likely does not exist.

When you use an underscore in this way, you are writing a partially applied function. In Scala, when you invoke a function, passing in any needed arguments, you apply that function to the arguments. For example, given the following function:

```
scala> def sum(a: Int, b: Int, c: Int) = a + b + c
```

```
sum: (Int,Int,Int)Int
```

You could apply the function `sum` to the arguments 1, 2, and 3 like this:  
scala> `sum(1, 2, 3)`

```
res12: Int = 6
```

A partially applied function is an expression in which you don't supply all of the arguments needed by the function. Instead, you supply some, or none, of the needed arguments. For example, to create a partially applied function expression involving `sum`, in which you supply none of the three required

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 8.6](#)

[Chapter 8 · Functions and Closures](#)

arguments, you just place an underscore after “sum”. The resulting function can then be stored in a variable. Here’s an example:

```
scala> val a = sum _  
a: (Int, Int, Int) => Int = <function>
```

Given this code, the Scala compiler instantiates a function value that takes the three integer parameters missing from the partially applied function expression, `sum _`, and assigns a reference to that new function value to the variable `a`. When you apply three arguments to this new function value, it will turn around and invoke `sum`, passing in those same three arguments:

```
scala> a(1, 2, 3)
```

```
res13: Int = 6
```

Here’s what just happened: The variable named `a` refers to a function value object. This function value is an instance of a class generated automatically by the Scala compiler from `sum _`, the partially applied function expression.

The class generated by the compiler has an `apply` method that takes three arguments.<sup>4</sup> The generated class’s `apply` method takes three arguments because three is the number of arguments missing in the `sum _` expression. The Scala compiler translates the expression `a(1, 2, 3)` into an invocation of the function value’s `apply` method, passing in the three arguments 1, 2, and 3.

Thus, `a(1, 2, 3)` is a short form for:

```
scala> a.apply(1, 2, 3)
```

```
res14: Int = 6
```

This `apply` method, defined in the class generated automatically by the Scala compiler from the expression `sum _`, simply forwards those three missing parameters to `sum`, and returns the result. In this case `apply` invokes `sum(1, 2, 3)`, and returns what `sum` returns, which is 6.

Another way to think about this kind of expression, in which an underscore used to represent an entire parameter list, is as a way to transform a def into a function value. For example, if you have a local function, such as `sum(a: Int, b: Int, c: Int): Int`, you can “wrap” it in a function value whose apply method has the same parameter list and result types. When you apply this function value to some arguments, it in turn applies sum to 4The generated class extends trait Function3, which declares a three-arg apply method.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 8.6

### Chapter 8 · Functions and Closures

183

those same arguments, and returns the result. Although you can’t assign a method or nested function to a variable, or pass it as an argument to another function, you can do these things if you wrap the method or nested function in a function value by placing an underscore after its name.

Now, although `sum _` is indeed a partially applied function, it may not be obvious to you why it is called this. It has this name because you are not applying that function to all of its arguments. In the case of `sum _`, you are applying it to none of its arguments. But you can also express a partially applied function by supplying some but not all of the required arguments.

Here’s an example:

```
scala> val b = sum(1, _: Int, 3)
```

```
b: (Int) => Int = <function>
```

In this case, you’ve supplied the first and last argument to sum, but the middle argument is missing. Since only one argument is missing, the Scala compiler generates a new function class whose apply method takes one argument. When invoked with that one argument, this generated function’s

apply method invokes sum, passing in 1, the argument passed to the function, and 3. Here's an example:

```
scala> b(2)
```

```
res15: Int = 6
```

In this case, b.apply invoked sum(1, 2, 3).

```
scala> b(5)
```

```
res16: Int = 9
```

And in this case, b.apply invoked sum(1, 5, 3).

If you are writing a partially applied function expression in which you leave off all parameters, such as `println _` or `sum _`, you can express it more concisely by leaving off the underscore if a function is required at that point in the code. For example, instead of printing out each of the numbers in `someNumbers` (defined on [page 178](#)) like this:

```
someNumbers.foreach(println _)
```

You could just write:

```
someNumbers.foreach(println)
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 8.7](#)

### [Chapter 8 · Functions and Closures](#)

184

This last form is allowed only in places where a function is required, such as the invocation of `foreach` in this example. The compiler knows a function is required in this case, because `foreach` requires that a function be passed as an argument. In situations where a function is not required, attempting to

use this form will cause a compilation error. Here's an example: scala> val c = sum

```
<console>:5: error: missing arguments for method sum...
```

follow this method with `\_` if you want to treat it as

a partially applied function

```
val c = sum
```

^

```
scala> val d = sum _
```

```
d: (Int, Int, Int) => Int = <function>
```

```
scala> d(10, 20, 30)
```

```
res17: Int = 60
```

8.7

## Closures

So far in this chapter, all the examples of function literals have referred only to passed parameters. For example, in  $(x: \text{Int}) \Rightarrow x > 0$ , the only variable used in the function body,  $x > 0$ , is  $x$ , which is defined as a parameter to the function. You can, however, refer to variables defined elsewhere:  $(x: \text{Int}) \Rightarrow x + \text{more}$

```
// how much more?
```

This function adds “more” to its argument, but what is more? From the point of view of this function, more is a [free variable](#), because the function literal does not itself give a meaning to it. The  $x$  variable, by contrast, is a [bound](#)

variable, because it does have a meaning in the context of the function: it is defined as the function's lone parameter, an Int. If you try using this function literal by itself, without any more defined in its scope, the compiler will complain:

```
scala> (x: Int) => x + more  
<console>:5: error: not found: value more  
(x: Int) => x + more  
^
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 8.7](#)

### [Chapter 8 · Functions and Closures](#)

185

Why the trailing underscore?

Scala's syntax for partially applied functions highlights a difference in the design trade-offs of Scala and classical functional languages such as Haskell or ML. In these languages, partially applied functions are considered the normal case. Furthermore, these languages have a fairly strict static type system that will usually highlight every error with partial applications that you can make. Scala bears a much closer relation to imperative languages such as Java, where a method that's not applied to all its arguments is considered an error. Furthermore, the object-oriented tradition of subtyping and a universal root type accepts some programs that would be considered erroneous in classical functional languages.

For instance, say you mistook the `drop(n: Int)` method of `List` for `tail()`, and you therefore forgot you need to pass a number to drop.

You might write, “`println(drop)`”. Had Scala adopted the classical functional tradition that partially applied functions are OK everywhere, this code

would type check. However, you might be surprised to find out that the output printed by this `println` statement would always be

`<function>`! What would have happened is that the expression drop would have been treated as a function object. Because `println` takes objects of any type, this would have compiled OK, but it would have given an unexpected result.

To avoid situations like this, Scala normally requires you to specify function arguments that are left out explicitly, even if the indication is as simple as a ‘`_`’. Scala allows you to leave off even the `_` only when a function type is expected.

On the other hand, the same function literal will work fine so long as there is something available named more:

```
scala> var more = 1
```

```
more: Int = 1
```

```
scala> val addMore = (x: Int) => x + more
```

```
addMore: (Int) => Int = <function>
```

```
scala> addMore(10)
```

```
res19: Int = 11
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 8.7](#)

[Chapter 8 · Functions and Closures](#)

186

The function value (the object) that’s created at runtime from this function literal is called a [closure](#). The name arises from the act of “closing” the function literal by “capturing” the bindings of its free variables. A function

literal with no free variables, such as  $(x: \text{Int}) \Rightarrow x + 1$ , is called a closed term, where a term is a bit of source code. Thus a function value created at runtime from this function literal is not a closure in the strictest sense, because  $(x: \text{Int}) \Rightarrow x + 1$  is already closed as written. But any function literal with free variables, such as  $(x: \text{Int}) \Rightarrow x + \text{more}$ , is an open term. Therefore, any function value created at runtime from  $(x: \text{Int}) \Rightarrow x + \text{more}$  will by definition require that a binding for its free variable, `more`, be captured. The resulting function value, which will contain a reference to the captured `more` variable, is called a closure, therefore, because the function value is the end product of the act of closing the open term,  $(x: \text{Int}) \Rightarrow x + \text{more}$ .

This example brings up a question: what happens if more changes after the closure is created? In Scala, the answer is that the closure sees the change. For example:

```
scala> more = 9999
```

```
more: Int = 9999
```

```
scala> addMore(10)
```

```
res21: Int = 10009
```

Intuitively, Scala's closures capture variables themselves, not the value to which variables refer.<sup>5</sup> As the previous example demonstrates, the closure created for  $(x: \text{Int}) \Rightarrow x + \text{more}$  sees the change to `more` made outside the closure. The same is true in the opposite direction. Changes made by a closure to a captured variable are visible outside the closure. Here's an example:

```
scala> val someNumbers = List(-11, -10, -5, 0, 5, 10) someNumbers:  
List[Int] = List(-11, -10, -5, 0, 5, 10)
```

```
scala> var sum = 0
```

```
sum: Int = 0
```

```
scala> someNumbers.foreach(sum +=  
_)
```

By contrast, Java’s inner classes do not allow you to access modifiable variables in surrounding scopes at all, so there is no difference between capturing a variable and capturing its currently held value.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 8.7

### Chapter 8 · Functions and Closures

187

```
scala> sum
```

```
res23: Int = -11
```

This example uses a roundabout way to sum the numbers in a List. Variable sum is in a surrounding scope from the function literal sum += \_, which adds numbers to sum. Even though it is the closure modifying sum at runtime, the resulting total, -11, is still visible outside the closure.

What if a closure accesses some variable that has several different copies as the program runs? For example, what if a closure uses a local variable of some function, and the function is invoked many times? Which instance of that variable gets used at each access?

Only one answer is consistent with the rest of the language: the instance used is the one that was active at the time the closure was created. For example, here is a function that creates and returns “increase” closures: def makeIncreaser(more: Int) = (x: Int) => x + more

Each time this function is called it will create a new closure. Each closure will access the more variable that was active when the closure was created.

```
scala> val inc1 = makeIncreaser(1)
```

```
inc1: (Int) => Int = <function>
```

```
scala> val inc9999 = makeIncreaser(9999)
```

```
inc9999: (Int) => Int = <function>
```

When you call `makeIncreaser(1)`, a closure is created and returned that captures the value 1 as the binding for `more`. Similarly, when you call `makeIncreaser(9999)`, a closure that captures the value 9999 for `more` is returned. When you apply these closures to arguments (in this case, there's just one argument, `x`, which must be passed in), the result that comes back depends on how `more` was defined when the closure was created: `scala> inc1(10)`

```
res24: Int = 11
```

```
scala> inc9999(10)
```

```
res25: Int = 10009
```

It makes no difference that the `more` in this case is a parameter to a method call that has already returned. The Scala compiler rearranges things in cases like this so that the captured parameter lives out on the heap, instead of the

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 8.8](#)

[Chapter 8 · Functions and Closures](#)

188

stack, and thus can outlive the method call that created it. This rearrangement is all taken care of automatically, so you don't have to worry about it. Capture any variable you like: `val`, `var`, or parameter.

8.8

Repeated parameters

Scala allows you to indicate that the last parameter to a function may be repeated. This allows clients to pass variable length argument lists to the function. To denote a repeated parameter, place an asterisk after the type of the parameter. For example:

```
scala> def echo(args: String*) =  
for (arg <- args) println(arg)  
echo: (String*)Unit
```

Defined this way, echo can be called with zero to many String arguments:

```
scala> echo()
```

```
scala> echo("one")
```

```
one
```

```
scala> echo("hello", "world!")
```

```
hello
```

```
world!
```

Inside the function, the type of the repeated parameter is an Array of the declared type of the parameter. Thus, the type of args inside the echo function, which is declared as type “String\*” is actually Array[String].

Nevertheless, if you have an array of the appropriate type, and attempt to pass it as a repeated parameter, you'll get a compiler error: `scala> val arr = Array("What's", "up", "doc?") arr: Array[java.lang.String] = Array(What's, up, doc?)`

```
scala> echo(arr)
```

```
<console>:7: error: type mismatch;
```

```
found
```

: Array[java.lang.String]

required: String

echo(arr)

^

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 8.9](#)

### [Chapter 8 · Functions and Closures](#)

189

To accomplish this, you'll need to append the array argument with a colon and an `_*` symbol, like this:

scala> echo(arr: \_\*)

What's

up

doc?

This notation tells the compiler to pass each element of arr as its own argument to echo, rather than all of it as a single argument.

8.9

Tail recursion

In [Section 7.2](#), we mentioned that to transform a while loop that updates vars into a more functional style that uses only vals, you may sometimes need to use recursion. Here's an example of a recursive function that approximates a value by repeatedly improving a guess until it is good enough: def approximate(guess: Double): Double =

```
if (isGoodEnough(guess)) guess  
else approximate(improve(guess))
```

A function like this is often used in search problems, with appropriate implementations for `isGoodEnough` and `improve`. If you want the `approximate` function to run faster, you might be tempted to write it with a `while` loop to try and speed it up, like this:

```
def approximateLoop(initialGuess: Double): Double = {  
    var guess = initialGuess  
  
    while (!isGoodEnough(guess))  
        guess = improve(guess)  
  
    guess  
}
```

Which of the two versions of `approximate` is preferable? In terms of brevity and `var` avoidance, the first, functional one wins. But is the imperative approach perhaps more efficient? In fact, if we measure execution times it turns out that they are almost exactly the same! This might seem surprising, because a recursive call looks much more expensive than a simple jump from the end of a loop to its beginning.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 8.9](#)

[Chapter 8 · Functions and Closures](#)

190

However, in the case of `approximate` above, the Scala compiler is able to apply an important optimization. Note that the recursive call is the last thing

that happens in the evaluation of function approximate's body. Functions like approximate, which call themselves as their last action, are called

tail recursive. The Scala compiler detects tail recursion and replaces it with a jump back to the beginning of the function, after updating the function parameters with the new values.

The moral is that you should not shy away from using recursive algorithms to solve your problem. Often, a recursive solution is more elegant and concise than a loop-based one. If the solution is tail recursive, there won't be any runtime overhead to be paid.

### Tracing tail-recursive functions

A tail-recursive function will not build a new stack frame for each call; all calls will execute in a single frame. This may surprise a programmer inspecting a stack trace of a program that failed. For example, this function calls itself some number of times then throws an exception:

```
def boom(x: Int): Int =  
  if (x == 0) throw new Exception("boom!")  
  else boom(x - 1) + 1
```

This function is not tail recursive, because it performs an increment operation after the recursive call. You'll get what you expect when you run it: scala>

```
boom(3)
```

```
java.lang.Exception: boom!
```

```
at .boom(<console>:5)
```

```
at .boom(<console>:6)
```

```
at .boom(<console>:6)
```

at .boom(<console>:6)

at .<init>(<console>:6)

...

If you now modify boom so that it does become tail recursive: def bang(x: Int): Int =

if (x == 0) throw new Exception("bang!")

else bang(x - 1)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 8.9](#)

[Chapter 8 · Functions and Closures](#)

191

Tail call optimization

The compiled code for approximate is essentially the same as the compiled code for approximateLoop. Both functions compile down to the same thirteen instructions of Java bytecodes. If you look through the bytecodes generated by the Scala compiler for the tail recursive method, approximate, you'll see that although both isGoodEnough and improve are invoked in the body of the method, approximate is not. The Scala compiler optimized away the recursive call: public double approximate(double);

Code:

0:

aload\_0

1:

astore\_3

2:

aload\_0

3:

dload\_1

4:

invokevirtual

#24; //Method isGoodEnough:(D)Z

7:

ifeq

12

10:

dload\_1

11:

dreturn

12:

aload\_0

13:

dload\_1

14:

invokevirtual

#27; //Method improve:(D)D

17:

dstore\_1

18:

goto

2

You'll get:

scala> bang(5)

java.lang.Exception: bang!

at .bang(<console>:5)

at .<init>(<console>:6)

...

This time, you see only a single stack frame for bang. You might think that bang crashed before it called itself, but this is not the case. If you think you

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 8.9](#)

[Chapter 8 · Functions and Closures](#)

192

might be confused by tail-call optimizations when looking at a stack trace, you can turn them off by giving a:

-g:notailcalls

argument to the scala shell or to the scalac compiler. With that option specified, you will get a longer stack trace:

```
scala> bang(5)
```

```
java.lang.Exception: bang!
```

```
at .bang(<console>:5)
```

```
at .<init>(<console>:6)
```

```
...
```

## Limits of tail recursion

The use of tail recursion in Scala is fairly limited, because the JVM instruction set makes implementing more advanced forms of tail recursion very difficult. Scala only optimizes directly recursive calls back to the same function making the call. If the recursion is indirect, as in the following example of two mutually recursive functions, no optimization is possible:

```
def isEven(x: Int): Boolean =
```

```
if (x == 0) true else isOdd(x - 1)
```

```
def isOdd(x: Int): Boolean =
```

```
if (x == 0) false else isEven(x - 1)
```

You also won't get a tail-call optimization if the final call goes to a function value. Consider for instance the following recursive code: val funValue = nestedFun \_

```
def nestedFun(x: Int) {  
    if (x != 0) { println(x); funValue(x - 1) }  
}
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 8.10](#)

### [Chapter 8 · Functions and Closures](#)

193

The funValue variable refers to a function value that essentially wraps a call to nestedFun. When you apply the function value to an argument, it turns around and applies nestedFun to that same argument, and returns the result.

You might hope, therefore, the Scala compiler would perform a tail-call optimization, but in this case it would not. Thus, tail-call optimization is limited to situations in which a method or nested function calls itself directly as its last operation, without going through a function value or some other inter-mediary. (If you don't fully understand tail recursion yet, see [Section 8.9](#).)

8.10

### Conclusion

This chapter has given you a grand tour of functions in Scala. In addition to methods, Scala provides local functions, function literals, and function values. In addition to normal function calls, Scala provides partially applied functions and functions with repeated parameters. When possible, function calls are implemented as optimized tail calls, and thus many nice-looking recursive functions run just as quickly as hand-optimized versions that use

while loops. The next chapter will build on these foundations and show how Scala’s rich support for functions helps you abstract over control.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 9

### Control Abstraction

In [Chapter 7](#), we pointed out that Scala doesn’t have many built-in control abstractions, because it gives you the ability to create your own. In the previous chapter, you learned about function values. In this chapter, we’ll show you how to apply function values to create new control abstractions. Along the way, you’ll also learn about currying and by-name parameters.

#### 9.1

##### Reducing code duplication

All functions are separated into common parts, which are the same in every invocation of the function, and non-common parts, which may vary from one function invocation to the next. The common parts are in the body of the function, while the non-common parts must be supplied via arguments.

When you use a function value as an argument, the non-common part of the algorithm is itself some other algorithm! At each invocation of such a function, you can pass in a different function value as an argument, and the invoked function will, at times of its choosing, invoke the passed function value. These higher-order functions—functions that take functions as parameters—give you extra opportunities to condense and simplify code.

One benefit of higher-order functions is they enable you to create control abstractions that allow you to reduce code duplication. For example, suppose you are writing a file browser, and you want to provide an API that allows users to search for files matching some criterion. First, you add a facility to search for files whose names end in a particular string. This would enable your users to find, for example, all files with a “.scala”

extension. You could provide such an API by defining a public `filesEnding` method inside

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 9.1

### Chapter 9 · Control Abstraction

195

a singleton object like this:

```
object FileMatcher {  
  
    private def filesHere = (new java.io.File(".")).listFiles def  
    filesEnding(query: String) =  
  
        for (file <- filesHere; if file.getName.endsWith(query)) yield file  
  
    }  

```

The `filesEnding` method obtains the list of all files in the current directory using the private helper method `filesHere`, then filters them based on whether each file name ends with the user-specified query. Given `filesHere` is private, the `filesEnding` method is the only accessible method defined in `FileMatcher`, the API you provide to your users.

So far so good, and there is no repeated code yet. Later on, though, you decide to let people search based on any part of the file name. This is good for when your users cannot remember if they named a file `phb-important.doc`, `stupid-phb-report.doc`, `may2003salesdoc.phb`, or something entirely different, but they think that “phb” appears in the name somewhere. You go back to work and add this function to your `FileMatcher` API: `def filesContaining(query: String) =`

```
for (file <- filesHere; if file.getName.contains(query)) yield file
```

This function works just like filesEnding. It searches filesHere, checks the name, and returns the file if the name matches. The only difference is that this function uses contains instead of endsWith.

The months go by, and the program becomes more successful. Eventually, you give in to the requests of a few power users who want to search based on regular expressions. These sloppy guys have immense directories with thousands of files, and they would like to do things like find all “pdf”

files that have “oopsla” in the title somewhere. To support them, you write this function:

```
def filesRegex(query: String) =
```

```
for (file <- filesHere; if file.getName.matches(query)) yield file
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 9.1

### Chapter 9 · Control Abstraction

196

Experienced programmers will notice all of this repetition and wonder if it can be factored into a common helper function. Doing it the obvious way does not work, however. You would like to be able to do the following: def filesMatching(query: String, method) =

```
for (file <- filesHere; if file.getName.method(query)) yield file
```

This approach would work in some dynamic languages, but Scala does not allow pasting together code at runtime like this. So what do you do?

Function values provide an answer. While you cannot pass around a method name as a value, you can get the same effect by passing around a function value that calls the method for you. In this case, you could add a matcher parameter to the method whose sole purpose is to check a file name against a query:

```
def filesMatching(query: String,  
matcher: (String, String) => Boolean) = {  
  for (file <- filesHere; if matcher(file.getName, query)) yield file  
}
```

In this version of the method, the if clause now uses matcher to check the file name against the query. Precisely what this check does depends on what is specified as the matcher. Take a look, now, at the type of matcher itself.

It is a function, and thus has a  $\Rightarrow$  in the type. This function takes two string arguments—the file name and the query—and returns a boolean, so the type of this function is  $(\text{String}, \text{String}) \Rightarrow \text{Boolean}$ .

Given this new filesMatching helper method, you can simplify the three searching methods by having them call the helper method, passing in an appropriate function:

```
def filesEnding(query: String) =  
  filesMatching(query, _.endsWith(_))  
  
def filesContaining(query: String) =  
  filesMatching(query, _.contains(_))  
  
def filesRegex(query: String) =  
  filesMatching(query, _.matches(_))
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 9.1](#)

[Chapter 9](#) · Control Abstraction

The function literals shown in this example use the placeholder syntax, introduced in the previous chapter, which may not as yet feel very natural to you. Thus, here's a clarification of how placeholders are used in this example. The function literal `_endsWith(_)`, used in the `filesEnding` method, means the same thing as:

`(fileName: String, query: String) => fileName.endsWith(query)` Because `filesMatching` takes a function that requires two `String` arguments, however, you need not specify the types of the arguments. Thus you could also write `(fileName, query) => fileName.endsWith(query)`.

Since the parameters are each used only once in the body of the function, and since the first parameter, `fileName`, is used first in the body, and the second parameter, `query`, is used second, you can use the placeholder syntax: `_endsWith(_)`. The first underscore is a placeholder for the first parameter, the file name, and the second underscore a placeholder for the second parameter, the query string.

This code is already simplified, but it can actually be even shorter. Notice that the `query` gets passed to `filesMatching`, but `filesMatching` does nothing with the `query` except to pass it back to the passed matcher function. This passing back and forth is unnecessary, because the caller already knew the `query` to begin with! You might as well simply remove the `query` parameter from `filesMatching` and `matcher`, thus simplifying the code as shown in [Listing 9.1](#).

This example demonstrates the way in which first-class functions can help you eliminate code duplication where it would be very difficult to do so without them. In Java, for example, you could create an interface containing a method that takes one `String` and returns a `Boolean`, then create and pass anonymous inner class instances that implement this interface to `filesMatching`. Although this approach would remove the code duplication you are trying to eliminate, it would at the same time add as much or more new code. Thus the benefit is not worth the cost, and you may as well live with the duplication.

Moreover, this example demonstrates how closures can help you reduce code duplication. The function literals used in the previous example, such

as `_.endsWith(_)` and `_.contains(_)`, are instantiated at runtime into function values that are not closures, because they don't capture any free variables. Both variables used in the expression, `_.endsWith(_)`, for example, are represented by underscores, which means they are taken from arguments

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 9.2](#)

### [Chapter 9 · Control Abstraction](#)

198

```
object FileMatcher {  
  
    private def filesHere = (new java.io.File(".")).listFiles  
    private def filesMatching(matcher: String => Boolean) =  
  
        for (file <- filesHere; if matcher(file.getName))  
  
            yield file  
  
    def filesEnding(query: String) =  
  
        filesMatching(_.endsWith(query))  
  
    def filesContaining(query: String) =  
  
        filesMatching(_.contains(query))  
  
    def filesRegex(query: String) =  
  
        filesMatching(_.matches(query))  
  
}
```

Listing 9.1 · Using closures to reduce code duplication.

to the function. Thus, `_.endsWith(_)` uses two bound variables, and no free variables. By contrast, the function literal `_.endsWith(query)`, used in the most recent example, contains one bound variable, the argument represented by the underscore, and one free variable named `query`. It is only because Scala supports closures that you were able to remove the `query` parameter from `filesMatching` in the most recent example, thereby simplifying the code even further.

## 9.2

### Simplifying client code

The previous example demonstrated that higher-order functions can help reduce code duplication as you implement an API. Another important use of higher-order functions is to put them in an API itself to make client code more concise. A good example is provided by the special-purpose looping methods of Scala's collection types.<sup>1</sup> Many of these are listed in [Table 3.1](#)

in [Chapter 3](#), but take a look at just one example for now to see why these methods are so useful.

<sup>1</sup>These special-purpose looping methods are defined in trait `Iterable`, which is extended by `List`, `Set`, `Array`, and `Map`. See [Chapter 17](#) for a discussion.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 9.2](#)

[Chapter 9](#) · [Control Abstraction](#)

199

Consider exists, a method that determines whether a passed value is contained in a collection. You could of course search for an element by having a var initialized to false, looping through the collection checking each item, and setting the var to true if you find what you are looking for.

Here's a method that uses this approach to determine whether a passed `List` contains a negative number:

```
def containsNeg(nums: List[Int]): Boolean = {  
    var exists = false  
    for (num <- nums)  
        if (num < 0)  
            exists = true  
    exists  
}
```

If you define this method in the interpreter, you can call it like this: scala>  
containsNeg(List(1, 2, 3, 4))

```
res0: Boolean = false  
  
scala> containsNeg(List(1, 2, -3, 4))  
  
res1: Boolean = true
```

A more concise way to define the method, though, is by calling the higher-order function exists on the passed List, like this:

```
def containsNeg(nums: List[Int]) = nums.exists(_ < 0) This version of  
containsNeg yields the same results as the previous: scala>  
containsNeg(Nil)
```

```
res2: Boolean = false  
  
scala> containsNeg(List(0, -1, -2))  
  
res3: Boolean = true
```

The exists method represents a control abstraction. It is a special-purpose looping construct provided by the Scala library rather than being built into the Scala language like while or for. In the previous section, the higher-

order function, filesMatching, reduces code duplication in the implementation of the object FileMatcher. The exists method provides a similar benefit, but because exists is public in Scala's collections API, the code

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 9.3

### Chapter 9 · Control Abstraction

200

duplication it reduces in client code of that API. If exists didn't exist, and you wanted to write a containsOdd method, to test whether a list contains odd numbers, you might write it like this:

```
def containsOdd(nums: List[Int]): Boolean = {  
    var exists = false  
    for (num <- nums)  
        if (num % 2 == 1)  
            exists = true  
    exists  
}
```

If you compare the body of containsNeg with that of containsOdd, you'll find that everything is repeated except the test condition of an if expression.

Using exists, you could write this instead:

def containsOdd(nums: List[Int]) = nums.exists(\_ % 2 == 1) The body of the code in this version is again identical to the body of the corresponding containsNeg method (the version that uses exists), except the condition for

which to search is different. Yet the amount of code duplication is much smaller because all of the looping infrastructure is factored out into the exists method itself.

There are many other looping methods in Scala's standard library. As with exists, they can often shorten your code if you recognize opportunities to use them.

### 9.3

## Currying

In Chapter 1, we said that Scala allows you to create new control abstractions that "feel like native language support." Although the examples you've seen so far are indeed control abstractions, it is unlikely anyone would mistake them for native language support. To understand how to make control abstractions that feel more like language extensions, you first need to understand the functional programming technique called [currying](#).

A curried function is applied to multiple argument lists, instead of just one. [Listing 9.2](#) shows a regular, non-curried function, which adds two Int parameters, x and y.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 9.3](#)

### [Chapter 9 · Control Abstraction](#)

201

```
scala> def plainOldSum(x: Int, y: Int) = x + y
```

```
plainOldSum: (Int,Int)Int
```

```
scala> plainOldSum(1, 2)
```

```
res4: Int = 3
```

## Listing 9.2 · Defining and invoking a “plain old” function.

By contrast, [Listing 9.3](#) shows a similar function that’s curried. Instead of one list of two Int parameters, you apply this function to two lists of one Int parameter each.

```
scala> def curriedSum(x: Int)(y: Int) = x + y
```

```
curriedSum: (Int)(Int)Int
```

```
scala> curriedSum(1)(2)
```

```
res5: Int = 3
```

## Listing 9.3 · Defining and invoking a curried function.

What’s happening here is that when you invoke curriedSum, you actually get two traditional function invocations back to back. The first function invocation takes a single Int parameter named x, and returns a function value for the second function. This second function takes the Int parameter y. Here’s a function named first that does in spirit what the first traditional function invocation of curriedSum would do:

```
scala> def first(x: Int) = (y: Int) => x + y
```

```
first: (Int)(Int) => Int
```

Applying 1 to the first function—in other words, invoking the first function and passing in 1—yields the second function:

```
scala> val second = first(1)
```

```
second: (Int) => Int = <function>
```

Applying 2 to the second function yields the result:

```
scala> second(2)
```

```
res6: Int = 3
```

## Section 9.4

### Chapter 9 · Control Abstraction

202

These first and second functions are just an illustration of the currying process. They are not directly connected to the curriedSum function. Nevertheless, there is a way to get an actual reference to curriedSum's "second"

function. You can use the placeholder notation to use curriedSum in a partially applied function expression, like this:

```
scala> val onePlus = curriedSum(1)_
```

```
onePlus: (Int) => Int = <function>
```

The underscore in curriedSum(1)\_ is a placeholder for the second parameter list.<sup>2</sup> The result is a reference to a function that, when invoked, adds one to its sole Int argument and returns the result:

```
scala> onePlus(2)
```

```
res7: Int = 3
```

And here's how you'd get a function that adds two to its sole Int argument:

```
scala> val twoPlus = curriedSum(2)_
```

```
twoPlus: (Int) => Int = <function>
```

```
scala> twoPlus(2)
```

```
res8: Int = 4
```

9.4

## Writing new control structures

In languages with first-class functions, you can effectively make new control structures even though the syntax of the language is fixed. All you need to do is create methods that take functions as arguments.

For example, here is the “twice” control structure, which repeats an operation two times and returns the result:

```
scala> def twice(op: Double => Double, x: Double) = op(op(x)) twice:  
((Double) => Double,Double)Double
```

```
scala> twice(_ + 1, 5)
```

```
res9: Double = 7.0
```

2In the previous chapter, when the placeholder notation was used on traditional methods, like `println _`, you had to leave a space between the name and the underscore. In this case you don’t, because whereas `println_` is a legal identifier in Scala, `curriedSum(1)_` is not.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 9.4](#)

[Chapter 9 · Control Abstraction](#)

203

The type of `op` in this example is `Double => Double`, which means it is a function that takes one `Double` as an argument and returns another `Double`.

Any time you find a control pattern repeated in multiple parts of your code, you should think about implementing it as a new control structure.

Earlier in the chapter you saw `filesMatching`, a very specialized control pattern. Consider now a more widely used coding pattern: open a resource, operate on it, and then close the resource. You can capture this in a control abstraction using a method like the following:

```
def withPrintWriter(file: File, op: PrintWriter => Unit) {  
    val writer = new PrintWriter(file)  
    try {  
        op(writer)  
    } finally {  
        writer.close()  
    }  
}
```

Given such a method, you can use it like this:

```
withPrintWriter(  
    new File("date.txt"),  
    writer => writer.println(new java.util.Date)  
)
```

The advantage of using this method is that it's `withPrintWriter`, not user code, that assures the file is closed at the end. So it's impossible to forget to close the file. This technique is called the loan pattern, because a control-abstraction function, such as `withPrintWriter`, opens a resource and "loans" it to a function. For instance, `withPrintWriter` in the previous example loans a `PrintWriter` to the function, `op`. When the function completes, it signals that it no longer needs the "borrowed" resource. The resource is then closed in a `finally` block, to ensure it is indeed closed, regardless of whether the function completes by returning normally or throwing an exception.

One way in which you can make the client code look a bit more like a built-in control structure is to use curly braces instead of parentheses to surround the argument list. In any method invocation in Scala in which you're

passing in exactly one argument, you can opt to use curly braces to surround the argument instead of parentheses.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 9.4

### Chapter 9 · Control Abstraction

204

For example, instead of:

```
scala> println("Hello, world!")
```

Hello, world!

You could write:

```
scala> println { "Hello, world!" }
```

Hello, world!

In the second example, you used curly braces instead of parentheses to surround the arguments to `println`. This curly braces technique will work, however, only if you're passing in one argument. Here's an attempt at violating that rule:

```
scala> val g = "Hello, world!"
```

```
g: java.lang.String = Hello, world!
```

```
scala> g.substring { 7, 9 }
```

```
<console>:1: error: ';' expected but ',' found.
```

```
g.substring { 7, 9 }
```

^

Because you are attempting to pass in two arguments to `substring`, you get an error when you try to surround those arguments with curly braces.

Instead, you'll need to use parentheses:

```
scala> g.substring(7, 9)
```

```
res12: java.lang.String = wo
```

The purpose of this ability to substitute curly braces for parentheses for passing in one argument is to enable client programmers to write function literals between curly braces. This can make a method call feel more like a control abstraction. Take the `withPrintWriter` method defined previously as an example. In its most recent form, `withPrintWriter` takes two arguments, so you can't use curly braces. Nevertheless, because the function passed to `withPrintWriter` is the last argument in the list, you can use currying to pull the first argument, the `File`, into a separate argument list. This will leave the function as the lone parameter of the second argument list.

[Listing 9.4](#) shows how you'd need to redefine `withPrintWriter`.

The new version differs from the old one only in that there are now two parameter lists with one parameter each instead of one parameter list with

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 9.5](#)

[Chapter 9 · Control Abstraction](#)

205

```
def withPrintWriter(file: File)(op: PrintWriter => Unit) {
```

```
    val writer = new PrintWriter(file)
```

```
    try {
```

```
        op(writer)
```

```
} finally {  
    writer.close()  
}  
}
```

Listing 9.4 · Using the loan pattern to write to a file.

two parameters. Look between the two parameters. In the previous version of withPrintWriter, shown on [page 203](#), you see . . . File, op. . . . But in this version, you see . . . File)(op. . . . Given the above definition, you can call the method with a more pleasing syntax:

```
val file = new File("date.txt")  
  
withPrintWriter(file) {  
    writer => writer.println(new java.util.Date)  
}
```

In this example, the first argument list, which contains one File argument, is written surrounded by parentheses. The second argument list, which contains one function argument, is surrounded by curly braces.

## 9.5

### By-name parameters

The withPrintWriter method shown in the previous section differs from built-in control structures of the language, such as if and while, in that the code between the curly braces takes an argument. The withPrintWriter method requires one argument of type PrintWriter. This argument shows up as the “writer =>” in:

```
withPrintWriter(file) {
```

```
writer => writer.println(new java.util.Date)  
}
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 9.5](#)

### [Chapter 9 · Control Abstraction](#)

206

What if you want to implement something more like if or while, however, where there is no value to pass into the code between the curly braces? To help with such situations, Scala provides by-name parameters.

As a concrete example, suppose you want to implement an assertion construct called myAssert.<sup>3</sup> The myAssert function will take a function value as input and consult a flag to decide what to do. If the flag is set, myAssert will invoke the passed function and verify that it returns true. If the flag is turned off, myAssert will quietly do nothing at all.

Without using by-name parameters, you could write myAssert like this:

```
var assertionsEnabled = true
```

```
def myAssert(predicate: () => Boolean) =  
  if (assertionsEnabled && !predicate())  
    throw new AssertionError
```

The definition is fine, but using it is a little bit awkward: myAssert(() => 5 > 3)

You would really prefer to leave out the empty parameter list and => symbol in the function literal and write the code like this:

myAssert(5 > 3) // Won't work, because missing () => By-name parameters exist precisely so that you can do this. To make a by-name parameter, you

give the parameter a type starting with `=>` instead of `() =>`. For example, you could change myAssert's predicate parameter into a by-name parameter by changing its type, “`() => Boolean`”, into

```
“=> Boolean”. Listing 9.5 shows how that would look: def  
byNameAssert(predicate: => Boolean) =  
  
if (assertionsEnabled && !predicate)
```

```
throw new AssertionErro
```

### **Listing 9.5 · Using a by-name parameter.**

Now you can leave out the empty parameter in the property you want to assert. The result is that using `byNameAssert` looks exactly like using a built-in control structure:

<sup>3</sup>You'll call this `myAssert`, not `assert`, because Scala provides an `assert` of its own, which will be described in [Section 14.1](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 9.5](#)

### [Chapter 9 · Control Abstraction](#)

207

`byNameAssert(5 > 3)`

A by-name type, in which the empty parameter list, `()`, is left out, is only allowed for parameters. There is no such thing as a by-name variable or a by-name field.

Now, you may be wondering why you couldn't simply write `myAssert` using a plain old `Boolean` for the type of its parameter, like this: `def boolAssert(predicate: Boolean) =`

```
if (assertionsEnabled && !predicate)
```

```
throw new AssertionError
```

This formulation is also legal, of course, and the code using this version of `boolAssert` would still look exactly as before:

```
boolAssert(5 > 3)
```

Nevertheless, one difference exists between these two approaches that is important to note. Because the type of `boolAssert`'s parameter is `Boolean`, the expression inside the parentheses in `boolAssert(5 > 3)` is evaluated before the call to `boolAssert`. The expression `5 > 3` yields true, which is passed to `boolAssert`. By contrast, because the type of `byNameAssert`'s predicate parameter is `=> Boolean`, the expression inside the parentheses in `byNameAssert(5 > 3)` is not evaluated before the call to `byNameAssert`.

Instead a function value will be created whose `apply` method will evaluate `5 > 3`, and this function value will be passed to `byNameAssert`.

The difference between the two approaches, therefore, is that if assertions are disabled, you'll see any side effects that the expression inside the parentheses may have in `boolAssert`, but not in `byNameAssert`. For example, if assertions are disabled, attempting to assert on "`x / 0 == 0`" will yield an exception in `boolAssert`'s case:

```
scala> var assertionsEnabled = false
```

```
assertionsEnabled: Boolean = false
```

```
scala> boolAssert(x / 0 == 0)
```

```
java.lang.ArithmaticException: / by zero
```

```
at .<init>(<console>:8)
```

```
at .<clinit>(<console>)
```

```
at RequestResult$.<init>(<console>:3)
```

```
at RequestResult$.<clinit>(<console>...)
```

## Section 9.6

### Chapter 9 · Control Abstraction

208

But attempting to assert on the same code in `byNameAssert`'s case will not yield an exception:

```
scala> byNameAssert(x / 0 == 0)
```

9.6

### Conclusion

This chapter has shown you how to build on Scala's rich function support to build control abstractions. You can use functions within your code to factor out common control patterns, and you can take advantage of higher-order functions in the Scala library to reuse control patterns that are common across all programmers' code. This chapter has also shown how to use currying and by-name parameters so that your own higher-order functions can be used with a concise syntax.

In the previous chapter and this one, you have seen quite a lot of information about functions. The next few chapters will go back to discussing more object-oriented features of the language.

## Chapter 10

### Composition and Inheritance

[Chapter 6](#) introduced some basic object-oriented aspects of Scala. This chapter will pick up where [Chapter 6](#) left off and dive with much greater detail into Scala's support for object-oriented programming. We'll compare

two fundamental relationships between classes: composition and inheritance.

Composition means one class holds a reference to another, using the referenced class to help it fulfill its mission. Inheritance is the superclass/subclass relationship. In addition to these topics, we'll discuss abstract classes, parameterless methods, extending classes, overriding methods and fields, parametric fields, invoking superclass constructors, polymorphism and dynamic binding, final members and classes, and factory objects and methods.

## 10.1

### A two-dimensional layout library

As a running example in this chapter, we'll create a library for building and rendering two-dimensional layout elements. Each element will represent a rectangle filled with text. For convenience, the library will provide factory methods named "elem" that construct new elements from passed data. For example, you'll be able to create a layout element containing a string using a factory method with the following signature:

`elem(s: String): Element`

As you can see, elements will be modeled with a type named `Element`.

You'll be able to call `above` or `beside` on an element, passing in a second element, to get a new element that combines the two. For example,

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 10.2](#)

[Chapter 10 · Composition and Inheritance](#)

210

the following expression would construct a larger element consisting of two columns, each with a height of two:

```
val column1 = elem("hello") above elem("***") val column2 = elem("***")
above elem("world") column1 beside column2
```

Printing the result of this expression would give:

hello \*\*\*

\*\*\* world

Layout elements are a good example of a system in which objects can be constructed from simple parts with the aid of composing operators. In this chapter, we'll define classes that enable element objects to be constructed from arrays, lines, and rectangles—the simple parts. We'll also define composing operators above and beside. Such composing operators are also often called combinators because they combine elements of some domain into new elements.

Thinking in terms of combinators is generally a good way to approach library design: it pays to think about the fundamental ways to construct objects in an application domain. What are the simple objects? In what ways can more interesting objects be constructed out of simpler ones? How do combinators hang together? What are the most general combinations? Do they satisfy any interesting laws? If you have good answers to these questions, your library design is on track.

## 10.2

### Abstract classes

Our first task is to define type `Element`, which represents layout elements.

Since elements are two dimensional rectangles of characters, it makes sense to include a member, `contents`, that refers to the contents of a layout element. The contents can be represented as an array of strings, where each string represents a line. Hence, the type of the result returned by `contents` will be `Array[String]`. [Listing 10.1](#) shows what it will look like.

In this class, contents is declared as a method that has no implementation. In other words, the method is an abstract member of class Element. A class with abstract members must itself be declared abstract, which is done by writing an abstract modifier in front of the class keyword:

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 10.3

### Chapter 10 · Composition and Inheritance

211

```
abstract class Element {
```

```
  def contents: Array[String]
```

```
}
```

Listing 10.1 · Defining an abstract method and class.

```
abstract class Element ...
```

The abstract modifier signifies that the class may have abstract members that do not have an implementation. As a result, you cannot instantiate an abstract class. If you try to do so, you'll get a compiler error: scala> new Element

```
<console>:5: error: class Element is abstract;
```

```
cannot be instantiated
```

```
new Element
```

```
^
```

Later in this chapter you'll see how to create subclasses of class Element, which you'll be able to instantiate because they fill in the missing definition for contents.

Note that the contents method in class Element does not carry an abstract modifier. A method is abstract if it does not have an implementation (i.e., no equals sign or body). Unlike Java, no abstract modifier is necessary (or allowed) on method declarations. Methods that do have an implementation are called concrete.

Another bit of terminology distinguishes between declarations and definitions. Class Element [declares](#) the abstract method contents, but currently

[defines](#) no concrete methods. In the next section, however, we'll enhance Element by defining some concrete methods.

## 10.3

### Defining parameterless methods

As a next step, we'll add methods to Element that reveal its width and height, as shown in [Listing 10.2](#). The height method returns the number of lines in contents. The width method returns the length of the first line, or, if there are no lines in the element, zero. (This means you cannot define an element with a height of zero and a non-zero width.)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### [Section 10.3](#)

#### [Chapter 10 · Composition and Inheritance](#)

212

```
abstract class Element {
```

```
    def contents: Array[String]
```

```
    def height: Int = contents.length
```

```
    def width: Int = if (height == 0) 0 else contents(0).length
```

```
}
```

Listing 10.2 · Defining parameterless methods width and height.

Note that none of Element's three methods has a parameter list, not even an empty one. For example, instead of:

```
def width(): Int
```

the method is defined without parentheses:

```
def width: Int
```

Such [parameterless methods](#) are quite common in Scala. By contrast, methods defined with empty parentheses, such as def height(): Int, are called empty-paren methods. The recommended convention is to use a parameterless method whenever there are no parameters and the method accesses mutable state only by reading fields of the containing object (in particular, it does not change mutable state). This convention supports the uniform access principle,<sup>1</sup> which says that client code should not be affected by a decision to implement an attribute as a field or method. For instance, we could have chosen to implement width and height as fields instead of methods, simply by changing the def in each definition to a val:

```
abstract class Element {  
  
    def contents: Array[String]  
  
    val height = contents.length  
  
    val width =  
  
        if (height == 0) 0 else contents(0).length  
  
}
```

The two pairs of definitions are completely equivalent from a client's point of view. The only difference is that field accesses might be slightly faster

than method invocations, because the field values are pre-computed when the 1Meyer, Object-Oriented Software Construction [Mey00]

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 10.3

### Chapter 10 · Composition and Inheritance

213

class is initialized, instead of being computed on each method call. On the other hand, the fields require extra memory space in each Element object.

So it depends on the usage profile of a class whether an attribute is better represented as a field or method, and that usage profile might change over time. The point is that clients of the Element class should not be affected when its internal implementation changes.

In particular, a client of class Element should not need to be rewritten if a field of that class gets changed into an access function so long as the access function is pure, i.e., it does not have any side effects and does not depend on mutable state. The client should not need to care either way.

So far so good. But there's still a slight complication that has to do with the way Java handles things. The problem is that Java does not implement the uniform access principle. So it's `string.length()` in Java, not `string.length` (even though it's `array.length`, not `array.length()`).

Needless to say, this is very confusing.

To bridge that gap, Scala is very liberal when it comes to mixing parameterless and empty-paren methods. In particular, you can override a parameterless method with an empty-paren method, and vice versa. You can also leave off the empty parentheses on an invocation of any function that takes no arguments. For instance, the following two lines are both legal in Scala:

```
Array(1, 2, 3).toString  
"abc".length
```

In principle it's possible to leave out all empty parentheses in Scala function calls. However, it is recommended to still write the empty parentheses when the invoked method represents more than a property of its receiver object. For instance, empty parentheses are appropriate if the method performs I/O, or writes reassignable variables (vars), or reads vars other than the receiver's fields, either directly or indirectly by using mutable objects. That way, the parameter list acts as a visual clue that some interesting computation is triggered by the call. For instance:

```
"hello".length  
// no () because no side-effect  
  
println()  
  
// better to not drop the ()
```

To summarize, it is encouraged style in Scala to define methods that take no parameters and have no side effects as parameterless methods, i.e., leaving off the empty parentheses. On the other hand, you should never define a

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 10.4](#)

### [Chapter 10 · Composition and Inheritance](#)

214

method that has side-effects without parentheses, because then invocations of that method would look like a field selection. So your clients might be surprised to see the side effects. Similarly, whenever you invoke a function that has side effects, be sure to include the empty parentheses when you write the invocation. Another way to think about this is if the function you're calling performs an operation, use the parentheses, but if it merely provides access to a property, leave the parentheses off.

10.4

## Extending classes

We still need to be able to create new element objects. You have already seen that “new Element” cannot be used for this because class Element is abstract. To instantiate an element, therefore, we will need to create a subclass that extends Element and implements the abstract contents method.

[Listing 10.3](#) shows one possible way to do that: class ArrayElement(contains: Array[String]) extends Element {  
def contents: Array[String] = contains  
}

**Listing 10.3 · Defining ArrayElement as a subclass of Element.**

Class ArrayElement is defined to extend class Element. Just like in Java, you use an extends clause after the class name to express this:

... extends Element ...

Such an extends clause has two effects: it makes class ArrayElement inherit all non-private members from class Element, and it makes the type ArrayElement a subtype of the type Element. Given ArrayElement extends Element, class ArrayElement is called a subclass of class Element.

Conversely, Element is a superclass of ArrayElement.

If you leave out an extends clause, the Scala compiler implicitly assumes your class extends from `scala.AnyRef`, which on the Java platform is the same as class `java.lang.Object`. Thus, class Element implicitly extends class `AnyRef`. You can see these inheritance relationships in [Figure 10.1](#).

Inheritance means that all members of the superclass are also members of the subclass, with two exceptions. First, private members of the super-

## Section 10.4

### Chapter 10 · Composition and Inheritance

215

scala

AnyRef

«java.lang.Object»

Element

«abstract»

ArrayElement

Array[String]

Figure 10.1 · Class diagram for ArrayElement.

class are not inherited in a subclass. Second, a member of a superclass is not inherited if a member with the same name and parameters is already implemented in the subclass. In that case we say the member of the subclass overrides the member of the superclass. If the member in the subclass is concrete and the member of the superclass is abstract, we also say that the concrete member implements the abstract one.

For example, the contents method in ArrayElement overrides (or, alternatively: implements) abstract method contents in class Element.<sup>2</sup> By contrast, class ArrayElement inherits the width and height methods from class Element. For example, given an ArrayElement ae, you can query its width using ae.width, as if width were defined in class ArrayElement:

```
scala> val ae = new ArrayElement(Array("hello", "world")) ae:  
ArrayElement = ArrayElement@d94e60
```

```
scala> ae.width
```

```
res1: Int = 5
```

One flaw with this design is that because the returned array is mutable, clients could change it. For the book we'll keep things simple, but were `ArrayElement` part of a real project, you might consider returning a defensive copy of the array instead. Another problem is we aren't currently ensuring that every `String` element of the `contents` array has the same length. This could be solved by checking the precondition in the primary constructor, and throwing an exception if it is violated.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 10.5](#)

### [Chapter 10 · Composition and Inheritance](#)

216

Subtyping means that a value of the subclass can be used wherever a value of the superclass is required. For example:

```
val e: Element = new ArrayElement(Array("hello"))
```

Variable `e` is defined to be of type `Element`, so its initializing value should also be an `Element`. In fact, the initializing value's type is `ArrayElement`.

This is OK, because class `ArrayElement` extends class `Element`, and as a result, the type `ArrayElement` is compatible with the type `Element`.<sup>3</sup>

[Figure 10.1](#) also shows the composition relationship that exists between `ArrayElement` and `Array[String]`. This relationship is called composition because class `ArrayElement` is “composed” out of class `Array[String]`, in that the Scala compiler will place into the binary class it generates for `ArrayElement` a field that holds a reference to the passed `conts` array. We'll discuss some design considerations concerning composition and inheritance later in this chapter, in [Section 10.11](#).

10.5

Overriding methods and fields

The uniform access principle is just one aspect where Scala treats fields and methods more uniformly than Java. Another difference is that in Scala, fields and methods belong to the same namespace. This makes it possible for a field to override a parameterless method. For instance, you could change the implementation of contents in class `ArrayElement` from a method to a field without having to modify the abstract method definition of contents in class `Element`, as shown in [Listing 10.4](#):

```
class ArrayElement(contents: Array[String]) extends Element {  
    val contents: Array[String] = contents  
}
```

[Listing 10.4 · Overriding a parameterless method with a field.](#)

Field `contents` (defined with a `val`) in this version of `ArrayElement` is a perfectly good implementation of the parameterless method `contents` (declared with a `def`) in class `Element`.

3For more perspective on the difference between subclass and subtype, see the glossary entry for [subtype](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 10.6](#)

[Chapter 10 · Composition and Inheritance](#)

217

On the other hand, in Scala it is forbidden to define a field and method with the same name in the same class, whereas it is allowed in Java. For example, this Java class would compile just fine:

```
// This is Java  
  
class CompilesFine {
```

```
private int f = 0;  
  
public int f() {  
  
    return 1;  
  
}  
  
}
```

But the corresponding Scala class would not compile:

```
class WontCompile {  
  
    private var f = 0 // Won't compile, because a field  
  
    def f = 1  
  
    // and method have the same name  
  
}
```

Generally, Scala has just two namespaces for definitions in place of Java's four. Java's four namespaces are fields, methods, types, and packages. By contrast, Scala's two namespaces are:

- values (fields, methods, packages, and singleton objects)
- types (class and trait names)

The reason Scala places fields and methods into the same namespace is precisely so you can override a parameterless method with a val, something you can't do with Java.<sup>4</sup>

## 10.6

### Defining parametric fields

Consider again the definition of class `ArrayElement` shown in the previous section. It has a parameter `contents` whose sole purpose is to be copied into the `contents` field. The name `contents` of the parameter was chosen just so that 4The reason that packages share the same namespace as fields and methods in Scala is to enable you to import packages in addition to just importing the names of types, and the fields and methods of singleton objects. This is also something you can't do in Java. It will be described in [Section 13.2](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 10.6

### Chapter 10 · Composition and Inheritance

218

it would look similar to the field name `contents` without actually clashing with it. This is a “code smell,” a sign that there may be some unnecessary redundancy and repetition in your code.

You can avoid the code smell by combining the parameter and the field in a single [parametric field](#) definition, as shown in [Listing 10.5](#):

```
class ArrayElement(  
    val contents: Array[String]  
) extends Element
```

[Listing 10.5 · Defining contents as a parametric field.](#)

Note that now the `contents` parameter is prefixed by `val`. This is a shorthand that defines at the same time a parameter and field with the same name. Specifically, class `ArrayElement` now has an (unre assignable) field `contents`, which can be accessed from outside the class. The field is initialized with the value of the parameter. It's as if the class had been written as follows, where `x123` is an arbitrary fresh name for the parameter: `class ArrayElement(x123: Array[String]) extends Element {`

```
val contents: Array[String] = x123  
}
```

You can also prefix a class parameter with var, in which case the corresponding field would be reassignable. Finally, it is possible to add modifiers such as private, protected,<sup>5</sup> or override to these parametric fields, just as you can do for any other class member. Consider, for instance, the following class definitions:

```
class Cat {  
    val dangerous = false  
}  
  
class Tiger(  
    override val dangerous: Boolean,  
    private var age: Int  
) extends Cat
```

The protected modifier, which grants access to subclasses, will be covered in detail in

[Chapter 13.](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 10.7](#)

[Chapter 10 · Composition and Inheritance](#)

219

Tiger's definition is a shorthand for the following alternate class definition with an overriding member dangerous and a private member age: class

```
Tiger(param1: Boolean, param2: Int) extends Cat {  
    override val dangerous = param1  
    private var age = param2  
}
```

Both members are initialized from the corresponding parameters. We chose the names of those parameters, param1 and param2, arbitrarily. The important thing was that they not clash with any other name in scope.

## 10.7

### Invoking superclass constructors

You now have a complete system consisting of two classes: an abstract class Element, which is extended by a concrete class ArrayElement. You might also envision other ways to express an element. For example, clients might want to create a layout element consisting of a single line given by a string.

Object-oriented programming makes it easy to extend a system with new data-variations. You can simply add subclasses. For example, [Listing 10.6](#)

shows a LineElement class that extends ArrayElement:

```
class LineElement(s: String) extends ArrayElement(Array(s)) {  
    override def width = s.length  
    override def height = 1  
}
```

[Listing 10.6 · Invoking a superclass constructor.](#)

Since LineElement extends ArrayElement, and ArrayElement's constructor takes a parameter (an Array[String]), LineElement needs to pass an

argument to the primary constructor of its superclass. To invoke a superclass constructor, you simply place the argument or arguments you want to pass in parentheses following the name of the superclass. For example, class LineElement passes Array(s) to ArrayElement's primary constructor by placing it in parentheses after the superclass ArrayElement's name:

... extends ArrayElement(Array(s)) ...

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 10.8](#)

### [Chapter 10 · Composition and Inheritance](#)

220

Element

«abstract»

ArrayElement

Array[String]

LineElement

Figure 10.2 · Class diagram for LineElement.

With the new subclass, the inheritance hierarchy for layout elements now looks as shown in [Figure 10.2](#).

10.8

Using override modifiers

Note that the definitions of width and height in LineElement carry an override modifier. In [Section 6.3](#), you saw this modifier in the definition of a `toString` method. Scala requires such a modifier for all members that

override a concrete member in a parent class. The modifier is optional if a member implements an abstract member with the same name. The modifier is forbidden if a member does not override or implement some other member in a base class. Since height and width in class LineElement override concrete definitions in class Element, override is required.

This rule provides useful information for the compiler that helps avoid some hard-to-catch errors and makes system evolution safer. For instance, if you happen to misspell the method or accidentally give it a different parameter list, the compiler will respond with an error message: \$ scalac LineElement.scala

.../LineElement.scala:50:

error: method hight overrides nothing

override def hight = 1

^

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 10.8](#)

[Chapter 10 · Composition and Inheritance](#)

221

The override convention is even more important when it comes to system evolution. Say you defined a library of 2D drawing methods. You made it publicly available, and it is widely used. In the next version of the library you want to add to your base class Shape a new method with this signature: def hidden(): Boolean

Your new method will be used by various drawing methods to determine whether a shape needs to be drawn. This could lead to a significant speedup, but you cannot do this without the risk of breaking client code. After all, a client could have defined a subclass of Shape with a different implementation of hidden. Perhaps the client's method actually makes the

receiver object disappear instead of testing whether the object is hidden. Because the two versions of hidden override each other, your drawing methods would end up making objects disappear, which is certainly not what you want! These “accidental overrides” are the most common manifestation of what is called the

“fragile base class” problem. The problem is that if you add new members to base classes (which we usually call superclasses) in a class hierarchy, you risk breaking client code.

Scala cannot completely solve the fragile base class problem, but it improves on the situation compared to Java.<sup>6</sup> If the drawing library and its clients were written in Scala, then the client’s original implementation of hidden could not have had an override modifier, because at the time there was no other method with that name. Once you add the hidden method to the second version of your shape class, a recompile of the client would give an error like the following:

```
.../Shapes.scala:6: error: error overriding method
```

```
hidden in class Shape of type ()Boolean;
```

```
method hidden needs override' modifier
```

```
def hidden(): Boolean =
```

```
^
```

That is, instead of wrong behavior your client would get a compile-time error, which is usually much preferable.

<sup>6</sup>In Java 1.5, an @Override annotation was introduced that works similarly to Scala’s override modifier, but unlike Scala’s override, is not required.

## Polymorphism and dynamic binding

You saw in [Section 10.4](#) that a variable of type `Element` could refer to an object of type `ArrayElement`. The name for this phenomenon is polymorphism, which means “many shapes” or “many forms.” In this case, `Element` objects can have many forms.<sup>7</sup> So far, you’ve seen two such forms: `ArrayElement` and `LineElement`. You can create more forms of `Element` by defining new `Element` subclasses. For example, here’s how you could define a new form of `Element` that has a given width and height and is filled everywhere with a given character:

```
class UniformElement(  
    ch: Char,  
    override val width: Int,  
    override val height: Int  
) extends Element {  
  
    private val line = ch.toString * width  
  
    def contents = Array.make(height, line)  
}
```

The inheritance hierarchy for class `Element` now looks as shown in [Figure 10.3](#).

As a result, Scala will accept all of the following assignments, because the assigning expression’s type conforms to the type of the defined variable:

```
val e1: Element = new ArrayElement(Array("hello", "world")) val ae:  
ArrayElement = new LineElement("hello") val e2: Element = ae
```

```
val e3: Element = new UniformElement('x', 2, 3)
```

If you check the inheritance hierarchy, you'll find that in each of these four val definitions, the type of the expression to the right of the equals sign is below the type of the val being initialized to the left of the equals sign.

The other half of the story, however, is that method invocations on variables and expressions are dynamically bound. This means that the actual method implementation invoked is determined at run time based on the class of the object, not the type of the variable or expression. To demonstrate this <sup>7</sup>This kind of polymorphism is called subtyping polymorphism. Another kind of polymorphism in Scala, called universal polymorphism, is discussed in [Chapter 19](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 10.9](#)

### [Chapter 10 · Composition and Inheritance](#)

223

Element

«abstract»

UniformElement

ArrayElement

LineElement

### Figure 10.3 · Class hierarchy of layout elements

behavior, we'll temporarily remove all existing members from our Element classes and add a method named demo to Element. We'll override demo in in ArrayElement and LineElement, but not in UniformElement:

```
abstract class Element {
```

```
def demo() {  
    println("Element's implementation invoked")  
}  
}  
  
class ArrayElement extends Element {  
    override def demo() {  
        println("ArrayElement's implementation invoked")  
    }  
}  
  
class LineElement extends ArrayElement {  
    override def demo() {  
        println("LineElement's implementation invoked")  
    }  
}  
  
// UniformElement inherits Element's demo  
  
class UniformElement extends Element
```

If you enter this code into the interpreter, you can then define this method

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 10.10](#)

[Chapter 10 · Composition and Inheritance](#)

that takes an Element and invokes demo on it:

```
def invokeDemo(e: Element) {  
    e.demo()  
}
```

If you pass an ArrayElement to invokeDemo, you'll see a message indicating ArrayElement's implementation of demo was invoked, even though the type of the variable, e, on which demo was invoked is Element:  
scala> invokeDemo(new ArrayElement)

ArrayElement's implementation invoked

Similarly, if you pass a LineElement to invokeDemo, you'll see a message that indicates LineElement's demo implementation was invoked: scala> invokeDemo(new LineElement)

LineElement's implementation invoked

The behavior when passing a UniformElement may at first glance look suspicious, but it is correct:

```
scala> invokeDemo(new UniformElement)
```

Element's implementation invoked

Because UniformElement does not override demo, it inherits the implementation of demo from its superclass, Element. Thus, Element's implementation is the correct implementation of demo to invoke when the class of the object is UniformElement.

## 10.10

### Declaring final members

Sometimes when designing an inheritance hierarchy, you want to ensure that a member cannot be overridden by subclasses. In Scala, as in Java, you do this by adding a final modifier to the member. For example, you could place a final modifier on ArrayElement's demo method, as shown in [List-ing 10.7](#).

Given this version of ArrayElement, an attempt to override demo in its subclass, LineElement, would not compile:

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 10.10](#)

### [Chapter 10 · Composition and Inheritance](#)

225

```
class ArrayElement extends Element {  
    final override def demo() {  
        println("ArrayElement's implementation invoked")  
    }  
}
```

[Listing 10.7 · Declaring a final method.](#)

```
elem.scala:18: error: error overriding method demo  
in class ArrayElement of type ()Unit;  
method demo cannot override final member  
override def demo() {  
^
```

You may also at times want to ensure that an entire class not be subclassed. To do this you simply declare the entire class final by adding a final modifier to the class declaration. For example, [Listing 10.8](#) shows how you would declare ArrayElement final:

```
final class ArrayElement extends Element {  
    override def demo() {  
        println("ArrayElement's implementation invoked")  
    }  
}
```

**Listing 10.8 · Declaring a final class.**

With this version of ArrayElement, any attempt at defining a subclass would fail to compile:

```
elem.scala: 18: error: illegal inheritance from final class ArrayElement
```

```
class LineElement extends ArrayElement {  
    ^
```

We'll now remove the final modifiers and demo methods, and go back to the earlier implementation of the Element family. We'll focus our attention in the remainder of this chapter to completing a working version of the layout library.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 10.11](#)

[Chapter 10 · Composition and Inheritance](#)

## 10.11

### Using composition and inheritance

Composition and inheritance are two ways to define a new class in terms of another existing class. If what you’re after is primarily code reuse, you should in general prefer composition to inheritance. Only inheritance suffers from the fragile base class problem, in which you can inadvertently break subclasses by changing a superclass.

One question you can ask yourself about an inheritance relationship is whether it models an is-a relationship.<sup>8</sup> For example, it would be reasonable to say that `ArrayElement` is-an `Element`. Another question you can ask is whether clients will want to use the subclass type as a superclass type.<sup>9</sup> In the case of `ArrayElement`, we do indeed expect clients will want to use an `ArrayElement` as an `Element`.

If you ask these questions about the inheritance relationships shown in

[Figure 10.3](#), do any of the relationships seem suspicious? In particular, does it seem obvious to you that a `LineElement` is-an `ArrayElement`? Do you think clients would ever need to use a `LineElement` as an `ArrayElement`?

In fact, we defined `LineElement` as a subclass of `ArrayElement` primarily to reuse `ArrayElement`’s definition of `contents`. Perhaps it would be better, therefore, to define `LineElement` as a direct subclass of `Element`, like this:

```
class LineElement(s: String) extends Element {
```

```
    val contents = Array(s)
```

```
    override def width = s.length
```

```
    override def height = 1
```

```
}
```

In the previous version, `LineElement` had an inheritance relationship with `ArrayElement`, from which it inherited `contents`. It now has a composition relationship with `Array`: it holds a reference to an array of strings from its

own contents field.<sup>10</sup> Given this implementation of LineElement, the inheritance hierarchy for Element now looks as shown in [Figure 10.4](#).

8Meyers, Effective C++ [[Mey91](#)]

9Eckel, Thinking in Java [[Eck98](#)]

10Class ArrayElement also has a composition relationship with Array, because its parametric contents field holds a reference to an array of strings. The code for ArrayElement is shown in [Listing 10.5](#) on [page 218](#). Its composition relationship is represented in class diagrams by a diamond, as shown, for example, in [Figure 10.1](#) on [page 215](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 10.12](#)

### [Chapter 10 · Composition and Inheritance](#)

227

Element

«abstract»

ArrayElement

LineElement

UniformElement

Figure 10.4 · Class hierarchy with revised LineElement.

10.12

Implementing above, beside, and toString

As a next step, we'll implement method above in class Element. Putting one element above another means concatenating the two contents values of the

elements. So a first draft of method above could look like this: def above(that: Element): Element =

```
new ArrayElement(this.contents ++ that.contents)
```

The `++` operation concatenates two arrays. Arrays in Scala are represented as Java arrays, but support many more methods. Specifically, arrays in Scala inherit from a class `scala.Seq`, which represents sequence-like structures and contains a number of methods for accessing and transforming sequences.

Some other array methods will be explained in this chapter, and a comprehensive discussion will be given in [Chapter 17](#).

In fact, the code shown previously is not quite sufficient, because it does not permit you to put elements of different widths on top of each other. To keep things simple in this section, however, we'll leave this as is and only pass elements of the same length to `above`. In [Section 10.14](#), we'll make an enhancement to `above` so that clients can use it to combine elements of different widths.

The next method to implement is `beside`. To put two elements beside each other, we'll create a new element in which every line results from concatenating corresponding lines of the two elements. As before, to keep things simple we'll start by assuming the two elements have the same height. This leads to the following design of method `beside`:

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 10.12](#)

[Chapter 10 · Composition and Inheritance](#)

228

```
def beside(that: Element): Element = {
```

```
    val contents = new Array[String](this.contents.length)
```

```
for (i <- 0 until this.contents.length)

contents(i) = this.contents(i) + that.contents(i)

new ArrayElement(contents)

}
```

The `beside` method first allocates a new array, `contents`, and fills it with the concatenation of the corresponding array elements in `this.contents` and `that.contents`. It finally produces a new `ArrayElement` containing the new contents.

Although this implementation of `beside` works, it is in an imperative style, the telltale sign of which is the loop in which we index through arrays.

The method could alternatively be abbreviated to one expression: `new ArrayElement(`

```
for (
(line1, line2) <- this.contents zip that.contents
) yield line1 + line2
)
```

Here, the two arrays `this.contents` and `that.contents` are transformed into an array of pairs (as `Tuple2`s are called) using the `zip` operator. The `zip` method picks corresponding elements in its two arguments and forms an array of pairs. For instance, this expression:

`Array(1, 2, 3) zip Array("a", "b")`

will evaluate to:

`Array((1, "a"), (2, "b"))`

If one of the two operand arrays is longer than the other, zip will drop the remaining elements. In the expression above, the third element of the left operand, 3, does not form part of the result, because it does not have a corresponding element in the right operand.

The zipped array is then iterated over by a for expression. Here, the syntax “for ((line1, line2) <- ...)” allows you to name both elements of a pair in one pattern, i.e., line1 stands now for the first element of the pair, and line2 stands for the second. Scala’s pattern-matching system will

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 10.13](#)

### [Chapter 10 · Composition and Inheritance](#)

229

be described in detail in [Chapter 15](#). For now, you can just think of this as a way to define two vals, line1 and line2, for each step of the iteration.

The for expression has a yield part and therefore yields a result. The result is of the same kind as the expression iterated over, i.e., it is an array.

Each element of the array is the result of concatenating the corresponding lines, line1 and line2. So the end result of this code is the same as in the first version of beside, but because it avoids explicit array indexing, the result is obtained in a less error-prone way.

You still need a way to display elements. As usual, this is done by defining a `toString` method that returns an element formatted as a string. Here is its definition:

```
override def toString = contents mkString "\n"
```

The implementation of `toString` makes use of `mkString`, which is defined for all sequences, including arrays. As you saw in [Section 7.8](#), an expression like “`arr mkString sep`” returns a string consisting of all elements

of the array arr. Each element is mapped to a string by calling its `toString` method.

A separator string sep is inserted between consecutive element strings. So the expression “`contents mkString "\n"`” formats the contents array as a string, where each array element appears on a line by itself.

Note that `toString` does not carry an empty parameter list. This follows the recommendations for the uniform access principle, because `toString` is a pure method that does not take any parameters.

With the addition of these three methods, class Element now looks as shown in [Listing 10.9](#).

## 10.13

### Defining a factory object

You now have a hierarchy of classes for layout elements. This hierarchy could be presented to your clients “as is.” But you might also choose to hide the hierarchy behind a factory object. A factory object contains methods that construct other objects. Clients would then use these factory methods for object construction rather than constructing the objects directly with `new`.

An advantage of this approach is that object creation can be centralized and the details of how objects are represented with classes can be hidden. This hiding will both make your library simpler for clients to understand, because

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 10.13](#)

[Chapter 10 · Composition and Inheritance](#)

230

abstract class Element {

```

def contents: Array[String]

def width: Int =
  if (height == 0) 0 else contents(0).length

def height: Int = contents.length

def above(that: Element): Element =
  new ArrayElement(this.contents ++ that.contents)

def beside(that: Element): Element =
  new ArrayElement(
    for (
      (line1, line2) <- this.contents zip that.contents
    ) yield line1 + line2
  )

override def toString = contents mkString "\n"
}

```

Listing 10.9 · Class Element with above, beside, and toString.

less detail is exposed, and provide you with more opportunities to change your library's implementation later without breaking client code.

The first task in constructing a factory for layout elements is to choose where the factory methods should be located. Should they be members of a singleton object or of a class? What should the containing object or class be called? There are many possibilities. A straightforward solution is to create a companion object of class Element and make this be the factory object for layout elements. That way, you need to expose only the class/object combo

of Element to your clients, and you can hide the three implementation classes ArrayElement, LineElement, and UniformElement.

[Listing 10.10](#) is a design of the Element object that follows this scheme.

The Element companion object contains three overloaded variants of an elem method. Each variant constructs a different kind of layout object.

With the advent of these factory methods, it makes sense to change the implementation of class Element so that it goes through the elem factory methods rather than creating new ArrayElement instances explicitly. To call the factory methods without qualifying them with Element, the name of the

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 10.14](#)

### [Chapter 10 · Composition and Inheritance](#)

231

```
object Element {  
  
    def elem(contents: Array[String]): Element =  
        new ArrayElement(contents)  
  
    def elem(chr: Char, width: Int, height: Int): Element =  
        new UniformElement(chr, width, height)  
  
    def elem(line: String): Element =  
        new LineElement(line)  
  
}
```

[Listing 10.10 · A factory object with factory methods.](#)

singleton object, we will import Element.elem at the top of the source file.

In other words, instead of invoking the factory methods with Element.elem inside class Element, we'll import Element.elem so we can just call the factory methods by their simple name, elem. [Listing 10.11](#) shows what class Element will look like after these changes.

In addition, given the factory methods, the subclasses ArrayElement, LineElement and UniformElement could now be private, because they need no longer be accessed directly by clients. In Scala, you can define classes and singleton objects inside other classes and singleton objects. One way to make the Element subclasses private, therefore, is to place them inside the Element singleton object and declare them private there. The classes will still be accessible to the three elem factory methods, where they are needed. [Listing 10.12](#) shows how that will look.

## 10.14

### Heighten and widen

We need one last enhancement. The version of Element shown in [List-](#)

[ing 10.11](#) is not quite sufficient, because it does not allow clients to place elements of different widths on top of each other, or place elements of different heights beside each other. For example, evaluating the following expression would not work correctly, because the second line in the combined element is longer than the first:

```
new ArrayElement(Array("hello")) above
```

```
new ArrayElement(Array("world!"))
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 10.14](#)

[Chapter 10 · Composition and Inheritance](#)

```
import Element.elem

abstract class Element {

    def contents: Array[String]

    def width: Int =
        if (height == 0) 0 else contents(0).length

    def height: Int = contents.length

    def above(that: Element): Element =
        elem(this.contents ++ that.contents)

    def beside(that: Element): Element =
        elem(
            for (
                (line1, line2) <- this.contents zip that.contents
            ) yield line1 + line2
        )

    override def toString = contents mkString "\n"
}
```

Listing 10.11 · Class Element refactored to use factory methods.

Similarly, evaluating the following expression would not work properly, because the first ArrayElement has a height of two, and the second a height of only one:

```
new ArrayElement(Array("one", "two")) beside new  
ArrayElement(Array("one"))
```

[Listing 10.13](#) shows a private helper method, widen, which takes a width and returns an Element of that width. The result contains the contents of this Element, centered, padded to the left and right by any spaces needed to achieve the required width. [Listing 10.13](#) also shows a similar method, heighten, which performs the same function in the vertical direction. The widen method is invoked by above to ensure that Elements placed above each other have the same width. Similarly, the heighten method is invoked by beside to ensure that elements placed beside each other have the same height. With these changes, the layout library is ready for use.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 10.14](#)

### [Chapter 10 · Composition and Inheritance](#)

233

```
object Element {  
  
    private class ArrayElement(  
        val contents: Array[String]  
    ) extends Element  
  
    private class LineElement(s: String) extends Element {  
        val contents = Array(s)  
  
        override def width = s.length  
  
        override def height = 1  
    }  
}
```

```
private class UniformElement(  
    ch: Char,  
    override val width: Int,  
    override val height: Int  
) extends Element {  
  
    private val line = ch.toString * width  
  
    def contents = Array.make(height, line)  
  
}  
  
def elem(contents:  
    Array[String]): Element =  
    new ArrayElement(contents)  
  
def elem(chr: Char, width: Int, height: Int): Element =  
    new UniformElement(chr, width, height)  
  
def elem(line: String): Element =  
    new LineElement(line)  
  
}
```

Listing 10.12 · Hiding implementation with private classes.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 10.14](#)

[Chapter 10 · Composition and Inheritance](#)

234

```
import Element.elem

abstract class Element {

  def contents: Array[String]

  def width: Int = contents(0).length

  def height: Int = contents.length

  def above(that: Element): Element = {
    val this1 = this widen that.width
    val that1 = that widen this.width
    elem(this1.contents ++ that1.contents)
  }

  def beside(that: Element): Element = {
    val this1 = this heighten that.height
    val that1 = that heighten this.height
    elem(
      for ((line1, line2) <- this1.contents zip that1.contents) yield line1 + line2)
  }

  def widen(w: Int): Element =
    if (w <= width) this
```

```

else {

    val left = elem(' ', (w - width) / 2, height)

    var right = elem(' ', w - width - left.width, height)

    left beside this beside right

}

def heighten(h: Int): Element =
    if (h <= height) this

    else {

        val top = elem(' ', width, (h - height) / 2)

        var bot = elem(' ', width, h - height - top.height)

        top above this above bot

    }

override def toString = contents mkString "\n"
}

```

Listing 10.13 · Element with widen and heighten methods.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 10.15](#)

[Chapter 10 · Composition and Inheritance](#)

235

10.15

## Putting it all together

A fun way to exercise almost all elements of the layout library is to write a program that draws a spiral with a given number of edges. This Spiral program, shown in [Listing 10.14](#), will do just that: import Element.elem

```
object Spiral {  
  
    val space = elem(" ")  
  
    val corner = elem("+")  
  
    def spiral(nEdges: Int, direction: Int): Element = {  
  
        if (nEdges == 1)  
            elem("+")  
  
        else {  
  
            val sp = spiral(nEdges - 1, (direction + 3) % 4)  
  
            def verticalBar = elem('l', 1, sp.height)  
  
            def horizontalBar = elem('l', sp.width, 1)  
  
            if (direction == 0)  
                (corner beside horizontalBar) above (sp beside space)  
  
            else if (direction == 1)  
                (sp above space) beside (corner above verticalBar)  
  
            else if (direction == 2)  
                (space beside sp) above (horizontalBar beside corner)  
  
            else  
                corner  
        }  
    }  
}
```

```
(verticalBar above corner) beside (space above sp)
}

}

def main(args: Array[String]) {
    val nSides = args(0).toInt
    println(spiral(nSides, 0))
}

}
```

Listing 10.14 · The Spiral application.

Because Spiral is a standalone object with a main method with the proper signature, it is a Scala application. Spiral takes one command-line

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 10.16](#)

### [Chapter 10 · Composition and Inheritance](#)

236

argument, an integer, and draws a spiral with the specified number of edges.

For example, you could draw a six-edge spiral as shown below on the left, and larger spirals as shown to the right:

```
$ scala Spiral 6
```

```
$ scala Spiral 11
```

```
$ scala Spiral 17
```

+----  
+-----  
+-----  
|  
|  
|  
| +-+  
| +---+  
| +-----+  
| + |  
||  
|  
||  
|  
|  
|| +-+ |  
|| +-----+ |  
+---+  
|| |

||

|||

||

||++||

|||+---+||

||

||

|||

|||

|+---+|

|||++|||

|

|

|||

|||

+-----+

|||+--+|||

|||

|||

||+-----+||

```
||  
||  
| +-----+ |  
|  
|  
+-----+  
10.16
```

## Conclusion

In this section, you saw more concepts related to object-oriented programming in Scala. Among others, you encountered abstract classes, inheritance and subtyping, class hierarchies, parametric fields, and method overriding.

You should have developed a feel for constructing a non-trivial class hierarchy in Scala. We'll work with the layout library again in [Chapter 14](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 11

### Scala's Hierarchy

Now that you've seen the details of class inheritance in the previous chapter, it is a good time to take a step back and look at Scala's class hierarchy as a whole. In Scala, every class inherits from a common superclass named Any.

Because every class is a subclass of Any, the methods defined in Any are “universal” methods: they may be invoked on any object. Scala also defines some interesting classes at the bottom of the hierarchy, Null and Nothing,

which essentially act as common subclasses. For example, just as Any is a superclass of every other class, Nothing is a subclass of every other class.

In this chapter, we'll give you a tour of Scala's class hierarchy.

## 11.1

### Scala's class hierarchy

[Figure 11.1](#) shows an outline of Scala's class hierarchy. At the top of the hierarchy is class Any, which defines methods that include the following:

```
final def ==(that: Any): Boolean  
final def !=(that: Any): Boolean  
def equals(that: Any): Boolean  
def hashCode: Int  
def toString: String
```

Because every class inherits from Any, every object in a Scala program can be compared using ==, !=, or equals; hashed using hashCode; and formatted using toString. The equality and inequality methods, == and !=, are declared final in class Any, so they cannot be overridden in subclasses.

In fact, == is always the same as equals and != is always the negation of

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 11.1](#)

[Chapter 11](#) · [Scala's Hierarchy](#)

238

equals. So individual classes can tailor what == or != means by overriding the equals method. We'll show an example later in this chapter.

The root class Any has two subclasses: AnyVal and AnyRef. AnyVal is the parent class of every built-in value class in Scala. There are nine such value classes: Byte, Short, Char, Int, Long, Float, Double, Boolean, and Unit. The first eight of these correspond to Java's primitive types, and their values are represented at run time as Java's primitive values. The instances of these classes are all written as literals in Scala. For example, 42 is an instance of Int, 'x' is an instance of Char, and false an instance of Boolean. You cannot create instances of these classes using new. This is enforced by the

"trick" that value classes are all defined to be both abstract and final. So if you were to write:

```
scala> new Int
```

you would get:

```
<console>:5: error: class Int is abstract; cannot be instantiated
```

```
new Int
```

```
^
```

The other value class, Unit, corresponds roughly to Java's void type; it is used as the result type of a method that does not otherwise return an interesting result. Unit has a single instance value, which is written (), as discussed in [Section 7.2](#).

As explained in [Chapter 5](#), the value classes support the usual arithmetic and boolean operators as methods. For instance, Int has methods named +

and \*, and Boolean has methods named || and &&. Value classes also inherit all methods from class Any. You can test this in the interpreter: scala> 42.toString

```
res1: java.lang.String = 42
```

```
scala> 42.hashCode
```

```
res2: Int = 42
```

scala> 42 equals 42

res3: Boolean = true

Note that the value class space is flat; all value classes are subtypes of `scala.AnyVal`, but they do not subclass each other. Instead there are im-

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 11.1](#)

[Chapter 11](#) · [Scala's Hierarchy](#)

239

version

`va.langja`

on

`String`

`eyp`

`va` classes) ...

Subt

Implicit C

t»

`bjec`

(other Ja

.O

...

ala

ala

sc

sc

Null

AnyRef va.lang

ala classes) ...

«ja

(other Sc...

alasc List

ala

ala

Scala.

sc

sc

Seq

of

ScalaObject

y

alasc

Iterable

hierarch

ala

ala

sc

Any

sc

Nothing

Class:

alasc Unit

11.1

alasc Boolean

alasc Char

Figure

alasc AnyVal

alasc Byte

alasc Short

alasc Int

alasc Long

alasc Float

alasc Double

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 11.1](#)

### [Chapter 11 · Scala's Hierarchy](#)

240

plicit conversions between different value class types. For example, an instance of class `scala.Int` is automatically widened (by an implicit conversion) to an instance of class `scala.Long` when required.

As mentioned in [Section 5.9](#), implicit conversions are also used to add more functionality to value types. For instance, the type `Int` supports all of the operations below:

```
scala> 42 max 43
```

```
res4: Int = 43
```

```
scala> 42 min 43
```

```
res5: Int = 42
```

```
scala> 1 until 5
```

```
res6: Range = Range(1, 2, 3, 4)
```

```
scala> 1 to 5
```

```
res7: Range.Inclusive = Range(1, 2, 3, 4, 5)
```

```
scala> 3.abs
```

```
res8: Int = 3
```

```
scala> (-3).abs
```

```
res9: Int = 3
```

Here's how this works: The methods min, max, until, to, and abs are all defined in a class `scala.runtime.RichInt`, and there is an implicit conversion from class `Int` to `RichInt`. The conversion is applied whenever a method is invoked on an `Int` that is undefined in `Int` but defined in `RichInt`.

Similar “booster classes” and implicit conversions exist for the other value classes. Implicit conversions will be discussed in detail in [Chapter 21](#).

The other subclass of the root class `Any` is class `AnyRef`. This is the base class of all reference classes in Scala. As mentioned previously, on the Java platform `AnyRef` is in fact just an alias for class `java.lang.Object`.

So classes written in Java as well as classes written in Scala all inherit from `AnyRef`.<sup>1</sup> One way to think of `java.lang.Object`, therefore, is as the way `AnyRef` is implemented on the Java platform. Thus, although you can use `Object` and `AnyRef` interchangeably in Scala programs on the Java platform, the recommended style is to use `AnyRef` everywhere.

1The reason the `AnyRef` alias exists, instead of just using the name `java.lang.Object`, is because Scala was designed to work on both the Java and .NET platforms. On .NET, `AnyRef` is an alias for `System.Object`.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 11.2](#)

[Chapter 11](#) · [Scala's Hierarchy](#)

241

Scala classes are different from Java classes in that they also inherit from a special marker trait called `ScalaObject`. The idea is that the `ScalaObject` contains methods that the Scala compiler defines and implements in order to make execution of Scala programs more efficient. Right now, `Scala object` contains a single method, named `$tag`, which is used internally to speed up pattern matching.

## 11.2

### How primitives are implemented

How is all this implemented? In fact, Scala stores integers in the same way as Java: as 32-bit words. This is important for efficiency on the JVM and also for interoperability with Java libraries. Standard operations like addition or multiplication are implemented as primitive operations.

However, Scala uses the “backup” class `java.lang.Integer` whenever an integer needs to be seen as a (Java) object. This happens for instance when invoking the `toString` method on an integer number or when assigning an integer to a variable of type `Any`. Integers of type `Int` are converted transparently to

“boxed integers” of type `java.lang.Integer` whenever necessary.

All this sounds a lot like auto-boxing in Java 5 and it is indeed quite similar. There’s one crucial difference, though, in that boxing in Scala is much less visible than boxing in Java. Try the following in Java:

```
// This is Java

boolean isEqual(int x, int y) {

    return x == y;

}

System.out.println(isEqual(421, 421));
```

You will surely get true. Now, change the argument types of `isEqual` to `java.lang.Integer` (or `Object`, the result will be the same):

```
// This is Java

boolean isEqual(Integer x, Integer y) {

    return x == y;
```

```
}
```

```
System.out.println(isEqual(421, 421));
```

You will find that you get false! What happens is that the number 421 gets boxed twice, so that the arguments for x and y are two different objects.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 11.2

### Chapter 11 · Scala's Hierarchy

242

Because == means reference equality on reference types, and Integer is a reference type, the result is false. This is one aspect where it shows that Java is not a pure object-oriented language. There is a difference between primitive types and reference types that can be clearly observed.

Now try the same experiment in Scala:

```
scala> def isEqual(x: Int, y: Int) = x == y
```

```
isEqual: (Int,Int)Boolean
```

```
scala> isEqual(421, 421)
```

```
res10: Boolean = true
```

```
scala> def isEqual(x: Any, y: Any) = x == y
```

```
isEqual: (Any,Any)Boolean
```

```
scala> isEqual(421, 421)
```

```
res11: Boolean = true
```

In fact, the equality operation `==` in Scala is designed to be transparent with respect to the type's representation. For value types, it is the natural (numeric or boolean) equality. For reference types, `==` is treated as an alias of the `equals` method inherited from `Object`. That method is originally defined as reference equality, but is overridden by many subclasses to implement their natural notion of equality. This also means that in Scala you never fall into Java's well-known trap concerning string comparisons. In Scala, string comparison works as it should:

```
scala> val x = "abcd".substring(2)
```

```
x: java.lang.String = cd
```

```
scala> val y = "abcd".substring(2)
```

```
y: java.lang.String = cd
```

```
scala> x == y
```

```
res12: Boolean = true
```

In Java, the result of comparing `x` with `y` would be false. The programmer should have used `equals` in this case, but it is easy to forget.

However, there are situations where you need reference equality instead of user-defined equality. For example, in some situations where efficiency is paramount, you would like to hash cons with some classes and compare their

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 11.3](#)

[Chapter 11](#) · [Scala's Hierarchy](#)

243

instances with reference equality.<sup>2</sup> For these cases, class `AnyRef` defines an additional `eq` method, which cannot be overridden and is implemented as

reference equality (i.e., it behaves like `==` in Java for reference types).

There's also the negation of `eq`, which is called `ne`. For example:

```
scala> val x = new String("abc")
```

```
x: java.lang.String = abc
```

```
scala> val y = new String("abc")
```

```
y: java.lang.String = abc
```

```
scala> x == y
```

```
res13: Boolean = true
```

```
scala> x eq y
```

```
res14: Boolean = false
```

```
scala> x ne y
```

```
res15: Boolean = true
```

Equality in Scala is discussed further in [Chapter 28](#).

## 11.3

### Bottom types

At the bottom of the type hierarchy in [Figure 11.1](#) you see the two classes `scala.Null` and `scala.Nothing`. These are special types that handle some

“corner cases” of Scala's object-oriented type system in a uniform way.

Class `Null` is the type of the null reference; it is a subclass of every reference class (i.e., every class that itself inherits from `AnyRef`). `Null` is not compatible with value types. You cannot, for example, assign a null value to an integer variable:

```
scala> val i: Int = null  
  
<console>:4: error: type mismatch;  
found  
  : Null(null)  
required: Int
```

You hash cons instances of a class by caching all instances you have created in a weak collection. Then, any time you want a new instance of the class, you first check the cache.

If the cache already has an element equal to the one you are about to create, you can reuse the existing instance. As a result of this arrangement, any two instances that are equal with `equals()` are also equal with reference equality.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 11.4](#)

[Chapter 11](#) · [Scala's Hierarchy](#)

244

Type `Nothing` is at the very bottom of Scala's class hierarchy; it is a subtype of every other type. However, there exist no values of this type whatsoever. Why does it make sense to have a type without values? As discussed in

[Section 7.4](#), one use of `Nothing` is that it signals abnormal termination. For instance there's the `error` method in the `Predef` object of Scala's standard library, which is defined like this:

```
def error(message: String): Nothing =  
  
  throw new RuntimeException(message)
```

The return type of error is Nothing, which tells users that the method will not return normally (it throws an exception instead). Because Nothing is a subtype of every other type, you can use methods like error in very flexible ways. For instance:

```
def divide(x: Int, y: Int): Int =  
  if (y != 0) x / y  
  else error("can't divide by zero")
```

The “then” branch of the conditional,  $x / y$ , has type Int, whereas the else branch, the call to error, has type Nothing. Because Nothing is a subtype of Int, the type of the whole conditional is Int, as required.

## 11.4

### Conclusion

In this chapter we showed you the classes at the top and bottom of Scala’s class hierarchy. Now that you’ve gotten a good foundation on class inheritance in Scala, you’re ready to understand mixin composition. In the next chapter, you’ll learn about traits.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 12

### Traits

Traits are a fundamental unit of code reuse in Scala. A trait encapsulates method and field definitions, which can then be reused by mixing them into classes. Unlike class inheritance, in which each class must inherit from just one superclass, a class can mix in any number of traits. This chapter shows you how traits work and shows two of the most common ways they are useful: widening thin interfaces to rich ones, and defining stackable modifications. It also shows how to use the Ordered trait and compares traits to the multiple inheritance of other languages.

## 12.1

### How traits work

A trait definition looks just like a class definition except that it uses the keyword trait. An example is shown in [Listing 12.1](#):

```
trait Philosophical {  
  
  def philosophize() {  
  
    println("I consume memory, therefore I am!")  
  
  }  
  
}
```

[Listing 12.1](#) · The definition of trait Philosophical.

This trait is named Philosophical. It does not declare a superclass, so like a class, it has the default superclass of AnyRef. It defines one method, named philosophize, which is concrete. It's a simple trait, just enough to show how traits work.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 12.1](#)

[Chapter 12](#) · [Traits](#)

246

Once a trait is defined, it can be mixed in to a class using either the extends or with keywords. Scala programmers “mix in” traits rather than inherit from them, because mixing in a trait has important differences from the multiple inheritance found in many other languages. This issue is discussed in [Section 12.6](#). For example, [Listing 12.2](#) shows a class that mixes in the Philosophical trait using extends:

```
class Frog extends Philosophical {  
    override def toString = "green"  
}
```

Listing 12.2 · Mixing in a trait using extends.

You can use the `extends` keyword to mix in a trait; in that case you implicitly inherit the trait's superclass. For instance, in [Listing 12.2](#), class `Frog` subclasses `AnyRef` (the superclass of `Philosophical`) and mixes in `Philosophical`. Methods inherited from a trait can be used just like methods inherited from a superclass. Here's an example:

```
scala> val frog = new Frog  
frog: Frog = green  
  
scala> frog.philosophize()  
I consume memory, therefore I am!
```

A trait also defines a type. Here's an example in which `Philosophical` is used as a type:

```
scala> val phil: Philosophical = frog  
phil: Philosophical = green  
  
scala> phil.philosophize()  
I consume memory, therefore I am!
```

The type of `phil` is `Philosophical`, a trait. Thus, variable `phil` could have been initialized with any object whose class mixes in `Philosophical`.

If you wish to mix a trait into a class that explicitly extends a superclass, you use `extends` to indicate the superclass and `with` to mix in the trait.

[Listing 12.3](#) shows an example. If you want to mix in multiple traits, you add more with clauses. For example, given a trait HasLegs, you could mix both Philosophical and HasLegs into Frog as shown in [Listing 12.4](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 12.1](#)

### [Chapter 12 · Traits](#)

247

```
class Animal
```

```
class Frog extends Animal with Philosophical {
```

```
    override def toString = "green"
```

```
}
```

Listing 12.3 · Mixing in a trait using with.

```
class Animal
```

```
trait HasLegs
```

```
class Frog extends Animal with Philosophical with HasLegs {
```

```
    override def toString = "green"
```

```
}
```

Listing 12.4 · Mixing in multiple traits.

In the examples you've seen so far, class Frog has inherited an implementation of philosophize from trait Philosophical. Alternatively, Frog could override philosophize. The syntax looks the same as overriding a method declared in a superclass. Here's an example:

```
class Animal

class Frog extends Animal with Philosophical {

    override def toString = "green"

    override def philosophize() {

        println("It ain't easy being " + toString + "!")
    }
}
```

Because this new definition of Frog still mixes in trait Philosophize, you can still use it from a variable of that type. But because Frog overrides Philosophical's implementation of philosophize, you'll get a new behavior when you call it:

```
scala> val phrog: Philosophical = new Frog
```

```
phrog: Philosophical = green
```

```
scala> phrog.philosophize()
```

It ain't easy being green!

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 12.2](#)

[Chapter 12](#) · [Traits](#)

248

At this point you might philosophize that traits are like Java interfaces with concrete methods, but they can actually do much more. Traits can, for example, declare fields and maintain state. In fact, you can do anything in a

trait definition that you can do in a class definition, and the syntax looks exactly the same, with only two exceptions. First, a trait cannot have any “class” parameters, i.e., parameters passed to the primary constructor of a class. In other words, although you could define a class like this: class Point(x: Int, y: Int)

The following attempt to define a trait would not compile: trait NoPoint(x: Int, y: Int) // Does not compile

You’ll find out in [Section 20.5](#) how to work around this restriction.

The other difference between classes and traits is that whereas in classes, super calls are statically bound, in traits, they are dynamically bound. If you write “super.toString” in a class, you know exactly which method implementation will be invoked. When you write the same thing in a trait, however, the method implementation to invoke for the super call is undefined when you define the trait. Rather, the implementation to invoke will be determined anew each time the trait is mixed into a concrete class. This curious behavior of super is key to allowing traits to work as stackable modifications, which will be described in [Section 12.5](#). The rules for resolving super calls will be given in [Section 12.6](#).

## 12.2

### Thin versus rich interfaces

One major use of traits is to automatically add methods to a class in terms of methods the class already has. That is, traits can enrich a thin interface, making it into a rich interface.

Thin versus rich interfaces represents a commonly faced trade-off in object-oriented design. The trade-off is between the implementers and the clients of an interface. A rich interface has many methods, which make it convenient for the caller. Clients can pick a method that exactly matches the functionality they need. A thin interface, on the other hand, has fewer methods, and thus is easier on the implementers. Clients calling into a thin interface, however, have to write more code. Given the smaller selection of

## [Section 12.3](#)

### [Chapter 12 · Traits](#)

249

methods to call, they may have to choose a less than perfect match for their needs and write extra code to use it.

Java's interfaces are more often thin than rich. For example, interface CharSequence, which was introduced in Java 1.4, is a thin interface common to all string-like classes that hold a sequence of characters. Here's its definition when seen as a Scala trait:

```
trait CharSequence {  
  
    def charAt(index: Int): Char  
  
    def length: Int  
  
    def subSequence(start: Int, end: Int): CharSequence  
  
    def toString(): String  
  
}
```

Although most of the dozens of methods in class String would apply to any CharSequence, Java's CharSequence interface declares only four methods. Had CharSequence instead included the full String interface, it would have placed a large burden on implementers of CharSequence. Every programmer that implemented CharSequence in Java would have had to define dozens more methods. Because Scala traits can contain concrete methods, they make rich interfaces far more convenient.

Adding a concrete method to a trait tilts the thin-rich trade-off heavily towards rich interfaces. Unlike in Java, adding a concrete method to a Scala trait is a one-time effort. You only need to implement the method once, in

the trait itself, instead of needing to reimplement it for every class that mixes in the trait. Thus, rich interfaces are less work to provide in Scala than in a language without traits.

To enrich an interface using traits, simply define a trait with a small number of abstract methods—the thin part of the trait’s interface—and a potentially large number of concrete methods, all implemented in terms of the abstract methods. Then you can mix the enrichment trait into a class, implement the thin portion of the interface, and end up with a class that has all of the rich interface available.

## 12.3

Example: Rectangular objects

Graphics libraries often have many different classes that represent something rectangular. Some examples are windows, bitmap images, and regions se-

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 12.3](#)

[Chapter 12 · Traits](#)

250

lected with a mouse. To make these rectangular objects convenient to use, it is nice if the library provides geometric queries such as width, height, left, right, topLeft, and so on. However, many such methods exist that would be nice to have, so it can be a large burden on library writers to provide all of them for all rectangular objects in a Java library. If such a library were written in Scala, by contrast, the library writer could use traits to easily supply all of these convenience methods on all the classes they’d like.

To see how, first imagine what the code would look like without traits.

There would be some basic geometric classes like Point and Rectangle:

```
class Point(val x: Int, val y: Int)
```

```
class Rectangle(val topLeft: Point, val bottomRight: Point) {  
  
    def left = topLeft.x  
  
    def right = bottomRight.x  
  
    def width = right - left  
  
    // and many more geometric methods...  
  
}
```

This Rectangle class takes two points in its primary constructor: the coordinates of the top-left and bottom-right corners. It then implements many convenience methods such as left, right, and width by performing simple calculations on these two points.

```
Another class a graphics library might have is a 2-D graphical widget:  
abstract class Component {  
  
    def topLeft: Point  
  
    def bottomRight: Point  
  
    def left = topLeft.x  
  
    def right = bottomRight.x  
  
    def width = right - left  
  
    // and many more geometric methods...  
  
}
```

Notice that the definitions of left, right, and width are exactly the same in the two classes. They will also be the same, aside from minor variations, in any other classes for rectangular objects.

This repetition can be eliminated with an enrichment trait. The trait will have two abstract methods: one that returns the top-left coordinate of the object, and another that returns the bottom-right coordinate. It can then supply

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 12.3](#)

### [Chapter 12 · Traits](#)

251

concrete implementations of all the other geometric queries. [Listing 12.5](#) shows what it will look like:

```
trait Rectangular {  
    def topLeft: Point  
    def bottomRight: Point  
    def left = topLeft.x  
    def right = bottomRight.x  
    def width = right - left  
    // and many more geometric methods...  
}
```

[Listing 12.5 · Defining an enrichment trait.](#)

Class Component can mix in this trait to get all the geometric methods provided by Rectangular:

```
abstract class Component extends Rectangular {
```

```
// other methods...
```

```
}
```

Similarly, Rectangle itself can mix in the trait:

```
class Rectangle(val topLeft: Point, val bottomRight: Point) extends  
Rectangular {
```

```
// other methods...
```

```
}
```

Given these definitions, you can create a Rectangle and call geometric methods such as width and left on it:

```
scala> val rect = new Rectangle(new Point(1, 1),
```

```
new Point(10, 10))
```

```
rect: Rectangle = Rectangle@3536fd
```

```
scala> rect.left
```

```
res2: Int = 1
```

```
scala> rect.right
```

```
res3: Int = 10
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 12.4](#)

[Chapter 12 · Traits](#)

252

```
scala> rect.width
```

```
res4: Int = 9
```

12.4

## The Ordered trait

Comparison is another domain where a rich interface is convenient. Whenever you compare two objects that are ordered, it is convenient if you use a single method call to ask about the precise comparison you want. If you want “is less than,” you would like to call `<`, and if you want “is less than or equal,” you would like to call `<=`. With a thin comparison interface, you might just have the `<` method, and you would sometimes have to write things like `“(x < y) || (x == y)”`. A rich interface would provide you with all of the usual comparison operators, thus allowing you to directly write things like `“x <= y”`.

Before looking at `Ordered`, imagine what you might do without it. Suppose you took the `Rational` class from [Chapter 6](#) and added comparison operations to it. You would end up with something like this:<sup>1</sup>

```
class Rational(n: Int, d: Int) {  
    // ...  
  
    def < (that: Rational) =  
        this.numer * that.denom > that.numer * this.denom  
  
    def > (that: Rational) = that < this  
  
    def <= (that: Rational) = (this < that) || (this == that)  
    def >= (that: Rational)  
        = (this > that) || (this == that)  
}
```

This class defines four comparison operators (`<`, `>`, `<=`, and `>=`), and it’s a classic demonstration of the costs of defining a rich interface. First, notice that three of the comparison operators are defined in terms of the first one.

For example, `>` is defined as the reverse of `<`, and `<=` is defined as literally “less than or equal.” Additionally, notice that all three of these methods would be the same for any other class that is comparable. There is nothing special about rational numbers regarding `<=`. In a comparison context, `<=` is always used to mean “less than or equals.” Overall, there is quite a lot of 1The full code for the Rational class on which this example is based is shown in [List-](#)

[ing 6.5 on page 145.](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 12.4](#)

[Chapter 12](#) · [Traits](#)

253

boilerplate code in this class which would be the same in any other class that implements comparison operations.

This problem is so common that the Scala provides a trait to help with it. The trait is called `Ordered`. To use it, you replace all of the individual comparison methods with a single `compare` method. The `Ordered` trait then defines `<`, `>`, `<=`, and `>=` for you in terms of this one method. Thus, trait `Ordered` allows you to enrich a class with comparison methods by implementing only one method, `compare`.

Here is how it looks if you define comparison operations on `Rational` by using the `Ordered` trait:

```
class Rational(n: Int, d: Int) extends Ordered[Rational] {  
    // ...  
  
    def compare(that: Rational) =  
        (this.numer * that.denom) - (that.numer * this.denom)
```

}

There are just two things to do. First, this version of Rational mixes in the Ordered trait. Unlike the traits you have seen so far, Ordered requires you to specify a [type parameter](#) when you mix it in. Type parameters are not discussed in detail until [Chapter 19](#), but for now all you need to know is that when you mix in Ordered, you must actually mix in Ordered[C], where C

is the class whose elements you compare. In this case, Rational mixes in Ordered[Rational].

The second thing you need to do is define a compare method for comparing two objects. This method should compare the receiver, this, with the object passed as an argument to the method. It should return an integer that is zero if the objects are the same, negative if receiver is less than the argument, and positive if the receiver is greater than the argument. In this case, the comparison method of Rational uses a formula based on converting the fractions to a common denominator and then subtracting the resulting numerators. Given this mixin and the definition of compare, class Rational now has all four comparison methods:

```
scala> val half = new Rational(1, 2)
```

```
half: Rational = 1/2
```

```
scala> val third = new Rational(1, 3)
```

```
third: Rational = 1/3
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 12.5](#)

[Chapter 12](#) · [Traits](#)

254

```
scala> half < third
```

```
res5: Boolean = false
```

```
scala> half > third
```

```
res6: Boolean = true
```

Any time you implement a class that is ordered by some comparison, you should consider mixing in the `Ordered` trait. If you do, you will provide the class's users with a rich set of comparison methods.

Beware that the `Ordered` trait does not define `equals` for you, because it is unable to do so. The problem is that implementing `equals` in terms of `compare` requires checking the type of the passed object, and because of type erasure, `Ordered` itself cannot do this test. Thus, you need to define `equals` yourself, even if you inherit `Ordered`. You'll find out how to go about this in [Chapter 28](#).

## 12.5

### Traits as stackable modifications

You have now seen one major use of traits: turning a thin interface into a rich one. Now we'll turn to a second major use: providing stackable modifications to classes. Traits let you modify the methods of a class, and they do so in a way that allows you to stack those modifications with each other.

As an example, consider stacking modifications to a queue of integers.

The queue will have two operations: `put`, which places integers in the queue, and `get`, which takes them back out. Queues are first-in, first-out, so `get` should return the integers in the same order they were put in the queue.

Given a class that implements such a queue, you could define traits to perform modifications such as these:

- Doubling: double all integers that are put in the queue
- Incrementing: increment all integers that are put in the queue

- Filtering: filter out negative integers from a queue

These three traits represent modifications, because they modify the behavior of an underlying queue class rather than defining a full queue class themselves. The three are also stackable. You can select any of the three you like, mix them into a class, and obtain a new class that has all of the modifications you chose.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 12.5](#)

### [Chapter 12 · Traits](#)

255

An abstract IntQueue class is shown in [Listing 12.6](#). IntQueue has a put method that adds new integers to the queue and a get method that removes and returns them. A basic implementation of IntQueue that uses an ArrayBuffer is shown in [Listing 12.7](#).

```
abstract class IntQueue {  
  
  def get(): Int  
  
  def put(x: Int)  
  
}
```

[Listing 12.6 · Abstract class IntQueue.](#)

```
import scala.collection.mutable.ArrayBuffer  
  
class BasicIntQueue extends IntQueue {  
  
  private val buf = new ArrayBuffer[Int]  
  
  def get() = buf.remove(0)
```

```
def put(x: Int) { buf += x }

}
```

Listing 12.7 · A BasicIntQueue implemented with an ArrayBuffer.

Class BasicIntQueue has a private field holding an array buffer. The get method removes an entry from one end of the buffer, while the put method adds elements to the other end. Here's how this implementation looks when you use it:

```
scala> val queue = new BasicIntQueue
queue: BasicIntQueue = BasicIntQueue@24655f
scala> queue.put(10)
scala> queue.put(20)
scala> queue.get()
res9: Int = 10
scala> queue.get()
res10: Int = 20
```

So far so good. Now take a look at using traits to modify this behavior.

[Listing 12.8](#) shows a trait that doubles integers as they are put in the queue.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 12.5](#)

[Chapter 12](#) · [Traits](#)

The Doubling trait has two funny things going on. The first is that it declares a superclass, IntQueue. This declaration means that the trait can only be mixed into a class that also extends IntQueue. Thus, you can mix Doubling into BasicIntQueue, but not into Rational.

```
trait Doubling extends IntQueue {  
  
    abstract override def put(x: Int) { super.put(2 * x) }  
  
}
```

Listing 12.8 · The Doubling stackable modification trait.

The second funny thing is that the trait has a super call on a method declared abstract. Such calls are illegal for normal classes, because they will certainly fail at run time. For a trait, however, such a call can actually succeed. Since super calls in a trait are dynamically bound, the super call in trait Doubling will work so long as the trait is mixed in after another trait or class that gives a concrete definition to the method.

This arrangement is frequently needed with traits that implement stackable modifications. To tell the compiler you are doing this on purpose, you must mark such methods as abstract override. This combination of modifiers is only allowed for members of traits, not classes, and it means that the trait must be mixed into some class that has a concrete definition of the method in question.

There is a lot going on with such a simple trait, isn't there! Here's how it looks to use the trait:

```
scala> class MyQueue extends BasicIntQueue with Doubling defined class  
MyQueue
```

```
scala> val queue = new MyQueue  
  
queue: MyQueue = MyQueue@91f017  
  
scala> queue.put(10)
```

```
scala> queue.get()
```

```
res12: Int = 20
```

In the first line in this interpreter session, we define class MyQueue, which extends BasicIntQueue and mixes in Doubling. We then put a 10 in the queue, but because Doubling has been mixed in, the 10 is doubled. When we get an integer from the queue, it is a 20.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 12.5](#)

### [Chapter 12 · Traits](#)

257

Note that MyQueue defines no new code. It simply identifies a class and mixes in a trait. In this situation, you could supply “BasicIntQueue with Doubling” directly to new instead of defining a named class. It would look as shown in [Listing 12.9](#):

```
scala> val queue = new BasicIntQueue with Doubling
```

```
queue: BasicIntQueue with Doubling = $anon$1@5fa12d
```

```
scala> queue.put(10)
```

```
scala> queue.get()
```

```
res14: Int = 20
```

[Listing 12.9 · Mixing in a trait when instantiating with new.](#)

To see how to stack modifications, we need to define the other two modification traits, Incrementing and Filtering. Implementations of these traits are shown in [Listing 12.10](#):

```
trait Incrementing extends IntQueue {
```

```
abstract override def put(x: Int) { super.put(x + 1) }

}

trait Filtering extends IntQueue {

abstract override def put(x: Int) {

if (x >= 0) super.put(x)

}

}
```

Listing 12.10: Stackable modification traits Incrementing and Filtering.

Given these modifications, you can now pick and choose which ones you want for a particular queue. For example, here is a queue that both filters negative numbers and adds one to all numbers that it keeps: `scala> val queue = (new BasicIntQueue`

with Incrementing with Filtering)

`queue: BasicIntQueue with Incrementing with Filtering...`

`scala> queue.put(-1); queue.put(0); queue.put(1)`

`scala> queue.get()`

`res15: Int = 1`

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 12.6](#)

[Chapter 12](#) · Traits

```
scala> queue.get()
```

```
res16: Int = 2
```

The order of mixins is significant.<sup>2</sup> The precise rules are given in the following section, but, roughly speaking, traits further to the right take effect first. When you call a method on a class with mixins, the method in the trait furthest to the right is called first. If that method calls super, it invokes the method in the next trait to its left, and so on. In the previous example, Filtering's put is invoked first, so it removes integers that were negative to begin with. Incrementing's put is invoked second, so it adds one to those integers that remain.

If you reverse the order, first integers will be incremented, and then the integers that are still negative will be discarded:

```
scala> val queue = (new BasicIntQueue
```

```
with Filtering with Incrementing)
```

```
queue: BasicIntQueue with Filtering with Incrementing...
```

```
scala> queue.put(-1); queue.put(0); queue.put(1)
```

```
scala> queue.get()
```

```
res17: Int = 0
```

```
scala> queue.get()
```

```
res18: Int = 1
```

```
scala> queue.get()
```

```
res19: Int = 2
```

Overall, code written in this style gives you a great deal of flexibility. You can define sixteen different classes by mixing in these three traits in different combinations and orders. That's a lot of flexibility for a small

amount of code, so you should keep your eyes open for opportunities to arrange code as stackable modifications.

## 12.6

Why not multiple inheritance?

Traits are a way to inherit from multiple class-like constructs, but they differ in important ways from the multiple inheritance present in many languages.

One difference is especially important: the interpretation of super. With 2Once a trait is mixed into a class, you can alternatively call it a mixin.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 12.6](#)

[Chapter 12](#) · [Traits](#)

259

multiple inheritance, the method called by a super call can be determined right where the call appears. With traits, the method called is determined by a linearization of the classes and traits that are mixed into a class. This is the difference that enables the stacking of modifications described in the previous section.

Before looking at linearization, take a moment to consider how to stack modifications in a language with traditional multiple inheritance. Imagine the following code, but this time interpreted as multiple inheritance instead of trait mixin:

```
// Multiple inheritance thought experiment
```

```
val q = new BasicIntQueue with Incrementing with Doubling q.put(42)
```

```
// which put would be called?
```

The first question is, which put method would get invoked by this call? Perhaps the rule would be that the last superclass wins, in which case Doubling would get called. Doubling would double its argument and call super.put, and that would be it. No incrementing would happen! Likewise, if the rule were that the first superclass wins, the resulting queue would increment integers but not double them. Thus neither ordering would work.

You might also entertain the possibility of allowing programmers to identify exactly which superclass method they want when they say super. For example, imagine the following Scala-like code, in which super appears to be explicitly invoked on both Incrementing and Doubling:

```
// Multiple inheritance thought experiment

trait MyQueue extends BasicIntQueue

with Incrementing with Doubling {

    def put(x: Int) {

        Incrementing.super.put(x) // (Not real Scala)

        Doubling.super.put(x)

    }

}
```

This approach would give us new problems. The verbosity of this attempt is the least of its problems. What would happen is that the base class's put method would get called twice—once with an incremented value and once with a doubled value, but neither time with an incremented, doubled value.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 12.6](#)

[Chapter 12](#) · [Traits](#)

There is simply no good solution to this problem using multiple inheritance. You would have to back up in your design and factor the code differently. By contrast, the traits solution in Scala is straightforward. You simply mix in Incrementing and Doubling, and Scala's special treatment of super in traits makes it all work out. Something is clearly different here from traditional multiple inheritance, but what?

As hinted previously, the answer is linearization. When you instantiate a class with new, Scala takes the class and all of its inherited classes and traits and puts them in a single, linear order. Then, whenever you call super inside one of those classes, the invoked method is the next one up the chain. If all of the methods but the last call super, the net result is stackable behavior.

The precise order of the linearization is described in the language specification. It is a little bit complicated, but the main thing you need to know is that, in any linearization, a class is always linearized before all of its superclasses and mixed in traits. Thus, when you write a method that calls super, that method is definitely modifying the behavior of the superclasses and mixed in traits, not the other way around.

### Note

The remainder of this section describes the details of linearization. You can safely skip the rest of this section if you are not interested in understanding those details right now.

The main properties of Scala's linearization are illustrated by the following example: Say you have a class Cat, which inherits from a superclass Animal and two traits Furry and FourLegged. FourLegged extends in turn another trait HasLegs:

```
class Animal
```

```
trait Furry extends Animal
```

```
trait HasLegs extends Animal
```

trait FourLegged extends HasLegs

class Cat extends Animal with Furry with FourLegged

Class Cat's inheritance hierarchy and linearization are shown in [Figure 12.1](#). Inheritance is indicated using traditional UML notation:3 arrows

with white, triangular arrowheads indicate inheritance, with the arrowhead pointing to the supertype. The arrows with darkened, non-triangular arrowheads depict linearization. The darkened arrowheads point in the direction in which super calls will be resolved.

[Rum04]

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 12.6](#)

### [Chapter 12 · Traits](#)

261

Any

AnyRef

Animal

HasLegs

Furry

FourLegged

Cat

Figure 12.1 · Inheritance hierarchy and linearization of class Cat.

pointing to the supertype. The arrows with darkened, non-triangular arrowheads depict linearization. The darkened arrowheads point in the direction in which super calls will be resolved.

The linearization of Cat is computed from back to front as follows. The last part of the linearization of Cat is the linearization of its superclass, Animal. This linearization is copied over without any changes. (The linearization of each of these types is shown in [Table 12.1](#) on [page 262](#).) Because Animal doesn't explicitly extend a superclass or mix in any supertraits, it by default extends AnyRef, which extends Any. Animal's linearization, therefore, looks like:

Animal

AnyRef

Any

The second to last part is the linearization of the first mixin, trait Furry, but all classes that are already in the linearization of Animal are left out now, so that each class appears only once in Cat's linearization. The result is: Furry

Animal

AnyRef

Any

This is preceded by the linearization of FourLegged, where again any classes that have already been copied in the linearizations of the superclass or the first mixin are left out:

FourLegged

HasLegs

Furry

Animal

AnyRef

Any

Finally, the first class in the linearization of Cat is Cat itself:

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 12.7](#)

### [Chapter 12 · Traits](#)

262

Table 12.1 · Linearization of types in Cat's hierarchy

Type

Linearization

Animal

Animal, AnyRef, Any

Furry

Furry, Animal, AnyRef, Any

FourLegged

FourLegged, HasLegs, Animal, AnyRef, Any

HasLegs

HasLegs, Animal, AnyRef, Any

Cat

Cat, FourLegged, HasLegs, Furry, Animal, AnyRef, Any

Cat

FourLegged

HasLegs

Furry

Animal

AnyRef

Any

When any of these classes and traits invokes a method via super, the implementation invoked will be the first implementation to its right in the linearization.

12.7

To trait, or not to trait?

Whenever you implement a reusable collection of behavior, you will have to decide whether you want to use a trait or an abstract class. There is no firm rule, but this section contains a few guidelines to consider.

If the behavior will not be reused, then make it a concrete class. It is not reusable behavior after all.

If it might be reused in multiple, unrelated classes, make it a trait. Only traits can be mixed into different parts of the class hierarchy.

If you want to inherit from it in Java code, use an abstract class. Since traits with code do not have a close Java analog, it tends to be awkward to inherit from a trait in a Java class. Inheriting from a Scala class, meanwhile, is exactly like inheriting from a Java class. As one exception, a Scala trait with only abstract members translates directly to a Java interface, so you should feel free to define such traits even if you expect Java code to inherit from it. See [Chapter 29](#) for more information on working with Java and Scala together.

If you plan to distribute it in compiled form, and you expect outside groups to write classes inheriting from it, you might lean towards using an abstract

class. The issue is that when a trait gains or loses a member, any classes that inherit from it must be recompiled, even if they have not changed.

If outside clients will only call into the behavior, instead of inheriting from

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 12.8

### Chapter 12 · Traits

263

it, then using a trait is fine.

If efficiency is very important, lean towards using a class. Most Java runtimes make a virtual method invocation of a class member a faster operation than an interface method invocation. Traits get compiled to interfaces and therefore may pay a slight performance overhead. However, you should make this choice only if you know that the trait in question constitutes a performance bottleneck and have evidence that using a class instead actually solves the problem.

If you still do not know, after considering the above, then start by making it as a trait. You can always change it later, and in general using a trait keeps more options open.

12.8

## Conclusion

This chapter has shown you how traits work and how to use them in several common idioms. You saw that traits are similar to multiple inheritance, but because they interpret super using linearization, they both avoid some of the difficulties of traditional multiple inheritance, and allow you to stack behaviors. You also saw the Ordered trait and learned how to write your own enrichment traits.

Now that you have seen all of these facets, it is worth stepping back and taking another look at traits as a whole. Traits do not merely support the idioms described in this chapter. They are a fundamental unit of code that is reusable through inheritance. Because of this nature, many experienced Scala programmers start with traits when they are at the early stages of implementation. Each trait can hold less than an entire concept, a mere fragment of a concept. As the design solidifies, the fragments can be combined into more complete concepts through trait mixin.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 13

### Packages and Imports

When working on a program, especially a large one, it is important to minimize coupling—the extent to which the various parts of the program rely on the other parts. Low coupling reduces the risk that a small, seemingly innocuous change in one part of the program will have devastating consequences in another part. One way to minimize coupling is to write in a modular style. You divide the program into a number of smaller modules, each of which has an inside and an outside. When working on the inside of a module—its implementation—you need only coordinate with other programmers working on that very same module. Only when you must change the outside of a module—its interface—is it necessary to coordinate with developers working on other modules.

This chapter shows several constructs that help you program in a modular style. It shows how to place things in packages, make names visible through imports, and control the visibility of definitions through access modifiers.

The constructs are similar in spirit to constructs in Java, but there are some differences—usually ways that are more consistent—so it's worth reading this chapter even if you already know Java.

#### 13.1

##### Packages

Scala code resides in the Java platform's global hierarchy of packages. The example code you've seen so far in this book has been in the unnamed package. You can place code into named packages in Scala in two ways.

First, you can place the contents of an entire file into a package by putting a package clause at the top of the file, as shown in [Listing 13.1](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 13.1](#)

### [Chapter 13 · Packages and Imports](#)

265

```
package bobsrockets.navigation
```

```
class Navigator
```

[Listing 13.1 · Placing the contents of an entire file into a package.](#)

The package clause of [Listing 13.1](#) places class Navigator into the package named bobsrockets.navigation. Presumably, this is the navigation software developed by Bob's Rockets, Inc.

#### Note

Because Scala code is part of the Java ecosystem, it is recommended to follow Java's reverse-domain-name convention for Scala packages that you release to the public. Thus, a better name for Navigator's package might be com.bobsrockets.navigation. In this chapter, however, we'll leave off the "com." to make the examples easier to understand.

The other way you can place code into packages in Scala is more like C# namespaces. You follow a package clause by a section in curly braces that contains the definitions that go into the package. Among other things, this syntax lets you put different parts of a file into different packages. For example, you might include a class's tests in the same file as the original code, but put the tests in a different package, as shown in [Listing 13.2](#):

```
package bobsrockets {  
    package navigation {  
        // In package bobsrockets.navigation  
        class Navigator  
  
        package tests {  
            // In package bobsrockets.navigation.tests  
            class NavigatorSuite  
        }  
    }  
}
```

Listing 13.2 · Nesting multiple packages in the same file.

The Java-like syntax shown in [Listing 13.1](#) is actually just syntactic sugar for the more general nested syntax shown in [Listing 13.2](#). In fact, if you do

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 13.1](#)

[Chapter 13 · Packages and Imports](#)

266

nothing with a package except nest another package inside it, you can save a level of indentation using the approach shown in [Listing 13.3](#):

```
package bobsrockets.navigation {  
    // In package bobsrockets.navigation
```

```
class Navigator

package tests {

// In package bobsrockets.navigation.tests

class NavigatorSuite

}

}
```

Listing 13.3 · Nesting packages with minimal indentation.

As this notation hints, Scala’s packages truly nest. That is, package navigation is semantically inside of package bobsrockets. Java packages, despite being hierarchical, do not nest. In Java, whenever you name a package, you have to start at the root of the package hierarchy. Scala uses a more regular rule in order to simplify the language.

Take a look at [Listing 13.4](#). Inside the Booster class, it’s not necessary to reference Navigator as bobsrockets.navigation.Navigator, its fully qualified name. Since packages nest, it can be referred to as simply as navigation.Navigator. This shorter name is possible because class Booster is contained in package bobsrockets, which has navigation as a member. Therefore, navigation can be referred to without a prefix, just like the code inside methods of a class can refer to other methods of that class without a prefix.

Another consequence of Scala’s scoping rules is that packages in an inner scope hide packages of the same name that are defined in an outer scope. For instance, consider the code shown in [Listing 13.5](#), which has three packages named launch. There’s one launch in package bobsrockets.navigation, one in bobsrockets, and one at the top level (in a different file from the other two). Such repeated names work fine—after all they are a major reason to use packages—but they do mean you must use some care to access precisely the one you mean.

To see how to choose the one you mean, take a look at MissionControl in [Listing 13.5](#). How would you reference each of Booster1, Booster2, and

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 13.1](#)

### [Chapter 13 · Packages and Imports](#)

267

```
package bobsrockets {  
  package navigation {  
    class Navigator  
  }  
  
  package launch {  
    class Booster {  
      // No need to say bobsrockets.navigation.Navigator  
      val nav = new navigation.Navigator  
    }  
  }  
}
```

[Listing 13.4 · Scala packages truly nest.](#)

// In file launch.scala

```
package launch {  
  class Booster3
```

```
}

// In file bobsrockets.scala

package bobsrockets {

    package navigation {

        package launch {

            class Booster1

        }

        class MissionControl {

            val booster1 = new launch.Booster1

            val booster2 = new bobsrockets.launch.Booster2

            val booster3 = new _root_.launch.Booster3

        }

    }

    package launch {

        class Booster2

    }

}

}
```

Listing 13.5 · Accessing hidden package names.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 13.2](#)

## Chapter 13 · Packages and Imports

268

Booster3? Accessing the first one is easiest. A reference to launch by itself will get you to package bobsrockets.navigation.launch, because that is the launch package defined in the closest enclosing scope. Thus, you can refer to the first booster class as simply launch.Booster1. Referring to the second one also is not tricky. You can write bobrockets.launch.Booster2

and be clear about which one you are referencing. That leaves the question of the third booster class, however. How can you access Booster3, considering that a nested launch package shadows the top-level one?

To help in this situation, Scala provides a package named `_root_` that is outside any package a user can write. Put another way, every top-level package you can write is treated as a member of package `_root_`. For example, both launch and bobsrockets of [Listing 13.5](#) are members of package `_root_`. As a result, `_root_.launch` gives you the top-level launch package, and `_root_.launch.Booster3` designates the outermost booster class.

13.2

### Imports

In Scala, packages and their members can be imported using import clauses.

Imported items can then be accessed by a simple name like `File`, as opposed to requiring a qualified name like `java.io.File`. For example, consider the code shown in [Listing 13.6](#):

```
package bobsdelights
```

```
abstract class Fruit(
```

```
    val name: String,
```

```
    val color: String
```

```
)  
  
object Fruits {  
  
    object Apple extends Fruit("apple", "red") object Orange extends  
    Fruit("orange", "orange") object Pear extends Fruit("pear", "yellowish") val  
    menu = List(Apple, Orange, Pear)  
  
}
```

Listing 13.6 · Bob's delightful fruits, ready for import.

An import clause makes members of a package or object available by

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 13.2](#)

[Chapter 13 · Packages and Imports](#)

269

their names alone without needing to prefix them by the package or object name. Here are some simple examples:

```
// easy access to Fruit  
  
import bobsdelights.Fruit  
  
// easy access to all members of bobsdelights  
  
import bobsdelights._  
  
// easy access to all members of Fruits  
  
import bobsdelights.Fruits._
```

The first of these corresponds to Java's single type import, the second to Java's on-demand import. The only difference is that Scala's on-demand

imports are written with a trailing underscore (\_) instead of an asterisk (\*). (after all, \* is a valid identifier in Scala!). The third import clause above corresponds to Java's import of static class fields.

These three imports give you a taste of what imports can do, but Scala imports are actually much more general. For one, imports in Scala can appear anywhere, not just at the beginning of a compilation unit. Also, they can refer to arbitrary values. For instance, the import shown in [Listing 13.7](#)

is possible:

```
def showFruit(fruit: Fruit) {  
    import fruit._  
  
    println(name + "s are " + color)  
}
```

[Listing 13.7 · Importing the members of a regular \(not singleton\) object.](#)

Method showFruit imports all members of its parameter fruit, which is of type Fruit. The subsequent println statement can refer to name and color directly. These two references are equivalent to fruit.name and fruit.color. This syntax is particularly useful when you use objects as modules, which will be described in [Chapter 27](#).

Another way Scala's imports are flexible is that they can import packages themselves, not just their non-package members. This is only natural if you think of nested packages being contained in their surrounding package. For example, in [Listing 13.8](#), the package java.util.regex is imported. This makes regex usable as a simple name. To access the Pattern singleton ob-

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 13.2](#)

[Chapter 13 · Packages and Imports](#)

## Scala's flexible imports

Scala's import clauses are quite a bit more flexible than Java's. There are three principal differences. In Scala, imports:

- may appear anywhere
- may refer to objects (singleton or regular) in addition to packages
- let you rename and hide some of the imported members

ject from the `java.util.regex` package, you can just say, `regex.Pattern`, as shown in [Listing 13.8](#):

```
import java.util.regex

class AStarB {

    // Accesses java.util.regex.Pattern

    val pat = regex.Pattern.compile("a*b")

}
```

[Listing 13.8 · Importing a package name.](#)

Imports in Scala can also rename or hide members. This is done with an import selector clause enclosed in braces, which follows the object from which members are imported. Here are some examples:

```
import Fruits.{Apple, Orange}
```

This imports just members Apple and Orange from object Fruits.

```
import Fruits.{Apple => McIntosh, Orange}
```

This imports the two members Apple and Orange from object Fruits.

However, the Apple object is renamed to McIntosh. So this object can be accessed with either Fruits.Apple or McIntosh. A renaming clause is always of the form “<original-name> => <new-name>”.

```
import java.sql.{Date => SDate}
```

This imports the SQL date class as SDate, so that you can simultaneously import the normal Java date class as simply Date.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 13.2](#)

### [Chapter 13 · Packages and Imports](#)

271

```
import java.{sql => S}
```

This imports the java.sql package as S, so that you can write things like S.Date.

```
import Fruits.{_}
```

This imports all members from object Fruits. It means the same thing as  
import Fruits.\_.

```
import Fruits.{Apple => McIntosh, _}
```

This imports all members from object Fruits but renames Apple to McIntosh.

```
import Fruits.{Pear => _, _}
```

This imports all members of Fruits except Pear. A clause of the form

“<original-name> => \_” excludes <original-name> from the names that are imported. In a sense, renaming something to ‘\_’ means hiding it altogether. This is useful to avoid ambiguities. Say you have two packages, Fruits and

Notebooks, which both define a class Apple. If you want to get just the notebook named Apple, and not the fruit, you could still use two imports on demand like this:

```
import Notebooks._
```

```
import Fruits.{Apple => _, _}
```

This would import all Notebooks and all Fruits except for Apple.

These examples demonstrate the great flexibility Scala offers when it comes to importing members selectively and possibly under different names.

In summary, an import selector can consist of the following:

- A simple name x. This includes x in the set of imported names.
- A renaming clause x => y. This makes the member named x visible under the name y.
- A hiding clause x => \_. This excludes x from the set of imported names.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 13.3](#)

### [Chapter 13 · Packages and Imports](#)

272

- A catch-all ‘\_’. This imports all members except those members mentioned in a preceding clause. If a catch-all is given, it must come last in the list of import selectors.

The simpler import clauses shown at the beginning of this section can be seen as special abbreviations of import clauses with a selector clause. For example, “import p.\_” is equivalent to “import p.{\_}” and “import p.n”

is equivalent to “import p.{n}”.

## 13.3

### Implicit imports

Scala adds some imports implicitly to every program. In essence, it is as if the following three import clauses had been added to the top of every source file with extension “.scala”:

```
import java.lang._ // everything in the java.lang package import scala._  
// everything in the scala package  
import Predef._  
// everything in the Predef object
```

The `java.lang` package contains standard Java classes. It is always implicitly imported on the JVM implementation of Scala. The .NET implementation would import package `System` instead, which is the .NET analogue of `java.lang`. Because `java.lang` is imported implicitly, you can write `Thread` instead of `java.lang.Thread`, for instance.

As you have no doubt realized by now, the `scala` package contains the standard Scala library, with many common classes and objects. Because `scala` is imported implicitly, you can write `List` instead of `scala.List`, for instance.

The `Predef` object contains many definitions of types, methods, and implicit conversions that are commonly used on Scala programs. For example, because `Predef` is imported implicitly, you can write `assert` instead of `Predef.assert`.

The three import clauses above are treated a bit specially in that later imports overshadow earlier ones. For instance, the `StringBuilder` class is defined both in package `scala` and, from Java version 1.5 on, also in package `java.lang`. Because the `scala` import overshadows the `java.lang` import, the simple name `StringBuilder` will refer to `scala.StringBuilder`, not `java.lang.StringBuilder`.

## Section 13.4

### Chapter 13 · Packages and Imports

273

13.4

#### Access modifiers

Members of packages, classes, or objects can be labeled with the access modifiers private and protected. These modifiers restrict accesses to the members to certain regions of code. Scala's treatment of access modifiers roughly follows Java's but there are some important differences which are explained in this section.

#### Private members

Private members are treated similarly to Java. A member labeled private is visible only inside the class or object that contains the member definition.

In Scala, this rule applies also for inner classes. This treatment is more consistent, but differs from Java. Consider the example shown in [Listing 13.9:](#)

```
class Outer {  
    class Inner {  
        private def f() { println("f") }  
        class InnerMost {  
            f() // OK  
        }  
    }  
}
```

```
}

(new Inner).f() // error: f is not accessible

}
```

Listing 13.9 · How private access differs in Scala and Java.

In Scala, the access (new Inner).f() is illegal because f is declared private in Inner and the access is not from within class Inner. By contrast, the first access to f in class InnerMost is OK, because that access is contained in the body of class Inner. Java would permit both accesses because it lets an outer class access private members of its inner classes.

## Protected members

Access to protected members is also a bit more restrictive than in Java. In Scala, a protected member is only accessible from subclasses of the class in which the member is defined. In Java such accesses are also possible from other classes in the same package. In Scala, there is another way to achieve

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### Section 13.4

#### [Chapter 13](#) · [Packages and Imports](#)

274

this effect, as described below, so protected is free to be left as is. The example shown in [Listing 13.10](#) illustrates protected accesses: package p {

```
class Super {

protected def f() { println("f") }

}

class Sub extends Super {
```

```
f()  
}  
  
class Other {  
  
(new Super).f()  
  
// error: f is not accessible  
}  
  
}
```

Listing 13.10 · How protected access differs in Scala and Java.

In [Listing 13.10](#), the access to f in class Sub is OK because f is declared protected in Super and Sub is a subclass of Super. By contrast the access to f in Other is not permitted, because Other does not inherit from Super.

In Java, the latter access would be still permitted because Other is in the same package as Sub.

### Public members

Every member not labeled private or protected is public. There is no explicit modifier for public members. Such members can be accessed from anywhere.

### Scope of protection

Access modifiers in Scala can be augmented with qualifiers. A modifier of the form private[X] or protected[X] means that access is private or protected “up to” X, where X designates some enclosing package, class or singleton object.

Qualified access modifiers give you very fine-grained control over visibility. In particular they enable you to express Java’s accessibility notions such as

package private, package protected, or private up to outermost class, which are not directly expressible with simple modifiers in Scala. But they

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 13.4

### Chapter 13 · Packages and Imports

275

```
package bobsrockets {  
  package navigation {  
    private[bobsrockets] class Navigator {  
      protected[navigation] def useStarChart() {}  
      class LegOfJourney {  
        private[Navigator] val distance = 100  
      }  
      private[this] var speed = 200  
    }  
  }  
  package launch {  
    import navigation._  
    object Vehicle {  
      private[launch] val guide = new Navigator  
    }  
  }  
}
```

```
}
```

```
}
```

Listing 13.11 · Flexible scope of protection with access qualifiers.

also let you express accessibility rules that cannot be expressed in Java.

### List-

[ing 13.11](#) presents an example with many access qualifiers being used. In this listing, class Navigator is labeled private[bobsrockets]. This means that this class is visible in all classes and objects that are contained in package bobsrockets. In particular, the access to Navigator in object Vehicle is permitted, because Vehicle is contained in package launch, which is contained in bobsrockets. On the other hand, all code outside the package bobsrockets cannot access class Navigator.

This technique is quite useful in large projects that span several packages.

It allows you to define things that are visible in several sub-packages of your project but that remain hidden from clients external to your project. The same technique is not possible in Java. There, once a definition escapes its immediate package boundary, it is visible to the world at large.

Of course, the qualifier of a private may also be the directly enclosing package. An example is the access modifier of guide in object Vehicle in [Listing 13.11](#). Such an access modifier is equivalent to Java's package-private access.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 13.4](#)

[Chapter 13 · Packages and Imports](#)

276

Table 13.1 · Effects of private qualifiers on LegOfJourney.distance no access modifier

public access

private[bobsrockets]

access within outer package

private[navigation]

same as package visibility in Java

private[Navigator]

same as private in Java

private[LegOfJourney]

same as private in Scala

private[this]

access only from same object

All qualifiers can also be applied to protected, with the same meaning as private. That is, a modifier protected[X] in a class C allows access to the labeled definition in all subclasses of C and also within the enclosing package, class, or object X. For instance, the useStarChart method in [List-](#)

[ing 13.11](#) is accessible in all subclasses of Navigator and also in all code contained in the enclosing package navigation. It thus corresponds exactly to the meaning of protected in Java.

The qualifiers of private can also refer to an enclosing class or object.

For instance the distance variable in class LegOfJourney in [Listing 13.11](#)

is labeled private[Navigator], so it is visible from everywhere in class Navigator. This gives the same access capabilities as for private members of inner classes in Java. A private[C] where C is the outermost enclosing class is the same as just private in Java.

Finally, Scala also has an access modifier that is even more restrictive than private. A definition labeled `private[this]` is accessible only from within the same object that contains the definition. Such a definition is called object-private. For instance, the definition of `speed` in class `Navigator` in

[Listing 13.11](#) is object-private. This means that any access must not only be within class `Navigator`, but it must also be made from the very same instance of `Navigator`. Thus the accesses “`speed`” and “`this.speed`” would be legal from within `Navigator`. The following access, though, would not be allowed, even if it appeared inside class `Navigator`:

```
val other = new Navigator
```

`other.speed // this line would not compile`

Marking a member `private[this]` is a guarantee that it will not be seen from other objects of the same class. This can be useful for documentation. It also sometimes lets you write more general variance annotations (see

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 13.4](#)

### [Chapter 13](#) · [Packages and Imports](#)

277

[Section 19.7](#) for details).

To summarize, [Table 13.1](#) on [page 276](#) lists the effects of private qualifiers. Each line shows a qualified private modifier and what it would mean if such a modifier were attached to the distance variable declared in class `LegOfJourney` in [Listing 13.11](#).

Visibility and companion objects

In Java, static members and instance members belong to the same class, so access modifiers apply uniformly to them. You have already seen that in Scala there are no static members; instead you can have a companion object that contains members that exist only once. For instance, in [Listing 13.12](#)

object Rocket is a companion of class Rocket:

```
class Rocket {  
  
    import Rocket.fuel  
  
    private def canGoHomeAgain = fuel > 20  
  
}  
  
object Rocket {  
  
    private def fuel = 10  
  
    def chooseStrategy(rocket: Rocket) {  
  
        if (rocket.canGoHomeAgain)  
  
            goHome()  
  
        else  
  
            pickAStar()  
  
    }  
  
    def goHome() {}  
  
    def pickAStar() {}  
  
}
```

Listing 13.12: Accessing private members of companion classes and objects.

Scala's access rules privilege companion objects and classes when it comes to private or protected accesses. A class shares all its access rights with its companion object and vice versa. In particular, an object can access all

private members of its companion class, just as a class can access all private members of its companion object.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 13.5](#)

### [Chapter 13 · Packages and Imports](#)

278

For instance, the Rocket class above can access method fuel, which is declared private in object Rocket. Analogously, the Rocket object can access the private method canGetHome in class Rocket.

One exception where the similarity between Scala and Java breaks down concerns protected static members. A protected static member of a Java class C can be accessed in all subclasses of C. By contrast, a protected member in a companion object makes no sense, as singleton objects don't have any subclasses.

13.5

### Conclusion

In this chapter, you saw the basic constructs for dividing a program into packages. This gives you a simple and useful kind of modularity, so that you can work with very large bodies of code without different parts of the code trampling on each other. This system is the same in spirit as Java's packages, but there are some differences where Scala chooses to be more consistent or more general.

Looking ahead, [Chapter 27](#) describes a more flexible module system than division into packages. In addition to letting you separate code into several namespaces, that approach allows modules to be parameterized and to inherit from each other. In the next chapter, we'll turn our attention to assertions and unit testing.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 14

### Assertions and Unit Testing

Two important ways to check that the behavior of the software you write is as you expect are assertions and unit tests. In this chapter, we'll show you several options you have in Scala to write and run them.

#### 14.1

##### Assertions

Assertions in Scala are written as calls of a predefined method assert.<sup>1</sup> The expression assert(condition) throws an `AssertionError` if condition does not hold. There's also a two-argument version of assert. The expression assert(condition, explanation) tests condition, and, if it does not hold, throws an `AssertionError` that contains the given explanation.

The type of explanation is `Any`, so you can pass any object as the explanation. The assert method will call `toString` on it to get a string explanation to place inside the `AssertionError`.

For example, in the method named “above” of class `Element`, shown in

[Listing 10.13](#) on [page 234](#), you might place an assert after the calls to `widen` to make sure that the widened elements have equal widths. This is shown in

[Listing 14.1.](#)

Another way you might choose to do this is to check the widths at the end of the `widen` method, right before you return the value. You can accomplish this by storing the result in a `val`, performing an assertion on the result, then mentioning the `val` last so the result is returned if the assertion succeeds. You 1The assert method is defined in the `Predef` singleton object, whose members are automatically imported into every Scala source file.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 14.1](#)

## Chapter 14 · Assertions and Unit Testing

280

```
def above(that: Element): Element = {  
    val this1 = this widen that.width  
    val that1 = that widen this.width  
    assert(this1.width == that1.width)  
    elem(this1.contents ++ that1.contents)  
}
```

Listing 14.1 · Using an assertion.

can do this more concisely, however, with a convenience method in Predef named `ensuring`, as shown in [Listing 14.2](#).

The `ensuring` method can be used with any result type because of an implicit conversion. Although it looks in this code as if we're invoking `ensuring` on `widen`'s result, which is type `Element`, we're actually invoking `ensuring` on a type to which `Element` is implicitly converted. The `ensuring` method takes one argument, a predicate function that takes a result type and returns `Boolean`. `ensuring` will pass the result to the predicate.

If the predicate returns `true`, `ensuring` will return the result. Otherwise, `ensuring` will throw an `AssertionError`.

In this example, the predicate is “`w <= _width`”. The underscore is a placeholder for the one argument passed to the predicate, the `Element` result of the `widen` method. If the width passed as `w` to `widen` is less than or equal to the width of the result `Element`, the predicate will result in `true`, and `ensuring` will result in the `Element` on which it was invoked. Because this is the last expression of the `widen` method, `widen` itself will then result in the `Element`.

```
private def widen(w: Int): Element =  
  if (w <= width)  
    this  
  else {  
    val left = elem(' ', (w - width) / 2, height)  
    var right = elem(' ', w - width - left.width, height)  
    left beside this beside right  
  } ensuring (w <= _.width)
```

Listing 14.2 · Using ensuring to assert a function's result.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 14.2](#)

### [Chapter 14 · Assertions and Unit Testing](#)

281

Assertions (and ensuring checks) can be enabled and disabled using the JVM's `-ea` and `-da` command-line flags. When enabled, each assertion serves as a little test that uses the actual data encountered as the software runs. In the remainder of this chapter, we'll focus on the writing of external unit tests, which provide their own test data and run independently from the application.

## 14.2

### Unit testing in Scala

You have many options for unit testing in Scala, from established Java tools, such as JUnit and TestNG, to new tools written in Scala, such as

ScalaTest, specs, and ScalaCheck. In the remainder of this chapter, we'll give you a quick tour of these tools. We'll start with ScalaTest.

ScalaTest provides several ways to write tests, the simplest of which is to create classes that extend `org.scalatest.Suite` and define test methods in those classes. A `Suite` represents a suite of tests. Test methods start with

"test". [Listing 14.3](#) shows an example:

```
import org.scalatest.Suite
import Element.elem

class ElementSuite extends Suite {

    def testUniformElement() {
        val ele = elem('x', 2, 3)
        assert(ele.width == 2)
    }
}
```

[Listing 14.3 · Writing a test method with Suite.](#)

Although ScalaTest includes a `Runner` application, you can also run a `Suite` directly from the Scala interpreter by invoking `execute` on it. Trait `Suite`'s `execute` method uses reflection to discover its test methods and invokes them. Here's an example:

```
scala> (new ElementSuite).execute()
Test Starting - ElementSuite.testUniformElement
Test Succeeded - ElementSuite.testUniformElement
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 14.3](#)

## Chapter 14 · Assertions and Unit Testing

282

ScalaTest facilitates different styles of testing, because `execute` can be overridden in Suite subtypes. For example, ScalaTest offers a trait called `FunSuite`, which overrides `execute` so that you can define tests as function values rather than methods. [Listing 14.4](#) shows an example:

```
import org.scalatest.FunSuite
```

```
import Element.elem

class ElementSuite extends FunSuite {

    test("elem result should have passed width") {
        val ele = elem('x', 2, 3)
        assert(ele.width == 2)
    }
}
```

[Listing 14.4 · Writing a test function with FunSuite.](#)

The “Fun” in `FunSuite` stands for function. “test” is a method defined in `FunSuite`, which will be invoked by the primary constructor of `ElementSuite`. You specify the name of the test as a string between the parentheses, and the test code itself between curly braces. The test code is a function passed as a by-name parameter to `test`, which registers it for later execution. One benefit of `FunSuite` is you need not name all your tests starting with “test”. In addition, you can more easily give long names to your tests, because you need not encode them in camel case, as you must do with test methods.<sup>2</sup>

14.3

Informative failure reports

The tests in the previous two examples attempt to create an element of width 2 and assert that the width of the resulting element is indeed 2. Were this assertion to fail, you would see a message that indicated an assertion failed.

You'd be given a line number, but wouldn't know the two values that were unequal. You could find out by placing a string message in the assertion that includes both values, but a more concise approach is to use the triple-equals operator, which ScalaTest provides for this purpose:

<sup>2</sup>You can download ScalaTest from <http://www.scalatest.org/>.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 14.3](#)

### [Chapter 14 · Assertions and Unit Testing](#)

283

```
assert(ele.width === 2)
```

Were this assertion to fail, you would see a message such as “3 did not equal 2” in the failure report. This would tell you that ele.width wrongly returned 3. The triple-equals operator does not differentiate between the actual and expected result. It just indicates that the left operand did not equal the right operand. If you wish to emphasize this distinction, you could alternatively use ScalaTest’s expect method, like this:

```
expect(2) {  
    ele.width  
}
```

With this expression you indicate that you expect the code between the curly braces to result in 2. Were the code between the braces to result in 3, you’d see the message, “Expected 2, but got 3” in the test failure report.

If you want to check that a method throws an expected exception, you can use ScalaTest's intercept method, like this:

```
intercept(classOf[IllegalArgumentException]) {  
    elem('x', -2, 3)  
}
```

If the code between the curly braces completes abruptly with an instance of the passed exception class, intercept will return the caught exception, in case you want to inspect it further. Most often, you'll probably only care that the expected exception was thrown, and ignore the result of intercept, as is done in this example. On the other hand, if the code does not throw an exception, or throws a different exception, intercept will throw an AssertionError, and you'll get a helpful error message in the failure report, such as:

Expected IllegalArgumentException to be thrown,  
but NegativeArraySizeException was thrown.

The goal of ScalaTest's === operator and its expect and intercept methods is to help you write assertion-based tests that are clear and concise. In the next section, we'll show you how to use this syntax in JUnit and TestNG tests written in Scala.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 14.4](#)

[Chapter 14 · Assertions and Unit Testing](#)

284

14.4

Using JUnit and TestNG

The most popular unit testing framework on the Java platform is JUnit, an open source tool written by Kent Beck and Erich Gamma. You can write JUnit tests in Scala quite easily. Here's an example using JUnit 3.8.1:

```
import junit.framework.TestCase

import junit.framework.Assert.assertEquals
import junit.framework.Assert.fail

import Element.elem

class ElementTestCase extends TestCase {

    def testUniformElement() {
        val ele = elem('x', 2, 3)
        assertEquals(2, ele.width)
        assertEquals(3, ele.height)

        try {
            elem('x', -2, 3)
            fail()
        }
        catch {
            case e: IllegalArgumentException => // expected
        }
    }
}
```

Once you compile this class, JUnit will run it like any other TestCase. JUnit doesn't care that it was written in Scala. If you wish to use ScalaTest's assertion syntax in your JUnit 3 test, however, you can instead subclass JUnit3Suite, as shown [Listing 14.5](#).

Trait JUnit3Suite extends TestCase, so once you compile this class, JUnit will run it just fine, even though it uses ScalaTest's more concise assertion syntax. Moreover, because JUnit3Suite mixes in ScalaTest's trait Suite, you can alternatively run this test class with ScalaTest's runner. The goal is to provide a gentle migration path to enable JUnit users to start writing JUnit tests in Scala that take advantage of the conciseness afforded by Scala. ScalaTest also has a JUnit3WrapperSuite, which enables you to run existing JUnit tests written in Java with ScalaTest's runner.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 14.4](#)

### [Chapter 14 · Assertions and Unit Testing](#)

285

```
import org.scalatest.junit.JUnit3Suite  
  
import Element.elem  
  
class ElementSuite extends JUnit3Suite {  
  
  def testUniformElement() {  
  
    val ele = elem('x', 2, 3)  
  
    assert(ele.width === 2)  
  
    expect(3) { ele.height }  
  
    intercept(classOf[IllegalArgumentException]) {  
  
      elem('x', -2, 3)  
    }  
  }  
}
```

```
}
```

```
}
```

```
}
```

### Listing 14.5 · Writing a JUnit test with JUnit3Suite.

ScalaTest offers similar integration classes for JUnit 4 and TestNG, both of which make heavy use of annotations. We'll show an example using TestNG, an open source framework written by Cédric Beust and Alexandru Popescu. As with JUnit, you can simply write TestNG tests in Scala, compile them, and run them with TestNG's runner. Here's an example:

```
import org.testng.annotations.Test
```

```
import org.testng.Assert.assertEquals
```

```
import Element.elem
```

```
class ElementTests {
```

```
    @Test def verifyUniformElement() {
```

```
        val ele = elem('x', 2, 3)
```

```
        assertEquals(ele.width, 2)
```

```
        assertEquals(ele.height, 3)
```

```
}
```

```
    @Test {
```

```
        val expectedExceptions =
```

```
            Array(classOf[IllegalArgumentException])
```

```
}
```

```
def elemShouldThrowIAE() { elem('x', -2, 3) }

}
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 14.5](#)

### [Chapter 14 · Assertions and Unit Testing](#)

286

If you prefer to use ScalaTest's assertion syntax in your TestNG tests, however, you can extend trait `TestNGSuite`, as shown in [Listing 14.6](#):

```
import org.scalatest.testng.TestNGSuite

import org.testng.annotations.Test

import Element.elem

class ElementSuite extends TestNGSuite {

  @Test def verifyUniformElement() {

    val ele = elem('x', 2, 3)

    assert(ele.width === 2)

    expect(3) { ele.height }

    intercept(classOf[IllegalArgumentException]) {

      elem('x', -2, 3)

    }

  }

}
```

**Listing 14.6 · Writing a TestNG test with TestNGSuite.**

As with JUnit3Suite, you can run a TestNGSuite with either TestNG or ScalaTest, and ScalaTest also provides a TestNGWrapperSuite that enables you to run existing TestNG tests written in Java with ScalaTest. To see an example of JUnit 4 tests written in Scala, see [Section 29.2](#).

14.5

Tests as specifications

In the behavior-driven development (BDD) testing style, the emphasis is on writing human-readable specifications of the expected behavior of code, and accompanying tests that verify the code has the specified behavior. ScalaTest includes a trait, Spec, which facilitates this style of testing. An example is shown in [Listing 14.7](#).

A Spec contains “describers” and “specifiers.” A describer, written as a string followed by two dashes and a block, describes the “subject” being specified and tested. A specifier, written as a string followed by one dash and a block, specifies a small bit of behavior of that subject (in the string) and provides code that verifies that behavior (in the block). When a Spec is executed, it will run each specifier as a ScalaTest test. A Spec can gen-

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 14.5](#)

[Chapter 14 · Assertions and Unit Testing](#)

287

```
import org.scalatest.Spec
```

```
class ElementSpec extends Spec {
```

```
    "A UniformElement" -- {
```

```

"should have a width equal to the passed value" - {
    val ele = elem('x', 2, 3)
    assert(ele.width === 2)
}

"should have a height equal to the passed value" - {
    val ele = elem('x', 2, 3)
    assert(ele.height === 3)
}

"should throw an IAE if passed a negative width" - {
    intercept(classOf[IllegalArgumentException]) {
        elem('x', -2, 3)
    }
}
}
}
}
}

```

Listing 14.7 · Specifying and testing behavior with a ScalaTest Spec.

erate output when it is executed that reads more like a specification. For example, here's what the output will look like if you run ElementSpec from

[Listing 14.7](#) in the interpreter:

```
scala> (new ElementSpec).execute()
```

A UniformElement

- should have a width equal to the passed value
- should have a height equal to the passed value
- should throw an IAE if passed a negative width

The specs testing framework, an open source tool written in Scala by Eric Torreborre, also supports the BDD style of testing but with a different syntax.

For example, you could use specs to write the test shown in [Listing 14.8](#).

One goal of specs is to enable you to write assertions that read more like natural language and generate descriptive failure messages. Specs provides

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 14.6](#)

### [Chapter 14 · Assertions and Unit Testing](#)

288

```
import org.specs._

object ElementSpecification extends Specification {
  "A UniformElement" should {
    "have a width equal to the passed value" in {
      val ele = elem('x', 2, 3)
      ele.width must be_==(2)
    }
    "have a height equal to the passed value" in {
```

```
val ele = elem('x', 2, 3)

ele.height must be_==(3)

}

"throw an IAE if passed a negative width" in {

  elem('x', -2, 3) must

    throwA(new IllegalArgumentException)

}

}

}
```

Listing 14.8 · Specifying and testing behavior with the specs framework.

a large number of matchers for this purpose. You can also create your own matchers. You can see some examples of matchers in action in [Listing 14.8](#)

in the lines that contain “must be\_==” and “must throwA”. You can also use specs matchers in ScalaTest, JUnit, or TestNG tests written in Scala by mixing trait org.specs.SpecsMatchers into your test classes. You can use specs standalone, but it is also integrated with ScalaTest and JUnit, so you can run specs tests with those tools as well.<sup>3</sup>

## 14.6

### Property-based testing

Another useful testing tool for Scala is ScalaCheck, an open source framework written by Rickard Nilsson. ScalaCheck enables you to specify properties that the code under test must obey. For each property, ScalaCheck will generate test data and run tests that check whether the property holds.

[Listing 14.9](#) show an example of using ScalaCheck from a ScalaTest suite.

3 You can download specs from <http://code.google.com/p/specs/>.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 14.6](#)

### [Chapter 14 · Assertions and Unit Testing](#)

289

```
import org.scalatest.prop.FunSuite
import org.scalacheck.Prop._
import Element.elem

class ElementSuite extends FunSuite {

  test("elem result should have passed width", (w: Int) => w > 0 ==>
    (elem('x', w, 3).width == w)

  )
  test("elem result should have passed height", (h: Int) => h > 0 ==>
    (elem('x', 2, h).height == h)
  )
}
```

[Listing 14.9 · Writing property-based tests with ScalaCheck](#).

In this example, we check two properties that the elem factory should obey. ScalaCheck properties are expressed as function values that take as parameters the required test data, which will be generated by ScalaCheck. In the first property shown in [Listing 14.9](#), the test data is an integer named

w that represents a width. Inside the body of the function, you see:  $w > 0 \implies (\text{elem}('x', w, 3).\text{width} == w)$

The  $\implies$  symbol is an implication operator. It implies that whenever the left hand expression is true, the expression on the right must hold true. Thus in this case, the expression on the right of  $\implies$  must hold true whenever w is greater than 0. The right-hand expression in this case will yield true if the width passed to the elem factory is the same as the width of the Element returned by the factory.

With this small amount of code, ScalaCheck will generate possibly hundreds of values for w and test each one, looking for a value for which the property doesn't hold. If the property holds true for every value ScalaCheck tries, the test will pass. Otherwise, the test will complete abruptly with an AssertionError that contains information including the value that caused the failure.

In [Listing 14.9](#), each test was composed of a single property. Sometimes, however, you may want to make multiple property checks within a single test, or perform both property checks and assertions in the same test. Scala-

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 14.7](#)

### [Chapter 14 · Assertions and Unit Testing](#)

290

```
import org.scalatest.junit.JUnit3Suite  
  
import org.scalatest.prop.Checkers  
  
import org.scalacheck.Prop._  
  
import Element.elem  
  
class ElementSuite extends JUnit3Suite with Checkers {
```

```
def testUniformElement() {  
    check((w: Int) => w > 0 ==> (elem('x', w, 3).width == w)) check((h: Int) =>  
    h > 0 ==> (elem('x', 2, h).height == h))  
}  
}
```

Listing 14.10 · Checking properties from a JUnit TestCase with Checkers.

Test's Checkers trait makes this easy. Simply mix Checkers into your test class, and pass properties to one of several “check” methods. For example,

[Listing 14.10](#) shows a JUnit3Suite performing the same two ScalaCheck property checks shown in the previous example, but this time in a single test.

As with all JUnit3Suites, this class is a JUnit TestCase and can therefore be run with either ScalaTest or JUnit.<sup>4</sup>

## 14.7

### Organizing and running tests


Each framework mentioned in this chapter provides some mechanism for organizing and running tests. In this section, we'll give a quick overview of ScalaTest's approach. To get the full story on any of these frameworks, however, you'll need to consult their documentation.

In ScalaTest, you organize large test suites by nesting Suites inside Suites. When a Suite is executed, it will execute its nested Suites as well as its tests. The nested Suites will in turn execute their nested Suites, and so on. A large test suite, therefore, is represented as a tree of Suite objects. When you execute the root Suite in the tree, all Suites in the tree will be executed.

You can nest suites manually or automatically. To nest manually, you either override the nestedSuites method on your Suites, or pass the Suites you

want to nest to the constructor of class SuperSuite, which ScalaTest 4 You can download ScalaCheck from <http://code.google.com/p/scalacheck/>.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

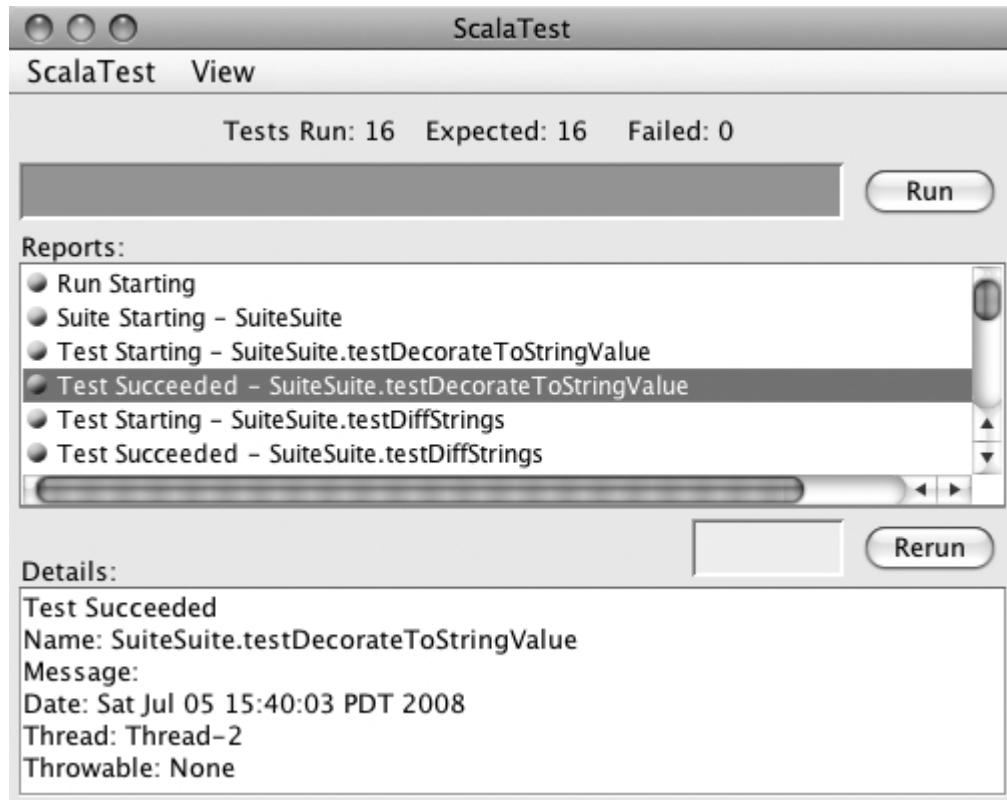

## [Section 14.7](#)

### [Chapter 14 · Assertions and Unit Testing](#)

291

Figure 14.1 · ScalaTest's graphical reporter.

provides for this purpose. To nest automatically, you provide package names to ScalaTest's Runner, which will discover Suites automatically, nest them under a root Suite, and execute the root Suite.

You can invoke ScalaTest's Runner application from the command line or an ant task. You must specify which suites you want to run, either by naming the suites explicitly or indicating name prefixes with which you

want Runner to perform automatic discovery. You can optionally specify a runpath, a list of directories and JAR files from which to load class files for the tests and the code they exercise.<sup>5</sup> You can also specify one or more reporters, which will determine how test results will be presented.

For example, the ScalaTest distribution includes the suites that test ScalaTest itself. You can run one of these suites, SuiteSuite,<sup>6</sup> with the following command:

```
$ scala -cp scalatest-0.9.4.jar org.scalatest.tools.Runner
```

-p "scalatest-0.9.4-tests.jar" -s org.scalatest.SuiteSuite With -cp you place ScalaTest's JAR file on the class path. The next token, 5Tests can be anywhere on the runpath or classpath, but typically you would keep your tests separate from your production code, in a separate directory hierarchy that mirrors your source tree's directory hierarchy.

<sup>6</sup>SuiteSuite is so-named because it is a suite of tests that test trait Suite itself.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 14.8](#)

### [Chapter 14 · Assertions and Unit Testing](#)

292

org.scalatest.tools.Runner, is the fully qualified name of the Runner application. Scala will run this application and pass the remaining tokens as command line arguments. The -p specifies the runpath, which in this case is a JAR file that contains the suite classes: scalatest-0.9.4-tests.jar.

The -s indicates SuiteSuite is the suite to execute. Because you don't explicitly specify a reporter, you will by default get the graphical reporter.

The result is shown in [Figure 14.1](#).

14.8

## Conclusion

In this chapter you saw examples of mixing assertions directly in production code as well as writing them externally in unit tests. You saw that as a Scala programmer, you can take advantage of popular testing tools from the Java community, such as JUnit and TestNG, as well as newer tools designed explicitly for Scala, such as ScalaTest, ScalaCheck, and specs. Both in-code assertions and unit testing can help you achieve your software quality goals.

We felt that these techniques are important enough to justify the short detour from the Scala tutorial that this chapter represented. In the next chapter, however, we'll return to the language tutorial and cover a very useful aspect of Scala: pattern matching.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 15

### Case Classes and Pattern Matching

This chapter introduces case classes and pattern matching, twin constructs that support you when writing regular, non-encapsulated data structures.

These two constructs are particularly helpful for tree-like recursive data.

If you have programmed in a functional language before, then you will probably recognize pattern matching. Case classes will be new to you, though. Case classes are Scala's way to allow pattern matching on objects without requiring a large amount of boilerplate. In the common case, all you need to do is add a single case keyword to each class that you want to be pattern matchable.

This chapter starts with a simple example of case classes and pattern matching. It then goes through all of the kinds of patterns that are supported, talks about the role of sealed classes, discusses the Option type, and shows some non-obvious places in the language where pattern matching is used.

Finally, a larger, more realistic example of pattern matching is shown.

## 15.1

### A simple example

Before delving into all the rules and nuances of pattern matching, it is worth looking at a simple example to get the general idea. Let's say you need to write a library that manipulates arithmetic expressions, perhaps as part of a domain-specific language you are designing.

A first step to tackle this problem is the definition of the input data. To keep things simple, we'll concentrate on arithmetic expressions consisting of variables, numbers, and unary and binary operations. This is expressed by the hierarchy of Scala classes shown in [Listing 15.1](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### [Section 15.1](#)

#### [Chapter 15 · Case Classes and Pattern Matching](#)

294

abstract class Expr

case class Var(name: String) extends Expr

case class Number(num: Double) extends Expr

case class UnOp(operator: String, arg: Expr) extends Expr  
case class BinOp(operator: String,

left: Expr, right: Expr) extends Expr

[Listing 15.1 · Defining case classes.](#)

The hierarchy includes an abstract base class Expr with four subclasses, one for each kind of expression being considered.<sup>1</sup> The bodies of all five classes

are empty. As mentioned previously, in Scala you can leave out the braces around an empty class body if you wish, so class C is the same as class C {}.

## Case classes

The other noteworthy thing about the declarations of [Listing 15.1](#) is that each subclass has a case modifier. Classes with such a modifier are called case classes. Using the modifier makes the Scala compiler add some syntactic conveniences to your class.

First, it adds a factory method with the name of the class. This means you can write say, Var("x") to construct a Var object instead of the slightly longer new Var("x"):

```
scala> val v = Var("x")
```

```
v: Var = Var(x)
```

The factory methods are particularly nice when you nest them. Because there are no noisy new keywords sprinkled throughout the code, you can take in the expression's structure at a glance:

```
scala> val op = BinOp("+", Number(1), v)
```

```
op: BinOp = BinOp(+,Number(1.0),Var(x))
```

The second syntactic convenience is that all arguments in the parameter list of a case class implicitly get a val prefix, so they are maintained as fields:  
1Instead of an abstract class, we could have equally well chosen to model the root of that class hierarchy as a trait. Modeling it as an abstract class may be slightly more efficient.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 15.1](#)

[Chapter 15 · Case Classes and Pattern Matching](#)

```
scala> v.name
```

```
res0: String = x
```

```
scala> op.left
```

```
res1: Expr = Number(1.0)
```

Third, the compiler adds “natural” implementations of methods `toString`, `hashCode`, and `equals` to your class. They will print, hash, and compare a whole tree consisting of the class and (recursively) all its arguments. Since

`==` in Scala always forwards to `equals`, this means in particular that elements of case classes are always compared structurally:

```
scala> println(op)
```

```
BinOp(+,Number(1.0),Var(x))
```

```
scala> op.right == Var("x")
```

```
res3: Boolean = true
```

All these conventions add a lot of convenience, at a small price. The price is that you have to write the `case` modifier and that your classes and objects become a bit larger. They are larger because additional methods are generated and an implicit field is added for each constructor parameter. However, the biggest advantage of case classes is that they support pattern matching.

## Pattern matching

Say you want to simplify arithmetic expressions of the kinds just presented.

There is a multitude of possible simplification rules. The following three rules just serve as an illustration:

```

UnOp("-", UnOp("-", e))

=> e

// Double negation

BinOp("+", e, Number(0)) => e

// Adding zero

BinOp("*", e, Number(1)) => e

// Multiplying by one

```

Using pattern matching, these rules can be taken almost as they are to form the core of a simplification function in Scala, as shown in [Listing 15.2](#). The function, `simplifyTop`, can be used like this:

```
scala> simplifyTop(UnOp("-", UnOp("-", Var("x")))) res4: Expr = Var(x)
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 15.1](#)

### [Chapter 15 · Case Classes and Pattern Matching](#)

296

```

def simplifyTop(expr: Expr): Expr = expr match {

  case UnOp("-", UnOp("-", e))

  => e

  // Double negation

  case BinOp("+", e, Number(0)) => e

  // Adding zero

```

```
case BinOp("*", e, Number(1)) => e  
// Multiplying by one  
  
case _ => expr  
}
```

Listing 15.2 · The `simplifyTop` function, which does a pattern match.

The right-hand side of `simplifyTop` consists of a match expression.

match corresponds to switch in Java, but it's written after the selector expression. I.e., it's:

selector match { alternatives }

instead of:

switch (selector) { alternatives }

A pattern match includes a sequence of alternatives, each starting with the keyword case. Each alternative includes a pattern and one or more expressions, which will be evaluated if the pattern matches. An arrow symbol `=>` separates the pattern from the expressions.

A match expression is evaluated by trying each of the patterns in the order they are written. The first pattern that matches is selected, and the part following the arrow is selected and executed.

A constant pattern like "+" or 1 matches values that are equal to the constant with respect to `==`. A variable pattern like `e` matches every value.

The variable then refers to that value in the right hand side of the case clause.

In this example, note that the first three examples evaluate to `e`, a variable that is bound within the associated pattern. The wildcard pattern `(_)` also matches every value, but it does not introduce a variable name to refer to

that value. In [Listing 15.2](#), notice how the match ends with a default case that does nothing to the expression. Instead, it just results in `expr`, the expression matched upon.

A constructor pattern looks like `UnOp("-", e)`. This pattern matches all values of type `UnOp` whose first argument matches `"-"` and whose second argument matches `e`. Note that the arguments to the constructor are

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 15.1](#)

### [Chapter 15 · Case Classes and Pattern Matching](#)

297

themselves patterns. This allows you to write deep patterns using a concise notation. Here's an example:

`UnOp("-", UnOp("-", e))`

Imagine trying to implement this same functionality using the visitor design pattern!<sup>2</sup> Almost as awkward, imagine implementing it as a long sequence of if statements, type tests, and type casts.

match compared to switch

Match expressions can be seen as a generalization of Java-style switches. A Java-style switch can be naturally expressed as a match expression where each pattern is a constant and the last pattern may be a wildcard (which represents the default case of the switch). There are three differences to keep in mind, however. First, match is an expression in Scala, i.e., it always results in a value. Second, Scala's alternative expressions never "fall through"

into the next case. Third, if none of the patterns match, an exception named `MatchError` is thrown. This means you always have to make sure that all cases are covered, even if it means adding a default case where there's nothing to do. [Listing 15.3](#) shows an example: `expr match {`

```
case BinOp(op, left, right) =>  
    println(expr + " is a binary operation")  
  
case _ =>  
}
```

Listing 15.3 · A pattern match with an empty “default” case.

The second case is necessary in [Listing 15.3](#), because otherwise the match expression would throw a MatchError for every expr argument that is not a BinOp. In this example, no code is specified for that second case, so if that case runs it does nothing. The result of either case is the unit value ‘()’, which is also, therefore, the result of the entire match expression.

2Gamma, et. al., Design Patterns [\[Gam95\]](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 15.2](#)

[Chapter 15](#) · Case Classes and Pattern Matching

298

15.2

Kinds of patterns

The previous example showed several kinds of patterns in quick succession.

Now take a minute to look at each.

The syntax of patterns is easy, so do not worry about that too much.

All patterns look exactly like the corresponding expression. For instance, given the hierarchy of [Listing 15.1](#), the pattern Var(x) matches any variable

expression, binding `x` to the name of the variable. Used as an expression, `Var(x)`—exactly the same syntax—recreates an equivalent object, assuming `x` is already bound to the variable’s name. Since the syntax of patterns is so transparent, the main thing to pay attention to is just what kinds of patterns are possible.

## Wildcard patterns

The wildcard pattern `(_)` matches any object whatsoever. You have already seen it used as a default, catch-all alternative, like this:

```
expr match {  
    case BinOp(op, left, right) =>  
        println(expr + "is a binary operation")  
  
    case _ =>  
}  
}
```

Wildcards can also be used to ignore parts of an object that you do not care about. For example, the previous example does not actually care what the elements of a binary operation are. It just checks whether it is a binary operation at all. Thus the code can just as well use the wildcard pattern for the elements of the `BinOp`, as shown in [Listing 15.4](#):

```
expr match {  
    case BinOp(_, _, _) => println(expr + "is a binary operation")  
    case _ =>  
        println("It's something else")  
}  
}
```

[Listing 15.4 · A pattern match with wildcard patterns.](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 15.2](#)

[Chapter 15 · Case Classes and Pattern Matching](#)

## Constant patterns

A constant pattern matches only itself. Any literal may be used as a constant.

For example, 5, true, and "hello" are all constant patterns. Also, any val or singleton object can be used as a constant. For example, Nil, a singleton object, is a pattern that matches only the empty list. [Listing 15.5](#) shows some examples of constant patterns:

```
def describe(x: Any) = x match {
    case 5 => "five"
    case true => "truth"
    case "hello" => "hi!"
    case Nil => "the empty list"
    case _ => "something else"
}
```

[Listing 15.5](#) · A pattern match with constant patterns.

Here is how the pattern match shown in [Listing 15.5](#) looks in action: scala> describe(5)

```
res5: java.lang.String = five
scala> describe(true)
res6: java.lang.String = truth
scala> describe("hello")
```

```
res7: java.lang.String = hi!
```

```
scala> describe(Nil)
```

```
res8: java.lang.String = the empty list
```

```
scala> describe(List(1,2,3))
```

```
res9: java.lang.String = something else
```

## Variable patterns

A variable pattern matches any object, just like a wildcard. Unlike a wildcard, Scala binds the variable to whatever the object is. You can then use this variable to act on the object further. For example, [Listing 15.6](#) shows a pattern match that has a special case for zero, and a default case for all other

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 15.2](#)

### [Chapter 15 · Case Classes and Pattern Matching](#)

300

values. The default cases uses a variable pattern so that it has a name for the value, no matter what it is.

```
expr match {  
  case 0 => "zero"  
  case somethingElse => "not zero: "+ somethingElse  
}
```

[Listing 15.6 · A pattern match with a variable pattern.](#)

## Variable or constant?

Constant patterns can have symbolic names. You saw this already when we used Nil as a pattern. Here is a related example, where a pattern match involves the constants E (2.71828...) and Pi (3.14159...):

```
scala> import Math.{E, Pi}
```

```
import Math.{E, Pi}

scala> E match {
    case Pi => "strange math? Pi = "+ Pi
    case _ => "OK"
}

res10: java.lang.String = OK
```

As expected, E does not match Pi, so the “strange math” case is not used.

How does the Scala compiler know that Pi is a constant imported from the java.lang.Math object, and not a variable that stands for the selector value itself? Scala uses a simple lexical rule for disambiguation: a simple name starting with a lowercase letter is taken to be a pattern variable; all other references are taken to be constants. To see the difference, create a lowercase alias for pi and try with that:

```
scala> val pi = Math.Pi
pi: Double = 3.141592653589793

scala> E match {
    case pi => "strange math? Pi = "+ pi
}

res11: java.lang.String = strange math? Pi = 2.7182818...
```

## Section 15.2

### Chapter 15 · Case Classes and Pattern Matching

301

Here the compiler will not even let you add a default case at all. Since pi is a variable pattern, it will match all inputs, and so no cases following it can be reached:

```
scala> E match {  
  case pi => "strange math? Pi = "+ pi  
  case _ => "OK"  
}  
  
<console>:9: error: unreachable code  
  
case _ => "OK"
```

If you need to, you can still use a lowercase name for a pattern constant, using one of two tricks. First, if the constant is a field of some object, you can prefix it with a qualifier. For instance, pi is a variable pattern, but this.pi or obj.pi are constants even though they start with lowercase letters. If that does not work (because pi is a local variable, say), you can alternatively enclose the variable name in back ticks. For instance, `pi would again be interpreted as a constant, not as a variable:

```
scala> E match {  
  casèpi => "strange math? Pi = "+ pi  
  case _ => "OK"  
}
```

res13: java.lang.String = OK

As you can see, the back-tick syntax for identifiers is used for two different purposes in Scala to help you code your way out of unusual circumstances.

Here you see that it can be used to treat a lowercase identifier as a constant in a pattern match. Earlier on, in [Section 6.10](#), you saw that it can also be used to treat a keyword as an ordinary identifier, e.g., writing Thread.`yield`() treats yield as an identifier rather than a keyword.

## Constructor patterns

Constructors are where pattern matching becomes really powerful. A constructor pattern looks like “BinOp(“+”, e, Number(0))”. It consists of a name (BinOp) and then a number of patterns within parentheses: “+”, e, and Number(0). Assuming the name designates a case class, such a pattern means to first check that the object is a member of the named case class, and

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 15.2](#)

### [Chapter 15 · Case Classes and Pattern Matching](#)

302

then to check that the constructor parameters of the object match the extra patterns supplied.

These extra patterns mean that Scala patterns support deep matches.

Such patterns not only check the top-level object supplied, but also check the contents of the object against further patterns. Since the extra patterns can themselves be constructor patterns, you can use them to check arbitrarily deep into an object. For example, the pattern shown in [Listing 15.7](#) checks that the top-level object is a BinOp, that its third constructor parameter is a Number, and that the value field of that number is 0. This pattern is one line long yet checks three levels deep.

```
expr match {  
  case BinOp("+", e, Number(0)) => println("a deep match") case _ =>  
}
```

Listing 15.7 · A pattern match with a constructor pattern.

## Sequence patterns

You can match against sequence types like List or Array just like you match against case classes. Use the same syntax, but now you can specify any number of elements within the pattern. For example, [Listing 15.8](#) shows a pattern that checks for a three-element list starting with zero: expr match {

```
case List(0, _, _) => println("found it")  
case _ =>  
}
```

Listing 15.8 · A sequence pattern with a fixed length.

If you want to match against a sequence without specifying how long it can be, you can specify `_*` as the last element of the pattern. This funny-looking pattern matches any number of elements within a sequence, including zero elements. [Listing 15.9](#) shows an example that matches any list that starts with zero, regardless of how long the list is.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 15.2](#)

### [Chapter 15 · Case Classes and Pattern Matching](#)

303

```
expr match {
```

```
case List(0, _) => println("found it")

case _ =>

}
```

Listing 15.9 · A sequence pattern with an arbitrary length.

### Tuple patterns

You can match against tuples, too. A pattern like (a, b, c) matches an arbitrary 3-tuple. An example is shown in [Listing 15.10](#):

```
def tupleDemo(expr: Any) =  
  
expr match {  
  
case (a, b, c)  
  
=>  
  
println("matched "+ a + b + c)  
  
case _ =>  
  
}
```

Listing 15.10 · A pattern match with a tuple pattern.

If you load the tupleDemo method shown in [Listing 15.10](#) into the interpreter, and pass to it a tuple with three elements, you'll see: scala> tupleDemo(("a ", 3, "-tuple")) matched a 3-tuple

### Typed patterns

You can use a typed pattern as a convenient replacement for type tests and type casts. [Listing 15.11](#) shows an example: def generalSize(x: Any) = x match {

```
case s: String => s.length  
case m: Map[_,_] => m.size  
case _ => -1  
}
```

Listing 15.11 · A pattern match with typed patterns.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 15.2](#)

### [Chapter 15 · Case Classes and Pattern Matching](#)

304

Here are a few examples of using the generalSize method in the interpreter:

```
scala> generalSize("abc")  
res14: Int = 3  
  
scala> generalSize(Map(1 -> 'a', 2 -> 'b'))  
res15: Int = 2  
  
scala> generalSize(Math.Pi)  
res16: Int = -1
```

The generalSize method returns the size or length of objects of various types. Its argument is of type Any, so it could be any value. If the argument is a String, the method returns the string's length. The pattern “s: String” is a typed pattern; it matches every (non-null) instance of String. The pattern variable s then refers to that string.

Note that, even though `s` and `x` refer to the same value, the type of `x` is `Any`, but the type of `s` is `String`. So you can write `s.length` in the alternative expression that corresponds to the pattern, but you could not write `x.length`, because the type `Any` does not have a `length` member.

An equivalent but more long-winded way that achieves the effect of a match against a typed pattern employs a type test followed by a type cast.

Scala uses a different syntax than Java for these. To test whether an expression `expr` has type `String`, say, you write:

`expr.isInstanceOf[String]`

To cast the same expression to type `String`, you use:

`expr.asInstanceOf[String]`

Using a type test and cast, you could rewrite the first case of the previous match expression as shown in [Listing 15.12](#).

The operators `isInstanceOf` and `asInstanceOf` are treated as predefined methods of class `Any` which take a type parameter in square brackets.

In fact, `x.asInstanceOf[String]` is a special case of a method invocation with an explicit type parameter `String`.

As you will have noted by now, writing type tests and casts is rather verbose in Scala. That's intentional, because it is not encouraged practice.

You are usually better off using a pattern match with a typed pattern. That's

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 15.2](#)

[Chapter 15 · Case Classes and Pattern Matching](#)

```
if (x.isInstanceOf[String]) {  
    val s = x.asInstanceOf[String]  
    s.length  
} else ...
```

Listing 15.12 · Using `isInstanceOf` and `asInstanceOf` (poor style).

particularly true if you need to do both a type test and a type cast, because both operations are then rolled into a single pattern match.

The second case of the previous match expression contains the type pattern “`m: Map[_, _]`”. This pattern matches any value that is a `Map` of some arbitrary key and value types and lets `m` refer to that value. Therefore, `m.size` is well typed and returns the size of the map. The underscores in the type pattern are like wildcards in other patterns. You could have also used (lowercase) type variables instead.

### Type erasure

Can you also test for a map with specific element types? This would be handy, say for testing whether a given value is a map from type `Int` to type `Int`. Let's try:

```
scala> def isIntIntMap(x: Any) = x match {  
    case m: Map[Int, Int] => true  
    case _ => false  
}
```

warning: there were unchecked warnings; re-run with

-unchecked for details

`isIntIntMap: (Any)Boolean`

The interpreter emitted an “unchecked warning.” You can find out details by starting the interpreter again with the -unchecked command-line option:

```
scala> :quit
```

```
$ scala -unchecked
```

Welcome to Scala version 2.7.2

(Java HotSpot(TM) Client VM, Java 1.5.0\_13).

Type in expressions to have them evaluated.

Type :help for more information.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 15.2](#)

[Chapter 15 · Case Classes and Pattern Matching](#)

306

```
scala>
```

```
def isIntIntMap(x: Any) = x match {  
    case m: Map[Int, Int] => true  
    case _ => false  
}
```

<console>:5: warning: non variable type-argument Int in type pattern is unchecked since it is eliminated by erasure case m: Map[Int, Int] => true

^

Scala uses the erasure model of generics, just like Java does. This means that no information about type arguments is maintained at runtime.

Consequently, there is no way to determine at runtime whether a given Map object has been created with two Int arguments, rather than with arguments of different types. All the system can do is determine that a value is a Map of some arbitrary type parameters. You can verify this behavior by applying isIntIntMap to arguments of different instances of class Map:

```
scala> isIntIntMap(Map(1 -> 1))
```

```
res17: Boolean = true
```

```
scala> isIntIntMap(Map("abc" -> "abc")) res18: Boolean = true
```

The first application returns true, which looks correct, but the second application also returns true, which might be a surprise. To alert you to the possibly non-intuitive runtime behavior, the compiler emits unchecked warnings like the one shown above.

The only exception to the erasure rule is arrays, because they are handled specially in Java as well as in Scala. The element type of an array is stored with the array value, so you can pattern match on it. Here's an example:

```
scala> def isStringArray(x: Any) = x match {
```

```
    case a: Array[String] => "yes"
```

```
    case _ => "no"
```

```
}
```

```
isStringArray: (Any)java.lang.String
```

```
scala> val as = Array("abc")
```

```
as: Array[java.lang.String] = Array(abc)
```

```
scala> isStringArray(as)
```

```
res19: java.lang.String = yes
```

## Section 15.3

### Chapter 15 · Case Classes and Pattern Matching

307

```
scala> val ai = Array(1, 2, 3)
```

```
ai: Array[Int] = Array(1, 2, 3)
```

```
scala> isStringArray(ai)
```

```
res20: java.lang.String = no
```

Variable binding

In addition to the standalone variable patterns, you can also add a variable to any other pattern. You simply write the variable name, an at sign (@), and then the pattern. This gives you a variable-binding pattern. The meaning of such a pattern is to perform the pattern match as normal, and if the pattern succeeds, set the variable to the matched object just as with a simple variable pattern.

As an example, [Listing 15.13](#) shows a pattern match that looks for the absolute value operation being applied twice in a row. Such an expression can be simplified to only take the absolute value one time.

```
expr match {  
  case UnOp("abs", e @ UnOp("abs", _)) => e case _ =>  
}
```

Listing 15.13 · A pattern with a variable binding (via the @ sign).

In [Listing 15.13](#), there is a variable-binding pattern with e as the variable and UnOp("abs", \_) as the pattern. If the entire pattern match succeeds, then the portion that matched the UnOp("abs", \_) part is made available as variable e. As the code is written, e then gets returned as is.

## 15.3

### Pattern guards

Sometimes, syntactic pattern matching is not precise enough. For instance, say you are given the task of formulating a simplification rule that replaces sum expressions with two identical operands such as  $e + e$  by multiplications of two, e.g.,  $e * 2$ . In the language of Expr trees, an expression like: `BinOp("+", Var("x"), Var("x"))`

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### [Section 15.3](#)

#### [Chapter 15 · Case Classes and Pattern Matching](#)

308

would be transformed by this rule to:

`BinOp("*", Var("x"), Number(2))`

You might try to define this rule as follows:

```
scala> def simplifyAdd(e: Expr) = e match {  
  case BinOp("+", x, x) => BinOp("*", x, Number(2))  
  case _ => e  
}
```

```
<console>:10: error: x is already defined as value x  
case BinOp("+", x, x)  
=> BinOp("*", x, Number(2)) ^
```

This fails, because Scala restricts patterns to be linear: a pattern variable may only appear once in a pattern. However, you can re-formulate the match with a [pattern guard](#), as shown in [Listing 15.14](#):

```
scala> def simplifyAdd(e: Expr) = e match {
```

```
case BinOp("+", x, y) if x == y =>  
  BinOp("*", x, Number(2))  
  
case _ => e  
}
```

simplifyAdd: (Expr)Expr

Listing 15.14 · A match expression with a pattern guard.

A pattern guard comes after a pattern and starts with an if. The guard can be an arbitrary boolean expression, which typically refers to variables in the pattern. If a pattern guard is present, the match succeeds only if the guard evaluates to true. Hence, the first case above would only match binary operations with two equal operands.

Some other examples of guarded patterns are:

```
// match only positive integers  
  
case n: Int if 0 < n => ...  
  
// match only strings starting with the letter 'a'  
  
case s: String if s(0) == 'a' => ...
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 15.4](#)

[Chapter 15 · Case Classes and Pattern Matching](#)

309

15.4

Pattern overlaps

Patterns are tried in the order in which they are written. The version of `simplify` shown in [Listing 15.15](#) presents an example where the order of the cases matters:

```
def simplifyAll(expr: Expr): Expr = expr match {  
    case UnOp("-", UnOp("-", e)) =>  
        simplifyAll(e)  
        // '-' is its own inverse  
    case BinOp("+", e, Number(0)) =>  
        simplifyAll(e)  
        // '0' is a neutral element for '+'  
    case BinOp("*", e, Number(1)) =>  
        simplifyAll(e)  
        // '1' is a neutral element for '*'  
    case UnOp(op, e) =>  
        UnOp(op, simplifyAll(e))  
    case BinOp(op, l, r) =>  
        BinOp(op, simplifyAll(l), simplifyAll(r))  
    case _ => expr  
}
```

[Listing 15.15](#) · Match expression in which case order matters.

The version of simplify shown in [Listing 15.15](#) will apply simplification rules everywhere in an expression, not just at the top, as simplifyTop did.

It can be derived from simplifyTop by adding two more cases for general unary and binary expressions (cases four and five in [Listing 15.15](#)).

The fourth case has the pattern UnOp(op, e); i.e., it matches every unary operation. The operator and operand of the unary operation can be arbitrary.

They are bound to the pattern variables op and e, respectively. The alternative in this case applies simplifyAll recursively to the operand e and then rebuilds the same unary operation with the (possibly) simplified operand.

The fifth case for BinOp is analogous: it is a “catch-all” case for arbitrary binary operations, which recursively applies the simplification method to its two operands.

In this example, it is important that the catch-all cases come after the more specific simplification rules. If you wrote them in the other order, then the catch-all case would be run in favor of the more specific rules. In many cases, the compiler will even complain if you try.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 15.5](#)

### [Chapter 15 · Case Classes and Pattern Matching](#)

310

For example, here’s a match expression that won’t compile because the first case will match anything that would be matched by the second case:

```
scala> def simplifyBad(expr: Expr): Expr = expr match {
```

```
    case UnOp(op, e) => UnOp(op, simplifyBad(e))
```

```
    case UnOp("-", UnOp("-", e)) => e
```

```
}
```

```
<console>:17: error: unreachable code
```

```
case UnOp("-", UnOp("-", e)) => e ^
```

15.5

## Sealed classes

Whenever you write a pattern match, you need to make sure you have covered all of the possible cases. Sometimes you can do this by adding a default case at the end of the match, but that only applies if there is a sensible default behavior. What do you do if there is no default? How can you ever feel safe that you covered all the cases?

In fact, you can enlist the help of the Scala compiler in detecting missing combinations of patterns in a match expression. To be able to do this, the compiler needs to be able to tell which are the possible cases. In general, this is impossible in Scala, because new case classes can be defined at any time and in arbitrary compilation units. For instance, nothing would prevent you from adding a fifth case class to the Expr class hierarchy in a different compilation unit from the one where the other four cases are defined.

The alternative is to make the superclass of your case classes sealed.

A sealed class cannot have any new subclasses added except the ones in the same file. This is very useful for pattern matching, because it means you only need to worry about the subclasses you already know about. What's more, you get better compiler support as well. If you match against case classes that inherit from a sealed class, the compiler will flag missing combinations of patterns with a warning message.

Therefore, if you write a hierarchy of classes intended to be pattern matched, you should consider sealing them. Simply put the sealed keyword in front of the class at the top of the hierarchy. Programmers using your class hierarchy will then feel confident in pattern matching against it. The

sealed keyword, therefore, is often a license to pattern match. [Listing 15.16](#) shows an example in which Expr is turned into a sealed class.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 15.5](#)

### [Chapter 15 · Case Classes and Pattern Matching](#)

311

sealed abstract class Expr

case class Var(name: String) extends Expr

case class Number(num: Double) extends Expr

case class UnOp(operator: String, arg: Expr) extends Expr  
case class BinOp(operator: String,

left: Expr, right: Expr) extends Expr

[Listing 15.16](#) · A sealed hierarchy of case classes.

Now define a pattern match where some of the possible cases are left out:  
def describe(e: Expr): String = e match {

case Number(\_) => "a number"

case Var(\_)

=> "a variable"

}

You will get a compiler warning like the following:

warning: match is not exhaustive!

missing combination

UnOp

missing combination

BinOp

Such a warning tells you that there's a risk your code might produce a MatchError exception because some possible patterns (UnOp, BinOp) are not handled. The warning points to a potential source of runtime faults, so it is usually a welcome help in getting your program right.

However, at times you might encounter a situation where the compiler is too picky in emitting the warning. For instance, you might know from the context that you will only ever apply the describe method above to expressions that are either Numbers or Vars. So you know that in fact no MatchError will be produced. To make the warning go away, you could add a third catch-all case to the method, like this:

```
def describe(e: Expr): String = e match {  
    case Number(_) => "a number"  
    case Var(_) => "a variable"  
    case _ => throw new RuntimeException // Should not happen  
}
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 15.6](#)

[Chapter 15 · Case Classes and Pattern Matching](#)

That works, but it is not ideal. You will probably not be very happy that you were forced to add code that will never be executed (or so you think), just to make the compiler shut up.

A more lightweight alternative is to add an `@unchecked` annotation to the selector expression of the match. This is done as follows: `def describe(e: Expr): String = (e: @unchecked) match {`

```
case Number(_) => "a number"
```

```
case Var(_)
```

```
=> "a variable"
```

```
}
```

Annotations are described in [Chapter 25](#). In general, you can add an annotation to an expression in the same way you add a type: follow the expression with a colon and the name of the annotation (preceded by an at sign). For example, in this case you add an `@unchecked` annotation to the variable `e`, with “`e: @unchecked`”. The `@unchecked` annotation has a special meaning for pattern matching. If a match’s selector expression carries this annotation, exhaustivity checking for the patterns that follow will be suppressed.

## 15.6

### The Option type

Scala has a standard type named `Option` for optional values. Such a value can be of two forms. It can be of the form `Some(x)` where `x` is the actual value. Or it can be the `None` object, which represents a missing value.

Optional values are produced by some of the standard operations on Scala’s collections. For instance, the `get` method of Scala’s `Map` produces `Some(value)` if a value corresponding to a given key has been found, or `None` if the given key is not defined in the `Map`. Here’s an example: `scala> val capitals =`

Map("France" -> "Paris", "Japan" -> "Tokyo") capitals:

```
scala.collection.immutable.Map[java.lang.String,
```

```
java.lang.String] = Map(France -> Paris, Japan -> Tokyo) scala> capitals  
get "France"
```

```
res21: Option[java.lang.String] = Some(Paris)
```

```
scala> capitals get "North Pole"
```

```
res22: Option[java.lang.String] = None
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 15.6](#)

### [Chapter 15 · Case Classes and Pattern Matching](#)

313

The most common way to take optional values apart is through a pattern match. For instance:

```
scala> def show(x: Option[String]) = x match {  
case Some(s) => s  
case None => "?"  
}
```

```
show: (Option[String])String
```

```
scala> show(capitals get "Japan")
```

```
res23: String = Tokyo
```

```
scala> show(capitals get "France")
```

```
res24: String = Paris
```

```
scala> show(capitals get "North Pole")
```

```
res25: String = ?
```

The Option type is used frequently in Scala programs. Compare this to the dominant idiom in Java of using null to indicate no value. For example, the get method of `java.util.HashMap` returns either a value stored in the `HashMap`, or null if no value was found. This approach works for Java, but is error prone, because it is difficult in practice to keep track of which variables in a program are allowed to be null. If a variable is allowed to be null, then you must remember to check it for null every time you use it. When you forget to check, you open the possibility that a `NullPointerException` may result at runtime. Because such exceptions may not happen very often, it can be difficult to discover the bug during testing. For Scala, the approach would not work at all, because it is possible to store value types in hash maps, and null is not a legal element for a value type. For instance, a `HashMap[Int, Int]` cannot return null to signify “no element”.

By contrast, Scala encourages the use of Option to indicate an optional value. This approach to optional values has several advantages over Java’s.

First, it is far more obvious to readers of code that a variable whose type is `Option[String]` is an optional String than a variable of type `String`, which may sometimes be null. But most importantly, that programming error described earlier of using a variable that may be null without first checking it for null becomes in Scala a type error. If a variable is of type `Option[String]` and you try to use it as a `String`, your Scala program will not compile.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 15.7](#)

[Chapter 15 · Case Classes and Pattern Matching](#)

## Patterns everywhere

Patterns are allowed in many parts of Scala, not just in standalone match expressions. Take a look at some other places you can use patterns.

### Patterns in variable definitions

Any time you define a val or a var, you can use a pattern instead of a simple identifier. For example, you can use this to take apart a tuple and assign each of its parts to its own variable, as shown in [Listing 15.17](#):

```
scala> val myTuple = (123, "abc")
myTuple: (Int, java.lang.String) = (123,abc)
scala> val (number, string) = myTuple
number: Int = 123
string: java.lang.String = abc
```

**Listing 15.17 · Defining multiple variables with one assignment.**

This construct is quite useful when working with case classes. If you know the precise case class you are working with, then you can deconstruct it with a pattern. Here's an example:

```
scala> val exp = new BinOp("*", Number(5), Number(1)) exp: BinOp =
BinOp(*,Number(5.0),Number(1.0))
scala> val BinOp(op, left, right) = exp
op: String = *
left: Expr = Number(5.0)
```

right: Expr = Number(1.0)

## Case sequences as partial functions

A sequence of cases (i.e., alternatives) in curly braces can be used anywhere a function literal can be used. Essentially, a case sequence is a function literal, only more general. Instead of having a single entry point and list of parameters, a case sequence has multiple entry points, each with their own list of parameters. Each case is an entry point to the function, and the

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### [Section 15.7](#)

#### [Chapter 15 · Case Classes and Pattern Matching](#)

315

parameters are specified with the pattern. The body of each entry point is the right-hand side of the case.

Here is a simple example:

```
val withDefault: Option[Int] => Int = {  
    case Some(x) => x  
    case None => 0  
}
```

The body of this function has two cases. The first case matches a Some, and returns the number inside the Some. The second case matches a None, and returns a default value of zero. Here is this function in use: scala>  
withDefault(Some(10))

res25: Int = 10

scala> withDefault(None)

```
res26: Int = 0
```

This facility is quite useful for the actors library, described in [Chapter 30](#).

Here is some typical actors code. It passes a pattern match directly to the react method:

```
react {  
  
  case (name: String, actor: Actor) => {  
  
    actor ! getip(name)  
  
    act()  
  
  }  
  
  case msg => {  
  
    println("Unhandled message: " + msg)  
  
    act()  
  
  }  
  
}
```

One other generalization is worth noting: a sequence of cases gives you a partial function. If you apply such a function on a value it does not support, it will generate a run-time exception. For example, here is a partial function that returns the second element of a list of integers:

```
val second: List[Int] => Int = {  
  
  case x :: y :: _ => y  
  
}
```

## Section 15.7

### Chapter 15 · Case Classes and Pattern Matching

316

When you compile this, the compiler will correctly complain that the match is not exhaustive:

```
<console>:17: warning: match is not exhaustive!
```

missing combination

Nil

This function will succeed if you pass it a three-element list, but not if you pass it an empty list:

```
scala> second(List(5,6,7))
```

```
res24: Int = 6
```

```
scala> second(List())
```

```
scala.MatchError: List()
```

```
at $anonfun$1.apply(<console>:17)
```

```
at $anonfun$1.apply(<console>:17)
```

If you want to check whether a partial function is defined, you must first tell the compiler that you know you are working with partial functions. The type `List[Int] => Int` includes all functions from lists of integers to integers, whether or not the functions are partial. The type that only includes partial functions from lists of integers to integers is written `PartialFunction[List[Int],Int]`. Here is the second function again, this time written with a partial function type:

```
val second: PartialFunction[List[Int],Int] = {
```

```
case x :: y :: _ => y
```

```
}
```

Partial functions have a method `isDefinedAt`, which can be used to test whether the function is defined at a particular value. In this case, the function is defined for any list that has at least two elements:

```
scala> second.isDefinedAt(List(5,6,7))
```

```
res27: Boolean = true
```

```
scala> second.isDefinedAt(List())
```

```
res28: Boolean = false
```

The typical example of a partial function is a pattern matching function literal like the one in the previous example. In fact, such an expression gets

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 15.7](#)

[Chapter 15 · Case Classes and Pattern Matching](#)

317

translated by the Scala compiler to a partial function by translating the patterns twice—once for the implementation of the real function, and once to test whether the function is defined or not. For instance, the function literal

{ `case x :: y :: _ => y` } above gets translated to the following partial function value:

```
new PartialFunction[List[Int], Int] {
```

```
  def apply(xs: List[Int]) = xs match {
```

```
    case x :: y :: _ => y
```

```
}

def isDefinedAt(xs: List[Int]) = xs match {

  case x :: y :: _ => true

  case _ => false

}

}
```

This translation takes effect whenever the declared type of a function literal is `PartialFunction`. If the declared type is just `Function1`, or is missing, the function literal is instead translated to a complete function.

In general, you should try to work with complete functions whenever possible, because using partial functions allows for runtime errors that the compiler cannot help you with. Sometimes partial functions are really helpful, though. You might be sure that an unhandled value will never be supplied. Alternatively, you might be using a framework that expects partial functions and so will always check `isDefinedAt` before calling the function. An example of the latter is the react example given above, where the argument is a partially defined function, defined precisely for those messages that the caller wants to handle.

## Patterns in for expressions

You can also use a pattern in a for expression, as shown in [Listing 15.18](#).

This for expression retrieves all key/value pairs from the `capitals` map.

Each pair is matched against the pattern `(country, city)`, which defines the two variables `country` and `city`.

The pair pattern shown in [Listing 15.18](#) was special because the match against it can never fail. Indeed, `capitals` yields a sequence of pairs, so you can be sure that every generated pair can be matched against a pair pattern.

## Section 15.8

### Chapter 15 · Case Classes and Pattern Matching

318

scala> for ((country, city) <- capitals)

println("The capital of " + country + " is " + city)  
The capital of France is  
Paris

The capital of Japan is Tokyo

Listing 15.18 · A for expression with a tuple pattern.

But it is equally possible that a pattern might not match a generated value.

[Listing 15.19](#) shows an example where that is the case: scala> val results =  
List(Some("apple"), None, Some("orange"))

results: List[Option[java.lang.String]] = List(Some(apple), None,  
Some(orange))

scala> for (Some(fruit) <- results) println(fruit)

apple

orange

Listing 15.19 · Picking elements of a list that match a pattern.

As you can see from this example, generated values that do not match the pattern are discarded. For instance, the second element None in the results list does not match the pattern Some(fruit); therefore it does not show up in the output.

15.8

A larger example

After having learned the different forms of patterns, you might be interested in seeing them applied in a larger example. The proposed task is to write an expression formatter class that displays an arithmetic expression in a two-dimensional layout. Divisions such as “ $x / x + 1$ ” should be printed vertically, by placing the numerator on top of the denominator, like this:

-----

$x + 1$

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 15.8](#)

### [Chapter 15 · Case Classes and Pattern Matching](#)

319

As another example, here’s the expression  $((a / (b * c) + 1 / n) / 3)$  in two dimensional layout:

a

1

----- + -

$b * c$

n

-----

3

From these examples it looks like the class (we’ll call it ExprFormatter) will have to do a fair bit of layout juggling, so it makes sense to use the layout library developed in [Chapter 10](#). We’ll also use the Expr family of

case classes you saw previously in this chapter, and place both [Chapter 10](#)'s layout library and this chapter's expression formatter into named packages.

The full code for the example will be shown in [Listings 15.20](#) and [15.21](#).

A useful first step is to concentrate on horizontal layout. A structured expression like:

```
BinOp("+",
BinOp("*",
BinOp("+", Var("x"), Var("y")), Var("z")),
Number(1))
```

should print  $(x + y) * z + 1$ . Note that parentheses are mandatory around  $x + y$ , but would be optional around  $(x + y) * z$ . To keep the layout as legible as possible, your goal should be to omit parentheses wherever they are redundant, while ensuring that all necessary parentheses are present.

To know where to put parentheses, the code needs to know about the relative precedence of each operator, so it's a good idea to tackle this first.

You could express the relative precedence directly as a map literal of the following form:

```
Map(
  "|" -> 0, "||" -> 0,
  "&" -> 1, "&&" -> 1, ...
)
```

However, this would involve some amount of pre-computation of precedences on your part. A more convenient approach is to just define groups

## [Section 15.8](#)

### [Chapter 15 · Case Classes and Pattern Matching](#)

320

of operators of increasing precedence and then calculate the precedence of each operator from that. [Listing 15.20](#) shows the code.

The precedence variable is a map from operators to their precedences, which are integers starting with 0. It is calculated using a for expression with two generators. The first generator produces every index  $i$  of the `opGroups` array. The second generator produces every operator `op` in `opGroups(i)`. For each such operator the for expression yields an association from the operator `op` to its index  $i$ . Hence, the relative position of an operator in the array is taken to be its precedence. Associations are written with an infix arrow, e.g., `op -> i`. So far you have seen associations only as part of map constructions, but they are also values in their own right. In fact, the association `op -> i` is nothing else but the pair `(op, i)`.

Now that you have fixed the precedence of all binary operators except `/`, it makes sense to generalize this concept to also cover unary operators. The precedence of a unary operator is higher than the precedence of every binary operator. Thus we can set `unaryPrecedence` (shown in [Listing 15.20](#)) to the length of the `opGroups` array, which is one more than the precedence of the

\* and % operators.

The precedence of a fraction is treated differently from the other operators because fractions use vertical layout. However, it will prove convenient to assign to the division operator the special precedence value `-1`, so we'll initialize `fractionPrecedence` to `-1` (shown in [Listing 15.20](#)).

After these preparations, you are ready to write the main format method.

This method takes two arguments: an expression e, of type Expr, and the precedence enclPrec of the operator directly enclosing the expression e (if there's no enclosing operator, enclPrec should be zero). The method yields a layout element that represents a two-dimensional array of characters.

[Listing 15.21](#) shows the remainder of class ExprFormatter, which includes three methods. The first method, stripDot, is a helper method. The next method, the private format method, does most of the work to format expressions. The last method, also named format, is the lone public method in the library, which takes an expression to format.

The private format method does its work by performing a pattern match on the kind of expression. The match expression has five cases. We'll discuss each case individually. The first case is:

```
case Var(name) =>
```

```
    elem(name)
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 15.8](#)

[Chapter 15 · Case Classes and Pattern Matching](#)

321

```
package org.stairwaybook.expr
```

```
import layout.Element.elem
```

```
sealed abstract class Expr
```

```
case class Var(name: String) extends Expr
```

```
case class Number(num: Double) extends Expr
```

```
case class UnOp(operator: String, arg: Expr) extends Expr
case class BinOp(operator: String,
```

```
left: Expr, right: Expr) extends Expr

class ExprFormatter {

// Contains operators in groups of increasing precedence private val
opGroups = 

Array(
Set("|", "||"),
Set("&", "&&"),
Set("^"),
Set("==", "!="),
Set("<", "<=", ">", ">="), Set("+", "-"),
Set("*", "%")
)

// A mapping from operators to their precedence

private val precedence = {

val assocs = 

for {
i <- 0 until opGroups.length
op <- opGroups(i)
} yield op -> i

Map() ++ assocs
}

}
```

```
private val unaryPrecedence = opGroups.length
```

```
private val fractionPrecedence = -1
```

```
// continued in Listing 15.21...
```

Listing 15.20 · The top half of the expression formatter.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 15.8](#)

### [Chapter 15 · Case Classes and Pattern Matching](#)

322

```
// ...continued from Listing 15.20
```

```
private def format(e: Expr, enclPrec: Int): Element =
```

```
e match {
```

```
  case Var(name) =>
```

```
    elem(name)
```

```
  case Number(num) =>
```

```
    def stripDot(s: String) =
```

```
      if (s endsWith ".0") s.substring(0, s.length - 2) else s
```

```
    elem(stripDot(num.toString))
```

```
  case UnOp(op, arg) =>
```

```
    elem(op) beside format(arg, unaryPrecedence)
```

```
  case BinOp("/", left, right) =>
```

```

val top = format(left, fractionPrecedence)

val bot = format(right, fractionPrecedence)

val line = elem('-', top.width max bot.width, 1)

val frac = top above line above bot

if (enclPrec != fractionPrecedence) frac

else elem(" ") beside frac beside elem(" ") case BinOp(op, left, right) =>

val opPrec = precedence(op)

val l = format(left, opPrec)

val r = format(right, opPrec + 1)

val oper = l beside elem(" "+ op +" ") beside r if (enclPrec <= opPrec) oper

else elem("(") beside oper beside elem(")")

}

def format(e: Expr): Element = format(e, 0)

}

```

Listing 15.21 · The bottom half of the expression formatter.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 15.8](#)

### [Chapter 15 · Case Classes and Pattern Matching](#)

323

If the expression is a variable, the result is an element formed from the variable's name.

The second case is:

```
case Number(num) =>  
  
def stripDot(s: String) =  
  
if (s endsWith ".0") s.substring(0, s.length - 2) else s  
  
elem(stripDot(num.toString))
```

If the expression is a number, the result is an element formed from the number's value. The stripDot function cleans up the display of a floating-point number by stripping any ".0" suffix from a string.

The third case is:

```
case UnOp(op, arg) =>  
  
elem(op) beside format(arg, unaryPrecedence)
```

If the expression is a unary operation UnOp(op, arg) the result is formed from the operation op and the result of formatting the argument arg with the highest-possible environment precedence.<sup>3</sup> This means that if arg is a binary operation (but not a fraction) it will always be displayed in parentheses.

The fourth case is:

```
case BinOp("/", left, right) =>  
  
val top = format(left, fractionPrecedence)  
  
val bot = format(right, fractionPrecedence)  
  
val line = elem('-', top.width max bot.width, 1)  
  
val frac = top above line above bot  
  
if (enclPrec != fractionPrecedence) frac
```

else elem(" ") beside frac beside elem(" ") If the expression is a fraction, an intermediate result frac is formed by placing the formatted operands left and right on top of each other, separated by an horizontal line element. The width of the horizontal line is the maximum of the widths of the formatted operands. This intermediate result is 3The value of unaryPrecedence is the highest possible precedence, because it was initialized to one more than the precedence of the \* and % operators.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 15.8

### Chapter 15 · Case Classes and Pattern Matching

324

also the final result unless the fraction appears itself as an argument of another fraction. In the latter case, a space is added on each side of frac.

To see the reason why, consider the expression “(a / b) / c”. Without the widening correction, formatting this expression would give: a

-

b

-

c

The problem with this layout is evident—it’s not clear where the top-level fractional bar is. The expression above could mean either “(a / b) / c” or

“a / (b / c)”. To disambiguate, a space should be added on each side to the layout of the nested fraction “a / b”. Then the layout becomes unambiguous:  
a

-

b

---

c

The fifth and last case is:

case BinOp(op, left, right) =>

val opPrec = precedence(op)

val l = format(left, opPrec)

val r = format(right, opPrec + 1)

val oper = l beside elem(" " + op + " ") beside r if (enclPrec <= opPrec) oper

else elem("(") beside oper beside elem(")") This case applies for all other binary operations. Since it comes after the case starting with:

case BinOp("/", left, right) => ...

you know that the operator op in the pattern BinOp(op, left, right) cannot be a division. To format such a binary operation, one needs to format first its operands left and right. The precedence parameter for formatting the left operand is the precedence opPrec of the operator op, while for the

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 15.8](#)

[Chapter 15 · Case Classes and Pattern Matching](#)

325

right operand it is one more than that. This scheme ensures that parentheses also reflect the correct associativity. For instance, the operation: BinOp("-", Var("a"), BinOp("-", Var("b"), Var("c")))) would be correctly parenthesized

as “ $a - (b - c)$ ”. The intermediate result oper is then formed by placing the formatted left and right operands side-by-side, separated by the operator. If the precedence of the current operator is smaller than the precedence of the enclosing operator, r is placed between parentheses, otherwise it is returned as is.

This finishes the design of the private format function. The only remaining method is the public format method, which allows client programmers to format a top-level expression without passing a precedence argument.

[Listing 15.22](#) shows a demo program that exercises ExprFormatter: import org.stairwaybook.expr.\_

```
object Express extends Application {  
  
    val f = new ExprFormatter  
  
    val e1 = BinOp("*", BinOp("/", Number(1), Number(2)), BinOp("+",  
        Var("x"), Number(1)))  
  
    val e2 = BinOp("+", BinOp("/", Var("x"), Number(2)), BinOp("/",  
        Number(1.5), Var("x"))))  
  
    val e3 = BinOp("/", e1, e2)  
  
    def show(e: Expr) = println(f.format(e)+ "\n\n") for (val e <- Array(e1, e2,  
        e3)) show(e)  
  
}
```

Listing 15.22 · An application that prints formatted expressions.

Note that, even though this program does not define a main method, it is still a runnable application because it inherits from the Application trait.

As mentioned in [Section 4.5](#), trait Application simply defines an empty main method that gets inherited by the Express object. The actual work in the Express object gets done as part of the object’s initialization, before the main method is run. That’s why you can apply this trick only if your

program does not take any command-line arguments. Once there are arguments, you

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 15.9

### Chapter 15 · Case Classes and Pattern Matching

326

need to write the main method explicitly. You can run the Express program with the command:

scala Express

This will give the following output:

1

- \* (x + 1)

2

x

1.5

- + ---

2

x

1

- \* (x + 1)

2

-----  
x

1.5

- + ---

2

x

15.9

## Conclusion

In this chapter, you learned about Scala’s case classes and pattern matching in detail. Using them, you can take advantage of several concise idioms not normally available in object-oriented languages. Scala’s pattern matching goes further than this chapter describes, however. If you want to use pattern matching on one of your classes, but you do not want to open access to your classes the way case classes do, then you can use the extractors described in

[Chapter 24](#). In the next chapter, however, we’ll turn our attention to lists.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 16

### Working with Lists

Lists are probably the most commonly used data structure in Scala programs.

This chapter explains lists in detail. It presents many common operations that can be performed on lists. It also teaches some important design principles for programs working on lists.

16.1

## List literals

You saw lists already in the preceding chapters, so you know that a list containing the elements 'a', 'b', and 'c' is written `List('a', 'b', 'c')`.

Here are some other examples:

```
val fruit = List("apples", "oranges", "pears") val nums = List(1, 2, 3, 4)
```

```
val diag3 =
```

```
List(
```

```
List(1, 0, 0),
```

```
List(0, 1, 0),
```

```
List(0, 0, 1)
```

```
)
```

```
val empty = List()
```

Lists are quite similar to arrays, but there are two important differences.

First, lists are immutable. That is, elements of a list cannot be changed by assignment. Second, lists have a recursive structure (i.e., a linked list),<sup>1</sup>

whereas arrays are flat.

<sup>1</sup>For a graphical depiction of the structure of a List, see [Figure 22.2 on page 492](#).

## The List type

Like arrays, lists are homogeneous: the elements of a list all have the same type. The type of a list that has elements of type T is written List[T]. For instance, here are the same four lists with explicit types added: val fruit: List[String] = List("apples", "oranges", "pears") val nums: List[Int] = List(1, 2, 3, 4)

```
val diag3: List[List[Int]] =
```

```
List(
```

```
  List(1, 0, 0),
```

```
  List(0, 1, 0),
```

```
  List(0, 0, 1)
```

```
)
```

```
val empty: List[Nothing] = List()
```

The list type in Scala is covariant. This means that for each pair of types S and T, if S is a subtype of T, then List[S] is a subtype of List[T].

For instance, List[String] is a subtype of List[Object]. This is natural because every list of strings can also be seen as a list of objects.<sup>2</sup>

Note that the empty list has type List[Nothing]. You saw in [Section 11.3](#)

that Nothing is the bottom type in Scala's class hierarchy. It is a subtype of every other Scala type. Because lists are covariant, it follows that List[Nothing] is a subtype of List[T], for any type T. So the empty list object, which has type List[Nothing], can also be seen as an object of every

other list type of the form List[T]. That's why it is permissible to write code like:

```
// List() is also of type List[String]!
```

```
val xs: List[String] = List()
```

16.3

## Constructing lists

All lists are built from two fundamental building blocks, Nil and :: (pronounced “cons”). Nil represents the empty list. The infix operator, ::, expresses list extension at the front. That is, x :: xs represents a list whose

[2Chapter 19](#) gives more details on covariance and other kinds of variance.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### [Section 16.4](#)

#### [Chapter 16 · Working with Lists](#)

329

first element is x, followed by (the elements of) list xs. Hence, the previous list values could also have been defined as follows:

```
val fruit = "apples" :: ("oranges" :: ("pears" :: Nil)) val nums
```

```
= 1 :: (2 :: (3 :: (4 :: Nil)))
```

```
val diag3 = (1 :: (0 :: (0 :: Nil))) ::
```

```
(0 :: (1 :: (0 :: Nil))) ::
```

```
(0 :: (0 :: (1 :: Nil))) :: Nil
```

```
val empty = Nil
```

In fact the previous definitions of fruit, nums, diag3, and empty in terms of List(...) are just wrappers that expand to these definitions. For instance, List(1, 2, 3) creates the list 1 :: (2 :: (3 :: Nil)).

Because it ends in a colon, the :: operation associates to the right: A :: B :: C is interpreted as A :: (B :: C). Therefore, you can drop the parentheses in the previous definitions. For instance:

```
val nums = 1 :: 2 :: 3 :: 4 :: Nil
```

is equivalent to the previous definition of nums.

## 16.4

### Basic operations on lists

All operations on lists can be expressed in terms of the following three:  
head

returns the first element of a list

tail

returns a list consisting of all elements except the first  
isEmpty

returns true if the list is empty

These operations are defined as methods of class List. Some examples are shown in [Table 16.1](#).

The head and tail methods are defined only for non-empty lists. When selected from an empty list, they throw an exception. For instance: scala> Nil.head

```
java.util.NoSuchElementException: head of empty list
```

As an example of how lists can be processed, consider sorting the elements of a list of numbers into ascending order. One simple way to do so is

insertion sort, which works as follows: To sort a non-empty list  $x :: xs$ , sort the

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 16.5

### Chapter 16 · Working with Lists

330

Table 16.1 · Basic list operations

What it is

What it does

`empty.isEmpty`

returns true

`fruit.isEmpty`

returns false

`fruit.head`

returns "apples"

`fruit.tail.head`

returns "oranges"

`diag3.head`

returns `List(1, 0, 0)`

remainder  $xs$  and insert the first element  $x$  at the right position in the result.

Sorting an empty list yields the empty list. Expressed as Scala code, the insertion sort algorithm looks like:

```
def isort(xs: List[Int]): List[Int] =  
  if (xs.isEmpty) Nil  
  else insert(xs.head, isort(xs.tail))  
  
def insert(x: Int, xs: List[Int]): List[Int] =  
  if (xs.isEmpty || x <= xs.head) x :: xs  
  else xs.head :: insert(x, xs.tail)
```

## 16.5

### List patterns

Lists can also be taken apart using pattern matching. List patterns correspond one-by-one to list expressions. You can either match on all elements of a list using a pattern of the form `List(...)`, or you take lists apart bit by bit using patterns composed from the `::` operator and the `Nil` constant.

Here's an example of the first kind of pattern:

```
scala> val List(a, b, c) = fruit
```

```
a: String = apples
```

```
b: String = oranges
```

```
c: String = pears
```

The pattern `List(a, b, c)` matches lists of length 3, and binds the three elements to the pattern variables `a`, `b`, and `c`. If you don't know the number of list elements beforehand, it's better to match with `::` instead. For instance, the pattern `a :: b :: rest` matches lists of length 2 or greater:

## [Section 16.5](#)

### [Chapter 16 · Working with Lists](#)

331

About pattern matching on Lists

If you review the possible forms of patterns explained in [Chapter 15](#),

you might find that neither `List(...)` nor `::` looks like it fits one of the kinds of patterns defined there. In fact, `List(...)` is an instance of a library-defined extractor pattern. Such patterns will be treated in

[Chapter 24](#). The “cons” pattern `x :: xs` is a special case of an infix operation pattern. You know already that, when seen as an expression, an infix operation is equivalent to a method call. For patterns, the rules are different: When seen as a pattern, an infix operation such as `p op q` is equivalent to `op(p, q)`. That is, the infix operator `op` is treated as a constructor pattern. In particular, a cons pattern such as `x :: xs` is treated as `::(x, xs)`. This hints that there should be a class named `::` that corresponds to the pattern constructor. Indeed there is such a class.

It is named `scala.::` and is exactly the class that builds non-empty lists. So `::` exists twice in Scala, once as a name of a class in package `scala`, and again as a method in class `List`. The effect of the method

`::` is to produce an instance of the class `scala.::`. You’ll find out more details about how the `List` class is implemented in [Chapter 22](#).

```
scala> val a :: b :: rest = fruit
```

a: String = apples

b: String = oranges

rest: List[String] = List(pears)

Taking lists apart with patterns is an alternative to taking them apart with the basic methods head, tail, and isEmpty. For instance, here's insertion sort again, this time written with pattern matching:

```
def isort(xs: List[Int]): List[Int] = xs match {  
    case List() =>  
        List()  
    case x :: xs1 => insert(x, isort(xs1))  
    }  
  
def insert(x: Int, xs: List[Int]): List[Int] = xs match {  
    case List() =>  
        List(x)  
    case y :: ys => if (x <= y) x :: xs  
        else y :: insert(x, ys)  
}
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 16.6](#)

[Chapter 16 · Working with Lists](#)

332

Often, pattern matching over lists is clearer than decomposing them with methods, so pattern matching should be a part of your list processing toolbox.

This is all you need to know about lists in Scala to be able to use them correctly. However, there are also a large number of methods that capture common patterns of operations over lists. These methods make list processing programs more concise and often clearer. The next two sections present the most important methods defined in the List class.

## 16.6

### First-order methods on class List

This section explains most first-order methods defined in the List class. A method is first-order if it does not take any functions as arguments. The section also introduces by means of two examples some recommended techniques to structure programs that operate on lists.

#### Concatenating lists

An operation similar to `::` is list concatenation, written `::::`. Unlike `::`, `::::` takes two lists as operands. The result of `xs :::: ys` is a new list that contains all the elements of `xs`, followed by all the elements of `ys`. Here are some examples:

```
scala> List(1, 2) :::: List(3, 4, 5)
```

```
res0: List[Int] = List(1, 2, 3, 4, 5)
```

```
scala> List() :::: List(1, 2, 3)
```

```
res1: List[Int] = List(1, 2, 3)
```

```
scala> List(1, 2, 3) :::: List(4)
```

```
res2: List[Int] = List(1, 2, 3, 4)
```

Like `cons`, list concatenation associates to the right. An expression like this:  
`xs :::: ys :::: zs`

is interpreted like this:

`xs :: (ys :: zs)`

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 16.6](#)

### [Chapter 16 · Working with Lists](#)

333

#### The Divide and Conquer principle

Concatenation (`:::`) is implemented as a method in class `List`. It would also be possible to implement concatenation “by hand,” using pattern matching on lists. It’s instructive to try to do that yourself, because it shows a common way to implement algorithms using lists. First, we’ll settle on a signature for the concatenation method, which we’ll call `append`. In order not to mix things up too much, assume that `append` is defined outside the `List` class.

So it will take the two lists to be concatenated as parameters. These two lists must agree on their element type, but that element type can be arbitrary.

This can be expressed by giving `append` a type parameter<sup>3</sup> that represents the element type of the two input lists:

```
def append[T](xs: List[T], ys: List[T]): List[T]
```

To design the implementation of `append`, it pays to remember the “divide and conquer” design principle for programs over recursive data structures such as lists. Many algorithms over lists first split an input list into simpler cases using a pattern match. That’s the divide part of the principle. They then construct a result for each case. If the result is a non-empty list, some of its parts may be constructed by recursive invocations of the same algorithm.

That’s the conquer part of the principle.

To apply this principle to the implementation of the append method, the first question to ask is on which list to match. This is less trivial in the case of append than for many other methods because there are two choices. However, the subsequent “conquer” phase tells you that you need to construct a list consisting of all elements of both input lists. Since lists are constructed from the back towards the front, ys can remain intact whereas xs will need to be taken apart and prepended to ys. Thus, it makes sense to concentrate on xs as a source for a pattern match. The most common pattern match over lists simply distinguishes an empty from a non-empty list. So this gives the following outline of an append method:

```
def append[T](xs: List[T], ys: List[T]): List[T] =  
  xs match {  
    case List() => // ??  
    case x :: xs1 => // ??  
  }
```

<sup>3</sup>Type parameters will be explained in more detail in [Chapter 19](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 16.6](#)

### [Chapter 16 · Working with Lists](#)

334

All that remains is to fill in the two places marked with “??”. The first such place is the alternative where the input list xs is empty. In this case concatenation yields the second list:

```
case List() => ys
```

The second place left open is the alternative where the input list xs consists of some head x followed by a tail xs1. In this case the result is also a

nonempty list. To construct a non-empty list you need to know what the head and the tail of that list should be. You know that the first element of the result list is `x`. As for the remaining elements, these can be computed by appending the rest of the first list, `xs1`, to the second list `ys`. This completes the design and gives:

```
def append[T](xs: List[T], ys: List[T]): List[T] =  
  xs match {  
    case List() => ys  
    case x :: xs1 => x :: append(xs1, ys)  
  }
```

The computation of the second alternative illustrated the “conquer” part of the divide and conquer principle: Think first what the shape of the desired output should be, then compute the individual parts of that shape, using recursive invocations of the algorithm where appropriate. Finally, construct the output from these parts.

Taking the length of a list: `length`

The `length` method computes the length of a list.

```
scala> List(1, 2, 3).length
```

```
res3: Int = 3
```

On lists, unlike arrays, `length` is a relatively expensive operation. It needs to traverse the whole list to find its end and therefore takes time proportional to the number of elements in the list. That’s why it’s not a good idea to replace a test such as `xs.isEmpty` by `xs.length == 0`. The result of the two tests are equivalent, but the second one is slower, in particular if the list `xs` is long.

## Section 16.6

### Chapter 16 · Working with Lists

335

Accessing the end of a list: init and last

You know already the basic operations head and tail, which respectively take the first element of a list, and the rest of the list except the first element.

They each have a dual operation: last returns the last element of a (nonempty) list, whereas init returns a list consisting of all elements except the last one:

```
scala> val abcde = List('a', 'b', 'c', 'd', 'e')
```

```
abcde: List[Char] = List(a, b, c, d, e)
```

```
scala> abcde.last
```

```
res4: Char = e
```

```
scala> abcde.init
```

```
res5: List[Char] = List(a, b, c, d)
```

Like head and tail, these methods throw an exception when applied to an empty list:

```
scala> List().init
```

```
java.lang.UnsupportedOperationException: Nil.init
```

```
at scala.List.init(List.scala:544)
```

```
at ...
```

```
scala> List().last  
java.util.NoSuchElementException: Nil.last  
at scala.List.last(List.scala:563)  
at ...
```

Unlike head and tail, which both run in constant time, init and last need to traverse the whole list to compute their result. They therefore take time proportional to the length of the list.

It's a good idea to organize your data so that most accesses are at the head of a list, rather than the last element.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 16.6](#)

### [Chapter 16 · Working with Lists](#)

336

Reversing lists: reverse

If at some point in the computation an algorithm demands frequent accesses to the end of a list, it's sometimes better to reverse the list first and work with the result instead. Here's how to do the reversal:

```
scala> abcde.reverse  
res6: List[Char] = List(e, d, c, b, a)
```

Note that, like all other list operations, reverse creates a new list rather than changing the one it operates on. Since lists are immutable, such a change would not be possible, anyway. To verify this, check that the original value of abcde is unchanged after the reverse operation:

```
scala> abcde
```

res7: List[Char] = List(a, b, c, d, e)

The reverse, init, and last operations satisfy some laws which can be used for reasoning about computations and for simplifying programs.

1. reverse is its own inverse:

xs.reverse.reverse

equals

xs

2. reverse turns init to tail and last to head, except that the elements are reversed:

xs.reverse.init

equals

xs.tail.reverse

xs.reverse.tail

equals

xs.init.reverse

xs.reverse.head

equals

xs.last

xs.reverse.last

equals

xs.head

Reverse could be implemented using concatenation (::), like in the following method, rev:

```
def rev[T](xs: List[T]): List[T] = xs match {  
    case List() => xs  
    case x :: xs1 => rev(xs1) :: List(x)  
}
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 16.6

### Chapter 16 · Working with Lists

337

However, this method is less efficient than one would hope for. To study the complexity of rev, assume that the list xs has length n. Notice that there are n recursive calls to rev. Each call except the last involves a list concatenation. List concatenation xs :: ys takes time proportional to the length of its first argument xs. Hence, the total complexity of rev is:  $n + (n - 1) + \dots + 1 = (1 + n) * n/2$

In other words, rev's complexity is quadratic in the length of its input argument. This is disappointing when compared to the standard reversal of a mutable, linked list, which has linear complexity. However, the current implementation of rev is not the best implementation possible. You will see in

[Section 16.7](#) how to speed it up.

Prefixes and suffixes: drop, take and splitAt

The drop and take operations generalize tail and init in that they return arbitrary prefixes or suffixes of a list. The expression “xs take n” returns the first n elements of the list xs. If n is greater than xs.length, the whole list xs

is returned. The operation “xs drop n” returns all elements of the list xs except the first n ones. If n is greater than xs.length, the empty list is returned.

The splitAt operation splits the list at a given index, returning a pair of two lists.<sup>4</sup> It is defined by the equality:

xs splitAt n

equals

(xs take n, xs drop n)

However, splitAt avoids traversing the list xs twice. Here are some examples of these three methods:

scala> abcde take 2

res8: List[Char] = List(a, b)

scala> abcde drop 2

res9: List[Char] = List(c, d, e)

scala> abcde splitAt 2

res10: (List[Char], List[Char]) = (List(a, b), List(c, d, e))  
As mentioned in [Section 10.12](#), the term pair is an informal name for Tuple2.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 16.6](#)

[Chapter 16 · Working with Lists](#)

338

Element selection: apply and indices

Random element selection is supported through the apply method; however it is a less common operation for lists than it is for arrays.

```
scala> abcde apply 2 // rare in Scala
```

```
res11: Char = c
```

As for all other types, apply is implicitly inserted when an object appears in the function position in a method call, so the line above can be shortened to:

```
scala> abcde(2)
```

```
// rare in Scala
```

```
res12: Char = c
```

One reason why random element selection is less popular for lists than for arrays is that xs(n) takes time proportional to the index n. In fact, apply is simply defined by a combination of drop and head:

xs apply n

equals

(xs drop n).head

This definition also makes clear that list indices range from 0 up to the length of the list minus one, the same as for arrays. The indices method returns a list consisting of all valid indices of a given list:

```
scala> abcde.indices
```

```
res13: List[Int] = List(0, 1, 2, 3, 4)
```

Zipping lists: zip

The zip operation takes two lists and forms a list of pairs: scala> abcde.indices zip abcde

```
res14: List[(Int, Char)] = List((0,a), (1,b), (2,c), (3,d), (4,e))
```

If the two lists are of different length, any unmatched elements are dropped:

```
scala> val zipped = abcde zip List(1, 2, 3)
```

```
zipped: List[(Char, Int)] = List((a,1), (b,2), (c,3))
```

A useful special case is to zip a list with its index. This is done most efficiently with the `zipWithIndex` method, which pairs every element of a list with the position where it appears in the list.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 16.6](#)

### [Chapter 16 · Working with Lists](#)

339

```
scala> abcde.zipWithIndex
```

```
res15: List[(Char, Int)] = List((a,0), (b,1), (c,2), (d,3), (e,4))
```

Displaying lists: `toString` and `mkString`

The `toString` operation returns the canonical string representation of a list:

```
scala> abcde.toString
```

```
res16: String = List(a, b, c, d, e)
```

If you want a different representation you can use the `mkString` method. The operation `xs mkString (pre, sep, post)` involves four operands: the list `xs` to be displayed, a prefix string `pre` to be displayed in front of all elements, a separator string `sep` to be displayed between successive elements, and a postfix string `post` to be displayed at the end. The result of the operation is the string:

`pre + xs(0) + sep + ... + sep + xs(xs.length - 1) + post` The `mkString` method has two overloaded variants that let you drop some or all of its arguments. The first variant only takes a separator string: `xs mkString sep`

equals

```
xs mkString ("", sep, "")
```

The second variant lets you omit all arguments:

```
xs.mkString
```

equals

```
xs mkString ""
```

Here are some examples:

```
scala> abcde mkString ("[", ", ", "]") res17: String = [a,b,c,d,e]
```

```
scala> abcde mkString ""
```

```
res18: String = abcde
```

```
scala> abcde.mkString
```

```
res19: String = abcde
```

```
scala> abcde mkString ("List(", ", ", ")") res20: String = List(a, b, c, d, e)
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 16.6](#)

[Chapter 16 · Working with Lists](#)

340

There are also variants of the mkString methods called addString which append the constructed string to a StringBuilder object,<sup>5</sup> rather than returning them as a result:

```
scala> val buf = new StringBuilder
```

```
buf: StringBuilder =  
scala> abcde addString (buf, "(", ";", ")") res21: StringBuilder = (a;b;c;d;e)
```

The `mkString` and `addString` methods are inherited from `List`'s super trait `Iterable`, so they are applicable to all sorts of iterable collections.

Converting lists: `elements`, `toArray`, `copyToArray`

To convert data between the flat world of arrays and the recursive world of lists, you can use method `toArray` in class `List` and `toList` in class `Array`:

```
scala> val arr = abcde.toArray
```

```
arr: Array[Char] = Array(a, b, c, d, e)
```

```
scala> arr.toString
```

```
res22: String = Array(a, b, c, d, e)
```

```
scala> arr.toList
```

```
res23: List[Char] = List(a, b, c, d, e)
```

There's also a method `copyToArray`, which copies list elements to successive array positions within some destination array. The operation: `xs copyToArray (arr, start)`

copies all elements of the list `xs` to the array `arr`, beginning with position `start`. You must ensure that the destination array `arr` is large enough to hold the list in full. Here's an example:

```
scala> val arr2 = new Array[Int](10)
```

```
arr2: Array[Int] = Array(0, 0, 0, 0, 0, 0, 0, 0, 0, 0)
```

```
scala> List(1, 2, 3) copyToArray (arr2, 3)
```

```
scala> arr2.toString
```

```
res25: String = Array(0, 0, 0, 1, 2, 3, 0, 0, 0, 0)
```

This is class `scala.StringBuilder`, not `java.lang.StringBuilder`.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 16.6

### Chapter 16 · Working with Lists

341

Finally, if you need to access list elements via an iterator, you can use the `elements` method:

```
scala> val it = abcde.elements
```

```
it: Iterator[Char] = non-empty iterator
```

```
scala> it.next
```

```
res26: Char = a
```

```
scala> it.next
```

```
res27: Char = b
```

Example: Merge sort

The insertion sort presented earlier is concise to write, but it is not very efficient. Its average complexity is proportional to the square of the length of the input list. A more efficient algorithm is merge sort.

The fast track

This example provides another illustration of the divide and conquer principle and currying, as well as a useful discussion of algorithmic complexity. If you prefer to move a bit faster on your first pass through this book, however, you can safely skip to [Section 16.7](#).

Merge sort works as follows: First, if the list has zero or one elements, it is already sorted, so the list can be returned unchanged. Longer lists are split into two sub-lists, each containing about half the elements of the original list. Each sub-list is sorted by a recursive call to the sort function, and the resulting two sorted lists are then combined in a merge operation.

For a general implementation of merge sort, you want to leave open the type of list elements to be sorted, and also want to leave open the function to be used for the comparison of elements. You obtain a function of maximal generality by passing these two items as parameters. This leads to the implementation shown in [Listing 16.1](#).

The complexity of msort is order ( $n \log(n)$ ), where  $n$  is the length of the input list. To see why, note that splitting a list in two and merging two sorted lists each take time proportional to the length of the argument list(s).

Each recursive call of msort halves the number of elements in its input, so there are about  $\log(n)$  consecutive recursive calls until the base case of lists of length 1 is reached. However, for longer lists each call spawns off two

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 16.6](#)

### [Chapter 16](#) · [Working with Lists](#)

342

```
def msort[T](less: (T, T) => Boolean)
(xs: List[T]): List[T] = {
  def merge(xs: List[T], ys: List[T]): List[T] =
    (xs, ys) match {
      case (Nil, _) => ys
      case (_, Nil) => xs
      case (x :: xs, y :: ys) =>
        if (less(x, y))
          x :: merge(xs, ys)
        else
          y :: merge(xs, ys)
    }
  val n = xs.length / 2
  val (left, right) = xs.splitAt(n)
  merge(msort(left)(less), msort(right)(less))
}
```

```

case (x :: xs1, y :: ys1) =>
  if (less(x, y)) x :: merge(xs1, ys)
  else y :: merge(xs, ys1)

}

val n = xs.length / 2

if (n == 0) xs
else {
  val (ys, zs) = xs splitAt n
  merge(msort(less)(ys), msort(less)(zs))
}
}

```

Listing 16.1 · A merge sort function for Lists.

further calls. Adding everything up we obtain that at each of the  $\log(n)$  call levels, every element of the original lists takes part in one split operation and in one merge operation. Hence, every call level has a total cost proportional to  $n$ . Since there are  $\log(n)$  call levels, we obtain an overall cost proportional to  $n \log(n)$ . That cost does not depend on the initial distribution of elements in the list, so the worst case cost is the same as the average case cost. This property makes merge sort an attractive algorithm for sorting lists.

Here is an example of how `msort` is used:

```
scala> msort((x: Int, y: Int) => x < y)(List(5, 7, 1, 3)) res28: List[Int] =
List(1, 3, 5, 7)
```

The `msort` function is a classical example of the currying concept discussed in [Section 9.3](#). Currying makes it easy to specialize the function for particular comparison functions. Here's an example:

```
scala> val intSort = msort((x: Int, y: Int) => x < y) _
```

```
intSort: (List[Int]) => List[Int] = <function>
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 16.7](#)

### [Chapter 16 · Working with Lists](#)

343

The `intSort` variable refers to a function that takes a list of integers and sorts them in numerical order. As described in [Section 8.6](#), an underscore stands for a missing argument list. In this case, the missing argument is the list that should be sorted. As another example, here's how you could define a function that sorts a list of integers in reverse numerical order: `scala> val reverseIntSort = msort((x: Int, y: Int) => x > y) _`

`reverseIntSort: (List[Int]) => List[Int] = <function>` Because you provided the comparison function already via currying, you now need only provide the list to sort when you invoke the `intSort` or `reverseIntSort` functions. Here are some examples:

```
scala> val mixedInts = List(4, 1, 9, 0, 5, 8, 3, 6, 2, 7) mixedInts: List[Int] = List(4, 1, 9, 0, 5, 8, 3, 6, 2, 7) scala> intSort(mixedInts)
```

```
res0: List[Int] = List(0, 1, 2, 3, 4, 5, 6, 7, 8, 9)
```

```
scala> reverseIntSort(mixedInts)
```

```
res1: List[Int] = List(9, 8, 7, 6, 5, 4, 3, 2, 1, 0)
```

16.7

## Higher-order methods on class List

Many operations over lists have a similar structure. Several patterns appear time and time again. Some examples are: transforming every element of a list in some way, verifying whether a property holds for all elements of a list, extracting from a list elements satisfying a certain criterion, or combining the elements of a list using some operator. In Java, such patterns would usually be expressed by idiomatic combinations of for or while loops. In Scala, they can be expressed more concisely and directly using higher-order operators,<sup>6</sup> which are implemented as methods in class List. These higher-order operators are discussed in this section.

<sup>6</sup>By higher-order operators, we mean higher-order functions used in operator notation.

As mentioned in [Section 9.1](#), higher-order functions are functions that take other functions as parameters.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### [Section 16.7](#)

#### [Chapter 16 · Working with Lists](#)

344

Mapping over lists: map, flatMap and foreach

The operation xs map f takes as operands a list xs of type List[T] and a function f of type T => U. It returns the list resulting from applying the function f to each list element in xs. For instance:

```
scala> List(1, 2, 3) map (_ + 1)
```

```
res29: List[Int] = List(2, 3, 4)
```

```
scala> val words = List("the", "quick", "brown", "fox") words:  
List[java.lang.String] = List(the, quick, brown, fox) scala> words map  
(_.length)
```

```
res30: List[Int] = List(3, 5, 5, 3)
```

```
scala> words map (_.toList.reverse.mkString)
```

```
res31: List[String] = List(eht, kciuq, nworb, xof)
```

The flatMap operator is similar to map, but it takes a function returning a list of elements as its right operand. It applies the function to each list element and returns the concatenation of all function results. The difference between map and flatMap is illustrated in the following example: scala> words map (\_.toList)

```
res32: List[List[Char]] = List(List(t, h, e), List(q, u, i, c, k), List(b, r, o, w, n), List(f, o, x))
```

```
scala> words flatMap (_toList)
```

```
res33: List[Char] = List(t, h, e, q, u, i, c, k, b, r, o, w, n, f, o, x)
```

You see that where map returns a list of lists, flatMap returns a single list in which all element lists are concatenated.

The differences and interplay between map and flatMap are also demonstrated by the following expression, which constructs a list of all pairs  $(i, j)$  such that  $1 \leq j < i < 5$ :

```
scala> List.range(1, 5) flatMap (
  i => List.range(1, i) map (j => (i, j)))
)
```

```
res34: List[(Int, Int)] = List((2,1), (3,1), (3,2), (4,1), (4,2), (4,3))
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 16.7](#)

[Chapter 16 · Working with Lists](#)

List.range is a utility method that creates a list of all integers in some range. It is used twice in this example: once to generate a list of integers from 1 (including) until 5 (excluding), and in a second time to generate a list of integers from 1 until i, for each value of i taken from the first list. The map in this expression generates a list of tuples (i, j) where  $j < i$ . The outer flatMap in this example generates this list for each i between 1 and 5, and then concatenates all the results.

Note that the same list can alternatively be constructed with a for expression:

```
for (i <- List.range(1, 5); j <- List.range(1, i)) yield (i, j)
```

You'll learn more about the interplay of for expressions and list operations in [Chapter 23](#).

The third map-like operation is foreach. Unlike map and flatMap, however, foreach takes a procedure (a function with result type Unit) as right operand. It simply applies the procedure to each list element. The result of the operation itself is again Unit; no list of results is assembled. As an example, here is a concise way of summing up all numbers in a list: scala>

```
var sum = 0
```

```
sum: Int = 0
```

```
scala> List(1, 2, 3, 4, 5) foreach (sum += _)
```

```
scala> sum
```

```
res36: Int = 15
```

### Filtering lists: filter, partition, find, takeWhile, dropWhile, and span

The operation “xs filter p” takes as operands a list xs of type List[T] and a predicate function p of type T => Boolean. It yields the list of all elements x in xs for which p(x) is true. For instance:

```
scala> List(1, 2, 3, 4, 5) filter (_ % 2 == 0)
```

```
res37: List[Int] = List(2, 4)
```

```
scala> words filter (_ .length == 3)
```

```
res38: List[java.lang.String] = List(the, fox)
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 16.7

### Chapter 16 · Working with Lists

346

The partition method is like filter, but it returns a pair of lists. One list contains all elements for which the predicate is true, while the other list contains all elements for which the predicate is false. It is defined by the equality:

`xs partition p`

equals

`(xs filter p, xs filter (!p(_)))`

Here's an example:

```
scala> List(1, 2, 3, 4, 5) partition (_ % 2 == 0)
```

res39: (List[Int], List[Int]) = (List(2, 4), List(1, 3, 5)) The find method is also similar to filter but it returns the first element satisfying a given predicate, rather than all such elements. The operation `xs find p` takes a list `xs` and a predicate `p` as operands. It returns an optional value. If there is an element `x` in `xs` for which `p(x)` is true, `Some(x)` is returned. Otherwise, `p` is false for all elements, and `None` is returned. Here are some examples:

```
scala>
```

```
List(1, 2, 3, 4, 5) find (_ % 2 == 0)
```

```
res40: Option[Int] = Some(2)
```

scala>

```
List(1, 2, 3, 4, 5) find (_ <= 0)
```

```
res41: Option[Int] = None
```

The `takeWhile` and `dropWhile` operators also take a predicate as their right operand. The operation `xs takeWhile p` takes the longest prefix of list `xs` such that every element in the prefix satisfies `p`. Analogously, the operation `xs dropWhile p` removes the longest prefix from list `xs` such that every element in the prefix satisfies `p`. Here are some examples: `scala> List(1, 2, 3, -4, 5) takeWhile (_ > 0)`

```
res42: List[Int] = List(1, 2, 3)
```

```
scala> words dropWhile (_ startsWith "t")
```

`res43: List[java.lang.String] = List(quick, brown, fox)` The `span` method combines `takeWhile` and `dropWhile` in one operation, just like `splitAt` combines `take` and `drop`. It returns a pair of two lists, defined by the equality:

`xs span p`

equals

`(xs takeWhile p, xs dropWhile p)`

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 16.7](#)

[Chapter 16 · Working with Lists](#)

Like splitAt, span avoids traversing the list xs twice: scala> List(1, 2, 3, -4, 5) span (\_ > 0)

res44: (List[Int], List[Int]) = (List(1, 2, 3), List(-4, 5)) Predicates over lists:  
forall and exists

The operation xs forall p takes as arguments a list xs and a predicate p. Its result is true if all elements in the list satisfy p. Conversely, the operation xs exists p returns true if there is an element in xs that satisfies the predicate p. For instance, to find out whether a matrix represented as a list of lists has a row with only zeroes as elements:

scala> def hasZeroRow(m: List[List[Int]]) =

m exists (row => row forall (\_ == 0))

hasZeroRow: (List[List[Int]])Boolean

scala> hasZeroRow(diag3)

res45: Boolean = false

Folding lists: /: and :\

Another common kind of operation combines the elements of a list with some operator. For instance:

sum(List(a, b, c))

equals

0 + a + b + c

This is a special instance of a fold operation:

scala> def sum(xs: List[Int]): Int = (0 /: xs) (\_ + \_) sum: (List[Int])Int

Similarly:

`product(List(a, b, c))`

equals

`1 * a * b * c`

is a special instance of this fold operation:

scala> def product(xs: List[Int]): Int = (1 /: xs) (\_ \* \_)  
product: (List[Int])Int

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 16.7](#)

### [Chapter 16 · Working with Lists](#)

348

A fold left operation “(z /: xs) (op)” involves three objects: a start value z, a list xs, and a binary operation op. The result of the fold is op applied between successive elements of the list prefixed by z. For instance: (z /:  
`List(a, b, c)) (op)`

equals

`op(op(op(z, a), b), c)`

Or, graphically:

op

op

c

op

b

z

a

Here's another example that illustrates how `/:` is used. To concatenate all words in a list of strings with spaces between them and in front, you can write this:

scala>

```
("" /: words) (_ + " " + _)
```

```
res46: java.lang.String =
```

the quick brown fox

This gives an extra space at the beginning. To remove the space, you can use this slight variation:

scala> (words.head /: words.tail)

```
(_ + " " + _)
```

```
res47: java.lang.String = the quick brown fox
```

The `/:` operator produces left-leaning operation trees (its syntax with the slash rising forward is intended to be a reflection of that). The operator has

`:\  
\\` as an analog that produces right-leaning trees. For instance: `(List(a, b, c) :\  
\\ z) (op)`

equals

```
op(a, op(b, op(c, z)))
```

Or, graphically:

op

a

op

b

op

c

z

The `:\ $\lambda$`  operator is pronounced fold right. It involves the same three operands as fold left, but the first two appear in reversed order: The first operand is the list to fold, the second is the start value.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 16.7

### Chapter 16 · Working with Lists

349

For associative operations, fold left and fold right are equivalent, but there might be a difference in efficiency. Consider for instance an operation corresponding to the `List.flatten` method, which concatenates all elements in a list of lists.<sup>7</sup> This could be implemented with either fold left or fold right:

```
def flattenLeft[T](xss: List[List[T]]) =  
(List[T]() /: xss) (_ ::: _)
```

```
def flattenRight[T](xss: List[List[T]]) =  
(xss :\ List[T]()) (_ ::: _)
```

Because list concatenation, `xs ::: ys`, takes time proportional to its first argument `xs`, the implementation in terms of fold right in `flattenRight` is

more efficient than the fold left implementation in `flattenLeft`. The problem is that `flattenLeft(xss)` copies the first element list `xss.head`  $n - 1$  times, where  $n$  is the length of the list `xss`.

Note that both versions of `flatten` require a type annotation on the empty list that is the start value of the fold. This is due to a limitation in Scala's type inferencer, which fails to infer the correct type of the list automatically. If you try to leave out the annotation, you get the following: `scala> def flattenRight[T](xss: List[List[T]]) =`

```
(xss :\ List()) (_ ::: _)
```

```
<console>:15: error: type mismatch;
```

found

```
: List[T]
```

required: List[Nothing]

```
(xss :\ List()) (_ ::: _)
```

```
^
```

To find out why the type inferencer goes wrong, you'll need to know about the types of the fold methods and how they are implemented. More on this in [Chapter 22](#).

Lastly, although the `/:` and `:\` operators have the advantage that the direction of the slash resembles the graphical depiction of their respective left or right-leaning trees, and the associativity of the colon character places the start value in the same position in the expression as it is in the tree, some may find the resulting code less than intuitive. If you prefer, you can alternatively use the methods named `foldLeft` and `foldRight`, which are also defined on class `List`.

<sup>7</sup>`List.flatten` will be explained in the next section of this chapter.

## Section 16.7

### Chapter 16 · Working with Lists

350

Example: List reversal using fold

Earlier in the chapter you saw an implementation of method reverse, named rev, whose running time was quadratic in the length of the list to be reversed.

Here is now a different implementation of reverse that has linear cost. The idea is to use a fold left operation based on the following scheme: def reverseLeft[T](xs: List[T]) = (startvalue /: xs)(operation) It only remains to fill in the startvalue and operation parts. In fact, you can try to deduce these parts from some simple examples. To deduce the correct value of startvalue, you can start with the smallest possible list, List(), and calculate as follows:

List()

equals (by the properties of reverseLeft)

reverseLeft(List())

equals (by the template for reverseLeft)

(startvalue /: List())(operation)

equals (by the definition of /:)

startvalue

Hence, startvalue must be List(). To deduce the second operand, you can pick the next smallest list as an example case. You know already that startvalue is List(), so you can calculate as follows:

List(x)

equals (by the properties of reverseLeft)

reverseLeft(List(x))

equals (by the template for reverseLeft, with startvalue = List()) (List() /: List(x)) (operation)

equals (by the definition of /:)

operation(List(), x)

Hence, operation(List(), x) equals List(x), which can also be written as  $x :: \text{List}()$ . This suggests taking as operation the  $::$  operator with its operands exchanged. (This operation is sometimes called “snoc,” in reference to  $::$ , which is called cons.) We arrive then at the following implementation for reverseLeft:

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 16.8](#)

### [Chapter 16 · Working with Lists](#)

351

def reverseLeft[T](xs: List[T]) =

(List[T]() /: xs) {(ys, y) => y :: ys}

(Again, the type annotation in  $\text{List}[T]()$  is necessary to make the type inferencer work.) If you analyze the complexity of reverseLeft, you’ll find that it applies a constant-time operation (“snoc”)  $n$  times, where  $n$  is the length of the argument list. Hence, the complexity of reverseLeft is linear, as hoped for.

Sorting lists: sort

The operation  $\text{xs}$  sort before, where “ $\text{xs}$ ” is a list and “before” is a function that can be used to compare two elements, sorts the elements of list  $\text{xs}$ .

The expression  $x$  before  $y$  should return true if  $x$  should come before  $y$  in the intended ordering for the sort. For instance:

```
scala> List(1, -3, 4, 2, 6) sort (_ < _)
```

```
res48: List[Int] = List(-3, 1, 2, 4, 6)
```

```
scala> words sort (_ .length > _ .length)
```

res49: List[java.lang.String] = List(quick, brown, fox, the) Note that sort performs a merge sort similar to the msort algorithm shown in the last section, but it is a method of class List whereas msort was defined outside lists.

## 16.8

### Methods of the List object

So far, all operations you have seen in this chapter are implemented as methods of class List, so you invoke them on individual list objects. There are also a number of methods in the globally accessible object scala.List, which is the companion object of class List. Some of these operations are factory methods that create lists. Others are operations that work on lists of some specific shape. Both kinds of methods will be presented in this section.

#### Creating lists from their elements: List.apply

You've already seen on several occasions list literals such as List(1, 2, 3).

There's nothing special about their syntax. A literal like List(1, 2, 3) is

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 16.8](#)

[Chapter 16 · Working with Lists](#)

simply the application of the object List to the elements 1, 2, 3@. That is, it is equivalent to List.apply(1, 2, 3):

```
scala> List.apply(1, 2, 3)
```

```
res50: List[Int] = List(1, 2, 3)
```

### Creating a range of numbers: List.range

The range method, which you saw briefly earlier in the chapter in the discussion of map and flatmap, creates a list consisting of a range of numbers.

Its simplest form is List.range(from, until), which creates a list of all numbers starting at from and going up to until minus one. So the end value, until, does not form part of the range.

There's also a version of range that takes a step value as third parameter. This operation will yield list elements that are step values apart, starting at from. The step can be positive or negative:

```
scala> List.range(1, 5)
```

```
res51: List[Int] = List(1, 2, 3, 4)
```

```
scala> List.range(1, 9, 2)
```

```
res52: List[Int] = List(1, 3, 5, 7)
```

```
scala> List.range(9, 1, -3)
```

```
res53: List[Int] = List(9, 6, 3)
```

### Creating uniform lists: List.make

The make method creates a list consisting of zero or more copies of the same element. It takes two parameters: the length of the list to be created, and the element to be repeated:

```
scala> List.make(5, 'a')
res54: List[Char] = List(a, a, a, a, a)
scala> List.make(3, "hello")
res55: List[java.lang.String] = List(hello, hello, hello)
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 16.8

### Chapter 16 · Working with Lists

353

#### Unzipping lists: List.unzip

The unzip operation is the inverse of zip. Where zip takes two lists and forms a list of pairs, unzip takes a list of pairs and returns two lists, one consisting of the first element of each pair, the other consisting of the second element:

```
scala> val zipped = "abcde".toList zip List(1, 2, 3) zipped: List[(Char, Int)]
= List((a,1), (b,2), (c,3))
scala> List.unzip(zipped)
res56: (List[Char], List[Int]) = (List(a, b, c),
List(1, 2, 3))
```

#### Note

You might wonder why unzip is a method of the global List object, instead of being a method of class List. The problem is that unzip does not work on any list but only on a list of pairs, whereas Scala's type system requires every method of a class to be available on every instance of that class. Thus, unzip cannot go in the List class. It might be possible to extend

Scala's type system in the future so that it accepts methods that only apply to some instances of a class, but so far this has not been done.

Concatenating lists: List.flatten, List.concat

The flatten method takes a list of lists and concatenates all element lists of the main list. For example:

```
scala> val xss =
```

```
List(List('a', 'b'), List('c'), List('d', 'e'))
```

```
xss: List[List[Char]] = List(List(a, b), List(c), List(d, e)) scala>  
List.flatten(xss)
```

```
res57: List[Char] = List(a, b, c, d, e)
```

Note

The flatten method is packaged in the global List object for the same reason as unzip: it does not operate on any list, but only on lists with lists as elements, so it can't be a method of the generic List class.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 16.8](#)

[Chapter 16 · Working with Lists](#)

354

The concat method is similar to flatten in that it concatenates a number of element lists. The element lists are given directly as repeated parameters. The number of lists to be passed to concat is arbitrary: scala>  
List.concat(List('a', 'b'), List('c'))

```
res58: List[Char] = List(a, b, c)
```

```
scala> List.concat(List(), List('b'), List('c'))
```

```
res59: List[Char] = List(b, c)
```

```
scala> List.concat()
```

```
res60: List[Nothing] = List()
```

Mapping and testing pairs of lists: List.map2, List.forall2, List.exists2

The map2 method is similar to map, but it takes two lists as arguments together with a function that maps two element values to a result. The function gets applied to corresponding elements of the two lists, and a list is formed from the results:

```
scala> List.map2(List(10, 20), List(3, 4, 5)) (_ * _) res61: List[Int] =  
List(30, 80)
```

The exists2 and forall2 methods are similar to exists and forall, respectively, but they also take two lists and a boolean predicate that takes two arguments. The predicate is applied to corresponding arguments: scala> List.forall2(List("abc", "de"), List(3, 2)) (\_.length == \_)

```
res62: Boolean = true
```

```
scala> List.exists2(List("abc", "de"), List(3, 2)) (_.length != _)
```

```
res63: Boolean = false
```

The fast track

In the next (and final) section of this chapter, we provide insight into Scala's type inference algorithm. You can safely skip the entire section if you're not interested in such details right now, and instead go straight to the conclusion on [page 358](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 16.9](#)

[Chapter 16 · Working with Lists](#)

## Understanding Scala's type inference algorithm

One difference between the previous uses of sort and msort concerns the admissible syntactic forms of the comparison function. Compare:

```
scala> msort((x: Char, y: Char) => x > y)(abcde) res64: List[Char] = List(e, d, c, b, a)
```

with:

```
scala> abcde sort (_ > _)
```

```
res65: List[Char] = List(e, d, c, b, a)
```

The two expressions are equivalent, but the first uses a longer form of comparison function with named parameters and explicit types whereas the second uses the concise form, (\_ > \_), where named parameters are replaced by underscores. Of course, you could also use the first, longer form of comparison with sort. However, the short form cannot be used with msort:

```
scala> msort(_ > _)(abcde)
```

```
<console>:12: error: missing parameter type for expanded function ((x$1, x$2) => x$1.$greater(x$2))
```

```
msort(_ > _)(abcde)
```

^

To understand why, you need to know some details of Scala's type inference algorithm. Type inference in Scala is flow based. In a method application `m(args)`, the inferencer first checks whether the method `m` has a known type. If it has, that type is used to infer the expected type of the arguments. For instance, in `abcde.sort(_ > _)`, the type of `abcde` is `List[Char]`, hence `sort` is known to be a method that takes an argument of type `(Char, Char) => Boolean` and produces a result of type `List[Char]`.

Since the parameter types of the function arguments are thus known, they need not be written explicitly. With what it knows about sort, the inferencer can deduce that  $(\_ > \_)$  should expand to  $((x: \text{Char}, y: \text{Char}) \Rightarrow x > y)$  where x and y are some arbitrary fresh names.

Now consider the second case,  $\text{msort}(\_ > \_)(\text{abcde})$ . The type of msort is a curried, polymorphic method type that takes an argument of type  $(T, T) \Rightarrow \text{Boolean}$  to a function from  $\text{List}[T]$  to  $\text{List}[T]$  where T is some as-yet unknown type. The msort method needs to be instantiated with a type

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 16.9](#)

### [Chapter 16 · Working with Lists](#)

356

parameter before it can be applied to its arguments. Because the precise instance type of msort in the application is not yet known, it cannot be used to infer the type of its first argument. The type inferencer changes its strategy in this case; it first type checks method arguments to determine the proper instance type of the method. However, when tasked to type check the shorthand function literal,  $(\_ > \_)$ , it fails because it has no information about the types of the implicit function parameters that are indicated by underscores.

One way to resolve the problem is to pass an explicit type parameter to msort, as in:

```
scala> msort[Char](\_ > \_)(abcde)
```

```
res66: List[Char] = List(e, d, c, b, a)
```

Because the correct instance type of msort is now known, it can be used to infer the type of the arguments.

Another possible solution is to rewrite the msort method so that its parameters are swapped:

```
def msortSwapped[T](xs: List[T])(less:  
(T, T) => Boolean): List[T] = {  
    // same implementation as msort,  
    // but with arguments swapped  
}
```

Now type inference would succeed:

```
scala> msortSwapped(abcde)(_ > _)  
res67: List[Char] = List(e, d, c, b, a)
```

What has happened is that the inferencer used the known type of the first parameter abcde to determine the type parameter of msortSwapped. Once the precise type of msortSwapped was known, it could be used in turn to infer the type of the second parameter, (\_ > \_).

Generally, when tasked to infer the type parameters of a polymorphic method, the type inferencer consults the types of all value arguments in the first parameter list but no arguments beyond that. Since msortSwapped is a curried method with two parameter lists, the second argument (i.e., the function value) did not need to be consulted to determine the type parameter of the method.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 16.9](#)

[Chapter 16](#) · [Working with Lists](#)

357

This inference scheme suggests the following library design principle:  
When designing a polymorphic method that takes some non-function arguments and a function argument, place the function argument last in a

curried parameter list by its own. That way, the method's correct instance type can be inferred from the non-function arguments, and that type can in turn be used to type check the function argument. The net effect is that users of the method will be able to give less type information and write function literals in more compact ways.

Now to the more complicated case of a fold operation. Why is there the need for an explicit type parameter in an expression like the body of the flattenRight method shown previously?

```
(xss :\ List[T]()) (_ ::: _)
```

The type of the fold-right operation is polymorphic in two type variables.

Given an expression:

```
(xs :\ z) (op)
```

The type of xs must be a list of some arbitrary type A, say xs: List[A].

The start value z can be of some other type B. The operation op must then take two arguments of type A and B and must return a result of type B, i.e., op: (A, B) => B. Because the type of z is not related to the type of the list xs, type inference has no context information for z. Now consider the erroneous expression in the method flattenRight above:

```
(xss :\ List()) (_ ::: _)
```

```
// this won't compile
```

The start value z in this fold is an empty list, List(), so without additional type information its type is inferred to be a List[Nothing]. Hence, the inferencer will infer that the B type of the fold is List[Nothing]. Therefore, the operation (\_ ::: \_) of the fold is expected to be of the following type: (List[T], List[Nothing]) => List[Nothing]

This is indeed a possible type for the operation in that fold but it is not a very useful one! It says that the operation always takes an empty list as second argument and always produces an empty list as result. In other

words, the type inference settled too early on a type for `List()`, it should have waited until it had seen the type of the operation `op`. So the (otherwise very useful) rule to only consider the first argument section in a curried method

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 16.10

### Chapter 16 · Working with Lists

358

application for determining the method's type is at the root of the problem here. On the other hand, even if that rule were relaxed, the inferencer still could not come up with a type for `op` because its parameter types are not given. Hence, there is a Catch-22 situation which can only be resolved by an explicit type annotation from the programmer.

This example highlights some limitations of the local, flow-based type inference scheme of Scala. It is not present in the more global Hindley-Milner style of type inference used in functional languages such as ML or Haskell. However, Scala's local type inference deals much more gracefully with object-oriented subtyping than the Hindley-Milner style does. Fortunately, the limitations show up only in some corner cases, and are usually easily fixed by adding an explicit type annotation.

Adding type annotations is also a useful debugging technique when you get confused by type error messages related to polymorphic methods. If you are unsure what caused a particular type error, just add some type arguments or other type annotations, which you think are correct. Then you should be able to quickly see where the real problem is.

16.10

Conclusion

Now you have seen many ways to work with lists. You have seen the basic operations like head and tail, the first-order operations like reverse, the higher-order operations like map, and the utility methods in the List object.

Along the way, you learned a bit about how Scala’s type inference works.

Lists are a real work horse in Scala, so you will benefit from knowing how to use them. For that reason, this chapter has delved deeply into how to use lists. Lists are just one kind of collection that Scala supports, however.

The next chapter is broad, rather than deep, and shows you how to use a variety of Scala’s collection types.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 17

### Collections

Scala has a rich collections library. You’ve already seen the most commonly used collection types in previous chapters—arrays, lists, sets, and maps—but there is more to the story. In this chapter, we’ll start by giving an overview of how these types relate to each other in the collections inheritance hierarchy.

We’ll also briefly describe these and various other collection types that you may occasionally want to use, including discussing their tradeoffs of speed, space, and requirements on input data.

#### 17.1

##### Overview of the library

The Scala collections library involves many classes and traits. As a result, it can be challenging to get a big picture of the library by browsing the Scaladoc documentation. In [Figure 17.1](#), we show just the traits you need to know about to understand the big picture.

The main trait is `Iterable`, which is the supertrait of both mutable and immutable variations of sequences (`Seqs`), sets, and maps. Sequences are ordered collections, such as arrays and lists. Sets contain at most one of each object, as determined by the `==` method. Maps contain a collection of keys mapped to values.

`Iterable` is so named because it represents collection objects that can produce an `Iterator` via a method named `elements`:

```
def elements: Iterator[A]
```

The `A` in this example is the type parameter to `Iterator`, which indicates the type of element objects contained in the collection. The `Iterator` returned

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 17.1](#)

### [Chapter 17 · Collections](#)

360

scala

`Iterable`

«trait»

scala

`scala.collection`

`scala.collection`

`Seq`

`Set`

`Map`

«trait»

«trait»

«trait»

Figure 17.1 · Class hierarchy for Scala collections.

by elements is parameterized by the same type. An Iterable[Int]’s elements method, for example, will produce an Iterator[Int].

Iterable provides dozens of useful concrete methods, all implemented in terms of the Iterator returned by elements, which is the sole abstract method in trait Iterable. Among the methods defined in Iterable are many higher-order methods, most of which you’ve already seen in previous chapters. Some examples are map, flatMap, filter, exists, and find.

These higher-order methods provide concise ways to iterate through collections for specific purposes, such as to transform each element and produce a new collection (the map method) or find the first occurrence of an element given a predicate (the find method).

An Iterator has many of the same methods as Iterable, including the higher-order ones, but does not belong to the same hierarchy. As shown in [Figure 17.2](#), trait Iterator extends AnyRef. The difference between Iterable and Iterator is that trait Iterable represents types that can be iterated over (i.e., collection types), whereas trait Iterator is the mechanism used to perform an iteration. Although an Iterable can be iterated over multiple times, an Iterator can be used just once. Once you’ve iterated through a collection with an Iterator, you can’t reuse it. If you need to iterate through the same collection again, you’ll need to call elements on that collection to obtain a new Iterator.

The many concrete methods provided by Iterator are implemented in terms of two abstract methods, next and hasNext:

```
def hasNext: Boolean
```

def next: A

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 17.2](#)

### [Chapter 17 · Collections](#)

361

scala

AnyRef

«trait»

scala

Iterator

«trait»

Figure 17.2 · Class hierarchy for Iterator.

The hasNext method indicates whether any elements remain in the iteration.

The next method returns the next element.

Although most of the Iterable implementations you are likely to encounter will represent collections of a finite size, Iterable can also be used to represent infinite collections. The Iterator returned from an infinite collection could, for example, calculate and return the next digit of  $\pi$  each time its next method was invoked.

17.2

Sequences

Sequences, classes that inherit from trait Seq, let you work with groups of data lined up in order. Because the elements are ordered, you can ask for the first element, second element, 103rd element, and so on. In this section, we'll give you a quick tour of the most important sequences.

## Lists

Perhaps the most important sequence type to know about is class List, the immutable linked-list described in detail in the previous chapter. Lists support fast addition and removal of items to the beginning of the list, but they do not provide fast access to arbitrary indexes because the implementation must iterate through the list linearly.

This combination of features might sound odd, but they hit a sweet spot that works well for many algorithms. The fast addition and removal of initial elements means that pattern matching works well, as described in [Chapter 15](#).

The immutability of lists helps you develop correct, efficient al-

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 17.2](#)

[Chapter 17 · Collections](#)

362

gorithms because you never need to make copies of a list. Here's a short example showing how to initialize a list and access its head and tail:

```
scala> val colors = List("red", "blue", "green")
colors: List[java.lang.String] = List(red, blue, green)
scala> colors.head
```

```
res0: java.lang.String = red
```

```
scala> colors.tail
```

```
res1: List[java.lang.String] = List(blue, green)
```

For an introduction to lists see [Step 8 in Chapter 3](#), and for the details on using lists, see [Chapter 16](#). Lists will also be discussed in [Chapter 22](#), which provides insight into how lists are implemented in Scala.

## Arrays

Arrays allow you to hold a sequence of elements and efficiently access an element at an arbitrary position, both to get or update the element, with a zero-based index. Here's how you create an array whose size you know, but for which you don't yet know the element values:

```
scala> val fiveInts = new Array[Int](5)
```

```
fiveInts: Array[Int] = Array(0, 0, 0, 0, 0)
```

Here's how you initialize an array when you do know the element values:

```
scala> val fiveToOne = Array(5, 4, 3, 2, 1)
```

```
fiveToOne: Array[Int] = Array(5, 4, 3, 2, 1)
```

As mentioned previously, arrays are accessed in Scala by placing an index in parentheses, not square brackets as in Java. Here's an example of both accessing and updating an array element:

```
scala> fiveInts(0) = fiveToOne(4)
```

```
scala> fiveInts
```

```
res1: Array[Int] = Array(1, 0, 0, 0, 0)
```

Scala arrays are represented in the same way as Java arrays. So, you can seamlessly use existing Java methods that return arrays.<sup>1</sup>

<sup>1</sup>The difference in variance of Scala and Java's arrays—i.e., whether `Array[String]` is a subtype of `Array[AnyRef]`—will be discussed in [Section 19.3](#).

## Section 17.2

### Chapter 17 · Collections

363

You have seen arrays in action many times in previous chapters. The basics are in [Step 7](#) in [Chapter 3](#). Several examples of iterating through the elements of an array with a for expression are shown in [Section 7.3](#). Arrays also figure prominently in the two-dimensional layout library of [Chapter 10](#).

#### List buffers

Class List provides fast access to the head of the list, but not the end. Thus, when you need to build a list by appending to the end, you should consider building the list backwards by prepending elements to the front, then when you're done, calling reverse to get the elements in the order you need.

Another alternative, which avoids the reverse operation, is to use a ListBuffer. A ListBuffer is a mutable object (contained in package `scala.collection.mutable`), which can help you build lists more efficiently when you need to append. ListBuffer provides constant time append and prepend operations. You append elements with the `+=` operator, and prepend them with the `+` operator. When you're done building, you can obtain a List by invoking `toList` on the ListBuffer. Here's an example: `scala> import scala.collection.mutable.ListBuffer`

```
import scala.collection.mutable.ListBuffer
```

```
scala> val buf = new ListBuffer[Int]
```

```
buf: scala.collection.mutable.ListBuffer[Int] = ListBuffer()
```

```
scala> buf += 2
```

```
scala> buf
```

```
res11: scala.collection.mutable.ListBuffer[Int]
```

```
= ListBuffer(1, 2)

scala> 3 +: buf

res12: scala.collection.mutable.Buffer[Int]

= ListBuffer(3, 1, 2)

scala> buf.toList

res13: List[Int] = List(3, 1, 2)
```

Another reason to use ListBuffer instead of List is to prevent the potential for stack overflow. If you can build a list in the desired order by prepending, but the recursive algorithm that would be required is not tail

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 17.2](#)

### [Chapter 17 · Collections](#)

364

recursive, you can use a for expression or while loop and a ListBuffer instead. You'll see ListBuffer being used in this way in [Section 22.2](#).

#### Array buffers

An ArrayBuffer is like an array, except that you can additionally add and remove elements from the beginning and end of the sequence. All Array operations are available, though they are a little slower due to a layer of wrapping in the implementation. The new addition and removal operations are constant time on average, but occasionally require linear time due to the implementation needing to allocate a new array to hold the buffer's contents.

To use an ArrayBuffer, you must first import it from the mutable collections package:

```
scala> import scala.collection.mutable.ArrayBuffer
```

```
import scala.collection.mutable.ArrayBuffer
```

When you create an ArrayBuffer, you must specify a type parameter, but need not specify a length. The ArrayBuffer will adjust the allocated space automatically as needed:

```
scala> val buf = new ArrayBuffer[Int]()
```

```
buf: scala.collection.mutable.ArrayBuffer[Int] =
```

```
ArrayBuffer()
```

You can append to an ArrayBuffer using the `+=` method:

```
scala> buf += 12
```

```
scala> buf += 15
```

```
scala> buf
```

```
res16: scala.collection.mutable.ArrayBuffer[Int] =
```

```
ArrayBuffer(12, 15)
```

All the normal array methods are available. For example, you can ask an ArrayBuffer its length, or you can retrieve an element by its index: `scala> buf.length`

```
res17: Int = 2
```

```
scala> buf(0)
```

```
res18: Int = 12
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 17.2](#)

## Chapter 17 · Collections

365

### Queues

If you need a first-in-first-out sequence, you can use a Queue. Scala's collection library provides both mutable and immutable variants of Queue. Here's how you can create an empty immutable queue:

```
scala> import scala.collection.immutable.Queue  
import scala.collection.immutable.Queue  
  
scala> val empty = new Queue[Int]  
  
empty: scala.collection.immutable.Queue[Int] = Queue()
```

You can append an element to an immutable queue with enqueue: scala>  
val has1 = empty.enqueue(1)

```
has1: scala.collection.immutable.Queue[Int] = Queue(1)
```

To append multiple elements to a queue, call enqueue with a collection as its argument:

```
scala> val has123 = has1.enqueue(List(2, 3))
```

has123: scala.collection.immutable.Queue[Int] = Queue(1,2,3) To remove an element from the head of the queue, you use dequeue: scala> val (element, has23) = has123.dequeue

```
element: Int = 1
```

has23: scala.collection.immutable.Queue[Int] = Queue(2,3) On immutable queues, the dequeue method returns a pair (a Tuple2) consisting of the element at the head of the queue, and the rest of the queue with the head element removed.

You use a mutable queue similarly to how you use an immutable one, but instead of enqueue, you use the `+=` and `++=` operators to append. Also, on a mutable queue, the `dequeue` method will just remove the head element from the queue and return it. Here's an example:

```
scala> import scala.collection.mutable.Queue  
import scala.collection.mutable.Queue  
  
scala> val queue = new Queue[String]  
  
queue: scala.collection.mutable.Queue[String] = Queue()  
scala> queue += "a"
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 17.2](#)

### [Chapter 17 · Collections](#)

366

```
scala> queue ++= List("b", "c")  
  
scala> queue  
  
res21: scala.collection.mutable.Queue[String] = Queue(a, b, c)  
scala> queue.dequeue  
  
res22: String = a  
  
scala> queue  
  
res23: scala.collection.mutable.Queue[String] = Queue(b, c)
```

If you need a last-in-first-out sequence, you can use a Stack, which also comes in both mutable and immutable versions in the Scala collections library. You push an element onto a stack with `push`, pop an element with

pop, and peek at the top of the stack without removing it with `top`. Here's an example of a mutable stack:

```
scala> import scala.collection.mutable.Stack  
import scala.collection.mutable.Stack  
scala> val stack = new Stack[Int]  
stack: scala.collection.mutable.Stack[Int] = Stack()  
scala> stack.push(1)  
scala> stack  
res1: scala.collection.mutable.Stack[Int] = Stack(1)  
scala> stack.push(2)  
scala> stack  
res3: scala.collection.mutable.Stack[Int] = Stack(1, 2) scala> stack.top  
res8: Int = 2  
scala> stack  
res9: scala.collection.mutable.Stack[Int] = Stack(1, 2) scala> stack.pop  
res10: Int = 2  
scala> stack  
res11: scala.collection.mutable.Stack[Int] = Stack(1)
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 17.3](#)

[Chapter 17](#) · [Collections](#)

## Strings (via RichString)

One other sequence to be aware of is RichString, which is a Seq[Char].

Because Predef has an implicit conversion from String to RichString, you can treat any string as a Seq[Char]. Here's an example: scala> def hasUpperCase(s: String) = s.exists(\_.isUpper) hasUpperCase: (String)Boolean

```
scala> hasUpperCase("Robert Frost")
```

```
res14: Boolean = true
```

```
scala> hasUpperCase("e e cummings")
```

```
res15: Boolean = false
```

In this example, the exists method is invoked on the string named s in the hasUpperCase method body. Because no method named "exists" is declared in class String itself, the Scala compiler will implicitly convert s to RichString, which has the method. The exists method treats the string as a Seq[Char], and will return true if any of the characters are upper case.<sup>2</sup>

## 17.3

### Sets and maps

You have already seen the basics of sets and maps in previous chapters, starting with [Step 10](#) in [Chapter 3](#). In this section, we'll give more insight into their use and show you a few more examples.

As mentioned previously, the Scala collections library offers both mutable and immutable versions of sets and maps. The hierarchy for sets is shown in [Figure 3.2](#) on [page 82](#), and the hierarchy for maps is shown in [Figure 3.3](#)

on [page 84](#). As these diagrams show, the simple names Set and Map are used by three traits each, residing in different packages.

By default when you write “Set” or “Map” you get an immutable object.

If you want the mutable variant, you need to do an explicit import. Scala gives you easier access to the immutable variants, as a gentle encouragement to prefer them over their mutable counterparts. The easy access is provided via the Predef object, which is implicitly imported into every Scala source file. [Listing 17.1](#) shows the relevant definitions.

<sup>2</sup>The code given on [page 51](#) of [Chapter 1](#) presents a similar example.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 17.3](#)

### [Chapter 17 · Collections](#)

368

```
object Predef {  
    type Set[T] = scala.collection.immutable.Set[T]  
    type Map[K, V] = scala.collection.immutable.Map[K, V]  
    val Set = scala.collection.immutable.Set  
    val Map = scala.collection.immutable.Map  
    // ...  
}
```

[Listing 17.1 · Default map and set definitions in Predef.](#)

The “type” keyword is used in Predef to define Set and Map as aliases for the longer fully qualified names of the immutable set and map traits.<sup>3</sup>

The vals named Set and Map are initialized to refer to the singleton objects for the immutable Set and Map. So Map is the same as Predef.Map, which

is defined to be the same as `scala.collection.immutable.Map`. This holds both for the `Map` type and `Map` object.

If you want to use both mutable and immutable sets or maps in the same source file, one approach is to import the name of the package that contains the mutable variants:

```
scala> import scala.collection.mutable
```

```
import scala.collection.mutable
```

You can continue to refer to the immutable set as `Set`, as before, but can now refer to the mutable set as `mutable.Set`. Here's an example: `scala> val mutaSet = mutable.Set(1, 2, 3)`

```
mutaSet: scala.collection.mutable.Set[Int] = Set(3, 1, 2)
```

Using sets

The key characteristic of sets is that they will ensure that at most one of each object, as determined by `==`, will be contained in the set at any one time. As an example, we'll use a set to count the number of different words in a string.

The `split` method on `String` can separate a string into words, if you specify spaces and punctuation as word separators. The regular expression `3The` type keyword will be explained in more detail in [Section 20.6](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 17.3](#)

[Chapter 17](#) · [Collections](#)

369

"`[ !,.]+`" will suffice: it indicates the string should be split at each place that one or more space and/or punctuation characters exist: `scala> val text = "See Spot run. Run, Spot. Run!"`

```
text: java.lang.String = See Spot run. Run, Spot. Run!
```

```
scala> val wordsArray = text.split("[ !,.]+") wordsArray:  
Array[java.lang.String] =
```

```
Array(See, Spot, run, Run, Spot, Run)
```

To count the distinct words, you can convert them to the same case and then add them to a set. Because sets exclude duplicates, each distinct word will appear exactly one time in the set. First, you can create an empty set using the empty method provided on the Set companion objects: scala>

```
val words = mutable.Set.empty[String]
```

```
words: scala.collection.mutable.Set[String] = Set()
```

Then, just iterate through the words with a for expression, convert each word to lower case, and add it to the mutable set with the `+=` operator:

```
scala> for (word <- wordsArray)
```

```
    words += word.toLowerCase
```

```
scala> words
```

```
res25: scala.collection.mutable.Set[String] =
```

```
Set(spot, run, see)
```

Thus, the text contained exactly three distinct words: spot, run, and see.

The most commonly used methods on both mutable and immutable sets are shown in [Table 17.1](#).

### Using maps

Maps let you associate a value with each element of the collection. Using a map looks similar to using an array, except that instead of indexing with integers counting from 0, you can use any kind of key. If you import the `scala.collection.mutable` package, you can create an empty mutable map like this:

```
scala> val map = mutable.Map.empty[String, Int]
```

```
map: scala.collection.mutable.Map[String,Int] = Map()
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 17.3

### Chapter 17 · Collections

370

Table 17.1 · Common operations for sets

What it is

What it does

val nums = Set(1, 2, 3)

Creates an immutable set

(nums.toString returns Set(1, 2, 3))

nums + 5

Adds an element (returns

Set(1, 2, 3, 5))

nums - 3

Removes an element (returns Set(1, 2))

nums ++ List(5, 6)

Adds multiple elements (returns

Set(1, 2, 3, 5, 6))

nums -- List(1, 2)

Removes multiple elements (returns

Set(3))

nums \*\* Set(1, 3, 5, 7)

Takes the intersection of two sets (returns

Set(1, 3))

nums.size

Returns the size of the set (returns 3)

nums.contains(3)

Checks for inclusion (returns true)

import scala.collection.mutable

Makes the mutable collections easy to

access

val words =

Creates an empty, mutable set

mutable.Set.empty[String]

(words.toString returns Set())

words += "the"

Adds an element (words.toString

returns Set(the))

`words -= "the"`

Removes an element, if it exists

(`words.toString` returns `Set()`)

`words ++= List("do", "re", "mi")` Adds multiple elements

(`words.toString` returns

`Set(do, re, mi)`)

`words --= List("do", "re")`

Removes multiple elements

(`words.toString` returns `Set(mi)`)

`words.clear`

Removes all elements (`words.toString`

returns `Set()`)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 17.3](#)

[Chapter 17 · Collections](#)

371

Note that when you create a map, you must specify two types. The first type is for the keys of the map, the second for the values. In this case, the keys are strings and the values are integers.

Setting entries in a map looks similar to setting entries in an array: `scala> map("hello") = 1`

```
scala> map("there") = 2
```

```
scala> map
```

```
res28: scala.collection.mutable.Map[String,Int] =
```

```
Map(hello -> 1, there -> 2)
```

Likewise, reading a map is similar to reading an array: `scala> map("hello")`

```
res29: Int = 1
```

Putting it all together, here is a method that counts the number of times each word occurs in a string:

```
scala> def countWords(text: String) = {  
    val counts = mutable.Map.empty[String, Int]  
    for (rawWord <- text.split("[ ,!.]+")) {  
        val word = rawWord.toLowerCase  
        val oldCount =  
            if (counts.contains(word)) counts(word)  
            else 0  
        counts += (word -> (oldCount + 1))  
    }  
    counts  
}  
  
countWords: (String)scala.collection.mutable.Map[String,Int]
```

```
scala> countWords("See Spot run! Run, Spot. Run!") res30:  
scala.collection.mutable.Map[String,Int] =
```

```
Map(see -> 1, run -> 3, spot -> 2)
```

Given these counts, you can see that this text talks a lot about running, but not so much about seeing.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 17.3

### Chapter 17 · Collections

372

The way this code works is that a mutable map, named counts, maps each word to the number of times it occurs in the text. For each word in the text, the word's old count is looked up, that count is incremented by one, and the new count is saved back into counts. Note the use of contains to check whether a word has been seen yet or not. If counts.contains(word) is not true, then the word has not yet been seen and zero is used for the count.

Many of the most commonly used methods on both mutable and immutable maps are shown in [Table 17.2](#).

Table 17.2 · Common operations for maps

What it is

What it does

val nums = Map("i" -> 1, "ii" -> 2) Creates an immutable map

(nums.toString returns

Map(i -> 1, ii -> 2))

nums + ("vi" -> 6)

Adds an entry (returns Map(i -> 1,

ii -> 2, vi -> 6))

nums - "ii"

Removes an entry (returns Map(i -> 1))

nums ++ List("iii" -> 3, "v" -> 5) Adds multiple entries (returns

Map(i -> 1, ii -> 2, iii -> 3, v -> 5))

nums -- List("i", "ii")

Removes multiple entries (returns Map())

nums.size

Returns the size of the map (returns 2)

nums.contains("ii")

Checks for inclusion (returns true)

nums("ii")

Retrieves the value at a specified key

(returns 2)

nums.keys

Returns the keys (returns an Iterator

over the strings "i" and "ii")

nums.keySet

Returns the keys as a set (returns

`Set(i, ii))`

`nums.values`

Returns the values (returns an Iterator  
over the integers 1 and 2)

`nums.isEmpty`

Indicates whether the map is empty  
(returns false)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 17.3](#)

[Chapter 17 · Collections](#)

373

Table 17.2 · continued

`import scala.collection.mutable`

Makes the mutable collections easy to  
access

`val words =`

Creates an empty, mutable map

`mutable.Map.empty[String, Int]`

`words += ("one" -> 1)`

Adds a map entry from "one" to 1

(words.toString returns

Map(one -> 1))

words -= "one"

Removes a map entry, if it exists

(words.toString returns Map())

words +== List("one" -> 1,

Adds multiple map entries

"two" -> 2, "three" -> 3)

(words.toString returns

Map(one -> 1, two -> 2, three -> 3))

words --= List("one", "two")

Removes multiple objects

(words.toString returns

Map(three -> 3))

Default sets and maps

For most uses, the implementations of mutable and immutable sets and maps provided by the Set(), scala.collection.mutable.Map(), etc., factories will likely be sufficient. The implementations provided by these factories use a fast lookup algorithm, usually involving a hashtable, so they can quickly decide whether or not an object is in the collection.

The scala.collection.mutable.Set() factory method, for example, returns a scala.collection.mutable.HashSet, which uses a hashtable internally.

Similarly, the `scala.collection.mutable.Map()` factory returns a `scala.collection.mutable.HashMap`.

The story for immutable sets and maps is a bit more involved. The class returned by the `scala.collection.immutable.Set()` factory method, for example, depends on how many elements you pass to it, as shown in [Table 17.3](#).

For sets with fewer than five elements, a special class devoted exclusively to sets of each particular size is used, to maximize performance.

Once you request a set that has five or more elements in it, however, the factory method will return immutable `HashSet`.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 17.3

### Chapter 17 · Collections

374

Table 17.3 · Default immutable set implementations

Number of elements

Implementation

0

`scala.collection.immutable.EmptySet`

1

`scala.collection.immutable.Set1`

2

`scala.collection.immutable.Set2`

3

scala.collection.immutable.Set3

4

scala.collection.immutable.Set4

5 or more

scala.collection.immutable.HashSet

Similarly, the `scala.collection.immutable.Map()` factory method will return a different class depending on how many key-value pairs you pass to it, as shown in [Table 17.4](#). As with sets, for immutable maps with fewer than five elements, a special class devoted exclusively to maps of each particular size is used, to maximize performance. Once a map has five or more key-value pairs in it, however, an immutable HashMap is used.

Table 17.4 · Default immutable map implementations

Number of elements

Implementation

0

scala.collection.immutable.EmptyMap

1

scala.collection.immutable.Map1

2

scala.collection.immutable.Map2

3

scala.collection.immutable.Map3

4

scala.collection.immutable.Map4

5 or more

scala.collection.immutable.HashMap

The default immutable implementation classes shown in [Tables 17.3](#)

[and 17.4](#) work together to give you maximum performance. For example, if you add an element to an EmptySet, it will return a Set1. If you add an element to that Set1, it will return a Set2. If you then remove an element from the Set2, you'll get another Set1.

Sorted sets and maps

On occasion you may need a set or map whose iterator returns elements in a particular order. For this purpose, the Scala collections library provides traits SortedSet and SortedMap. These traits are implemented by classes

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 17.3](#)

[Chapter 17](#) · [Collections](#)

375

TreeSet and TreeMap, which use a red-black tree to keep elements (in the case of TreeSet) or keys (in the case of TreeMap) in order. The order is determined by the Ordered trait, which the element type of the set, or key type of the map, must either mix in or be implicitly convertible to. These classes only come in immutable variants. Here are some TreeSet examples:

```
scala> import scala.collection.immutable.TreeSet
```

```
import scala.collection.immutable.TreeSet
```

```
scala> val ts = TreeSet(9, 3, 1, 8, 0, 2, 7, 4, 6, 5) ts:  
scala.collection.immutable.SortedSet[Int] =
```

```
Set(0, 1, 2, 3, 4, 5, 6, 7, 8, 9)
```

```
scala> val cs = TreeSet('f', 'u', 'n')
```

cs: scala.collection.immutable.SortedSet[Char] = Set(f, n, u) And here are a few TreeMap examples:

```
scala> import scala.collection.immutable.TreeMap
```

```
import scala.collection.immutable.TreeMap
```

```
scala> var tm = TreeMap(3 -> 'x', 1 -> 'x', 4 -> 'x') tm:  
scala.collection.immutable.SortedMap[Int,Char] =
```

```
Map(1 -> x, 3 -> x, 4 -> x)
```

```
scala> tm += (2 -> 'x')
```

```
scala> tm
```

```
res38: scala.collection.immutable.SortedMap[Int,Char] =
```

```
Map(1 -> x, 2 -> x, 3 -> x, 4 -> x)
```

## Synchronized sets and maps

In [Section 1.1](#), we mentioned that if you needed a thread-safe map, you could mix the `SynchronizedMap` trait into whatever particular map implementation you desired. For example, you could mix `SynchronizedMap` into `HashMap`, as shown in [Listing 17.2](#). This example begins with an import of two traits, `Map` and `SynchronizedMap`, and one class, `HashMap`, from package `scala.collection.mutable`. The rest of the example is the definition of singleton object `MapMaker`, which declares one method, `makeMap`. The `makeMap` method declares its result type to be a mutable map of string keys to string values.

## Section 17.3

### Chapter 17 · Collections

376

```
import scala.collection.mutable.{Map,  
SynchronizedMap, HashMap}  
  
object MapMaker {  
  
  def makeMap: Map[String, String] = {  
  
    new HashMap[String, String] with  
      SynchronizedMap[String, String] {  
  
      override def default(key: String) =  
  
        "Why do you want to know?"  
  
    }  
  
  }  
  
}
```

Listing 17.2 · Mixing in the SynchronizedMap trait.

The first statement inside the body of makeMap constructs a new mutable HashMap that mixes in the SynchronizedMap trait:

```
new HashMap[String, String] with  
  SynchronizedMap[String, String]
```

Given this code, the Scala compiler will generate a synthetic subclass of `HashMap` that mixes in `SynchronizedMap`, and create (and return) an instance of it. This synthetic class will also override a method named `default`, because of this code:

```
override def default(key: String) =
```

"Why do you want to know?"

If you ask a map to give you the value for a particular key, but it doesn't have a mapping for that key, you'll by default get a `NoSuchElementException`. If you define a new map class and override the `default` method, however, your new map will return the value returned by `default` when queried with a non-existent key. Thus, the synthetic `HashMap` subclass generated by the compiler from the code in [Listing 17.2](#) will return the somewhat curt response string,

"Why do you want to know?", when queried with a non-existent key.

Because the mutable map returned by the `makeMap` method mixes in the `SynchronizedMap` trait, it can be used by multiple threads at once. Each

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 17.4](#)

[Chapter 17](#) · [Collections](#)

377

access to the map will be synchronized. Here's an example of the map being used, by one thread, in the interpreter:

```
scala> val capital = MapMaker.makeMap
```

```
capital: scala.collection.mutable.Map[String,String] = Map() scala> capital
++ List("US" -> "Washington",
```

```
"Paris" -> "France", "Japan" -> "Tokyo") res0:  
scala.collection.mutable.Map[String,String] =  
  
Map(Paris -> France, US -> Washington, Japan -> Tokyo) scala>  
capital("Japan")  
  
res1: String = Tokyo  
  
scala> capital("New Zealand")  
  
res2: String = Why do you want to know?  
  
scala> capital += ("New Zealand" -> "Wellington") scala> capital("New  
Zealand")  
  
res3: String = Wellington
```

You can create synchronized sets similarly to the way you create synchronized maps. For example, you could create a synchronized HashSet by mixing in the SynchronizedSet trait, like this:

```
import scala.collection.mutable  
  
val synchroSet =  
  
new mutable.HashSet[Int] with  
  
mutable.SynchronizedSet[Int]
```

Finally, if you are thinking of using synchronized collections, you may also wish to consider the concurrent collections of `java.util.concurrent` instead. Alternatively, you may prefer to use unsynchronized collections with Scala actors. Actors will be covered in detail in [Chapter 30](#).

## 17.4

### Selecting mutable versus immutable collections

For some problems, mutable collections work better, and for others, immutable collections work better. When in doubt, it is better to start with an immutable collection and change it later if you need to, because immutable collections can be easier to reason about than mutable ones.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 17.4](#)

### [Chapter 17 · Collections](#)

378

It can also sometimes be worthwhile to go the opposite way. If you find some code that uses mutable collections becoming complicated and hard to reason about, consider whether it would help to change some of the collections to immutable alternatives. In particular, if you find yourself worrying about making copies of mutable collections in just the right places, or thinking a lot about who “owns” or “contains” a mutable collection, consider switching some of the collections to their immutable counterparts.

Besides being potentially easier to reason about, immutable collections can usually be stored more compactly than mutable ones if the number of elements stored in the collection is small. For instance an empty mutable map in its default representation of HashMap takes up about 80 bytes and about 16

more are added for each entry that’s added to it. An empty immutable Map is a single object that’s shared between all references, so referring to it essentially costs just a single pointer field. What’s more, the Scala collections library currently stores immutable maps and sets with up to four entries in a single object, which typically takes up between 16 and 40 bytes, depending on the number of entries stored in the collection.<sup>4</sup> So for small maps and sets, the immutable versions are much more compact than the mutable ones.

Given that many collections are small, switching them to be immutable can give important space savings and performance advantages.

To make it easier to switch from immutable to mutable collections, and vice versa, Scala provides some syntactic sugar. Even though immutable sets and maps do not support a true `+=` method, Scala gives a useful alternate interpretation to `+=`. Whenever you write `a += b`, and `a` does not support a method named `+=`, Scala will try interpreting it as `a = a + b`. For example, immutable sets do not support a `+=` operator:

```
scala> val people = Set("Nancy", "Jane") people:  
scala.collection.immutable.Set[java.lang.String] =
```

```
Set(Nancy, Jane)
```

```
scala> people += "Bob"
```

```
<console>:6: error: reassignment to val
```

```
people += "Bob"
```

If you declare `people` as a `var`, instead of a `val`, however, then the collection can be “updated” with a `+=` operation, even though it is immutable. First, a 4The “single object” is an instance of `Set1` through `Set4`, or `Map1` through `Map4`, as shown in [Tables 17.3 and 17.4](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 17.4](#)

[Chapter 17](#) · [Collections](#)

379

new collection will be created, and then `people` will be reassigned to refer to the new collection:

```
scala> var people = Set("Nancy", "Jane") people:  
scala.collection.immutable.Set[java.lang.String] =
```

```
Set(Nancy, Jane)
```

```
scala> people += "Bob"
```

```
scala> people
```

```
res42: scala.collection.immutable.Set[java.lang.String] =
```

```
Set(Nancy, Jane, Bob)
```

After this series of statements, the `people` variable refers to a new immutable set, which contains the added string, "Bob". The same idea applies to any method ending in `=`, not just the `+=` method. Here's the same syntax used with the `-=` operator, which removes an element from a set, and the `++=`

operator, which adds a collection of elements to a set: `scala> people -= "Jane"`

```
scala> people ++= List("Tom", "Harry")
```

```
scala> people
```

```
res45: scala.collection.immutable.Set[java.lang.String] =
```

```
Set(Nancy, Bob, Tom, Harry)
```

To see how this is useful, consider again the following Map example from

### Section 1.1:

```
var capital = Map("US" -> "Washington", "France" -> "Paris")
```

```
capital += ("Japan" -> "Tokyo")
```

```
println(capital("France"))
```

This code uses immutable collections. If you want to try using mutable collections instead, all that is necessary is to import the mutable version of `Map`, thus overriding the default import of the immutable `Map`: `import scala.collection.mutable.Map`

```
// only change needed!
```

```
var capital = Map("US" -> "Washington", "France" -> "Paris") capital +=
("Japan" -> "Tokyo")

println(capital("France"))
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 17.5](#)

### [Chapter 17 · Collections](#)

380

Not all examples are quite that easy to convert, but the special treatment of methods ending in an equals sign will often reduce the amount of code that needs changing.

By the way, this syntactic treatment works on any kind of value, not just collections. For example, here it is being used on floating-point numbers:

```
scala> var roughlyPi = 3.0
```

```
roughlyPi: Double = 3.0
```

```
scala> roughlyPi += 0.1
```

```
scala> roughlyPi += 0.04
```

```
scala> roughlyPi
```

```
res48: Double = 3.14
```

The effect of this expansion is similar to Java's assignment operators `+=`, `-=`,

`*=`, etc., but it is more general because every operator ending in `=` can be converted.

## 17.5

### Initializing collections

As you've seen previously, the most common way to create and initialize a collection is to pass the initial elements to a factory method on the companion object of your chosen collection. You just place the elements in parentheses after the companion object name, and the Scala compiler will transform that to an invocation of an apply method on that companion object: `scala> List(1, 2, 3)`

```
res0: List[Int] = List(1, 2, 3)
```

```
scala> Set('a', 'b', 'c')
```

```
res1: scala.collection.immutable.Set[Char] = Set(a, b, c) scala> import  
scala.collection.mutable
```

```
import scala.collection.mutable
```

```
scala> mutable.Map("hi" -> 2, "there" -> 5) res2:  
scala.collection.mutable.Map[java.lang.String,Int] =
```

```
Map(hi -> 2, there -> 5)
```

```
scala> Array(1.0, 2.0, 3.0)
```

```
res3: Array[Double] = Array(1.0, 2.0, 3.0)
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 17.5](#)

[Chapter 17 · Collections](#)

381

Although most often you can let the Scala compiler infer the element type of a collection from the elements passed to its factory method, sometimes

you may want to create a collection but specify a different type from the one the compiler would choose. This is especially an issue with mutable collections. Here's an example:

```
scala> import scala.collection.mutable  
import scala.collection.mutable  
scala> val stuff = mutable.Set(42)  
stuff: scala.collection.mutable.Set[Int] = Set(42)  
scala> stuff += "abracadabra"  
<console>:7: error: type mismatch;  
found  
: java.lang.String("abracadabra")  
required: Int  
stuff += "abracadabra"  
^
```

The problem here is that `stuff` was given an element type of `Int`. If you want it to have an element type of `Any`, you need to say so explicitly by putting the element type in square brackets, like this: `scala> val stuff = mutable.Set[Any](42)`

```
stuff: scala.collection.mutable.Set[Any] = Set(42)
```

Another special situation is if you want to initialize a collection with another collection. For example, imagine you have a list, but you want a `TreeSet` containing the elements in the list. Here's the list: `scala> val colors = List("blue", "yellow", "red", "green")` `colors: List[java.lang.String] = List(blue, yellow, red, green)`

You cannot pass the colors list to the factory method for TreeSet: scala>  
import scala.collection.immutable.TreeSet

```
import scala.collection.immutable.TreeSet
```

```
scala> val treeSet = TreeSet(colors)
```

```
<console>:6: error: no implicit argument matching parameter type  
(List[java.lang.String]) =>
```

Ordered[List[java.lang.String]] was found.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 17.5](#)

### [Chapter 17 · Collections](#)

382

```
val treeSet = TreeSet(colors)
```

Instead, you'll need to create an empty TreeSet[String] and add to it the elements of the list with the TreeSet's ++ operator:

```
scala> val treeSet = TreeSet[String]() ++ colors
```

```
treeSet: scala.collection.immutable.SortedSet[String] =
```

```
Set(blue, green, red, yellow)
```

### Converting to array or list

If you need to initialize a list or array with another collection, on the other hand, it is quite straightforward. As you've seen previously, to initialize a new list with another collection, simply invoke `toList` on that collection:

```
scala> treeSet.toList
```

```
res54: List[String] = List(blue, green, red, yellow)
```

Or, if you need an array, invoke `toArray`:

```
scala> treeSet.toArray
```

```
res55: Array[String] = Array(blue, green, red, yellow)
```

Note that although the original colors list was not sorted, the elements in the list produced by invoking `toList` on the `TreeSet` are in alphabetical order.

When you invoke `toList` or `toArray` on a collection, the order of the elements in the resulting list or array will be the same as the order of elements produced by an iterator obtained by invoking `elements` on that collection.

Because a `TreeSet[String]`'s iterator will produce strings in alphabetical order, those strings will appear in alphabetical order in the list resulting from invoking `toList` on that `TreeSet`.

Keep in mind, however, that conversion to lists or arrays usually requires copying all of the elements of the collection, and thus may be slow for large collections. Sometimes you need to do it, though, due to an existing API.

Further, many collections only have a few elements anyway, in which case there is only a small speed penalty.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 17.6](#)

[Chapter 17 · Collections](#)

383

Converting between mutable and immutable sets and maps

Another situation that may arise occasionally is the need to convert a mutable set or map to an immutable one, or vice versa. To accomplish this, you can use the technique shown previously to initialize a `TreeSet` with the elements of a list. If you have a mutable collection, and want to convert it to a immutable one, for example, create an empty immutable collection and

add the elements of the mutable one via the `++` operator. Here's how you'd convert the immutable `TreeSet` from the previous example to a mutable set, and back again to an immutable one:

```
scala> import scala.collection.mutable  
import scala.collection.mutable  
scala> treeSet  
  
res5: scala.collection.immutable.SortedSet[String] =  
Set(blue, green, red, yellow)  
  
scala> val mutaSet = mutable.Set.empty ++ treeSet  
  
mutaSet: scala.collection.mutable.Set[String] =  
Set(yellow, blue, red, green)  
  
scala> val immutaSet = Set.empty ++ mutaSet  
  
immutaSet: scala.collection.immutable.Set[String] =  
Set(yellow, blue, red, green)
```

You can use the same technique to convert between mutable and immutable maps:

```
scala> val muta = mutable.Map("i" -> 1, "ii" -> 2) muta:  
scala.collection.mutable.Map[java.lang.String,Int] =  
  
Map(ii -> 2, i -> 1)  
  
scala> val immu = Map.empty ++ muta  
  
immu: scala.collection.immutable.Map[java.lang.String,Int] =  
Map(ii -> 2, i -> 1)
```

## 17.6

### Tuples

As described in [Step 9 in Chapter 3](#), a tuple combines a fixed number of items together so that they can be passed around as a whole. Unlike an array

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

#### [Section 17.6](#)

#### [Chapter 17 · Collections](#)

384

or list, a tuple can hold objects with different types. Here is an example of a tuple holding an integer, a string, and the console:

(1, "hello", Console)

Tuples save you the tedium of defining simplistic data-heavy classes. Even though defining a class is already easy, it does require a certain minimum effort, which sometimes serves no purpose. Tuples save you the effort of choosing a name for the class, choosing a scope to define the class in, and choosing names for the members of the class. If your class simply holds an integer and a string, there is no clarity added by defining a class named AnIntegerAndAString.

Because tuples can combine objects of different types, tuples do not inherit from Iterable. If you find yourself wanting to group exactly one integer and exactly one string, then you want a tuple, not a List or Array.

A common application of tuples is returning multiple values from a method. For example, here is a method that finds the longest word in a collection and also returns its index:

```
def longestWord(words: Array[String]) = {
```

```
    var word = words(0)
```

```
var idx = 0

for (i <- 1 until words.length)

if (words(i).length > word.length) {

word = words(i)

idx = i

}

(word, idx)

}
```

Here is an example use of the method:

```
scala> val longest =
longestWord("The quick brown fox".split(" "))
longest: (String, Int) =
(quick,1)
```

The longestWord function here computes two items: word, the longest word in the array, and idx, the index of that word. To keep things simple, the function assumes there is at least one word in the list, and it breaks ties by choosing the word that comes earlier in the list. Once the function

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 17.6](#)

[Chapter 17](#) · [Collections](#)

385

has chosen which word and index to return, it returns both of them together using the tuple syntax (word, idx).

To access elements of a tuple, you can use method `_1` to access the first element, `_2` to access the second, and so on:

```
scala> longest._1
```

```
res56: String = quick
```

```
scala> longest._2
```

```
res57: Int = 1
```

Additionally, you can assign each element of the tuple to its own variable,<sup>5</sup> like this:

```
scala> val (word, idx) = longest
```

```
word: String = quick
```

```
idx: Int = 1
```

```
scala> word
```

```
res58: String = quick
```

By the way, if you leave off the parentheses you get a different result:

```
scala> val word, idx = longest
```

```
word: (String, Int) = (quick,1)
```

```
idx: (String, Int) = (quick,1)
```

This syntax gives [multiple definitions](#) of the same expression. Each variable is initialized with its own evaluation of the expression on the right-hand side.

That the expression evaluates to a tuple in this case does not matter. Both variables are initialized to the tuple in its entirety. See [Chapter 18](#) for some examples where multiple definitions are convenient.

As a note of warning, tuples are almost too easy to use. Tuples are great when you combine data that has no meaning beyond “an A and a B.” However, whenever the combination has some meaning, or you want to add some methods to the combination, it is better to go ahead and create a class. For example, do not use a 3-tuple for the combination of a month, a day, and a year. Make a Date class. It makes your intentions explicit, which both clears up the code for human readers and gives the compiler and language opportunities to help you catch mistakes.

<sup>5</sup>This syntax is actually a special case of pattern matching, as described in detail in

## [Section 15.7.](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 17.7](#)

[Chapter 17 · Collections](#)

386

17.7

## Conclusion

This chapter has given an overview of the Scala collections library and the most important classes and traits in it. With this foundation you should be able to work effectively with Scala collections, and know where to look in Scaladoc when you need more information. In the next chapter, we’ll turn our attention from the Scala library back to the language, and discuss Scala’s support for mutable objects.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 18

### Stateful Objects

In previous chapters, we put the spotlight on functional (immutable) objects.

We did so because the idea of objects without any mutable state deserves to be better known. However, it is also perfectly possible to define objects with mutable state in Scala. Such stateful objects often come up naturally when you want to model objects in the real world that change over time.

This chapter explains what stateful objects are, and what Scala provides in terms of syntax to express them. The second part of this chapter introduces a larger case study on discrete event simulation, which involves stateful objects as well as building an internal domain specific language (DSL) for defining digital circuits to simulate.

## 18.1

### What makes an object stateful?

You can observe the principal difference between a purely functional object and a stateful one even without looking at the object's implementation. When you invoke a method or dereference a field on some purely functional object, you will always get the same result. For instance, given a list of characters: val cs = List('a', 'b', 'c')

an application of cs.head will always return 'a'. This is the case even if there is an arbitrary number of operations on the list cs between the point where it is defined and the point where the access cs.head is made.

For a stateful object, on the other hand, the result of a method call or field access may depend on what operations were previously performed on the

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 18.1](#)

[Chapter 18 · Stateful Objects](#)

object. A good example of a stateful object is a bank account. [Listing 18.1](#) shows a simplified implementation of bank accounts:

```
class BankAccount {  
  
    private var bal: Int = 0  
  
    def balance: Int = bal  
  
    def deposit(amount: Int) {  
  
        require(amount > 0)  
  
        bal += amount  
  
    }  
  
    def withdraw(amount: Int): Boolean =  
  
        if (amount > bal) false  
  
        else {  
  
            bal -= amount  
  
            true  
  
        }  
    }  

```

**Listing 18.1 · A mutable bank account class.**

The BankAccount class defines a private variable, bal, and three public methods: balance returns the current balance; deposit adds a given amount to bal; and withdraw tries to subtract a given amount from bal while assuring that the remaining balance won't be negative. The return value of

`withdraw` is a Boolean indicating whether the requested funds were successfully withdrawn.

Even if you know nothing about the inner workings of the `BankAccount` class, you can still tell that `BankAccounts` are stateful objects:

```
scala> val account = new BankAccount
```

```
account: BankAccount = BankAccount@bf5bb7
```

```
scala> account deposit 100
```

```
scala> account withdraw 80
```

```
res1: Boolean = true
```

```
scala>
```

```
account withdraw 80
```

```
res2: Boolean = false
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 18.1](#)

### [Chapter 18 · Stateful Objects](#)

389

Note that the two final withdrawals in the previous interaction returned different results. The first withdrawal operation returned true because the bank account contained sufficient funds to allow the withdrawal. The second operation, although the same as the first one, returned false, because the balance of the account had been reduced so that it no longer covered the requested funds. So, clearly bank accounts have mutable state, because the same operation can return different results at different times.

You might think that the statefulness of `BankAccount` is immediately apparent because it contains a `var` definition. State and vars usually go hand

in hand, but things are not always so clear-cut. For instance, a class might be stateful without defining or inheriting any vars because it forwards method calls to other objects that have mutable state. The reverse is also possible: A class might contain vars and still be purely functional. An example would be a class that caches the result of an expensive operation in a field for optimization purposes. To pick an example, assume the following unoptimized class Keyed with an expensive operation computeKey:

```
class Keyed {  
  
    def computeKey: Int = ... // this will take some time  
  
    ...  
  
}
```

Provided that computeKey neither reads nor writes any vars, you can make Keyed more efficient by adding a cache:

```
class MemoKeyed extends Keyed {  
  
    private var keyCache: Option[Int] = None  
  
    override def computeKey: Int = {  
  
        if (!keyCache.isDefined) keyCache = Some(super.computeKey)  
        keyCache.get  
  
    }  
  
}
```

Using MemoKeyed instead of Keyed can speed up things, because the second time the result of the computeKey operation is requested, the value stored in the keyCache field can be returned instead of running computeKey once again. But except for this speed gain, the behavior of class Keyed and MemoKeyed is exactly the same. Consequently, if Keyed is purely functional, then so is MemoKeyed, even though it contains a reassignable variable.

## [Section 18.2](#)

### [Chapter 18 · Stateful Objects](#)

390

18.2

#### Reassignable variables and properties

You can perform two fundamental operations on a reassignable variable: get its value or set it to a new value. In libraries such as JavaBeans, these operations are often encapsulated in separate getter and setter methods, which need to be defined explicitly. In Scala, every var that is a non-private member of some object implicitly defines a getter and a setter method with it.

These getters and setters are named differently from the Java convention, however. The getter of a var x is just named “x”, while its setter is named

“x\_=”.

For example, if it appears in a class, the var definition: var hour = 12 generates a getter, “hour”, and setter, “hour\_=”, in addition to a reassignable field. The field is always marked private[this], which means it can be accessed only from the object that contains it. The getter and setter, on the other hand, get the same visibility as the original var. If the var definition is public, so are its getter and setter, if it is protected they are also protected, and so on.

For instance, consider the class Time shown in [Listing 18.2](#), which defines two public vars named hour and minute:

```
class Time {
```

```
    var hour = 12
```

```
var minute = 0  
}
```

Listing 18.2 · A class with public vars.

This implementation is exactly equivalent to the class definition shown in [Listing 18.3](#). In the definitions shown in [Listing 18.3](#), the names of the local fields h and m are arbitrarily chosen so as not to clash with any names already in use.

An interesting aspect about this expansion of vars into getters and setters is that you can also choose to define a getter and a setter directly instead of defining a var. By defining these access methods directly you can interpret the operations of variable access and variable assignment as you like. For in-

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 18.2](#)

### [Chapter 18 · Stateful Objects](#)

391

```
class Time {  
    private[this] var h = 12  
    private[this] var m = 0  
    def hour: Int = h  
    def hour_=(x: Int) { h = x }  
    def minute: Int = m  
    def minute_=(x: Int) { m = x }
```

```
}
```

Listing 18.3 · How public vars are expanded into getter and setter methods.

stance, the variant of class Time shown in [Listing 18.4](#) contains requirements that catch all assignments to hour and minute with illegal values.

```
class Time {  
  
    private[this] var h = 12  
  
    private[this] var m = 12  
  
    def hour: Int = h  
  
    def hour_=(x: Int) {  
  
        require(0 <= x && x < 24)  
  
        h = x  
  
    }  
  
    def minute = m  
  
    def minute_=(x: Int) {  
  
        require(0 <= x && x < 60)  
  
        m = x  
  
    }  
}
```

Listing 18.4 · Defining getter and setter methods directly.

Some languages have a special syntactic construct for these variable-like quantities that are not plain variables in that their getter or setter can be redefined. For instance, C# has properties, which fulfill this role. Scala's convention of always interpreting a variable as a pair of setter and getter methods gives you in effect the same capabilities as C# properties without

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 18.2](#)

### [Chapter 18 · Stateful Objects](#)

392

requiring special syntax. Properties can serve many different purposes. In the example shown in [Listing 18.4](#), the setters enforced an invariant, thus protecting the variable from being assigned illegal values. You could also use a property to log all accesses to getters or setters of a variable. Or you could integrate variables with events, for instance by notifying some subscriber methods each time a variable is modified (you'll see examples of this in

[Chapter 33](#)).

It is also possible, and sometimes useful, to define a getter and a setter without an associated field. An example is the following class Thermometer, which encapsulates a temperature variable that can be read and updated.

Temperatures can be expressed in Celsius or Fahrenheit degrees. The class below allows you to get and set the temperature in either measure.

```
class Thermometer {  
  
    var celsius: Float = _  
  
    def fahrenheit = celsius * 9 / 5 + 32  
  
    def fahrenheit_= (f: Float) {
```

```
celsius = (f - 32) * 5 / 9  
}  
  
override def toString = fahrenheit + "F/" + celsius + "C"  
}
```

Listing 18.5 · Defining a getter and setter without an associated field.

The first line in the body of this class defines a var, celsius, which will contain the temperature in degrees Celsius. The celsius variable is initially set to a default value by specifying ‘\_’ as the “initializing value”

of the variable. More precisely, an initializer “=\_” of a field assigns a zero value to that field. The zero value depends on the field’s type. It is 0 for numeric types, false for booleans, and null for reference types. This is the same as if the same variable was defined in Java without an initializer.

Note that you cannot simply leave off the “=\_” initializer in Scala. If you had written:

```
var celsius: Float
```

this would declare an abstract variable, not an uninitialized one.<sup>1</sup>

<sup>1</sup>Abstract variables will be explained in [Chapter 20](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 18.3](#)

[Chapter 18](#) · [Stateful Objects](#)

393

The celsius variable definition is followed by a getter, “fahrenheit”, and a setter, “fahrenheit\_=”, which access the same temperature, but in degrees Fahrenheit. There is no separate field that contains the current temperature

value in Fahrenheit. Instead the getter and setter methods for Fahrenheit values automatically convert from and to degrees Celsius, respectively.

Here's an example of interacting with a Thermometer object: scala> val t = new Thermometer

```
t: Thermometer = 32.0F/0.0C
```

```
scala> t.celsius = 100
```

```
scala> t
```

```
res3: Thermometer = 212.0F/100.0C
```

```
scala> t.fahrenheit = -40
```

```
scala> t
```

```
res4: Thermometer = -40.0F/-40.0C
```

```
18.3
```

### Case study: Discrete event simulation

The rest of this chapter shows by way of an extended example how stateful objects can be combined with first-class function values in interesting ways. You'll see the design and implementation of a simulator for digital circuits. This task is decomposed into several subproblems, each of which is interesting individually: First, you'll see a little language for digital circuits.

The definition of this language will highlight a general method for embedding domain-specific languages in a host language like Scala. Second, we'll present a simple but general framework for discrete event simulation. The main task of this framework will be to keep track of actions that are performed in simulated time. Finally, we'll show how discrete simulation programs can be structured and built. The idea of such simulations is to model physical objects by simulated objects, and to use the simulation framework to model physical time.

The example is taken from the classic textbook Structure and Interpretation of Computer Programs by Abelson and Sussman [[Abe96](#)]. What's different here is that the implementation language is Scala instead of Scheme, and that the various aspects of the example are structured into four software

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 18.4](#)

### [Chapter 18 · Stateful Objects](#)

394

inverter

and-gate

or-gate

Figure 18.1 · Basic gates.

layers: one for the simulation framework, another for the basic circuit simulation package, a third for a library of user-defined circuits, and the last layer for each simulated circuit itself. Each layer is expressed as a class, and more specific layers inherit from more general ones.

## The fast track

Understanding the discrete event simulation example presented in this chapter will take some time. If you feel you want to get on with learning more Scala instead, it's safe to skip ahead to the next chapter.

18.4

A language for digital circuits

We'll start with a “little language” to describe digital circuits. A digital circuit is built from wires and function boxes. Wires carry signals, which

are transformed by function boxes. Signals are represented by booleans: true for signal-on and false for signal-off.

[Figure 18.1](#) shows three basic function boxes (or gates):

- An inverter, which negates its signal.
- An and-gate, which sets its output to the conjunction of its inputs.
- An or-gate, which sets its output to the disjunction of its inputs.

These gates are sufficient to build all other function boxes. Gates have delays, so an output of a gate will change only some time after its inputs change.

We'll describe the elements of a digital circuit by the following set of Scala classes and functions. First, there is a class `Wire` for wires. We can construct wires like this:

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 18.4](#)

### [Chapter 18 · Stateful Objects](#)

395

```
val a = new Wire
```

```
val b = new Wire
```

```
val c = new Wire
```

or, equivalent but shorter, like this:

```
val a, b, c = new Wire
```

Second, there are three procedures which “make” the basic gates we need:  
`def inverter(input: Wire, output: Wire)`

```
def andGate(a1: Wire, a2: Wire, output: Wire)
```

```
def orGate(o1: Wire, o2: Wire, output: Wire)
```

What's unusual, given the functional emphasis of Scala, is that these procedures construct the gates as a side-effect, instead of returning the constructed gates as a result. For instance, an invocation of `inverter(a, b)` places an inverter between the wires `a` and `b`. It turns out that this side-effecting construction makes it easier to construct complicated circuits gradually. Also, although methods most often have verb names, these have noun names that indicate which gate they are making. This reflects the declarative nature of the DSL: it should describe a circuit, not the actions of making one.

More complicated function boxes can be built from the basic gates. For instance, the method shown in [Listing 18.6](#) constructs a half-adder. The `halfAdder` method takes two inputs, `a` and `b`, and produces a sum, `s`, defined by “ $s = (a + b) \% 2$ ” and a carry, `c`, defined by “ $c = (a + b) / 2$ ”. A diagram of the half-adder is shown in [Figure 18.2](#).

```
def halfAdder(a: Wire, b: Wire, s: Wire, c: Wire) {
```

```
    val d, e = new Wire
```

```
    orGate(a, b, d)
```

```
    andGate(a, b, c)
```

```
    inverter(c, e)
```

```
    andGate(d, e, s)
```

```
}
```

[Listing 18.6](#) · The `halfAdder` method.

Note that `halfAdder` is a parameterized function box just like the three methods that construct the primitive gates. You can use the `halfAdder`

## [Section 18.4](#)

### [Chapter 18 · Stateful Objects](#)

396

a

d

e

s

c

b

Figure 18.2 · A half-adder circuit.

method to construct more complicated circuits. For instance, [Listing 18.7](#)

defines a full, one-bit adder, shown in [Figure 18.3](#), which takes two inputs, a and b, as well as a carry-in, cin, and which produces a sum output defined by “ $\text{sum} = (\text{a} + \text{b} + \text{cin}) \% 2$ ” and a carry-out output defined by

“ $\text{cout} = (\text{a} + \text{b} + \text{cin}) / 2$ ”.

```
def fullAdder(a: Wire, b: Wire, cin: Wire,  
             sum: Wire, cout: Wire) {  
  
    val s, c1, c2 = new Wire  
  
    halfAdder(a, cin, s, c1)  
  
    halfAdder(b, s, sum, c2)
```

```
orGate(c1, c2, cout)
```

```
}
```

Listing 18.7 · The fullAdder method.

Class Wire and functions inverter, andGate, and orGate represent a little language with which users can define digital circuits. It's a good example of an internal DSL, a domain specific language defined as a library in a host language instead of being implemented on its own.

The implementation of the circuit DSL still needs to be worked out.

Since the purpose of defining a circuit in the DSL is simulating the circuit, it makes sense to base the DSL implementation on a general API for discrete event simulation. The next two sections will present first the simulation API and then the implementation of the circuit DSL on top of it.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 18.5](#)

[Chapter 18 · Stateful Objects](#)

397

b

sum

half

a

s

adder

c2

half

cout

adder

c1

cin

Figure 18.3 · A full-adder circuit.

18.5

## The Simulation API

The simulation API is shown in [Listing 18.8](#). It consists of class `Simulation` in package `org.stairwaybook.simulation`. Concrete simulation libraries inherit this class and augment it with domain-specific functionality. The elements of the `Simulation` class are presented in this section.

A discrete event simulation performs user-defined actions at specified times. The actions, which are defined by concrete simulation subclasses, all share a common type:

```
type Action = () => Unit
```

This statement defines `Action` to be an alias of the type of procedure that takes an empty parameter list and returns `Unit`. `Action` is a type member of class `Simulation`. You can think of it as a more readable name for type `() => Unit`. Type members will be described in detail in [Section 20.6](#).

The time at which an action is performed is simulated time; it has nothing to do with the actual “wall clock” time. Simulated times are represented simply as integers. The current simulated time is kept in a private variable:

```
private var curtime: Int = 0
```

The variable has a public accessor method, which retrieves the current time:

```
def currentTime: Int = curtime
```

This combination of private variable with public accessor is used to make sure that the current time cannot be modified outside the Simulation class.

After all, you don't usually want your simulation objects to manipulate the current time, except possibly if your simulation models time travel.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 18.5

### Chapter 18 · Stateful Objects

398

```
abstract class Simulation {  
    type Action = () => Unit  
    case class WorkItem(time: Int, action: Action)  
    private var curtime = 0  
    def currentTime: Int = curtime  
    private var agenda: List[WorkItem] = List()  
    private def insert(ag: List[WorkItem],  
                      item: WorkItem): List[WorkItem] = {  
        if (ag.isEmpty || item.time < ag.head.time) item :: ag else ag.head ::  
            insert(ag.tail, item)  
    }  
    def afterDelay(delay: Int)(block: => Unit) {  
        val item = WorkItem(currentTime + delay, () => block)  
        agenda = insert(agenda, item)
```

```
}

private def next() {

    (agenda: @unchecked) match {

        case item :: rest =>

            agenda = rest

            curtime = item.time

            item.action()

    }

}

def run() {

    afterDelay(0) {

        println("/** simulation started, time = "+

               currentTime +" ***)")

    }

    while (!agenda.isEmpty) next()

}

}
```

Listing 18.8 · The Simulation class.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)  
[Section 18.5](#)

## Chapter 18 · Stateful Objects

399

An action that needs to be executed at a specified time is called a work item. Work items are implemented by the following class: case class `WorkItem(time: Int, action: Action)`

We made the `WorkItem` class a case class because of the syntactic conveniences this entails: you can use the factory method, `WorkItem`, to create instances of the class, and you get accessors for the constructor parameters `time` and `action` for free. Note also that class `WorkItem` is nested inside class `Simulation`. Nested classes in Scala are treated similarly to Java.

Section 20.7

will give more details.

The `Simulation` class keeps an agenda of all remaining work items that have not yet been executed. The work items are sorted by the simulated time at which they have to be run:

```
private var agenda: List[WorkItem] = List()
```

The agenda list will be kept in the proper sorted order by the `insert` method, which updates it. You can see `insert` being called from `afterDelay`, which is the only way to add a work item to the agenda:

```
def afterDelay(delay: Int)(block: => Unit) {
```

```
    val item = WorkItem(currentTime + delay, () => block)
    agenda = insert(agenda, item)
```

```
}
```

As the name implies, this method inserts an action (given by `block`) into the agenda so that it is scheduled for execution `delay` time units after the current simulation time. For instance, the following invocation would create a new work item to be executed at the simulated time, `currentTime + delay`:

```
afterDelay(delay) { count += 1 }
```

The code to be executed is contained in the method's second argument. The formal parameter for this argument has type “ $\Rightarrow$  Unit”, i.e., it is a computation of type Unit which is passed by name. Recall that by-name parameters are not evaluated when passed to a method. So in the call above, count would be incremented only when the simulation framework calls the action stored in the work item. Note that afterDelay is a curried function. It's a good example of the principle set forward in [Section 9.5](#) that currying can be used to make method calls look more like built-in syntax.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 18.5](#)

### [Chapter 18 · Stateful Objects](#)

400

The created work item still needs to be inserted into the agenda. This is done by the insert method, which maintains the invariant that the agenda is time-sorted:

```
private def insert(ag: List[WorkItem],  
item: WorkItem): List[WorkItem] =  
{  
  if (ag.isEmpty || item.time < ag.head.time) item :: ag else ag.head ::  
  insert(ag.tail, item)  
}
```

The core of the Simulation class is defined by the run method: `def run() {`

```
afterDelay(0) {  
  
  println("/** simulation started, time = "+  
  currentTime +" **")  
}
```

```
}

while (!agenda.isEmpty) next()

}
```

This method repeatedly takes the first item in the agenda, removes it from the agenda and executes it. It does this until there are no more items left in the agenda to execute. Each step is performed by calling the next method, which is defined as follows:

```
private def next() {

(agenda: @unchecked) match {

case item :: rest =>

agenda = rest

curtime = item.time

item.action()

}

}
```

The next method decomposes the current agenda with a pattern match into a front item, item, and a remaining list of work items, rest. It removes the front item from the current agenda, sets the simulated time curtime to the work item's time, and executes the work item's action.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 18.6](#)

[Chapter 18 · Stateful Objects](#)

Note that next can be called only if the agenda is non-empty. There's no case for an empty list, so you would get a MatchError exception if you tried to run next on an empty agenda.

In fact, the Scala compiler would normally warn you that you missed one of the possible patterns for a list:

```
Simulator.scala:19: warning: match is not exhaustive!
```

```
missing combination
```

```
Nil
```

```
agenda match {
```

```
  one warning found
```

In this case, the missing case is not a problem, because you know that next is called only on a non-empty agenda. Therefore, you might want to disable the warning. You saw in [Section 15.5](#) that this can be done by adding an @unchecked annotation to the selector expression of the pattern match.

That's why the Simulation code uses “(agenda: @unchecked) match”, not “agenda match”.

That's it. This seems surprisingly little code for a simulation framework.

You might wonder how this framework could possibly support interesting simulations, if all it does is execute a list of work items? In fact the power of the simulation framework comes from the fact that actions stored in work items can themselves install further work items into the agenda when they are executed. That makes it possible to have long-running simulations evolve from simple beginnings.

18.6

Circuit Simulation

The next step is to use the simulation framework to implement the domain-specific language for circuits shown in [Section 18.4](#). Recall that the circuit DSL consists of a class for wires and methods that create and-gates, or-gates, and inverters. These are all contained in a BasicCircuitSimulation class, which extends the simulation framework. This class is shown in [Listings 18.9 and 18.10](#).

Class BasicCircuitSimulation declares three abstract methods that represent the delays of the basic gates: InverterDelay, AndGateDelay, and OrGateDelay. The actual delays are not known at the level of this class,

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 18.6](#)

[Chapter 18 · Stateful Objects](#)

402

```
package org.stairwaybook.simulation

abstract class BasicCircuitSimulation extends Simulation {

    def InverterDelay: Int

    def AndGateDelay: Int

    def OrGateDelay: Int

    class Wire {

        private var sigVal = false

        private var actions: List[Action] = List()

        def getSignal = sigVal

        def setSignal(s: Boolean) =
```

```
if (s != sigVal) {  
    sigVal = s  
    actions foreach (_())  
}  
  
def addAction(a: Action) = {  
    actions = a :: actions  
    a()  
}  
}  
  
def inverter(input: Wire, output: Wire) = {  
    def invertAction() {  
        val inputSig = input.getSignal  
        afterDelay(InverterDelay) {  
            output setSignal !inputSig  
        }  
    }  
    input addAction invertAction  
}  
// continued in Listing 18.10...
```

Listing 18.9 · The first half of the BasicCircuitSimulation class.

## Section 18.6

### Chapter 18 · Stateful Objects

403

// ...continued from Listing 18.9

```
def andGate(a1: Wire, a2: Wire, output: Wire) = {
```

```
    def andAction() = {
```

```
        val a1Sig = a1.getSignal
```

```
        val a2Sig = a2.getSignal
```

```
        afterDelay(AndGateDelay) {
```

```
            output setSignal (a1Sig & a2Sig)
```

```
        }
```

```
}
```

```
a1 addAction andAction
```

```
a2 addAction andAction
```

```
}
```

```
def orGate(o1: Wire, o2: Wire, output: Wire) {
```

```
    def orAction() {
```

```
        val o1Sig = o1.getSignal
```

```
        val o2Sig = o2.getSignal
```

```

afterDelay(OrGateDelay) {

    output setSignal (o1Sig | o2Sig)

}

o1 addAction orAction

o2 addAction orAction

}

def probe(name: String, wire: Wire) {

    def probeAction() {

        println(name + " " + currentTime +
        " new-value = " + wire.getSignal)

    }

    wire addAction probeAction

}

}

```

Listing 18.10 · The second half of the BasicCircuitSimulation class.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 18.6](#)

[Chapter 18 · Stateful Objects](#)

because they depend on the technology of circuits that are simulated. That's why the delays are left abstract in class `BasicCircuitSimulation`, so that their concrete definition is delegated to a subclass.<sup>2</sup> The implementation of class `BasicCircuitSimulation`'s other members is described next.

## The Wire class

A wire needs to support three basic actions:

`getSignal: Boolean`: returns the current signal on the wire.

`setSignal(sig: Boolean)`: sets the wire's signal to `sig`.

`addAction(p: Action)`: attaches the specified procedure `p` to the actions of the wire. The idea is that all action procedures attached to some wire will be executed every time the signal of the wire changes.

Typically actions are added to a wire by components connected to the wire. An attached action is executed once at the time it is added to a wire, and after that, every time the signal of the wire changes.

Here is the implementation of the `Wire` class:

```
class Wire {  
    private var sigVal = false  
  
    private var actions: List[Action] = List()  
  
    def getSignal = sigVal  
  
    def setSignal(s: Boolean) =  
        if (s != sigVal) {  
            sigVal = s  
            actions foreach (_())  
        }  
}
```

```
}
```

```
def addAction(a: Action) = {
```

```
    actions = a :: actions
```

```
    a()
```

```
}
```

```
}
```

The names of these “delay” methods start with a capital letter because they represent constants. They are methods so they can be overridden in subclasses. You’ll find out how to do the same thing with vals in [Section 20.3](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 18.6](#)

[Chapter 18](#) · [Stateful Objects](#)

405

Two private variables make up the state of a wire. The variable `sigVal` represents the current signal, and the variable `actions` represents the action procedures currently attached to the wire. The only interesting method implementation is the one for `setSignal`: When the signal of a wire changes, the new value is stored in the variable `sigVal`. Furthermore, all actions attached to a wire are executed. Note the shorthand syntax for doing this:

“`actions foreach (_())`” applies the function, “`_()`”, to each element in the `actions` list. As described in [Section 8.5](#), the function “`_()`” is a shorthand for “`f => f()`”, i.e., it takes a function (we’ll call it `f`) and applies it to the empty parameter list.

The inverter method

The only effect of creating an inverter is that an action is installed on its input wire. This action is invoked once at the time the action is installed, and thereafter every time the signal on the input changes. The effect of the action is that the value of the inverter's output value is set (via `setSignal`) to the inverse of its input value. Since inverter gates have delays, this change should take effect only `InverterDelay` units of simulated time after the input value has changed and the action was executed. This suggests the following implementation:

```
def inverter(input: Wire, output: Wire) = {  
    def invertAction() {  
        val inputSig = input.getSignal  
        afterDelay(InverterDelay) {  
            output setSignal !inputSig  
        }  
    }  
  
    input addAction invertAction  
}
```

The effect of the `inverter` method is to add `invertAction` to the input wire. This action, when invoked, gets the input signal and installs another action that inverts the output signal into the simulation agenda. This other action is to be executed after `InverterDelay` units of simulated time. Note how the method uses the `afterDelay` method of the simulation framework to create a new work item that's going to be executed in the future.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 18.6](#)

[Chapter 18 · Stateful Objects](#)

## The andGate and orGate methods

The implementation of and-gates is analogous to the implementation of inverters. The purpose of an and-gate is to output the conjunction of its input signals. This should happen at AndGateDelay simulated time units after any one of its two inputs changes. Hence, the following implementation:

```
def andGate(a1: Wire, a2: Wire, output: Wire) = {
```

```
    def andAction() = {
        val a1Sig = a1.getSignal
        val a2Sig = a2.getSignal
        afterDelay(AndGateDelay) {
            output setSignal (a1Sig & a2Sig)
        }
    }

    a1 addAction andAction
    a2 addAction andAction
}
```

The effect of the andGate method is to add andAction to both of its input wires a1 and a2. This action, when invoked, gets both input signals and installs another action that sets the output signal to the conjunction of both input signals. This other action is to be executed after AndGateDelay units of simulated time. Note that the output has to be recomputed if either of the input wires changes. That's why the same andAction is installed on each of the two input wires a1 and a2. The orGate method is implemented similarly, except it performs a logical-or instead of a logical-and.

## Simulation output

To run the simulator, you need a way to inspect changes of signals on wires.

To accomplish this, you can simulate the action of putting a probe on a wire:

```
def probe(name: String, wire: Wire) {
```

```
    def probeAction() {
```

```
        println(name + " " + currentTime +
```

```
        " new-value = " + wire.getSignal)
```

```
}
```

```
wire addAction probeAction
```

```
}
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 18.6](#)

[Chapter 18](#) · [Stateful Objects](#)

407

The effect of the probe procedure is to install a probeAction on a given wire. As usual, the installed action is executed every time the wire's signal changes. In this case it simply prints the name of the wire (which is passed as first parameter to probe), as well as the current simulated time and the wire's new value.

Running the simulator

After all these preparations, it's time to see the simulator in action. To define a concrete simulation, you need to inherit from a simulation framework class. To see something interesting, we'll create an abstract simulation class that extends BasicCircuitSimulation and contains method

definitions for half-adders and full-adders as they were presented earlier in this chapter in

[Listings 18.6 and 18.7.](#) This class, which we'll call CircuitSimulation, is shown in [Listing 18.11:](#)

```
package org.stairwaybook.simulation

abstract class CircuitSimulation

extends BasicCircuitSimulation {

  def halfAdder(a: Wire, b: Wire, s: Wire, c: Wire) {

    val d, e = new Wire

    orGate(a, b, d)

    andGate(a, b, c)

    inverter(c, e)

    andGate(d, e, s)

  }

  def fullAdder(a: Wire, b: Wire, cin: Wire,
sum: Wire, cout: Wire) {

    val s, c1, c2 = new Wire

    halfAdder(a, cin, s, c1)

    halfAdder(b, s, sum, c2)

    orGate(c1, c2, cout)

  }

}
```

}

Listing 18.11 · The CircuitSimulation class.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 18.6](#)

### [Chapter 18 · Stateful Objects](#)

408

A concrete circuit simulation will be an object that inherits from class CircuitSimulation. The object still needs to fix the gate delays according to the circuit implementation technology that's simulated. Finally, you will also need to define the concrete circuit that's going to be simulated. You can do these steps interactively in the Scala interpreter:

```
scala> import org.stairwaybook.simulation._
```

```
import org.stairwaybook.simulation._
```

First, the gate delays. Define an object (call it MySimulation) that provides some numbers:

```
scala> object MySimulation extends CircuitSimulation {
```

```
    def InverterDelay = 1
```

```
    def AndGateDelay = 3
```

```
    def OrGateDelay = 5
```

```
}
```

```
defined module MySimulation
```

Because you are going to access the members of the MySimulation object repeatedly, an import of the object keeps the subsequent code shorter:

```
scala> import MySimulation._
```

```
import MySimulation._
```

Next, the circuit. Define four wires, and place probes on two of them:

```
scala> val input1, input2, sum, carry = new Wire
```

```
input1: MySimulation.Wire =
```

```
simulator.BasicCircuitSimulation$Wire@111089b
```

```
input2: MySimulation.Wire =
```

```
simulator.BasicCircuitSimulation$Wire@14c352e
```

```
sum: MySimulation.Wire =
```

```
simulator.BasicCircuitSimulation$Wire@37a04c
```

```
carry: MySimulation.Wire =
```

```
simulator.BasicCircuitSimulation$Wire@1fd10fa
```

```
scala> probe("sum", sum)
```

```
sum 0 new-value = false
```

```
scala> probe("carry", carry)
```

```
carry 0 new-value = false
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 18.7](#)

[Chapter 18 · Stateful Objects](#)

Note that the probes immediately print an output. This is a consequence of the fact that every action installed on a wire is executed a first time when the action is installed.

Now define a half-adder connecting the wires:

```
scala> halfAdder(input1, input2, sum, carry)
```

Finally, set the signals, one after another, on the two input wires to true and run the simulation:

```
scala> input1 setSignal true
```

```
scala> run()
```

```
*** simulation started, time = 0 ***
```

```
sum 8 new-value = true
```

```
scala> input2 setSignal true
```

```
scala> run()
```

```
*** simulation started, time = 8 ***
```

```
carry 11 new-value = true
```

```
sum 15 new-value = false
```

18.7

## Conclusion

This chapter has brought together two techniques that seem at first disparate: mutable state and higher-order functions. Mutable state was used to simulate physical entities whose state changes over time. Higher-order functions were used in the simulation framework to execute actions at specified points in simulated time. They were also used in the circuit simulations as triggers that associate actions with state changes. Along the

way, you saw a simple way to define a domain specific language as a library. That's probably enough for one chapter!

If you feel like staying a bit longer, you might want want to try more simulation examples. You can combine half-adders and full-adders to create larger circuits, or design new circuits from the basic gates defined so far and simulate them. In the next chapter, you'll learn about type parameterization in Scala, and see another example in which a combination of functional and imperative approaches yields a good solution.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 19

### Type Parameterization

In this chapter, we'll explain the details of type parameterization in Scala.

Along the way we'll demonstrate some of the techniques for information hiding introduced in [Chapter 13](#) by means of a concrete example: the design of a class for purely functional queues. We're presenting type parameterization and information hiding together, because information hiding can be used to obtain more general type parameterization variance annotations.

Type parameterization allows you to write generic classes and traits. For example, sets are generic and take a type parameter: they are defined as `Set[T]`. As a result, any particular set instance might be a `Set[String]`, a `Set[Int]`, etc.—but it must be a set of something. Unlike Java, which allows raw types, Scala requires that you specify type parameters. Variance defines inheritance relationships of parameterized types, such as whether a `Set[String]`, for example, is a subtype of `Set[AnyRef]`.

The chapter contains three parts. The first part develops a data structure for purely functional queues. The second part develops techniques to hide internal representation details of this structure. The final part explains variance of type parameters and how it interacts with information hiding.

## 19.1

### Functional queues

A functional queue is a data structure with three operations: head

returns the first element of the queue

tail

returns a queue without its first element

append

returns a new queue with a given element

appended at the end

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 19.1](#)

[Chapter 19 · Type Parameterization](#)

411

Unlike a mutable queue, a functional queue does not change its contents when an element is appended. Instead, a new queue is returned that contains the element. The goal of this chapter will be to create a class, which we'll name Queue, that works like this:

```
scala> val q = Queue(1, 2, 3)
```

```
q: Queue[Int] = Queue(1, 2, 3)
```

```
scala> val q1 = q append 4
```

```
q1: Queue[Int] = Queue(1, 2, 3, 4)
```

```
scala> q
```

```
res0: Queue[Int] = Queue(1, 2, 3)
```

If Queue were a mutable implementation, the append operation in the second input line above would affect the contents of q; in fact both the result, q1, and the original queue, q, would contain the sequence 1, 2, 3, 4 after the operation. But for a functional queue, the appended value shows up only in the result, q1, not in the queue, q, being operated on.

Purely functional queues also have some similarity with lists. Both are so called fully persistent data structures, where old versions remain available even after extensions or modifications. Both support head and tail operations. But where a list is usually extended at the front, using a :: operation, a queue is extended at the end, using append.

How can this be implemented efficiently? Ideally, a functional (immutable) queue should not have a fundamentally higher overhead than an imperative (mutable) one. That is, all three operations head, tail, and append should operate in constant time.

One simple approach to implement a functional queue would be to use a list as representation type. Then head and tail would just translate into the same operations on the list, whereas append would be concatenation. This would give the following implementation:

```
class SlowAppendQueue[T](elems: List[T]) { // Not efficient
  def head = elems.head
  def tail = new SlowAppendQueue(elems.tail)
  def append(x: T) = new SlowAppendQueue(elems :: List(x))
}
```

The problem with this implementation is in the append operation. It takes time proportional to the number of elements stored in the queue. If you want

## [Section 19.1](#)

### [Chapter 19 · Type Parameterization](#)

412

constant time append, you could also try to reverse the order of the elements in the representation list, so that the last element that's appended comes first in the list. This would lead to the following implementation:

```
class SlowHeadQueue[T](smele: List[T]) { // Not efficient
```

```
// smeles is elems reversed
```

```
def head = smeles.last
```

```
def tail = new SlowHeadQueue(smeles.init)
```

```
def append(x: T) = new SlowHeadQueue(x :: smeles)
```

```
}
```

Now append is constant time, but head and tail are not. They now take time proportional to the number of elements stored in the queue.

Looking at these two examples, it does not seem easy to come up with an implementation that's constant time for all three operations. In fact, it looks doubtful that this is even possible! However, by combining the two operations you can get very close. The idea is to represent a queue by two lists, called leading and trailing. The leading list contains elements towards the front, whereas the trailing list contains elements towards the back of the queue in reversed order. The contents of the whole queue are at each instant equal to "leading :: trailing.reverse".

Now, to append an element, you just cons it to the trailing list using the :: operator, so append is constant time. This means that, when an initially empty queue is constructed from successive append operations, the trailing list will grow whereas the leading list will stay empty. Then, before the first

head or tail operation is performed on an empty leading list, the whole trailing list is copied to leading, reversing the order of the elements. This is done in an operation called mirror. [Listing 19.1](#) shows an implementation of queues that uses this approach.

What is the complexity of this implementation of queues? The mirror operation might take time proportional to the number of queue elements, but only if list leading is empty. It returns directly if leading is non-empty.

Because head and tail call mirror, their complexity might be linear in the size of the queue, too. However, the longer the queue gets, the less often mirror is called. Indeed, assume a queue of length  $n$  with an empty leading list. Then mirror has to reverse-copy a list of length  $n$ . However, the next time mirror will have to do any work is once the leading list is empty again, which will be the case after  $n$  tail operations. This means

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 19.1](#)

### [Chapter 19 · Type Parameterization](#)

413

```
class Queue[T](  
    private val leading: List[T],  
    private val trailing: List[T]  
) {  
    private def mirror =  
        if (leading.isEmpty)  
            new Queue(trailing.reverse, Nil)  
        else
```

this

```
def head = mirror.leading.head  
def tail = {  
    val q = mirror  
    new Queue(q.leading.tail, q.trailing)  
}  
  
def append(x: T) =  
    new Queue(leading, x :: trailing)  
}
```

Listing 19.1 · A basic functional queue.

one can “charge” each of these  $n$  tail operations with one  $n$ ’th of the complexity of `mirror`, which means a constant amount of work. Assuming that `head`, `tail`, and `append` operations appear with about the same frequency, the amortized complexity is hence constant for each operation. So functional queues are asymptotically just as efficient as mutable ones.

Now, there are some caveats that need to be attached to this argument.

First, the discussion only was about asymptotic behavior, the constant factors might well be somewhat different. Second, the argument rested on the fact that `head`, `tail` and `append` are called with about the same frequency. If `head` is called much more often than the other two operations, the argument is not valid, as each call to `head` might involve a costly re-organization of the list with `mirror`. The second caveat can be avoided; it is possible to design functional queues so that in a sequence of successive `head` operations only the first one might require a re-organization. You will find out at the end of this chapter how this is done.

## Section 19.2

### Chapter 19 · Type Parameterization

414

19.2

#### Information hiding

The implementation of Queue shown in [Listing 19.1](#) is now quite good with regards to efficiency. You might object, though, that this efficiency is paid for by exposing a needlessly detailed implementation. The Queue constructor, which is globally accessible, takes two lists as parameters, where one is reversed—hardly an intuitive representation of a queue. What's needed is a way to hide this constructor from client code. In this section, we'll show you some ways to accomplish this in Scala.

#### Private constructors and factory methods

In Java, you can hide a constructor by making it private. In Scala, the primary constructor does not have an explicit definition; it is defined implicitly by the class parameters and body. Nevertheless, it is still possible to hide the primary constructor by adding a private modifier in front of the class parameter list, as shown in [Listing 19.2](#):

```
class Queue[T] private (
    private val leading: List[T],
    private val trailing: List[T]
)
```

[Listing 19.2 · Hiding a primary constructor by making it private.](#)

The private modifier between the class name and its parameters indicates that the constructor of Queue is private: it can be accessed only from within the class itself and its companion object. The class name Queue is still

public, so you can use it as a type, but you cannot call its constructor:  
scala> new Queue(List(1, 2), List(3))

```
<console>:6: error: constructor Queue cannot be accessed in object $iw  
new Queue(List(1, 2), List(3))  
^
```

Now that the primary constructor of class Queue can no longer be called from client code, there needs to be some other way to create new queues.

One possibility is to add an auxiliary constructor, like this: def this() = this(Nil, Nil)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 19.2](#)

### [Chapter 19 · Type Parameterization](#)

415

The auxiliary constructor shown in the previous example builds an empty queue. As a refinement, the auxiliary constructor could take a list of initial queue elements:

```
def this(elems: T*) = this(elems.toList, Nil)
```

Recall that T\* is the notation for repeated parameters, as described in [Section 8.8.](#)

Another possibility is to add a factory method that builds a queue from such a sequence of initial elements. A neat way to do this is to define an object Queue that has the same name as the class being defined and contains an apply method, as shown in [Listing 19.3:](#)

```
object Queue {
```

```
// constructs a queue with initial elements 'xs'  
  
def apply[T](xs: T*) = new Queue[T](xs.toList, Nil)  
  
}
```

Listing 19.3 · An apply factory method in a companion object.

By placing this object in the same source file as class Queue, you make the object a companion object of the class. You saw in [Section 13.4](#) that a companion object has the same access rights as its class. Because of this, the apply method in object Queue can create a new Queue object, even though the constructor of class Queue is private.

Note that, because the factory method is called apply, clients can create queues with an expression such as Queue(1, 2, 3). This expression expands to Queue.apply(1, 2, 3) since Queue is an object instead of a function.

As a result, Queue looks to clients as if it was a globally defined factory method. In reality, Scala has no globally visible methods; every method must be contained in an object or a class. However, using methods named apply inside global objects, you can support usage patterns that look like invocations of global methods.

An alternative: private classes

Private constructors and private members are one way to hide the initialization and representation of a class. Another, more radical way is to hide the class itself and only export a trait that reveals the public interface of the

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 19.2](#)

[Chapter 19 · Type Parameterization](#)

```
trait Queue[T] {  
    def head: T  
    def tail: Queue[T]  
    def append(x: T): Queue[T]  
}  
  
object Queue {  
    def apply[T](xs: T*): Queue[T] =  
        new QueueImpl[T](xs.toList, Nil)  
  
    private class QueueImpl[T](  
        private val leading: List[T],  
        private val trailing: List[T]  
    ) extends Queue[T] {  
  
        def mirror =  
            if (leading.isEmpty)  
                new QueueImpl(trailing.reverse, Nil)  
            else  
                this  
  
        def head: T = mirror.leading.head  
        def tail: QueueImpl[T] = {  
            val q = mirror  
            q.leading.tail match {  
                case Nil => q.trailing.  
                case x :: xs => new QueueImpl(xs, x :: q.trailing)  
            }  
        }  
    }  
}
```

```
new QueueImpl(q.leading.tail, q.trailing)

}

def append(x: T) =  
  new QueueImpl(leading, x :: trailing)

}
```

Listing 19.4 · Type abstraction for functional queues.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 19.3](#)

### [Chapter 19 · Type Parameterization](#)

417

class. The code in [Listing 19.4](#) implements this design. There's a trait Queue, which declares the methods head, tail, and append. All three methods are implemented in a subclass QueueImpl, which is itself a private inner class of object Queue. This exposes to clients the same information as before, but using a different technique. Instead of hiding individual constructors and methods, this version hides the whole implementation class.

19.3

#### Variance annotations

Queue, as defined in [Listing 19.4](#), is a trait, but not a type. Queue is not a type because it takes a type parameter. As a result, you cannot create variables of type Queue:

```
scala> def doesNotCompile(q: Queue) {}
```

```
<console>:5: error: trait Queue takes type parameters def  
doesNotCompile(q: Queue) {}
```

Instead, trait Queue enables you to specify parameterized types, such as Queue[String], Queue[Int], or Queue[AnyRef]:

```
scala> def doesCompile(q: Queue[AnyRef]) {}
```

```
doesCompile: (Queue[AnyRef])Unit
```

Thus, Queue is a trait, and Queue[String] is a type. Queue is also called a type constructor, because with it you can construct a type by specifying a type parameter. (This is analogous to constructing an object instance with a plain-old constructor by specifying a value parameter.) The type constructor Queue “generates” a family of types, which includes Queue[Int], Queue[String], and Queue[AnyRef].

You can also say that Queue is a generic trait. (Classes and traits that take type parameters are “generic,” but the types they generate are “parameterized,” not generic.) The term “generic” means that you are defining many specific types with one generically written class or trait. For example, trait Queue in [Listing 19.4](#) defines a generic queue. Queue[Int] and Queue[String], etc., would be the specific queues.

The combination of type parameters and subtyping poses some interesting questions. For example, are there any special subtyping relationships between members of the family of types generated by Queue[T]? More specifically, should a Queue[String] be considered a subtype of Queue[AnyRef]?

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 19.3](#)

[Chapter 19](#) · [Type Parameterization](#)

Or more generally, if S is a subtype of type T, then should Queue[S] be considered a subtype of Queue[T]? If so, you could say that trait Queue is

covariant (or “flexible”) in its type parameter T. Or, since it just has one type parameter, you could say simply that Queues are covariant. Covariant Queues would mean, for example, that you could pass a Queue[String] to the doesCompile method shown previously, which takes a value parameter of type Queue[AnyRef].

Intuitively, all this seems OK, since a queue of Strings looks like a special case of a queue of AnyRefs. In Scala, however, generic types have by default nonvariant (or, “rigid”) subtyping. That is, with Queue defined as in

[Listing 19.4.](#), queues with different element types would never be in a subtype relationship. A Queue[String] would not be usable as a Queue[AnyRef].

However, you can demand covariant (flexible) subtyping of queues by changing the first line of the definition of class Queue like this: trait Queue[+T] { ... }

Prefixing a formal type parameter with a + indicates that subtyping is covariant (flexible) in that parameter. By adding this single character, you are telling Scala that you want Queue[String], for example, to be considered a subtype of Queue[AnyRef]. The compiler will check that Queue is defined in a way that this subtyping is sound.

Besides +, there is also a prefix -, which indicates contravariant subtyping. If Queue were defined like this:

```
trait Queue[-T] { ... }
```

then if T is a subtype of type S, this would imply that Queue[S] is a subtype of Queue[T] (which in the case of queues would be rather surprising!).

Whether a type parameter is covariant, contravariant, or nonvariant is called the parameter’s variance. The + and - symbols you can place next to type parameters are called variance annotations.

In a purely functional world, many types are naturally covariant (flexible). However, the situation changes once you introduce mutable data. To find out why, consider the simple type of one-element cells that can be read or written, shown in [Listing 19.5](#).

The Cell type of [Listing 19.5](#) is declared nonvariant (rigid). For the sake of argument, assume for a moment that Cell was declared covariant instead—i.e., it was declared class Cell[+T]—and that this passed the

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 19.3](#)

### [Chapter 19 · Type Parameterization](#)

419

```
class Cell[T](init: T) {  
    private[this] var current = init  
  
    def get = current  
  
    def set(x: T) { current = x }  
}
```

[Listing 19.5](#) · A nonvariant (rigid) Cell class.

Scala compiler. (It doesn't, and we'll explain why shortly.) Then you could construct the following problematic statement sequence: val c1 = new Cell[String]("abc")

```
val c2: Cell[Any] = c1  
  
c2.set(1)  
  
val s: String = c1.get
```

Seen by itself, each of these four lines looks OK. The first line creates a cell of strings and stores it in a val named c1. The second line defines a new val, c2, of type Cell[Any], which initialized with c1. This is OK, since Cells are assumed to be covariant. The third line sets the value of cell c2

to 1. This is also OK, because the assigned value 1 is an instance of c2's element type Any. Finally, the last line assigns the element value of c1 into a string. Nothing strange here, as both the sides are of the same type. But taken together, these four lines end up assigning the integer 1 to the string s.

This is clearly a violation of type soundness.

Which operation is to blame for the runtime fault? It must be the second one, which uses covariant subtyping. The other statements are too simple and fundamental. Thus, a Cell of String is not also a Cell of Any, because there are things you can do with a Cell of Any that you cannot do with a Cell of String. You cannot use set with an Int argument on a Cell of String, for example.

In fact, were you to pass the covariant version of Cell to the Scala compiler, you would get a compile-time error:

Cell.scala:7: error: covariant type T occurs in

contravariant position in type T of value x

def set(x: T) = current = x

^

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 19.3](#)

[Chapter 19 · Type Parameterization](#)

420

Variance and arrays

It's interesting to compare this behavior with arrays in Java. In principle, arrays are just like cells except that they can have more than one element.

Nevertheless, arrays are treated as covariant in Java. You can try an example analogous to the cell interaction above with Java arrays:

```
// this is Java

String[] a1 = { "abc" };

Object[] a2 = a1;

a2[0] = new Integer(17);

String s = a1[0];
```

If you try out this example, you will find that it compiles, but executing the program will cause an `ArrayStore` exception to be thrown when `a2[0]` is assigned to an `Integer`:

```
Exception in thread "main" java.lang.ArrayStoreException:  
java.lang.Integer
```

at JavaArrays.main(JavaArrays.java:8)

What happens here is that Java stores the element type of the array at runtime. Then, every time an array element is updated, the new element value is checked against the stored type. If it is not an instance of that type, an `ArrayStore` exception is thrown.

You might ask why Java adopted this design, which seems both unsafe and expensive. When asked this question, James Gosling, the principal inventor of the Java language, answered that they wanted to have a simple means to treat arrays generically. For instance, they wanted to be able to write a method to sort all elements of an array, using a signature like the following that takes an array of `Object`:

```
void sort(Object[] a, Comparator cmp) { ... }
```

Covariance of arrays was needed so that arrays of arbitrary reference types could be passed to this sort method. Of course, with the arrival of Java generics, such a sort method can now be written with a type parameter, so the covariance of arrays is no longer necessary. For compatibility reasons, though, it has persisted in Java to this day.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 19.4](#)

### [Chapter 19 · Type Parameterization](#)

421

Scala tries to be purer than Java in not treating arrays as covariant. Here's what you get if you translate the first two lines of the array example to Scala:

```
scala> val a1 = Array("abc")
```

```
a1: Array[java.lang.String] = Array(abc)
```

```
scala> val a2: Array[Any] = a1
```

```
<console>:5: error: type mismatch;
```

```
found
```

```
: Array[java.lang.String]
```

```
required: Array[Any]
```

```
val a2: Array[Any] = a1
```

```
^
```

What happened here is that Scala treats arrays as nonvariant (rigid), so an `Array[String]` is not considered to conform to an `Array[Any]`. However, sometimes it is necessary to interact with legacy methods in Java that use an Object array as a means to emulate a generic array. For instance, you might want to call a sort method like the one described previously with an array of

Strings as argument. To make this possible, Scala lets you cast an array of Ts to an array of any supertype of T:

```
scala> val a2: Array[Object] =  
a1.asInstanceOf[Array[Object]]  
a2: Array[java.lang.Object] = Array(abc)
```

The cast is always legal at compile-time, and it will always succeed at runtime, because the JVM's underlying run-time model treats arrays as covariant, just as Java the language does. But you might get `ArrayStore` exceptions afterwards, again just as you would in Java.

## 19.4

### Checking variance annotations

Now that you have seen some examples where variance is unsound, you may be wondering which kind of class definitions need to be rejected and which can be accepted. So far, all violations of type soundness involved some reassignable field or array element. The purely functional implementation of queues, on the other hand, looks like a good candidate for covariance. However, the following example shows that you can “engineer” an unsound situation even if there is no reassignable field.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 19.4](#)

[Chapter 19](#) · [Type Parameterization](#)

422

To set up the example, assume that queues as defined in [Listing 19.4](#) are covariant. Then, create a subclass of queues that specializes the element type to Int and overrides the append method:

```
class StrangeIntQueue extends Queue[Int] {
```

```
override def append(x: Int) = {  
    println(Math.sqrt(x))  
    super.append(x)  
}  
}
```

The append method in StrangeIntQueue prints out the square root of its (integer) argument before doing the append proper. Now, you can write a counterexample in two lines:

```
val x: Queue[Any] = new StrangeIntQueue  
x.append("abc")
```

The first of these two lines is valid, because StrangeIntQueue is a subclass of Queue[Int], and, assuming covariance of queues, Queue[Int] is a subtype of Queue[Any]. The second line is valid because you can append a String to a Queue[Any]. However, taken together these two lines have the effect of applying a square root method to a string, which makes no sense.

Clearly it's not just mutable fields that make covariant types unsound.

The problem is more general. It turns out that as soon as a generic parameter type appears as the type of a method parameter, the containing class or trait may not be covariant in that type parameter. For queues, the append method violates this condition:

```
class Queue[+T] {  
    def append(x: T) =  
    ...  
}
```

Running a modified queue class like the one above through a Scala compiler would yield:

```
Queues.scala:11: error: covariant type T occurs in  
contravariant position in type T of value x  
def append(x: T) =  
^
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 19.4](#)

### [Chapter 19 · Type Parameterization](#)

423

Reassignable fields are a special case of the rule that disallows type parameters annotated with + from being used as method parameter types. As mentioned in [Section 18.2](#), a reassignable field, “var x: T”, is treated in Scala as a getter method, “def x: T”, and a setter method, “def x\_=(y: T)”. As you can see, the setter method has a parameter of the field’s type T. So that type may not be covariant.

#### The fast track

In the rest of this section, we’ll describe the mechanism by which the Scala compiler checks variance annotations. If you’re not interested in such detail right now, you can safely skip to [Section 19.5](#). The most important thing to understand is that the Scala compiler will check any variance annotations you place on type parameters. For example, if you try to declare a type parameter to be covariant (by adding a +), but that could lead to potential runtime errors, your program won’t compile.

To verify correctness of variance annotations, the Scala compiler classifies all positions in a class or trait body as positive, negative, or neutral. A

“position” is any location in the class (or trait, but from now on we’ll just write “class”) body where a type parameter may be used. Every method value parameter is a position, for example, because a method value parameter has a type, and therefore a type parameter could appear in that position.

The compiler checks each use of each of the class’s type parameters. Type parameters annotated with + may only be used in positive positions, while type parameters annotated with - may only be used in negative positions.

A type parameter with no variance annotation may be used in any position, and is, therefore, the only kind of type parameter that can be used in neutral positions of the class body.

To classify the positions, the compiler starts from the declaration of a type parameter and then moves inward through deeper nesting levels. Positions at the top level of the declaring class are classified as positive. By default, positions at deeper nesting levels are classified the same as that at enclosing levels, but there are a handful of exceptions where the classification changes. Method value parameter positions are classified to the flipped classification relative to positions outside the method, where the flip of a positive classification is negative, the flip of a negative classification is positive, and the flip of a neutral classification is still neutral.

Besides method value parameter positions, the current classification is also flipped at the type parameters of methods. A classification is sometimes

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 19.5](#)

[Chapter 19 · Type Parameterization](#)

424

flipped at the type argument position of a type, such as the Arg in C[Arg], depending on the variance of the corresponding type parameter. If C’s type parameter is annotated with a + then the classification stays the same. If C’s

type parameter is annotated with a `-`, then the current classification is flipped. If `C`'s type parameter has no variance annotation then the current classification is changed to neutral.

As a somewhat contrived example, consider the following class definition, where the variance of several positions is annotated with `+` (for positive) or `-` (for negative):

```
abstract class Cat[-T, +U] {  
  
  def meow[W-](volume: T-, listener: Cat[U+, T-]-)  
  
  : Cat[Cat[U+, T-]-, U+]+  
  
}
```

The positions of the type parameter, `W`, and the two value parameters, `volume` and `listener`, are all negative. Looking at the result type of `meow`, the position of the first `Cat[U, T]` argument is negative, because `Cat`'s first type parameter, `T`, is annotated with a `-`. The type `U` inside this argument is again in positive position (two flips), whereas the type `T` inside that argument is still in negative position.

You see from this discussion that it's quite hard to keep track of variance positions. That's why it's a welcome relief that the Scala compiler does this job for you.

Once the variances are computed, the compiler checks that each type parameter is only used in positions that are classified appropriately. In this case, `T` is only used in negative positions, and `U` is only used in positive positions. So class `Cat` is type correct.

## 19.5

### Lower bounds

Back to the `Queue` class. You saw that the previous definition of `Queue[T]`

shown in [Listing 19.4](#) cannot be made covariant in T because T appears as a type of a parameter of the append method, and that's a negative position.

Fortunately, there's a way to get unstuck: you can generalize the append method by making it polymorphic (i.e., giving the append method itself a type parameter) and using a lower bound for its type parameter. [Listing 19.6](#)

shows a new formulation of Queue that implements this idea.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 19.5](#)

### [Chapter 19 · Type Parameterization](#)

425

```
class Queue[+T] (private val leading: List[T],  
  private val trailing: List[T] ) {  
  def append[U >: T](x: U) =  
    new Queue[U](leading, x :: trailing) // ...  
}
```

[Listing 19.6](#) · A type parameter with a lower bound.

The new definition gives append a type parameter U, and with the syntax,

“U >: T”, defines T as the lower bound for U. As a result, U is required to be a supertype of T.<sup>1</sup> The parameter to append is now of type U instead of type T, and the return value of the method is now Queue[U] instead of Queue[T].

As an example, suppose there is a class Fruit with two subclasses, Apple and Orange. With the new definition of class Queue, it is possible to append an Orange to a Queue[Apple]. The result will be a Queue[Fruit].

This revised definition of append is type correct. Intuitively, if T is a more specific type than expected (for example, Apple instead of Fruit), a call to append will still work, because U (Fruit) will still be a supertype of T (Apple).<sup>2</sup>

The new definition of append is arguably better than the old one, because it is more general. Unlike the old version, the new definition allows you to append an arbitrary supertype U of the queue element type T. The result is then a Queue[U]. Together with queue covariance, this gives the right kind of flexibility for modeling queues of different element types in a natural way.

This shows that variance annotations and lower bounds play well together. They are a good example of type-driven design, where the types of an interface guide its detailed design and implementation. In the case of queues, you would probably not have thought of the refined implementation of append with a lower bound, but you might have decided to make queues covariant. In that case, the compiler would have pointed out the variance error for append. Correcting the variance error by adding a lower bound makes append more general and queues as a whole more usable.

1Supertype and subtype relationships are reflexive, which means a type is both a supertype and a subtype of itself. Even though T is a lower bound for U, you could still pass in a T to append.

2Technically, what happens is a flip occurs for lower bounds. The type parameter U is in a negative position (1 flip), while the lower bound ( $>: T$ ) is in a positive position (2 flips).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 19.6](#)

[Chapter 19](#) · [Type Parameterization](#)

This observation is also the main reason that Scala prefers declaration-site variance over use-site variance as it is found in Java's wildcards. With use-site variance, you are on your own designing a class. It will be the clients of the class that need to put in the wildcards, and if they get it wrong, some important instance methods will no longer be applicable. Variance being a tricky business, users usually get it wrong, and they come away thinking that wildcards and generics are overly complicated. With definition-side variance, you express your intent to the compiler, and the compiler will double check that the methods you want available will indeed be available.

## 19.6

### Contravariance

So far in this chapter, all examples you've seen were either covariant or nonvariant. But there are also cases where contravariance is natural. For instance, consider the trait of output channels shown in [Listing 19.7](#):

```
trait OutputChannel[-T] {  
    def write(x: T)  
}
```

**Listing 19.7 · A contravariant output channel.**

Here, `OutputChannel` is defined to be contravariant in `T`. So an output channel of `AnyRefs`, say, is a subtype of an output channel of `Strings`. Although it may seem non-intuitive, it actually makes sense. To see why, consider what you can do with an `OutputChannel[String]`. The only supported operation is writing a `String` to it. The same operation can also be done on an `OutputChannel[AnyRef]`. So it is safe to substitute an `OutputChannel[AnyRef]` for an `OutputChannel[String]`. By contrast, it would not be safe to substitute an `OutputChannel[String]` where an `OutputChannel[AnyRef]` is required. After all, you can send any object to an `OutputChannel[AnyRef]`, whereas an `OutputChannel[String]` requires that the written values are all strings.

This reasoning points to a general principle in type system design: it is safe to assume that a type T is a subtype of a type U if you can substitute a value of type T wherever a value of type U is required. This is called the Liskov Substitution Principle. The principle holds if T supports the same operations as U and all of T's operations require less and provide more

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 19.6](#)

### [Chapter 19 · Type Parameterization](#)

427

```
trait Function1[-S, +T] {  
    def apply(x: S): T  
}
```

[Listing 19.8 · Covariance and contravariance of Function1s.](#)

than the corresponding operations in U. In the case of output channels, an `OutputChannel[AnyRef]` can be a subtype of an `OutputChannel[String]`

because the two support the same write operation, and this operation requires less in `OutputChannel[AnyRef]` than in `OutputChannel[String]`.

“Less” means the argument is only required to be an `AnyRef` in the first case, whereas it is required to be a `String` in the second case.

Sometimes covariance and contravariance are mixed in the same type.

A prominent example is Scala’s function traits. For instance, whenever you write the function type `A => B`, Scala expands this to `Function1[A, B]`. The definition of `Function1` in the standard library uses both covariance and contravariance: the `Function1` trait is contravariant in the function argument type `S` and covariant in the result type `T`, as shown in [Listing 19.8](#). This

satisfies the Liskov substitution principle, because arguments are something that's required, whereas results are something that's provided.

As an example, consider the application shown in [Listing 19.9](#). In this example, class Publication contains one parametric field, title, of type String. Class Book extends Publication and forwards its string title parameter to the constructor of its superclass. The Library singleton object defines a set of books and a method printBookList, which takes a function, named info, of type Book => AnyRef. In other words, the type of the lone parameter to printBookList is a function that takes one Book argument and returns an AnyRef. The Customer application defines a method, getTitle, which takes a Publication as its lone parameter and returns a String, the title of the passed Publication.

Now take a look at the last line in Customer. This line invokes Library's printBookList method and passes getTitle, wrapped in a function value: Library.printBookList(getTitle)

This line of code type checks even though String, the function's result type, is a subtype of AnyRef, the result type of printBookList's info parameter. This code passes the compiler because function result types are de-

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 19.6](#)

### [Chapter 19 · Type Parameterization](#)

428

```
class Publication(val title: String)
```

```
class Book(title: String) extends Publication(title)
```

```
object Library {
```

```
    val books: Set[Book] =
```

```
    Set(
```

```

new Book("Programming in Scala"),
new Book("Walden")
)

def printBookList(info: Book => AnyRef) {
  for (book <- books) println(info(book))
}

object Customer extends Application {
  def getTitle(p: Publication): String = p.title
  Library.printBookList(getTitle)
}

```

Listing 19.9 · Demonstration of function type parameter variance.

clared to be covariant (the `+T` in [Listing 19.8](#)). If you look inside the body of `printBookList`, you can get a glimpse of why this makes sense.

The `printBookList` method iterates through its book list, and invokes the passed function on each book. It passes the `AnyRef` result returned by `info` to `println`, which invokes `toString` on it and prints the result. This activity will work with `String` as well as any other subclass of `AnyRef`, which is what covariance of function result types means.

Now consider the parameter type of the function being passed to the `printBookList` method. Although `printBookList`'s parameter type is declared as `Book`, the `getTitle` we're passing in takes a `Publication`, a supertype of `Book`. The reason this works is that since `printBookList`'s parameter type is `Book`, the body of the `printBookList` method will only be allowed to pass a `Book` into the function. And because `getTitle`'s parameter type is

Publication, the body of that function will only be able to access on its parameter, p, members that are declared in class Publication. Because any method declared in Publication is also available on its subclass Book, everything should work, which is what contravariance of function parameter

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 19.7](#)

### [Chapter 19 · Type Parameterization](#)

429

argument type

result type

Book => AnyRef

Book

AnyRef

Publication

Publication => String

String

Figure 19.1 · Covariance and contravariance in function type parameters.

types means. You can see all this graphically in [Figure 19.1](#).

The code in [Listing 19.9](#) compiles because Publication => String is a subtype of Book => AnyRef, as shown in the center of the [Figure 19.1](#). Because the result type of a Function1 is defined as covariant, the inheritance relationship of the two result types, shown at the right of the diagram, is in the same direction as that of the two functions shown in the

center. By contrast, because the parameter type of a Function1 is defined as contravariant, the inheritance relationship of the two parameter types, shown at the left of the diagram, is in the opposite direction as that of the two functions.

## 19.7

### Object private data

The Queue class seen so far has a problem in that the mirror operation might repeatedly copy the trailing into the leading list if head is called several times in a row on a list where leading is empty. The wasteful copying could be avoided by adding some judicious side effects. [Listing 19.10](#) presents a new implementation of Queue, which performs at most one trailing to leading adjustment for any sequence of head operations.

What's different with respect to the previous version is that now leading and trailing are reassignable variables, and mirror performs the reverse copy from trailing to leading as a side-effect on the current queue instead of returning a new queue. This side-effect is purely internal to the implementation of the Queue operation; since leading and trailing are private variables, the effect is not visible to clients of Queue. So by the terminology established in [Chapter 18](#), the new version of Queue still defines purely functional objects, in spite of the fact that they now contain reassignable fields.

You might wonder whether this code passes the Scala type checker. After

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 19.7](#)

[Chapter 19](#) · [Type Parameterization](#)

430

```
class Queue[+T] private (
    private[this] var leading: List[T],
```

```
private[this] var trailing: List[T]
) {
private def mirror() =
if (leading.isEmpty) {
while (!trailing.isEmpty) {
leading = trailing.head :: leading
trailing = trailing.tail
}
}
def head: T = {
mirror()
leading.head
}
def tail: Queue[T] = {
mirror()
new Queue(leading.tail, trailing)
}
def append[U >: T](x: U) =
new Queue[U](leading, x :: trailing)
}
```

## Listing 19.10 · An optimized functional queue.

all, queues now contain two reassignable fields of the covariant parameter type T. Is this not a violation of the variance rules? It would be indeed, except for the detail that leading and trailing have a private[this] modifier and are thus declared to be object private.

As mentioned in [Section 13.4](#), object private members can be accessed only from within the object in which they are defined. It turns out that accesses to variables from the same object in which they are defined do not cause problems with variance. The intuitive explanation is that, in order to construct a case where variance would lead to type errors, you need to have a reference to a containing object that has a statically weaker type than the type the object was defined with. For accesses to object private values, however,

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### [Section 19.8](#)

#### [Chapter 19 · Type Parameterization](#)

431

this is impossible.

Scala's variance checking rules contain a special case for object private definitions. Such definitions are omitted when it is checked that a type parameter with either a + or - annotation occurs only in positions that have the same variance classification. Therefore, the code in [Listing 19.10](#) compiles without error. On the other hand, if you had left out the [this] qualifiers from the two private modifiers, you would see two type errors: Queues.scala:1: error: covariant type T occurs in

contravariant position in type List[T] of parameter of

setter leading\_=

```
class Queue[+T] private (private var leading: List[T],
```

```
^
```

```
Queues.scala:1: error: covariant type T occurs in  
contravariant position in type List[T] of parameter of  
setter trailing_=
```

```
private var trailing: List[T]) {
```

```
^
```

19.8

## Upper bounds

In [Listing 16.1](#) on [page 342](#), we showed a merge sort function for lists that took a comparison function as a first argument and a list to sort as a second, curried argument. Another way you might want to organize such a sort function is by requiring the type of the list to mix in the `Ordered` trait. As mentioned in [Section 12.4](#), by mixing `Ordered` into a class and implementing `Ordered`'s one abstract method, `compare`, you enable clients to compare instances of that class with `<`, `>`, `<=`, and `>=`. For example, [Listing 19.11](#)

shows `Ordered` being mixed into a `Person` class. As a result, you can compare two persons like this:

```
scala> val robert = new Person("Robert", "Jones") robert: Person = Robert  
Jones
```

```
scala> val sally = new Person("Sally", "Smith") sally: Person = Sally Smith
```

```
scala> robert < sally
```

```
res0: Boolean = true
```

## [Section 19.8](#)

### [Chapter 19 · Type Parameterization](#)

432

```
class Person(val firstName: String, val lastName: String) extends  
Ordered[Person] {
```

```
def compare(that: Person) = {
```

```
val lastNameComparison =
```

```
lastName.compareToIgnoreCase(that.lastName)
```

```
if (lastNameComparison != 0)
```

```
lastNameComparison
```

```
else
```

```
firstName.compareToIgnoreCase(that.firstName)
```

```
}
```

```
override def toString = firstName + " " + lastName
```

```
}
```

Listing 19.11 · A Person class that mixes in the Ordered trait.

```
def orderedMergeSort[T <: Ordered[T]](xs: List[T]): List[T] = {
```

```
def merge(xs: List[T], ys: List[T]): List[T] =
```

```
(xs, ys) match {
```

```
case (Nil, _) => ys
```

```

case (_ , Nil) => xs

case (x :: xs1 , y :: ys1) =>
  if (x < y) x :: merge(xs1 , ys)
  else y :: merge(xs , ys1)

}

val n = xs.length / 2

if (n == 0) xs

else {

  val (ys , zs) = xs splitAt n

  merge(orderedMergeSort(ys) , orderedMergeSort(zs))

}

}

```

Listing 19.12 · A merge sort function with an upper bound.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 19.8](#)

### [Chapter 19 · Type Parameterization](#)

433

To require that the type of the list passed to your new sort function mixes in Ordered, you need to use an upper bound. An upper bound is specified similar to a lower bound, except instead of the `>`: symbol used for lower bounds, you use a `<:` symbol, as shown in [Listing 19.12](#). With the “`T <: Ordered[T]`” syntax, you indicate that the type parameter, `T`, has an upper

bound, `Ordered[T]`. This means that the element type of the list passed to `orderedMergeSort` must be a subtype of `Ordered`. Thus, you could pass a `List[Person]` to `orderedMergeSort`, because `Person` mixes in `Ordered`. For example, consider this list:

```
scala> val people = List(  
    new Person("Larry", "Wall"),  
    new Person("Anders", "Hejlsberg"),  
    new Person("Guido", "van Rossum"),  
    new Person("Alan", "Kay"),  
    new Person("Yukihiro", "Matsumoto")  
)
```

`people: List[Person] = List(Larry Wall, Anders Hejlsberg, Guido van Rossum, Alan Kay, Yukihiro Matsumoto)`

Because the element type of this list, `Person`, mixes in (and is therefore a subtype of) `Ordered[People]`, you can pass the list to `orderedMergeSort`:

```
scala> val sortedPeople = orderedMergeSort(people)
```

`sortedPeople: List[Person] = List(Anders Hejlsberg, Alan Kay, Yukihiro Matsumoto, Guido van Rossum, Larry Wall)`

Now, although the sort function shown in [Listing 19.12](#) serves as a useful illustration of upper bounds, it isn't actually the most general way in Scala to design a sort function that takes advantage the `Ordered` trait. For example, you couldn't use the `orderedMergeSort` function to sort a list of integers, because class `Int` is not a subtype of `Ordered[Int]`:

```
scala> val wontCompile = orderedMergeSort(List(3, 2, 1))  
<console>:5: error: inferred type arguments [Int] do not conform to method  
orderedMergeSort's type
```

parameter bounds [ $T <: \text{Ordered}[T]$ ]

```
val wontCompile = orderedMergeSort(List(3, 2, 1))
```

^

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 19.9](#)

### [Chapter 19 · Type Parameterization](#)

434

In [Section 21.6](#), we'll show you how to use implicit parameters and view bounds to achieve a more general solution.

19.9

#### Conclusion

In this chapter you saw several techniques for information hiding: private constructors, factory methods, type abstraction, and object private members.

You also learned how to specify data type variance and what it implies for class implementation. Finally, you saw two techniques which help in obtaining flexible variance annotations: lower bounds for method type parameters, and `private[this]` annotations for local fields and methods.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 20

### Abstract Members

A member of a class or trait is abstract if the member does not have a complete definition in the class. Abstract members are intended to be implemented in subclasses of the class in which they are declared. This idea

is found in many object-oriented languages. For instance, Java lets you declare abstract methods. Scala also lets you declare such methods, as you saw in

[Section 10.2](#). But Scala goes beyond that and implements the idea in its full generality: besides methods, you can also declare abstract fields and even abstract types as members of classes and traits.

In this chapter we'll describe all four kinds of abstract member: vals, vars, methods, and types. Along the way we'll discuss pre-initialized fields, lazy vals, path-dependent types, and enumerations.

## 20.1

### A quick tour of abstract members

The following trait declares one of each kind of abstract member: an abstract type (T), method (transform), val (initial), and var (current):

```
trait Abstract {
```

```
    type T
```

```
    def transform(x: T): T
```

```
    val initial: T
```

```
    var current: T
```

```
}
```

A concrete implementation of `Abstract` needs to fill in definitions for each of its abstract members. Here is an example implementation that provides

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 20.2](#)

[Chapter 20](#) · [Abstract Members](#)

these definitions:

```
class Concrete extends Abstract {
    type T = String
    def transform(x: String) = x + x
    val initial = "hi"
    var current = initial
}
```

The implementation gives a concrete meaning to the type name T by defining it as an alias of type String. The transform operation concatenates a given string with itself, and the initial and current values are both set to "hi".

This example gives you a rough first idea of what kinds of abstract members exist in Scala. The remainder of the chapter will present the details and explain what the new forms of abstract members, as well as type members in general, are good for.

## 20.2

### Type members

As you can see from the example in the previous section, the term abstract type in Scala means a type declared (with the “type” keyword) to be a member of a class or trait, without specifying a definition. Classes themselves may be abstract, and traits are by definition abstract, but neither of these are what are referred to as abstract types in Scala. An abstract type in Scala is always a member of some class or trait, such as type T in trait Abstract.

You can think of a non-abstract (or, “concrete”) type member, such as type T in class Concrete, as a way to define a new name, or alias, for a type. In class Concrete, for example, the type String is given the alias T. As a result, anywhere T appears in the definition of class Concrete, it means String. This includes the parameter and result types of transform, initial, and current, which mention T when they are declared in supertrait Abstract. Thus, when class Concrete implements these methods, those Ts are interpreted to mean String.

One reason to use a type member is to define a short, descriptive alias for a type whose real name is more verbose, or less obvious in meaning, than the alias. Such type members can help clarify the code of a class or trait.

The other main use of type members is to declare abstract types that must

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 20.3](#)

### [Chapter 20 · Abstract Members](#)

437

be defined in subclasses. This use, which was demonstrated in the previous section, will be described in detail later in this chapter.

20.3

#### Abstract vals

An abstract val declaration has a form like:

val initial: String

It gives a name and type for a val, but not its value. This value has to be provided by a concrete val definition in a subclass. For instance, class Concrete implemented the val using:

val initial = "hi"

You use an abstract val declaration in a class when you do not know the correct value in the class, but you do know that the variable will have an unchangeable value in each instance of the class.

An abstract val declaration resembles an abstract parameterless method declaration such as:

```
def initial: String
```

Client code would refer to both the val and the method in exactly the same way, i.e., obj.initial. However, if initial is an abstract val, the client is guaranteed that obj.initial will yield the same value every time it is referenced. If initial were an abstract method, that guarantee would not hold, because in that case initial could be implemented by a concrete method that returns a different value every time it's called.

In other words, an abstract val constrains its legal implementation: any implementation must be a val definition; it may not be a var or a def.

Abstract method declarations, on the other hand, may be implemented by both concrete method definitions and concrete val definitions. Given the abstract class Fruit shown in [Listing 20.1](#), class Apple would be a legal subclass implementation, but class BadApple would not.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 20.4](#)

[Chapter 20 · Abstract Members](#)

438

```
abstract class Fruit {
```

```
    val v: String // 'v' for value
```

```
    def m: String // 'm' for method
```

```
}
```

```
abstract class Apple extends Fruit {  
    val v: String  
    val m: String // OK to override a ‘def’ with a ‘val’  
}  
  
abstract class BadApple extends Fruit {  
    def v: String // ERROR: cannot override a ‘val’ with a ‘def’  
    def m: String  
}
```

Listing 20.1 · Overriding abstract vals and parameterless methods.

## 20.4

### Abstract vars

Like an abstract val, an abstract var declares just a name and a type, but not an initial value. For instance, [Listing 20.2](#) shows a trait AbstractTime, which declares two abstract variables named hour and minute:

```
trait AbstractTime {
```

```
    var hour: Int
```

```
    var minute: Int
```

```
}
```

Listing 20.2 · Declaring abstract vars.

What is the meaning of abstract vars like hour and minute? You saw in

[Section 18.2](#) that vars declared as members of classes come equipped with getter and setter methods. This holds for abstract vars as well. If you declare

an abstract var named hour, for example, you implicitly declare an abstract getter method, hour, and an abstract setter method, hour\_=. There's no reassignable field to be defined—that will come in subclasses that define the concrete implementation of the abstract var. For instance, the definition of AbstractTime shown in [Listing 20.2](#) is exactly equivalent to the definition shown in [Listing 20.3](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 20.5

### [Chapter 20](#) · Abstract Members

439

```
trait AbstractTime {
```

```
    def hour: Int
```

```
    // getter for ‘hour’
```

```
    def hour_=(x: Int)
```

```
    // setter for ‘hour’
```

```
    def minute: Int
```

```
    // getter for ‘minute’
```

```
    def minute_=(x: Int)
```

```
    // setter for ‘minute’
```

```
}
```

[Listing 20.3](#) · How abstract vars are expanded into getters and setters.

20.5

## Initializing abstract vals

Abstract vals sometimes play a role analogous to superclass parameters: they let you provide details in a subclass that are missing in a superclass. This is particularly important for traits, because traits don't have a constructor to which you could pass parameters. So the usual notion of parameterizing a trait works via abstract vals that are implemented in subclasses. As an example, consider a reformulation of class Rational from [Chapter 6](#), as shown in [Listing 6.5](#) on [page 145](#), as a trait: trait RationalTrait {

```
val numerArg: Int
```

```
val denomArg: Int
```

```
}
```

The Rational class from [Chapter 6](#) had two parameters: n for the numerator of the rational number, and d for the denominator. The RationalTrait trait given here defines instead two abstract vals: numerArg and denomArg.

To instantiate a concrete instance of that trait, you need to implement the abstract val definitions. Here's an example:

```
new RationalTrait {  
    val numerArg = 1  
    val denomArg = 2  
}
```

Here the keyword new appears in front of a trait name, RationalTrait, which is followed by a class body in curly braces. This expression yields an instance of an [anonymous class](#) that mixes in the trait and is defined by the body. This particular anonymous class instantiation has an effect analogous

## Section 20.5

### Chapter 20 · Abstract Members

440

to the instance creation new Rational(1, 2). The analogy is not perfect, however. There's a subtle difference concerning the order in which expressions are initialized. When you write:

```
new Rational(expr1, expr2)
```

the two expressions, expr1 and expr2, are evaluated before class Rational is initialized, so the values of expr1 and expr2 are available for the initialization of class Rational. For traits, however, the situation is the opposite.

When you write:

```
new RationalTrait {  
    val numerArg = expr1  
    val denomArg = expr2  
}
```

the expressions, expr1 and expr2, are evaluated as part of the initialization of the anonymous class, but the anonymous class is initialized after the RationalTrait. So the values of numerArg and denomArg are not available during the initialization of RationalTrait (more precisely, a selection of either value would yield the default value for type Int, 0). For the definition of RationalTrait given previously, this is not a problem, because the trait's initialization does not make use of values numerArg or denomArg.

However, it does become a problem in the variant of RationalTrait shown in [Listing 20.4](#), which defines normalized numerators and denominators:

```
trait RationalTrait {
```

```
val numerArg: Int  
  
val denomArg: Int  
  
require(denomArg != 0)  
  
private val g = gcd(numerArg, denomArg)  
  
val numer = numerArg / g  
  
val denom = denomArg / g  
  
private def gcd(a: Int, b: Int): Int =  
  
if (b == 0) a else gcd(b, a % b)  
  
override def toString = numer + "/" + denom  
  
}
```

Listing 20.4 · A trait that uses its abstract vals.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 20.5](#)

[Chapter 20 · Abstract Members](#)

441

If you try to instantiate this trait with some numerator and denominator expressions that are not simple literals, you'll get an exception: scala> val x = 2

x: Int = 2

scala> new RationalTrait {

val numerArg = 1 \* x

```
val denomArg = 2 * x  
}  
  
java.lang.IllegalArgumentException: requirement failed  
at scala.Predef$.require(Predef.scala:107)  
at RationalTrait$class.$init$(<console>:7)  
at $anon$1.<init>(<console>:7)  
....
```

The exception in this example was thrown because `denomArg` still had its default value of 0 when class `RationalTrait` was initialized, which caused the `require` invocation to fail.

This example demonstrates that initialization order is not the same for class parameters and abstract fields. A class parameter argument is evaluated before it is passed to the class constructor (unless the parameter is by-name).

An implementing `val` definition in a subclass, by contrast, is evaluated only after the superclass has been initialized.

Now that you understand why abstract `vals` behave differently from parameters, it would be good to know what can be done about this. Is it possible to define a `RationalTrait` that can be initialized robustly, without fearing errors due to uninitialized fields? In fact, Scala offers two alternative solutions to this problem, pre-initialized fields and lazy `vals`. They are presented in the remainder of this section.

### Pre-initialized fields

The first solution, pre-initialized fields, lets you initialize a field of a subclass before the superclass is called. To do this, simply place the field definition in braces before the superclass constructor call. As an example,

[Listing 20.5](#)

shows another attempt to create an instance of RationalTrait. As you see from this example, the initialization section comes before the mention of the supertrait RationalTrait. Both are separated by a with.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 20.5

### Chapter 20 · Abstract Members

442

```
scala> new {
```

```
  val numerArg = 1 * x
```

```
  val denomArg = 2 * x
```

```
} with RationalTrait
```

```
res15: java.lang.Object with RationalTrait = 1/2
```

Listing 20.5 · Pre-initialized fields in an anonymous class expression.

```
object twoThirds extends {
```

```
  val numerArg = 2
```

```
  val denomArg = 3
```

```
} with RationalTrait
```

Listing 20.6 · Pre-initialized fields in an object definition.

Pre-initialized fields are not restricted to anonymous classes; they can also be used in objects or named subclasses. Two examples are shown in [Listings 20.6 and 20.7](#). As you can see from these examples, the pre-initialization section comes in each case after the extends keyword of the defined object or class. Class RationalClass, shown in [Listing 20.7](#), exem-

plifies a general schema of how class parameters can be made available for the initialization of a supertrait.

Because pre-initialized fields are initialized before the superclass constructor is called, their initializers cannot refer to the object that's being constructed. Consequently, if such an initializer refers to this, the reference goes to the object containing the class or object that's being constructed, not the constructed object itself. Here's an example:

```
scala> new {  
    val numerArg = 1  
    val denomArg = this.numerArg * 2  
} with RationalTrait  
<console>:8: error: value numerArg is not a  
member of object $iw  
val denomArg = this.numerArg * 2  
^
```

The example did not compile because the reference this.numerArg was looking for a numerArg field in the object containing the new (which in this

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 20.5](#)

[Chapter 20](#) · [Abstract Members](#)

443

```
class RationalClass(n: Int, d: Int) extends {
```

```
    val numerArg = n
```

```
val denomArg = d
} with RationalTrait {
  def + (that: RationalClass) = new RationalClass(
    numer * that.denom + that.numer * denom,
    denom * that.denom
  )
}
```

Listing 20.7 · Pre-initialized fields in a class definition.

case was the synthetic object named \$iw, into which the interpreter puts user input lines). Once more, pre-initialized fields behave in this respect like class constructor arguments.

### Lazy vals

You can use pre-initialized fields to simulate precisely the initialization behavior of class constructor arguments. Sometimes, however, you might prefer to let the system itself sort out how things should be initialized. This can be achieved by making your val definitions lazy. If you prefix a val definition with a lazy modifier, the initializing expression on the right-hand side will only be evaluated the first time the val is used.

For an example, define an object Demo with a val as follows: scala> object Demo {

```
  val x = { println("initializing x"); "done" }
}
```

defined module Demo

Now, first refer to Demo, then to Demo.x:

```
scala> Demo
```

```
initializing x
```

```
res19: Demo.type = Demo$@97d1ff
```

```
scala> Demo.x
```

```
res20: java.lang.String = done
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 20.5](#)

[Chapter 20 · Abstract Members](#)

444

As you can see, the moment you use Demo, its x field becomes initialized.

The initialization of x forms part of the initialization of Demo. The situation changes, however, if you define the x field to be lazy: scala> object Demo {

```
lazy val x = { println("initializing x"); "done" }
```

```
}
```

```
defined module Demo
```

```
scala> Demo
```

```
res21: Demo.type = Demo$@d81341
```

```
scala> Demo.x
```

```
initializing x
```

```
res22: java.lang.String = done
```

Now, initializing Demo does not involve initializing x. The initialization of x will be deferred until the first time x is used.

This is similar to the situation where x is defined as a parameterless method, using a def. However, unlike a def a lazy val is never evaluated more than once. In fact, after the first evaluation of a lazy val the result of the evaluation is stored, to be reused when the same val is used subsequently.

```
trait LazyRationalTrait {  
  
    val numerArg: Int  
  
    val denomArg: Int  
  
    lazy val numer = numerArg / g  
  
    lazy val denom = denomArg / g  
  
    override def toString = numer + "/" + denom  
  
    private lazy val g = {  
  
        require(denomArg != 0)  
  
        gcd(numerArg, denomArg)  
  
    }  
  
    private def gcd(a: Int, b: Int): Int =  
  
        if (b == 0) a else gcd(b, a % b)  
  
    }  

```

Listing 20.8 · Initializing a trait with lazy vals.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 20.5](#)

## Chapter 20 · Abstract Members

445

Looking at this example, it seems that objects like Demo themselves behave like lazy vals, in that they are also initialized on demand, the first time they are used. This is correct. In fact an object definition can be seen as a shorthand for the definition of a lazy val with an anonymous class that describes the object's contents.

Using lazy vals, you could reformulate RationalTrait as shown in

[Listing 20.8.](#) In the new trait definition, all concrete fields are defined lazy.

Another change with respect to the previous definition of RationalTrait, shown in [Listing 20.4,](#) is that the require clause was moved from the body of the trait to the initializer of the private field, g, which computes the greatest common divisor of numerArg and denomArg. With these changes, there's nothing that remains to be done when LazyRationalTrait is initialized; all initialization code is now part of the right-hand side of a lazy val. Therefore, it is safe to initialize the abstract fields of LazyRationalTrait after the class is defined. Here's an example:

```
scala> val x = 2
x: Int = 2
scala> new LazyRationalTrait {
    val numerArg = 1 * x
    val denomArg = 2 * x
}
res1: java.lang.Object with LazyRationalTrait = 1/2
```

No pre-initialization is needed. It's instructive to trace the sequence of initializations that lead to the string 1/2 to be printed in the code above: 1.

First, a fresh instance of LazyRationalTrait gets created, and the initialization code of LazyRationalTrait is run. This initialization code is empty—none of the fields of LazyRationalTrait is as yet initialized.

2. Next, the primary constructor of the anonymous subclass defined by the new expression is executed. This involves the initialization of numerArg with 2 and denomArg with 4.

3. Next, the `toString` method is invoked on the constructed object by the interpreter, so that the resulting value can be printed.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 20.5

### Chapter 20 · Abstract Members

446

4. Next, the `numer` field is accessed for the first time by the `toString` method in trait `LazyRationalTrait`, so its initializer is evaluated.

5. The initializer of `numer` accesses the private field, `g`, so `g` is evaluated next. This evaluation accesses `numerArg` and `denomArg`, which were defined in Step 2.

6. Next, the `toString` method accesses the value of `denom`, which causes `denom`'s evaluation. The evaluation of `denom` accesses the values of `denomArg` and `g`. The initializer of the `g` field is not re-evaluated, because it was already evaluated in Step 5.

7. Finally, the result string "1/2" is constructed and printed.

Note that the definition of `g` comes textually after the definitions of `numer` and `denom` in class `LazyRationalTrait`. Nevertheless, because all three values are lazy, `g` gets initialized before the initialization of `numer` and `denom` is completed. This shows an important property of lazy vals: the textual order of their definitions does not matter, because values get initialized on demand. Therefore, lazy vals can free you as a programmer

from having to think hard how to arrange val definitions to ensure that everything is defined when it is needed.

However, this advantage holds only as long as the initialization of lazy vals neither produces side effects nor depends on them. In the presence of side effects, initialization order starts to matter. And then it can be quite difficult to trace in what order initialization code is run, as the previous example has demonstrated. So lazy vals are an ideal complement to functional objects, where the order of initializations does not matter, as long as everything gets initialized eventually. They are less well suited for code that's predominantly imperative.

## Lazy functional languages

Scala is by no means the first language to have exploited the perfect match of lazy definitions and functional code. In fact, there is a category of “lazy functional programming languages” in which every value and parameter is initialized lazily. The best known member of this class of languages is Haskell [\[SPJ02\]](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 20.6](#)

### [Chapter 20 · Abstract Members](#)

447

20.6

## Abstract types

In the beginning of this chapter, you saw, “type T”, an abstract type declaration. The rest of this chapter discusses what such an abstract type declaration means and what it’s good for. Like all other abstract declarations, an abstract type declaration is a placeholder for something that will be defined concretely in subclasses. In this case, it is a type that will be defined further down the class hierarchy. So T above refers to a type that is

at yet unknown at the point where it is declared. Different subclasses can provide different realizations of T.

Here is a well-known example where abstract types show up naturally.

Suppose you are given the task of modeling the eating habits of animals. You might start with a class Food and a class Animal with an eat method:

```
class Food

abstract class Animal {

    def eat(food: Food)

}
```

You might then attempt to specialize these two classes to a class of Cows that eat Grass:

```
class Grass extends Food

class Cow extends Animal {

    override def eat(food: Grass) {} // This won't compile

}
```

However, if you tried to compile the new classes, you'd get the following compilation errors:

```
BuggyAnimals.scala:7: error: class Cow needs to be
abstract, since method eat in class Animal of type
(Food)Unit is not defined
```

```
class Cow extends Animal {
```

^

```
BuggyAnimals.scala:8: error: method eat overrides nothing
override def eat(food: Grass) {}
```

^

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 20.6](#)

### [Chapter 20 · Abstract Members](#)

448

What happened is that the eat method in class Cow does not override the eat method in class Animal, because its parameter type is different—it's Grass in class Cow vs. Food in class Animal.

Some people have argued that the type system is unnecessarily strict in refusing these classes. They have said that it should be OK to specialize a parameter of a method in a subclass. However, if the classes were allowed as written, you could get yourself in unsafe situations very quickly. For instance, the following script would pass the type checker: class Food

```
abstract class Animal {
```

```
    def eat(food: Food)
```

```
}
```

```
class Grass extends Food
```

```
class Cow extends Animal {
```

```
    override def eat(food: Grass) {} // This won't compile,
```

```
}
```

```
// but if it did,...
```

```
class Fish extends Food  
  
val bessy: Animal = new Cow  
  
bessy eat (new Fish)  
  
// ...you could feed fish to cows.
```

The program would compile if the restriction were eased, because Cows are Animals and Animals do have an eat method that accepts any kind of Food, including Fish. But surely it would do a cow no good to eat a fish!

What you need to do instead is apply some more precise modeling.

Animals do eat Food, but what kind of Food each Animal eats depends on the Animal. This can be neatly expressed with an abstract type, as shown in

### [Listing 20.9:](#)

```
class Food  
  
abstract class Animal {  
  
type SuitableFood <: Food  
  
def eat(food: SuitableFood)  
  
}
```

[Listing 20.9 · Modeling suitable food with an abstract type.](#)

With the new class definition, an Animal can eat only food that's suitable.

What food is suitable cannot be determined at the level of the Animal class.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 20.7](#)

## Chapter 20 · Abstract Members

449

That's why SuitableFood is modeled as an abstract type. The type has an upper bound, Food, which is expressed by the “<: Food” clause. This means that any concrete instantiation of SuitableFood (in a subclass of Animal) must be a subclass of Food. For example, you would not be able to instantiate SuitableFood with class IOException.

```
class Grass extends Food

class Cow extends Animal {

  type SuitableFood = Grass

  override def eat(food: Grass) {}

}
```

Listing 20.10 · Implementing an abstract type in a subclass.

With Animal defined, you can now progress to cows, as shown in [List-ing 20.10](#). Class Cow fixes its SuitableFood to be Grass and also defines a concrete eat method for this kind of food. These new class definitions compile without errors. If you tried to run the “cows-that-eat-fish” counterexample with the new class definitions, you would get the following compiler error:

```
scala> class Fish extends Food

defined class Fish

scala> val bessy: Animal = new Cow

bessy: Animal = Cow@674bf6

scala> bessy eat (new Fish)
```

<console>:10: error: type mismatch;

found

: Fish

required: bessy.SuitableFood

bessy eat (new Fish)

^

20.7

Path-dependent types

Have a look at the last error message: What's interesting about it is the type required by the eat method: bessy.SuitableFood. This type consists of an object reference, bessy, which is followed by a type field, SuitableFood,

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 20.7](#)

[Chapter 20 · Abstract Members](#)

450

of the object. So this shows that objects in Scala can have types as members.

The meaning of bessy.SuitableFood is “the type SuitableFood that is a member of the object referenced from bessy,” or alternatively, the type of food that's suitable for bessy. A type like bessy.SuitableFood is called a path-dependent type. The word “path” here means a reference to an object.

It could be a single name, such as bessy, or a longer access path, such as farm.barn.bessy.SuitableFood, where each of farm, barn, and bessy are variables (or singleton object names) that refer to objects.

As the term “path-dependent type” says, the type depends on the path: in general, different paths give rise to different types. For instance, say you defined classes DogFood and Dog, like this:

```
class DogFood extends Food  
  
class Dog extends Animal {  
  
  type SuitableFood = DogFood  
  
  override def eat(food: DogFood) {}  
  
}
```

If you attempted to feed a dog with food fit for a cow, your code would not compile:

```
scala> val bessy = new Cow  
  
bessy: Cow = Cow@10cd6d  
  
scala> val lassie = new Dog  
  
bootsie: Dog = Dog@d11fa6  
  
scala> lassie eat (new bessy.SuitableFood)  
  
<console>:13: error: type mismatch;  
found  
  : Grass  
  
required: DogFood  
  
lassie eat (new bessy.SuitableFood)  
^
```

The problem here is that the type of the SuitableFood object passed to the eat method, bessy.SuitableFood, is incompatible with the parameter type of eat, lassie.SuitableFood. The case would be different for two Dogs however. Because Dog's SuitableFood type is defined to be an alias for class DogFood, the SuitableFood types of two Dogs are in fact the same.

As a result, the Dog instance named lassie could actually eat the suitable food of a different Dog instance (which we'll name bootsie):

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 20.7](#)

### [Chapter 20 · Abstract Members](#)

451

```
scala> val bootsie = new Dog
```

```
bootsie: Dog = Dog@54ca71
```

```
scala> lassie eat (new bootsie.SuitableFood)
```

A path-dependent type resembles the syntax for an inner class type in Java, but there is a crucial difference: a path-dependent type names an outer object, whereas an inner class type names an outer class. Java-style inner class types can also be expressed in Scala, but they are written differently.

Consider these two classes, Outer and Inner:

```
class Outer {
```

```
    class Inner
```

```
}
```

In Scala, the inner class is addressed using the expression Outer#Inner instead of Java's Outer.Inner. The '.' syntax is reserved for objects. For

example, imagine you instantiate two objects of type Outer, like this: val o1 = new Outer

```
val o2 = new Outer
```

Here o1.Inner and o2.Inner are two path-dependent types (and they are different types). Both of these types conform to (are subtypes of) the more general type Outer#Inner, which represents the Inner class with an arbitrary outer object of type Outer. By contrast, type o1.Inner refers to the Inner class with a specific outer object (the one referenced from o1). Likewise, type o2.Inner refers to the Inner class with a different, specific outer object (the one referenced from o2).

In Scala, as in Java, inner class instances hold a reference to an enclosing outer class instance. This allows an inner class, for example, to access members of its outer class. Thus you can't instantiate an inner class without in some way specifying an outer class instance. One way to do this is to instantiate the inner class inside the body of the outer class. In this case, the current outer class instance (referenced from this) will be used. Another way is to use a path-dependent type. For example, because the type, o1.Inner, names a specific outer object, you can instantiate it:

```
scala> new o1.Inner
```

```
res1: o1.Inner = Outer$Inner@13727f
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 20.8](#)

[Chapter 20](#) · [Abstract Members](#)

452

The resulting inner object will contain a reference to its outer object, the object referenced from o1. By contrast, because the type Outer#Inner does not name any specific instance of Outer, you can't create an instance of it:

```
scala> new Outer#Inner
```

```
<console>:6: error: Outer is not a legal prefix for a constructor
```

```
new Outer#Inner
```

```
^
```

20.8

## Enumerations

An interesting application of path-dependent types is found in Scala's support for enumerations. Some other languages, including Java and C#, have enumerations as a built-in language construct to define new types. Scala does not need special syntax for enumerations. Instead, there's a class in its standard library, `scala.Enumeration`. To create a new enumeration, you define an object that extends this class, as in the following example, which defines a new enumeration of Colors:

```
object Color extends Enumeration {  
    val Red = Value  
    val Green = Value  
    val Blue = Value  
}
```

Scala lets you also shorten several successive `val` or `var` definitions with the same right-hand side. Equivalently to the above you could write: `object Color extends Enumeration {`

```
    val Red, Green, Blue = Value  
}
```

This object definition provides three values: `Color.Red`, `Color.Green`, and `Color.Blue`. You could also import everything in `Color` with: `import Color._`

and then just use Red, Green, and Blue. But what is the type of these values?

Enumeration defines an inner class named Value, and the same-named parameterless Value method returns a fresh instance of that class. This means

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 20.8](#)

### [Chapter 20 · Abstract Members](#)

453

that a value such as Color.Red is of type Color.Value. Color.Value is the type of all enumeration values defined in object Color. It's a path-dependent type, with Color being the path and Value being the dependent type. What's significant about this is that it is a completely new type, different from all other types. In particular, if you would define another enumeration, such as: object Direction extends Enumeration {

```
val North, East, South, West = Value
```

```
}
```

then Direction.Value would be different from Color.Value because the path parts of the two types differ.

Scala's Enumeration class also offers many other features found in the enumeration designs of other languages. You can associate names with enumeration values by using a different overloaded variant of the Value method: object Direction extends Enumeration {

```
val North = Value("North")
```

```
val East = Value("East")
```

```
val South = Value("South")
```

```
val West = Value("West")  
}
```

You can step through all values of an enumeration with `foreach`, or use for expressions with `map`, `flatMap` and `filter`:

```
scala> for (d <- Direction) print(d + " ") North East South West
```

Values of an enumeration are numbered from 0, and you can find out the number of an enumeration value by its `id` method:

```
scala> Direction.East.id
```

```
res5: Int = 1
```

It's also possible to go the other way, from a non-negative integer number to the value that has this number as `id` in an enumeration: `scala> Direction(1)`

```
res6: Direction.Value = East
```

This should be enough to get you started with enumerations. You can find more information in the Scaladoc comments of class `scala.Enumeration`.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 20.9](#)

[Chapter 20 · Abstract Members](#)

454

20.9

Case study: Currencies

The rest of this chapter presents a case study that explains how abstract types can be used in Scala. The task is to design a class `Currency`. A typical

instance of Currency would represent an amount of money in dollars, euros, yen, or some other currency. It should be possible to do some arithmetic on currencies. For instance, you should be able to add two amounts of the same currency. Or you should be able to multiply a currency amount by a factor representing an interest rate.

These thoughts lead to the following first design for a currency class:

```
// A first (faulty) design of the Currency class
```

```
abstract class Currency {
```

```
    val amount: Long
```

```
    def designation: String
```

```
    override def toString = amount + " " + designation def + (that: Currency):  
    Currency = ...
```

```
    def *(x: Double): Currency = ...
```

```
}
```

The amount of a currency is the number of currency units it represents. This is a field of type Long so that very large amounts of money such as the market capitalization of Google or Microsoft can be represented. It's left abstract here, waiting to be defined when a subclass talks about concrete amounts of money. The designation of a currency is a string that identifies it. The `toString` method of class `Currency` indicates an amount and a designation.

It would yield results such as:

79 USD

11000 Yen

99 Euro

Finally, there are methods `+`, for adding currencies, and `*`, for multiplying a currency with a floating-point number. You can create a concrete currency value by supplying concrete amount and designation values, like this: new Currency {

```
val amount = 79L  
def designation = "USD"  
}
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 20.9](#)

### [Chapter 20 · Abstract Members](#)

455

This design would be OK if all we wanted to model was a single currency such as only dollars or only euros. But it fails once we need to deal with several currencies. Assume you model dollars and euros as two subclasses of class currency:

```
abstract class Dollar extends Currency {
```

```
    def designation = "USD"  
}
```

```
abstract class Euro extends Currency {
```

```
    def designation = "Euro"  
}
```

At first glance this looks reasonable. But it would let you add dollars to euros. The result of such an addition would be of type Currency. But it would be a funny currency that was made up of a mix of euros and dollars.

What you want instead is a more specialized version of the `+` method: when implemented in class `Dollar`, it should take `Dollar` arguments and yield a `Dollar` result; when implemented in class `Euro`, it should take `Euro` arguments and yield a `Euro` result. So the type of the addition method would change depending on which class you are in. Nonetheless, you would like to write the addition method just once, not each time a new currency is defined.

In Scala, there's a simple technique to deal with situations like this: if something is not known at the point where a class is defined, make it abstract in the class. This applies to both values and types. In the case of currencies, the exact argument and result type of the addition method are not known, so it is a good candidate for an abstract type. This would lead to the following sketch of class `AbstractCurrency`:

```
// A second (still imperfect) design of the Currency class abstract class
AbstractCurrency {

  type Currency <: AbstractCurrency

  val amount: Long

  def designation: String

  override def toString = amount + " " + designation def + (that: Currency):
  Currency = ...

  def *(x: Double): Currency = ...

}
```

The only differences from the previous situation are that the class is now called `AbstractCurrency`, and that it contains an abstract type `Currency`,

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 20.9](#)

[Chapter 20 · Abstract Members](#)

which represents the real currency in question. Each concrete subclass of `AbstractCurrency` would need to fix the `Currency` type to refer to the concrete subclass itself, thereby “tying the knot.”

For instance, here is a new version of class `Dollar`, which now extends class `AbstractCurrency`:

```
abstract class Dollar extends AbstractCurrency {
    type Currency = Dollar
    def designation = "USD"
}
```

This design is workable, but it is still not perfect. One problem is hidden by the ellipses that indicate the missing method definitions of `+` and `*` in class `AbstractCurrency`. In particular, how should addition be implemented in this class? It’s easy enough to calculate the correct amount of the new currency as `this.amount + that.amount`, but how would you convert the amount into a currency of the right type? You might try something like: `def + (that: Currency): Currency = new Currency {`

```
val amount = this.amount + that.amount
}
```

However, this would not compile:

```
error: class type required
def + (that: Currency): Currency = new Currency {
```

One of the restrictions of Scala’s treatment of abstract types is that you can neither create an instance of an abstract type, nor have an abstract type as a supertype of another class.<sup>1</sup> So the compiler would refuse the example code above that attempted to instantiate `Currency`.

However, you can work around this restriction using a factory method.

Instead of creating an instance of an abstract type directly, declare an abstract method that does it. Then, wherever the abstract type is fixed to be some concrete type, you also need to give a concrete implementation of the factory method. For class `AbstractCurrency`, this would look as follows:

1 There's some promising recent research on virtual classes, which would allow this, but virtual classes are not currently supported in Scala.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 20.9](#)

### [Chapter 20 · Abstract Members](#)

457

```
abstract class AbstractCurrency {  
    type Currency <: AbstractCurrency // abstract type  
    def make(amount: Long): Currency  
    // factory method  
    ...  
    // rest of class  
}
```

A design like this could be made to work, but it looks rather suspicious.

Why place the factory method inside class `AbstractCurrency`? This looks dubious, for at least two reasons. First, if you have some amount of currency (say, one dollar), you also hold in your hand the ability to make more of the same currency, using code such as:

```
myDollar.make(100)
```

```
// here are a hundred more!
```

In the age of color copying this might be a tempting scenario, but hopefully not one which you would be able to do for very long without being caught.

The second problem with this code is that you can make more Currency objects if you already have a reference to a Currency object, but how do you get the first object of a given Currency? You'd need another creation method, which does essentially the same job as make. So you have a case of code duplication, which is a sure sign of a code smell.

The solution, of course, is to move the abstract type and the factory method outside class AbstractCurrency. You need to create another class that contains the AbstractCurrency class, the Currency type, and the make factory method. We'll call this a CurrencyZone:

```
abstract class CurrencyZone {  
  
    type Currency <: AbstractCurrency  
  
    def make(x: Long): Currency  
  
    abstract class AbstractCurrency {  
  
        val amount: Long  
  
        def designation: String  
  
        override def toString = amount + " " + designation  
        def +(that: Currency): Currency =  
            make(this.amount + that.amount)  
  
        def *(x: Double): Currency =  
            make((this.amount * x).toLong)  
    }  
}
```

}

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 20.9](#)

### [Chapter 20 · Abstract Members](#)

458

An example of a concrete CurrencyZone is the US. You could define this as follows:

```
object US extends CurrencyZone {  
    abstract class Dollar extends AbstractCurrency {  
        def designation = "USD"  
    }  
    type Currency = Dollar  
    def make(x: Long) = new Dollar { val amount = x }  
}
```

Here, US is an object that extends CurrencyZone. It defines a class Dollar, which is a subclass of AbstractCurrency. So the type of money in this zone is US.Dollar. The US object also fixes the type Currency to be an alias for Dollar, and it gives an implementation of the make factory method to return a dollar amount.

This is a workable design. There are only a few refinements to be added.

The first refinement concerns subunits. So far, every currency was measured in a single unit: dollars, euros, or yen. However, most currencies have subunits: for instance, in the US, it's dollars and cents. The most straightforward way to model cents is to have the amount field in

US.Currency represent cents instead of dollars. To convert back to dollars, it's useful to introduce a field CurrencyUnit into class CurrencyZone, which contains the amount of one standard unit in that currency:

```
class CurrencyZone {  
    ...  
    val CurrencyUnit: Currency  
}
```

The US object could define the quantities Cent, Dollar, and CurrencyUnit as shown in [Listing 20.11](#). This definition is just like the previous definition of the US object, except that it adds three new fields. The field Cent represents an amount of 1 US.Currency. It's an object analogous to a one-cent coin. The field Dollar represents an amount of 100 US.Currency. So the US

object now defines the name Dollar in two ways. The type Dollar (defined by the abstract inner class named Dollar) represents the generic name of the Currency valid in the US currency zone. By contrast, the value Dollar (referenced from the val field named Dollar) represents a single US dollar,

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 20.9](#)

[Chapter 20](#) · [Abstract Members](#)

459

```
object US extends CurrencyZone {  
    abstract class Dollar extends AbstractCurrency {  
        def designation = "USD"  
    }  
}
```

```

type Currency = Dollar

def make(cents: Long) = new Dollar {

    val amount = cents

}

val Cent = make(1)

val Dollar = make(100)

val CurrencyUnit = Dollar

}

```

Listing 20.11 · The US currency zone.

analogous to a one-dollar bill. The third field definition of CurrencyUnit specifies that the standard currency unit in the US zone is the Dollar (i.e., the value Dollar, referenced from the field, not the type Dollar).

The `toString` method in class `Currency` also needs to be adapted to take subunits into account. For instance, the sum of ten dollars and twenty three cents should print as a decimal number: 10.23 USD. To achieve this, you could implement `Currency`'s `toString` method as follows: override `def toString =`

```

((amount.toDouble / CurrencyUnit.amount.toDouble)

formatted ("%."+ decimals(CurrencyUnit.amount) +"f")

+" "+ designation)

```

Here, `formatted` is a method that Scala makes available on several classes, including `Double`.<sup>2</sup> The `formatted` method returns the string that results from formatting the original string on which `formatted` was invoked according to a format string passed as the `formatted` method's right-hand

operand. The syntax of format strings passed to formatted is the same as that of Java's String.format method. For instance, the format string

`%.2f` formats a number with two decimal digits. The format string used in the `toString` shown previously is assembled by calling the `decimals` 2Scala uses rich wrappers, described in [Section 5.9](#), to make `formatted` available.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 20.9](#)

### [Chapter 20 · Abstract Members](#)

460

method on `CurrencyUnit.amount`. This method returns the number of decimal digits of a decimal power minus one. For instance, `decimals(10)` is 1, `decimals(100)` is 2, and so on. The `decimals` method is implemented by a simple recursion:

```
private def decimals(n: Long): Int =
```

```
if (n == 1) 0 else 1 + decimals(n / 10)
```

[Listing 20.12](#) shows some other currency zones: object `Europe` extends `CurrencyZone` {

```
abstract class Euro extends AbstractCurrency {
```

```
def designation = "EUR"
```

```
}
```

```
type Currency = Euro
```

```
def make(cents: Long) = new Euro {
```

```
val amount = cents
```

```

}

val Cent = make(1)

val Euro = make(100)

val CurrencyUnit = Euro

}

object Japan extends CurrencyZone {

abstract class Yen extends AbstractCurrency {

def designation = "JPY"

}

type Currency = Yen

def make(yen: Long) = new Yen {

val amount = yen

}

val Yen = make(1)

val CurrencyUnit = Yen

}

```

Listing 20.12 · Currency zones for Europe and Japan.

As another refinement you can add a currency conversion feature to the model. As a first step, you could write a Converter object that contains applicable exchange rates between currencies, as shown in [Listing 20.13](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 20.9

### Chapter 20 · Abstract Members

461

```
object Converter {  
    var exchangeRate = Map(  
        "USD" -> Map("USD" -> 1.0  
        , "EUR" -> 0.7596,  
        "JPY" -> 1.211 , "CHF" -> 1.223),  
        "EUR" -> Map("USD" -> 1.316 , "EUR" -> 1.0  
        ,  
        "JPY" -> 1.594 , "CHF" -> 1.623),  
        "JPY" -> Map("USD" -> 0.8257, "EUR" -> 0.6272,  
        "JPY" -> 1.0  
        , "CHF" -> 1.018),  
        "CHF" -> Map("USD" -> 0.8108, "EUR" -> 0.6160,  
        "JPY" -> 0.982 , "CHF" -> 1.0  
    )  
)  
}
```

Listing 20.13 · A converter object with an exchange rates map.

Then, you could add a conversion method, from, to class Currency, which converts from a given source currency into the current Currency object: def from(other: CurrencyZone#AbstractCurrency): Currency =

```
make(Math.round(  
other.amount.toDouble * Converter.exchangeRate  
(other.designation)(this.designation)))
```

The from method takes an arbitrary currency as argument. This is expressed by its formal parameter type, CurrencyZone#AbstractCurrency, which indicates that the argument passed as other must be an AbstractCurrency type in some arbitrary and unknown CurrencyZone. It produces its result by multiplying the amount of the other currency with the exchange rate between the other and the current currency.<sup>3</sup>

The final version of the CurrencyZone class is shown in [Listing 20.14](#).

You can test the class in the Scala command shell. We'll assume that the CurrencyZone class and all concrete CurrencyZone objects are defined in a package org.stairwaybook.currencies. The first step is to import everything in this package into the command shell:

```
scala> import org.stairwaybook.currencies._
```

By the way, in case you think you're getting a bad deal on Japanese yen, the exchange rates convert currencies based on their CurrencyZone amounts. Thus, 1.211 is the exchange rate between US cents to Japanese yen.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 20.9](#)

[Chapter 20 · Abstract Members](#)

```
abstract class CurrencyZone {  
  
    type Currency <: AbstractCurrency  
  
    def make(x: Long): Currency  
  
    abstract class AbstractCurrency {  
  
        val amount: Long  
  
        def designation: String  
  
        def + (that: Currency): Currency =  
            make(this.amount + that.amount)  
  
        def * (x: Double): Currency =  
            make((this.amount * x).toLong)  
  
        def - (that: Currency): Currency =  
            make(this.amount - that.amount)  
  
        def / (that: Double) =  
            make((this.amount / that).toLong)  
  
        def / (that: Currency) =  
            this.amount.toDouble / that.amount  
  
        def from(other: CurrencyZone#AbstractCurrency): Currency =  
            make(Math.round(  
                other.amount.toDouble * Converter.exchangeRate  
                (other.designation)(this.designation)))
```

```

private def decimals(n: Long): Int =
  if (n == 1) 0 else 1 + decimals(n / 10)

override def toString =
  ((amount.toDouble / CurrencyUnit.amount.toDouble)
    formatted ("%."+ decimals(CurrencyUnit.amount) +"f")
    +" "+ designation)
}

val CurrencyUnit: Currency
}

```

Listing 20.14 · The full code of class `CurrencyZone`.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 20.10](#)

[Chapter 20 · Abstract Members](#)

463

You can then do some currency conversions:

scala> Japan.Yen from US.Dollar \* 100

res16: Japan.Currency = 12110 JPY

scala> Europe.Euro from res16

res17: Europe.Currency = 75.95 EUR

scala> US.Dollar from res17

```
res18: US.Currency = 99.95 USD
```

The fact that we obtain almost the same amount after three conversions implies that these are some pretty good exchange rates!

You can also add up values of the same currency:

```
scala> US.Dollar * 100 + res18
```

```
res19: currencies.US.Currency = 199.95
```

On the other hand, you cannot add amounts of different currencies: `scala> US.Dollar + Europe.Euro`

```
<console>:7: error: type mismatch;
```

found

: currencies.Europe.Euro

required: currencies.US.Currency

US.Dollar + Europe.Euro

^

By preventing the addition of two values with different units (in this case, currencies), the type abstraction has done its job. It prevents us from performing calculations that are unsound. Failures to convert correctly between different units may seem like trivial bugs, but they have caused many serious systems faults. An example is the crash of the Mars Climate Orbiter spacecraft on September 23, 1999, which was caused because one engineering team used metric units while another used English units. If units had been coded in the same way as currencies are coded in this chapter, this error would have been detected by a simple compilation run. Instead, it caused the crash of the orbiter after a near ten-month voyage.

20.10

## Conclusion

Scala offers systematic and very general support for object-oriented abstraction. It enables you to not only abstract over methods, but also over values,

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### Section 20.10

#### Chapter 20 · Abstract Members

464

variables, and types. This chapter has shown how to take advantage of abstract members. They support a simple yet effective principle for systems structuring: when designing a class, make everything that is not yet known into an abstract member. The type system will then drive the development of your model, just as you saw with the currency case study. It does not matter whether the unknown is a type, method, variable or value. In Scala, all of these can be declared abstract.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 21

### Implicit Conversions and Parameters

There's a fundamental difference between your own code and libraries of other people: you can change or extend your own code as you wish, but if you want to use someone else's libraries, you usually have to take them as they are.

A number of constructs have sprung up in programming languages to alleviate this problem. Ruby has modules, and Smalltalk lets packages add to each other's classes. These are very powerful, but also dangerous, in that you modify the behavior of a class for an entire application, some parts of which you might not know. C# 3.0 has static extension methods, which are

more local, but also more restrictive in that you can only add methods, not fields, to a class, and you can't make a class implement new interfaces.

Scala's answer is implicit conversions and parameters. These can make existing libraries much more pleasant to deal with by letting you leave out tedious, obvious details that obscure the interesting parts of your code. Used tastefully, this results in code that is focused on the interesting, non-trivial parts of your program. This chapter shows you how implicits work, and presents some of the most common ways they are used.

## 21.1

### Implicit conversions

Before delving into the details of implicit conversions, take a look at a typical example of their use. One of the central collection traits in Scala is `RandomAccessSeq[T]`, which describes random access sequences over elements of type `T`. `RandomAccessSeqs` have most of the utility methods that you know from arrays or lists: `take`, `drop`, `map`, `filter`, `exists`, and

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### [Section 21.1](#)

### [Chapter 21 · Implicit Conversions and Parameters](#)

466

`mkString` are just some examples. To make a new random access sequence, all you must do is extend trait `RandomAccessSeq`. You only need to define two methods that are abstract in the trait: `length` and `apply`. You then get implementations of all the other useful methods in the trait “for free.”

So far so good. This works fine if you are about to define new classes, but what about existing ones? Maybe you'd like to also treat classes in other people's libraries as random access sequences, even if the designers of those libraries had not thought of making their classes extend `RandomAccessSeq`.

For instance, a String in Java would make a fine RandomAccessSeq[Char], except that unfortunately Java's String class does not inherit from Scala's RandomAccessSeq trait.

In situations like this, implicits can help. To make a String appear to be a subtype of RandomAccessSeq, you can define an implicit conversion from String to an adapter class that actually is a subtype of RandomAccessSeq:

```
implicit def stringWrapper(s: String) =
```

```
new RandomAccessSeq[Char] {  
    def length = s.length  
    def apply(i: Int) = s.charAt(i)  
}
```

That's it.<sup>1</sup> The implicit conversion is just a normal method. The only thing that's special is the implicit modifier at the start. You can apply the conversion explicitly to transform Strings to RandomAccessSeqs:

```
scala> stringWrapper("abc123") exists (_.isDigit)  
res0: Boolean = true
```

But you can also leave out the conversion and still get the same behavior:

```
scala> "abc123" exists (_.isDigit)
```

```
res1: Boolean = true
```

What goes on here under the covers is that the Scala compiler inserts the stringWrapper conversion for you. So in effect it rewrites the last expression above to the one before. But on the surface, it's as if Java's Strings had acquired all the useful methods of trait RandomAccessSeq.

<sup>1</sup>In fact, the Predef object already defines a stringWrapper conversion with similar functionality, so in practice you can use this conversion instead of defining your own.

## Chapter 21 · Implicit Conversions and Parameters

467

This aspect of implicits is similar to extension methods in C#, which also allow you to add new methods to existing classes. However, implicits can be far more concise than extension methods. For instance, we only needed to define the length and apply methods in the stringWrapper conversion, and we got all other methods in RandomAccessSeq for free. With extension methods you'd need to define every one of these methods again. This duplication makes code harder to write, and, more importantly, harder to maintain.

Imagine someone adds a new method to RandomAccessSeq sometime in the future. If all you have is extension methods, you'd have to chase down all RandomAccessSeq “copycats” one by one, and add the new method in each.

If you forget one of the copycats, your system would become inconsistent.

Talk about a maintenance nightmare! By contrast, with Scala's implicits, all conversions would pick up the newly added method automatically.

Another advantage of implicit conversions is that they support conversions into the target type, a type that's needed at some point in the code. For instance, suppose you write a method printWithSpaces, which prints all characters in a given random access sequence with spaces in between them:

```
def printWithSpaces(seq: RandomAccessSeq[Char]) =
```

```
seq mkString " "
```

Because Strings are implicitly convertible to RandomAccessSeqs, you can pass a string to printWithSpaces:

```
scala> printWithSpaces("xyz")
```

```
res2: String = x y z
```

The last expression is equivalent to the following one, where the conversion shows up explicitly:

```
scala> printWithSpaces(stringWrapper("xyz")) res3: String = x y z
```

This section has shown you some of the power of implicit conversions, and how they let you “dress up” existing libraries. In the next sections you’ll learn the rules that determine when implicit conversions are tried and how they are found.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 21.2](#)

### [Chapter 21 · Implicit Conversions and Parameters](#)

468

21.2

#### Rules for implicits

Implicit definitions are those that the compiler is allowed to insert into a program in order to fix any of its type errors. For example, if  $x + y$  does not type check, then the compiler might change it to  $\text{convert}(x) + y$ , where  $\text{convert}$  is some available implicit conversion. If  $\text{convert}$  changes  $x$  into something that has a  $+$  method, then this change might fix a program so that it type checks and runs correctly. If  $\text{convert}$  really is just a simple conversion function, then leaving it out of the source code can be a clarification.

Implicit conversions are governed by the following general rules: Marking Rule: Only definitions marked implicit are available.

The

implicit keyword is used to mark which declarations the compiler may use as implicits. You can use it to mark any variable, function, or object definition. Here’s an example of an implicit function definition:<sup>2</sup>

```
implicit def intToString(x: Int) = x.toString
```

The compiler will only change  $x + y$  to  $\text{convert}(x) + y$  if `convert` is marked as `implicit`. This way, you avoid the confusion that would result if the compiler picked random functions that happen to be in scope and inserted them as “conversions.” The compiler will only select among the definitions you have explicitly marked as `implicit`.

**Scope Rule:** An inserted implicit conversion must be in scope as a single identifier, or be associated with the source or target type of the conversion.

The Scala compiler will only consider implicit conversions that are in scope. To make an implicit conversion available, therefore, you must in some way bring it into scope. Moreover, with one exception, the implicit conversion must be in scope as a single identifier. The compiler will not insert a conversion of the form `someVariable.convert`. For example, it will not expand  $x + y$  to `someVariable.convert(x) + y`. If you want to make `someVariable.convert` available as an implicit, therefore, you would need to import it, which would make it available as a single identifier. Once imported, the compiler would be free to apply it as  $\text{convert}(x) + y$ . In fact, it is common for libraries to include a `Preamble` object including a number of `Variables` and singleton objects marked `implicit` can be used as implicit parameters.

This use case will be described later in this chapter.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 21.2](#)

[Chapter 21 · Implicit Conversions and Parameters](#)

469

useful implicit conversions. Code that uses the library can then do a single “`import Preamble._`” to access the library’s implicit conversions.

There's one exception to the "single identifier" rule. The compiler will also look for implicit definitions in the companion object of the source or expected target types of the conversion. For example, if you're attempting to pass a Dollar object to a method that takes a Euro, the source type is Dollar and the target type is Euro. You could, therefore, package an implicit conversion from Dollar to Euro in the companion object of either class, Dollar or Euro. Here's an example in which the implicit definition is placed in Dollar's companion object:

```
object Dollar {  
    implicit def dollarToEuro(x: Dollar): Euro = ...  
}  
  
class Dollar { ... }
```

In this case, the conversion dollarToEuro is said to be associated to the type Dollar. The compiler will find such an associated conversion every time it needs to convert from an instance of type Dollar. There's no need to import the conversion separately into your program.

The Scope Rule helps with modular reasoning. When you read code in a file, the only things you need to consider from other files are those that are either imported or are explicitly referenced through a fully qualified name.

This benefit is at least as important for implicits as for explicitly written code.

If implicits took effect system-wide, then to understand a file you would have to know about every implicit introduced anywhere in the program!

**Non-Ambiguity Rule:** An implicit conversion is only inserted if there is no other possible conversion to insert.

If the compiler has two options

to fix  $x + y$ , say using either  $\text{convert1}(x) + y$  or  $\text{convert2}(x) + y$ , then it will report an error and refuse to choose between them. It would be possible to

define some kind of “best match” rule that prefers some conversions over others. However, such choices lead to really obscure code. Imagine the compiler chooses convert2, but you are new to the file and are only aware of convert1—you could spend a lot of time thinking a different conversion had been applied!

In cases like this, one option is to remove one of the imported implicits so that the ambiguity is removed. If you prefer convert2, then remove the

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 21.2](#)

### [Chapter 21 · Implicit Conversions and Parameters](#)

470

import of convert1. Alternatively, you can write your desired conversion explicitly: convert2(x) + y.

**One-at-a-time Rule:** Only one implicit is tried.

The compiler will never

rewrite  $x + y$  to  $\text{convert1}(\text{convert2}(x)) + y$ . Doing so would cause compile times to increase dramatically on erroneous code, and it would increase the difference between what the programmer writes and what the program actually does. For sanity’s sake, the compiler does not insert further implicit conversions when it is already in the middle of trying another implicit.

However, it’s possible to circumvent this restriction by having implicits take implicit parameters, which will be described later in this chapter.

**Explicit-First Rule:** Whenever code type checks as it is written, no implicits are attempted.

The compiler will not change code that already

works. A corollary of this rule is that you can always replace implicit identifiers by explicit ones, thus making the code longer but with less apparent ambiguity. You can trade between these choices on a case-by-case basis.

Whenever you see code that seems repetitive and verbose, implicit conversions can help you decrease the tedium. Whenever code seems terse to the point of obscurity, you can insert conversions explicitly. The amount of implicits you leave the compiler to insert is ultimately a matter of style.

Naming an implicit conversion.

Implicit conversions can have arbitrary

names. The name of an implicit conversion matters only in two situations: if you want to write it explicitly in a method application, and for determining which implicit conversions are available at any place in the program.

To illustrate the second point, say you have an object with two implicit conversions:

```
object MyConversions {  
    implicit def stringWrapper(s: String):  
        RandomAccessSeq[Char] = ...  
    implicit def intToString(x: Int): String = ...  
}
```

In your application, you want to make use of the `stringWrapper` conversion, but you don't want integers to be converted automatically to strings by

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 21.3](#)

[Chapter 21 · Implicit Conversions and Parameters](#)

means of the `intToString` conversion. You can achieve this by importing only one conversion, but not the other:

```
import MyConversions.stringWrapper  
... // code making use of stringWrapper
```

In this example, it was important that the implicit conversions had names, because only that way could you selectively import one and not the other.

Where implicits are tried.

There are three places implicits are used in the

language: conversions to an expected type, conversions of the receiver of a selection, and implicit parameters. Implicit conversions to an expected type let you use one type in a context where a different type is expected. For example, you might have a `String` and want to pass it to a method that requires a `RandomAccessSeq[Char]`. Conversions of the receiver let you adapt the receiver of a method call, i.e., the object on which a method is invoked, if the method is not applicable on the original type. An example is `"abc".exists`, which is converted to `stringWrapper("abc").exists` because the `exists` method is not available on `Strings` but is available on `RandomAccessSeqs`.

Implicit parameters, on the other hand, are usually used to provide more information to the called function about what the caller wants. Implicit parameters are especially useful with generic functions, where the called function might otherwise know nothing at all about the type of one or more arguments. Each of the following three sections will discuss one of these three kinds of implicits.

## 21.3

### Implicit conversion to an expected type

Implicit conversion to an expected type is the first place the compiler will use implicits. The rule is simple. Whenever the compiler sees an X, but needs a Y, it will look for an implicit function that converts X to Y. For example, normally a double cannot be used as an integer, because it loses precision: scala> val i: Int = 3.5

```
<console>:5: error: type mismatch;
```

found

: Double(3.5)

required: Int

val i: Int = 3.5

^

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 21.3](#)

[Chapter 21 · Implicit Conversions and Parameters](#)

472

However, you can define an implicit conversion to smooth this over: scala> implicit def doubleToInt(x: Double) = x.toInt doubleToInt: (Double)Int

scala> val i: Int = 3.5

i: Int = 3

What happens here is that the compiler sees a Double, specifically 3.5, in a context where it requires an Int. So far, the compiler is looking at an ordinary type error. Before giving up, though, it searches for an implicit conversion from Double to Int. In this case, it finds one: doubleToInt, because doubleToInt is in scope as a single identifier. (Outside the interpreter, you might bring doubleToInt into scope via an import or

possibly through inheritance.) The compiler then inserts a call to doubleToInt automatically.

Behind the scenes, the code becomes:

```
val i: Int = doubleToInt(3.5)
```

This is literally an implicit conversion. You did not explicitly ask for conversion. Instead, you marked doubleToInt as an available implicit conversion by bringing it into scope as a single identifier, and then the compiler automatically used it when it needed to convert from a Double to an Int.

Converting Doubles to Ints might raise some eyebrows, because it's a dubious idea to have something that causes a loss in precision happen invisibly. So this is not really a conversion we recommend. It makes much more sense to go the other way, from some more constrained type to a more general one. For instance, an Int can be converted without loss of precision to a Double, so an implicit conversion from Int to Double makes sense. In fact, that's exactly what happens. The `scala.Predef` object, which is implicitly imported into every Scala program, defines implicit conversions that convert “smaller” numeric types to “larger” ones. For instance, you will find in `Predef` the following conversion:

```
implicit def int2double(x: Int): Double = x.toDouble
```

That's why in Scala Int values can be stored in variables of type Double.

There's no special rule in the type system for this; it's just an implicit conversion that gets applied.<sup>3</sup>

<sup>3</sup>The Scala compiler backend will treat the conversion specially, however, translating it to a special “i2d” bytecode. So the compiled image is the same as in Java.

## Chapter 21 · Implicit Conversions and Parameters

473

21.4

### Converting the receiver

Implicit conversions also apply to the receiver of a method call, the object on which the method is invoked. This kind of implicit conversion has two main uses. First, receiver conversions allow smoother integration of a new class into an existing class hierarchy. And second, they support writing domain-specific languages (DSLs) within the language.

To see how it works, suppose you write down `obj.doIt`, and `obj` does not have a member named `doIt`. The compiler will try to insert conversions before giving up. In this case, the conversion needs to apply to the receiver, `obj`. The compiler will act as if the expected “type” of `obj` were “has a member named `doIt`.” This “has a `doIt`” type is not a normal Scala type, but it is there conceptually and is why the compiler will insert an implicit conversion in this case.

### Interoperating with new types

As mentioned previously, one major use of receiver conversions is allowing smoother integration of new with existing types. In particular, they allow you to enable client programmers to use instances of existing types as if they were instances of your new type. Take, for example, class `Rational` shown in [Listing 6.5](#) on [page 145](#). Here’s a snippet of that class again: class `Rational(n: Int, d: Int) {`

...

```
def + (that: Rational): Rational = ...
```

```
def + (that: Int): Rational = ...
```

```
}
```

Class Rational has two overloaded variants of the + method, which take Rationals and Ints, respectively, as arguments. So you can either add two rational numbers or a rational number and an integer:

```
scala> val oneHalf = new Rational(1, 2)
```

```
oneHalf: Rational = 1/2
```

```
scala> oneHalf + oneHalf
```

```
res4: Rational = 1/1
```

```
scala> oneHalf + 1
```

```
res5: Rational = 3/2
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 21.4

### Chapter 21 · Implicit Conversions and Parameters

474

What about an expression like 1 + oneHalf, however? This expression is tricky because the receiver, 1, does not have a suitable + method. So the following gives an error:

```
scala> 1 + oneHalf
```

```
<console>:6: error: overloaded method value + with alternatives
(Double)Double <and> ... cannot be applied to (Rational)
```

```
1 + oneHalf
```

^

To allow this kind of mixed arithmetic, you need to define an implicit conversion from Int to Rational:

```
scala> implicit def intToRational(x: Int) =  
new Rational(x, 1)  
  
intToRational: (Int)Rational
```

With the conversion in place, converting the receiver does the trick: scala>  
1 + oneHalf

```
res6: Rational = 3/2
```

What happens behind the scenes here is that Scala compiler first tries to type check the expression 1 + oneHalf as it is. This fails because Int has several

+ methods, but none that takes a Rational argument. Next, the compiler searches for an implicit conversion from Int to another type that has a + method which can be applied to a Rational. It finds your conversion and applies it, which yields:

```
intToRational(1) + oneHalf
```

In this case, the compiler found the implicit conversion function because you entered its definition into the interpreter, which brought it into scope for the remainder of the interpreter session.

Simulating new syntax

The other major use of implicit conversions is to simulate adding new syntax.

Recall that you can make a Map using syntax like this:

```
Map(1 -> "one", 2 -> "two", 3 -> "three")
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 21.5](#)

## Chapter 21 · Implicit Conversions and Parameters

475

Have you wondered how the `->` is supported? It's not syntax! Instead, `->` is a method of the class `ArrowAssoc`, a class defined inside the standard Scala preamble (`scala.Predef`). The preamble also defines an implicit conversion from `Any` to `ArrowAssoc`. When you write `1 -> "one"`, the compiler inserts a conversion from `1` to `ArrowAssoc` so that the `->` method can be found. Here are the relevant definitions:

```
package scala

object Predef {

    class ArrowAssoc[A](x: A) {

        def -> [B](y: B): Tuple2[A, B] = Tuple2(x, y)

    }

    implicit def any2ArrowAssoc[A](x: A): ArrowAssoc[A] =
        new ArrowAssoc(x)

    ...
}
```

This “rich wrappers” pattern is common in libraries that provide syntax-like extensions to the language, so you should be ready to recognize the pattern when you see it. Whenever you see someone calling methods that appear not to exist in the receiver class, they are probably using implicits. Similarly, if you see a class named `RichSomething`, e.g., `RichInt` or `RichString`, that class is likely adding syntax-like methods to type `Something`.

You have already seen this rich wrappers pattern for the basic types described in [Chapter 5](#). As you can now see, these rich wrappers apply

more widely, often letting you get by with an internal DSL defined as a library where programmers in other languages might feel the need to develop an external DSL.

## 21.5

### Implicit parameters

The remaining place the compiler inserts implicits is within argument lists.

The compiler will sometimes replace someCall(a) with someCall(a)(b), or new SomeClass(a) with new SomeClass(a)(b), thereby adding a missing parameter list to complete a function call. It is the entire last curried parameter list that's supplied, not just the last parameter. For example, if someCall's missing last parameter list takes three parameters, the compiler might replace someCall(a) with someCall(a)(b, c, d). For this usage,

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### Section 21.5

### Chapter 21 · Implicit Conversions and Parameters

476

not only must the inserted identifiers, such as b, c, and d in (b, c, d), be marked implicit where they are defined, but also the last parameter list in someCall's or someClass's definition must be marked implicit.

Here's a simple example. Suppose you have a class PreferredPrompt, which encapsulates a shell prompt string (such as, say "\$ " or "> ") that is preferred by a user:

```
class PreferredPrompt(val preference: String)
```

Also, suppose you have a Greeter object with a greet method, which takes two parameter lists. The first parameter list takes a string user name, and the second parameter list takes a PreferredPrompt:

```
object Greeter {  
  
  def greet(name: String)(implicit prompt: PreferredPrompt) {  
  
    println("Welcome, " + name + ". The system is ready.")  
    println(prompt.preference)  
  
  }  
  
}
```

The last parameter list is marked `implicit`, which means it can be supplied implicitly. But you can still provide the prompt explicitly, like this:

```
scala> val bobsPrompt = new PreferredPrompt("relax> ")  
bobsPrompt:  
PreferredPrompt = PreferredPrompt@ece6e1
```

```
scala> Greeter.greet("Bob")(bobsPrompt)
```

Welcome, Bob. The system is ready.

relax>

To let the compiler supply the parameter implicitly, you must first define a variable of the expected type, which in this case is `PreferredPrompt`. You could do this, for example, in a preferences object:

```
object JoesPrefs {  
  
  implicit val prompt = new PreferredPrompt("Yes, master> ")  
  
}
```

Note that the `val` itself is marked `implicit`. If it wasn't, the compiler would not use it to supply the missing parameter list. It will also not use it if it isn't in scope as a single identifier. For example:

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 21.5](#)

## Chapter 21 · Implicit Conversions and Parameters

477

```
scala> Greeter.greet("Joe")
```

```
<console>:7: error: no implicit argument matching parameter type  
PreferredPrompt was found.
```

```
Greeter.greet("Joe")
```

Once you bring it into scope via an import, however, it will be used to supply the missing parameter list:

```
scala> import JoesPrefs._
```

```
import JoesPrefs._
```

```
scala> Greeter.greet("Joe")
```

Welcome, Joe. The system is ready.

Yes, master>

Note that the implicit keyword applies to an entire parameter list, not to individual parameters. [Listing 21.1](#) shows an example in which the last parameter list of Greeter's greet method, which is again marked implicit, has two parameters: prompt (of type PreferredPrompt) and drink (of type PreferredDrink):

```
class PreferredPrompt(val preference: String)
```

```
class PreferredDrink(val preference: String)
```

```
object Greeter {
```

```
  def greet(name: String)(implicit prompt: PreferredPrompt, drink:  
    PreferredDrink) {
```

```

    println("Welcome, "+ name +". The system is ready.") print("But while you
work, ")

    println("why not enjoy a cup of "+ drink.preference +"?")
    println(prompt.preference)

}

}

object JoesPrefs {

    implicit val prompt = new PreferredPrompt("Yes, master> ")
    implicit val
    drink = new PreferredDrink("tea")

}

```

Listing 21.1 · An implicit parameter list with multiple parameters.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 21.5](#)

### [Chapter 21 · Implicit Conversions and Parameters](#)

478

Singleton object JoesPrefs in [Listing 21.1](#) declares two implicit vals, prompt of type PreferredPrompt and drink of type PreferredDrink. As before, however, so long as these are not in scope as single identifiers, they won't be used to fill in a missing parameter list to greet: scala>

Greeter.greet("Joe")

<console>:8: error: no implicit argument matching parameter type  
 PreferredPrompt was found.

Greeter.greet("Joe")

^

You can bring both implicit vals into scope with an import: scala> import JoesPrefs.\_

import JoesPrefs.\_

Because both prompt and drink are now in scope as single identifiers, you can use them to supply the last parameter list explicitly, like this: scala> Greeter.greet("Joe")(prompt, drink) Welcome, Joe. The system is ready.

But while you work, why not enjoy a cup of tea?

Yes, master>

And because all the rules for implicit parameters are now met, you can alternatively let the Scala compiler supply prompt and drink for you by leaving off the last parameter list:

scala> Greeter.greet("Joe")

Welcome, Joe. The system is ready.

But while you work, why not enjoy a cup of tea?

Yes, master>

One thing to note about the previous examples is that we didn't use String as the type of prompt or drink, even though ultimately it was a String that each of them provided through their preference fields. Because the compiler selects implicit parameters by matching types of parameters against types of values in scope, implicit parameters usually have "rare"

or "special" enough types that accidental matches are unlikely. For example, the types PreferredPrompt and PreferredDrink in [Listing 21.1](#) were defined solely to serve as implicit parameter types. As a result, it is unlikely

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 21.5](#)

## Chapter 21 · Implicit Conversions and Parameters

479

that implicit variables of these types will be in scope if they aren't intended to be used as implicit parameters to Greeter.greet.

Another thing to know about implicit parameters is that they are perhaps most often used to provide information about a type mentioned explicitly in an earlier parameter list, similar to the type classes of Haskell. As an example, consider the maxListUpBound function shown in [Listing 21.2](#), which returns the maximum element of the passed list:

```
def maxListUpBound[T <: Ordered[T]](elements: List[T]): T =  
  elements match {  
    case List() =>  
      throw new IllegalArgumentException("empty list!")  
    case List(x) => x  
    case x :: rest =>  
      val maxRest = maxListUpBound(rest)  
      if (x > maxRest) x  
      else maxRest  
  }
```

[Listing 21.2](#) · A function with an upper bound.

The signature of maxListUpBound is similar to that of orderedMergeSort, shown in [Listing 19.12](#) on [page 432](#): it takes a List[T] as its argument, and specifies via an upper bound that T must be a subtype of Ordered[T]. As mentioned at the end of [Section 19.8](#), one weakness with this approach is that you can't use the function with lists whose element type isn't already a subtype of Ordered. For example, you couldn't use the maxListUpBound

function to find the maximum of a list of integers, because class Int is not a subtype of Ordered[Int].

Another, more general way to organize maxListUpBound would be to require a separate, second argument, in addition to the List[T] argument: a function that converts a T to an Ordered[T]. This approach is shown in

[Listing 21.3.](#) In this example, the second argument, orderer, is placed in a separate argument list and marked implicit.

The orderer parameter in this example is used to describe the ordering of Ts. In the body of maxListImpParm, this ordering is used in two places: a recursive call to maxListImpParm, and an if expression that checks whether the head of the list is larger than the maximum element of the rest of the list.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 21.5](#)

### [Chapter 21 · Implicit Conversions and Parameters](#)

480

```
def maxListImpParm[T](elements: List[T])
(implicit orderer: T => Ordered[T]): T =
  elements match {
    case List() =>
      throw new IllegalArgumentException("empty list!")
    case List(x) => x
    case x :: rest =>
      val maxRest = maxListImpParm(rest)(orderer)
      if (orderer(x) > maxRest) x
      else maxRest
```

```
else maxRest  
}
```

Listing 21.3 · A function with an implicit parameter.

The `maxListImpParm` function, shown in [Listing 21.3](#), is an example of an implicit parameter used to provide more information about a type mentioned explicitly in an earlier parameter list. To be specific, the implicit parameter `orderer`, of type `T => Ordered[T]`, provides more information about type `T`—in this case, how to order `Ts`. Type `T` is mentioned in `List[T]`, the type of parameter elements, which appears in the earlier parameter list.

Because elements must always be provided explicitly in any invocation of `maxListImpParm`, the compiler will know `T` at compile time, and can therefore determine whether an implicit definition of `T => Ordered[T]` is in scope. If so, it can pass in the second parameter list, `orderer`, implicitly.

This pattern is so common that the standard Scala library provides implicit “`orderer`” methods for many common types. You could therefore use this `maxListImpParm` method with a variety of types:

```
scala> maxListImpParm(List(1,5,10,3))
```

```
res10: Int = 10
```

```
scala> maxListImpParm(List(1.5, 5.2, 10.7, 3.14159)) res11: Double = 10.7
```

```
scala> maxListImpParm(List("one", "two", "three")) res12: java.lang.String = two
```

In the first case, the compiler inserted an `orderer` function for `Ints`; in the second case, for `Doubles`; in the third case, for `Strings`.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 21.6](#)

[Chapter 21 · Implicit Conversions and Parameters](#)

## A style rule for implicit parameters

As a style rule, it is best to use a

custom named type in the types of implicit parameters. For example, the types of prompt and drink in the previous example was not String, but PreferredPrompt and PreferredDrink, respectively. As a counterexample, consider that the maxListImpParm function could just as well have been written with the following type signature:

```
def maxListPoorStyle[T](elments: List[T])
```

```
(implicit orderer: (T, T) => Boolean): T
```

To use this version of the function, though, the caller would have to supply an orderer parameter of type  $(T, T) \Rightarrow \text{Boolean}$ . This is a fairly generic type that includes any function from two Ts to a Boolean. It does not indicate anything at all about what the type is for; it could be an equality test, a less-than test, a greater-than test, or something else entirely.

The actual code for maxListImpParm, given in [Listing 21.3](#), shows better style. It uses an orderer parameter of type  $T \Rightarrow \text{Ordered}[T]$ . The word Ordered in this type indicates exactly what the implicit parameter is used for: it is for ordering elements of T. Because this orderer type is more explicit, it becomes no trouble to add implicit conversions for this type in the standard library. To contrast, imagine the chaos that would ensue if you added an implicit of type  $(T, T) \Rightarrow \text{Boolean}$  in the standard library, and the compiler started sprinkling it around in people's code. You would end up with code that compiles and runs, but that does fairly arbitrary tests against pairs of items!

Thus the style rule: use at least one role-determining name within the type of an implicit parameter.

## View bounds

The previous example had an opportunity to use an implicit but did not. Note that when you use implicit on a parameter, then not only will the compiler try to supply that parameter with an implicit value, but the compiler will also use that parameter as an available implicit in the body of the method! Thus, both uses of orderer within the body of the method can be left out.

When the compiler examines the code in [Listing 21.4](#), it will see that the types do not match up. For example, x of type T does not have a > method, and so x > maxRest does not work. The compiler will not immediately stop,

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### Section 21.6

#### Chapter 21 · Implicit Conversions and Parameters

482

```
def maxList[T](elements: List[T])  
  
(implicit orderer: T => Ordered[T]): T =  
  
elements match {  
  
case List() =>  
  
throw new IllegalArgumentException("empty list!")  
case List(x) => x  
  
case x :: rest =>  
  
val maxRest = maxList(rest)  
  
// (orderer) is implicit  
  
if (x > maxRest) x
```

```
// orderer(x) is implicit  
else maxRest  
}
```

Listing 21.4 · A function that uses an implicit parameter internally.

however. It will first look for implicit conversions to repair the code. In this case, it will notice that `orderer` is available, so it can convert the code to `orderer(x) > maxRest`. Likewise for the expression `maxList(rest)`, which can be converted to `maxList(rest)(ordered)`. After these two insertions of implicits, the method fully type checks.

Look closely at `maxList`. There is not a single mention of the `ordered` parameter in the text of the method. All uses of `ordered` are implicit. Surprisingly, this coding pattern is actually fairly common. The implicit parameter is used only for conversions, and so it can itself be used implicitly.

Now, because the parameter name is never used explicitly, the name could have been anything. For example, `maxList` would behave identically if you left its body alone but changed the parameter name: `def maxList[T](elements: List[T])`

```
(implicit converter: T => Ordered[T]): T =  
// same body...
```

For that matter, it could just as well be:

```
def maxList[T](elements: List[T])  
(implicit iceCream: T => Ordered[T]): T =  
// same body...
```

Because this pattern is common, Scala lets you leave out the name of this parameter and shorten the method header by using a view bound. Using a

view

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 21.6](#)

### [Chapter 21 · Implicit Conversions and Parameters](#)

483

```
def maxList[T <% Ordered[T]](elements: List[T]): T =  
  elements match {  
    case List() =>  
      throw new IllegalArgumentException("empty list!")  
    case List(x) => x  
    case x :: rest =>  
      val maxRest = maxList(rest)  
      // (orderer) is implicit  
      if (x > maxRest) x  
      // orderer(x) is implicit  
      else maxRest  
  }
```

Listing 21.5 · A function with a view bound.

bound, you would write the signature of maxList as shown in [Listing 21.5](#).

You can think of “T <% Ordered[T]” as saying, “I can use any T, so long as T can be treated as an Ordered[T].” This is different from saying that T is an Ordered[T], which is what an upper bound, “T <: Ordered[T]”, would

say. For example, even though class Int is not a subtype of Ordered[Int], you could still pass a List[Int] to maxList so long as an implicit conversion from Int to Ordered[Int] is available. Moreover, if type T happens to already be an Ordered[T], you can still pass a List[T] to maxList. The compiler will use an implicit identity function, declared in Predef: implicit def identity[A](x: A): A = x

In this case, the conversion is a no-op; it simply returns the object it is given.

### View bounds and upper bounds

The maxListUpBound function, of [Listing 21.2](#), specifies that T is an Ordered[T] with its upper bound,  $T <: \text{Ordered}[T]$ . By contrast, the maxList function, of [Listing 21.5](#), specifies that T can be treated as an Ordered[T] with its view bound,  $T <% \text{Ordered}[T]$ . If you compare the code of maxListUpBound with that of maxList, you'll find that the only non-cosmetic difference between the two is that the upper bound symbol,  $<:$ , is changed to a view bound symbol,  $<%$ . But maxList of

[Listing 21.5](#) can work with many more types.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 21.6](#)

### [Chapter 21 · Implicit Conversions and Parameters](#)

484

```
object Mocha extends Application {
```

```
    class PreferredDrink(val preference: String)
```

```
    implicit val pref = new PreferredDrink("mocha") def enjoy(name: String)  
    (implicit drink: PreferredDrink) {
```

```
        print("Welcome, " + name)
```

```
print(". Enjoy a ")  
print(drink.preference)  
println("!")  
}  
  
enjoy("reader")  
}
```

Listing 21.6 · Sample code that uses an implicit parameter.

```
$ scalac -Xprint:typer mocha.scala  
[[syntax trees at end of typer]]// Scala source: mocha.scala package  
<empty> {  
  
final object Mocha extends java.lang.Object with Application with  
ScalaObject {  
  
// ...  
  
private[this] val pref: Mocha.PreferredDrink =  
  
new Mocha.this.PreferredDrink("mocha");  
  
implicit <stable> <accessor>  
  
def pref: Mocha.PreferredDrink = Mocha.this.pref;  
  
def enjoy(name: String)  
(implicit drink: Mocha.PreferredDrink): Unit = {  
  
scala.this.Predef.print("Welcome, "+(name)); scala.this.Predef.print(".  
Enjoy a ");
```

```
scala.this.Predef.print(drink.preference);

scala.this.Predef.println("!")

};

Mocha.this.enjoy("reader")(Mocha.this.pref)

}

}
```

Listing 21.7 · Sample code after type checking and insertion of implicits.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 21.7](#)

### [Chapter 21 · Implicit Conversions and Parameters](#)

485

21.7

#### Debugging implicits

Implicits are an extremely powerful feature in Scala, but one which is sometimes difficult to get right and to debug. This section contains a few tips for debugging implicits.

Sometimes you might wonder why the compiler did not find an implicit conversion that you think should apply. In that case it helps to write the conversion out explicitly. If that also gives an error message, you then know why the compiler could not apply your implicit. For instance, assume that you mistakenly took `stringWrapper` to be a conversion from `Strings` to `Lists`, instead of `RandomAccessSeqs`. You would wonder why the following does not work:

```
scala> val chars: List[Char] = "xyz"
```

```
<console>:12: error: type mismatch;
```

```
found
```

```
: java.lang.String("xyz")
```

```
required: List[Char]
```

```
val chars: List[Char] = "xyz"
```

In that case it helps to write the stringWrapper conversion explicitly, to find out what went wrong:

```
scala> val chars: List[Char] = stringWrapper("xyz")
```

```
<console>:12: error: type mismatch;
```

```
found
```

```
: java.lang.Object with RandomAccessSeq[Char]
```

```
required: List[Char]
```

```
val chars: List[Char] = stringWrapper("xyz")
```

```
^
```

With this, you have found the cause of the error: stringWrapper has the wrong return type. On the other hand, it's also possible that inserting the conversion explicitly will make the error go away. In that case you know that one of the other rules (such as the Scope Rule) was preventing the implicit from being applied.

When you are debugging a program, it can sometimes help to see what implicit conversions the compiler is inserting. The -Xprint:typer option to the compiler is useful for this. If you run scalac with this option, then the compiler will show you what your code looks like after all implicit conversions have been added by the type checker. An example is shown in

[Listing 21.6](#) and [Listing 21.7](#). If you look at the last statement in each of

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 21.8](#)

### [Chapter 21 · Implicit Conversions and Parameters](#)

486

these listings, you'll see that the second parameter list to enjoy, which was left off in the code in [Listing 21.6](#):

`enjoy("reader")`

was inserted by the compiler, as shown in [Listing 21.7](#):

`Mocha.this.enjoy("reader")(Mocha.this.pref)`

If you are brave, try `scala -Xprint:typer` to get an interactive shell that prints out the post-typing source code it uses internally. If you do so, be prepared to see an enormous amount of boilerplate surrounding the meat of your code.

21.8

#### Conclusion

Implicits are a powerful, code-condensing feature of Scala. This chapter has shown you Scala's rules about implicits, and it has shown you several common programming situations where you can profit from using implicits.

As a word of warning, implicits can make code confusing if they are used too frequently. Thus, before adding a new implicit conversion, first ask whether you can achieve a similar effect through other means, such as inheritance, mixin composition, or method overloading. If all of these fail, however, and you feel like a lot of your code is still tedious and redundant, then implicits might just be able to help you out.

## Chapter 22

### Implementing Lists

Lists have been ubiquitous in this book. Class List is probably the most commonly used structured data type in Scala. [Chapter 16](#) showed you how to use lists. This chapter “opens up the covers” and explains a bit how lists are implemented in Scala.

Knowing the internals of the List class is useful for several reasons. You gain a better idea of the relative efficiency of list operations, which will help you in writing fast and compact code using lists. You also learn a toolbox of techniques that you can apply in the design of your own libraries. Finally, the List class is a sophisticated application of Scala’s type system in general and its genericity concepts in particular. So studying class List will deepen your knowledge in these areas.

#### 22.1

##### The List class in principle

Lists are not “built-in” as a language construct in Scala; they are defined by an abstract class List in the scala package, which comes with two subclasses for :: and Nil. In the following we present a quick tour through class List. This section presents a somewhat simplified account of the class, compared to its real implementation in the Scala standard library, which is covered in [Section 22.3](#).

```
package scala
```

```
abstract class List[+T] {
```

List is an abstract class, so you cannot define elements by calling the empty List constructor. For instance the expression “new List” would be ille-

## Section 22.1

### Chapter 22 · Implementing Lists

488

scala

List[+T]

«sealed abstract»

scala

scala

::[T]

Nil

«final case»

«case object»

Figure 22.1 · Class hierarchy for Scala lists.

gal. The class has a type parameter T. The + in front of this type parameter specifies that lists are covariant, as discussed in [Chapter 19](#). Because of this property, you can assign a value of type List[Int], say, to a variable of type List[Any]:

```
scala> val xs = List(1, 2, 3)
```

```
xs: List[Int] = List(1, 2, 3)
```

```
scala> var ys: List[Any] = xs
```

```
ys: List[Any] = List(1, 2, 3)
```

All list operations can be defined in terms of three basic methods: def isEmpty: Boolean

def head: T

def tail: List[T]

These three methods are all abstract in class List. They are defined in the subobject Nil and the subclass ::. The hierarchy for List is shown in [Figure 22.1](#).

The Nil object

The Nil object defines an empty list. Its definition is shown in [Listing 22.1](#).

The Nil object inherits from type List[Nothing]. Because of covariance, this means that Nil is compatible with every instance of the List type.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 22.1](#)

[Chapter 22](#) · [Implementing Lists](#)

489

```
case object Nil extends List[Nothing] {
```

```
    override def isEmpty = true
```

```
    def head: Nothing =
```

```
        throw new NoSuchElementException("head of empty list")  
    def tail:  
        List[Nothing] =
```

```
        throw new NoSuchElementException("tail of empty list")
```

```
}
```

## Listing 22.1 · The definition of the Nil singleton object.

The three abstract methods of class List are implemented in the Nil object in a straightforward way: the isEmpty method returns true and the head and tail methods both throw an exception. Note that throwing an exception is not only reasonable, but practically the only possible thing to do for head: Because Nil is a List of Nothing, the result type of head must be Nothing. Since there is no value of this type, this means that head cannot return a normal value. It has to return abnormally by throwing an exception.<sup>1</sup>

The :: class

Class ::, pronounced “cons” for “construct,” represents non-empty lists. It’s named that way in order to support pattern matching with the infix ::. You have seen in [Section 16.5](#) that every infix operation in a pattern is treated as a constructor application of the infix operator to its arguments. So the pattern  $x :: xs$  is treated as  $::(x, xs)$  where :: is a case class. Here is the definition of the :: class:

```
final case class ::[T](hd: T, tl: List[T]) extends List[T] {  
    def head = hd  
    def tail = tl  
    override def isEmpty: Boolean = false  
}
```

The implementation of the :: class is straightforward. It takes two parameters hd and tl, representing the head and the tail of the list to be constructed.

<sup>1</sup>To be precise, the types would also permit for head to always go into an infinite loop instead of throwing an exception, but this is clearly not what’s wanted.

## Section 22.1

### Chapter 22 · Implementing Lists

490

The definitions of the head and tail method simply return the corresponding parameter. In fact, this pattern can be abbreviated by letting the parameters directly implement the head and tail methods of the superclass List, as in the following equivalent but shorter definition of the :: class: final case class ::[T](head: T, tail: List[T])

```
extends List[T] {  
    override def isEmpty: Boolean = false  
}
```

This works because every case class parameter is implicitly also a field of the class (it's like the parameter declaration was prefixed with val). Recall from

[Section 20.3](#) that Scala allows you to implement an abstract parameterless method such as head or tail with a field. So the code above directly uses the parameters head and tail as implementations of the abstract methods head and tail that were inherited from class List.

Some more methods

All other List methods can be written using the basic three. For instance:

```
def length: Int =
```

```
if (isEmpty) 0 else 1 + tail.length
```

or:

```
def drop(n: Int): List[T] =
```

```
if (isEmpty) Nil
```

```
else if (n <= 0) this
```

```
else tail.drop(n - 1)
```

or:

```
def map[U](f: T => U): List[U] =
```

```
if (isEmpty) Nil
```

```
else f(head) :: tail.map(f)
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 22.1](#)

### [Chapter 22 · Implementing Lists](#)

491

#### List construction

The list construction methods `::` and `:::` are special. Because they end in a colon, they are bound to their right operand. That is, an operation such as `x :: xs` is treated as the method call `xs.::(x)`, not `x.::(xs)`. In fact, `x.::(xs)` would not make sense, as `x` is of the list element type, which can be arbitrary, so we cannot assume that this type would have a `::` method.

For this reason, the `::` method should take an element value and yield a new list. What is the required type of the element value? You might be tempted to say, it should be the same as the list's element type, but in fact this is more restrictive than necessary. To see why, consider this class hierarchy:  
abstract class Fruit

```
class Apple extends Fruit
```

```
class Orange extends Fruit
```

[Listing 22.2](#) shows what happens when you construct lists of fruit:

```
scala> val apples = new Apple :: Nil
```

```
apples: List[Apple] = List(Apple@585fa9)
```

```
scala> val fruits = new Orange :: apples
```

fruits: List[Fruit] = List(Orange@cd6798, Apple@585fa9) Listing 22.2 · Prepending a supertype element to a subtype list.

The apples value is treated as a List of Apples, as expected. However, the definition of fruits shows that it's still possible to add an element of a different type to that list. The element type of the resulting list is Fruit, which is the most precise common supertype of the original list element type (i.e., Apple) and the type of the element to be added (i.e., Orange).

This flexibility is obtained by defining the :: method (cons) as shown in

[Listing 22.3.](#)

```
def ::[U >: T](x: U): List[U] = new scala:::(x, this) Listing 22.3 · The  
definition of method :: (cons) in class List.
```

Note that the method is itself polymorphic—it takes a type parameter named U. Furthermore, U is constrained in [U >: T] to be a supertype of the

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 22.1](#)

[Chapter 22 · Implementing Lists](#)

492

Orange

Apple

head

```
head
```

```
::
```

```
::
```

```
tail
```

```
tail
```

```
fruits
```

```
apples
```

```
Nil
```

Figure 22.2 · The structure of the Scala lists shown in [Listing 22.2](#).

list element type T. The element to be added is required to be of type U and the result is a List[U].

With the formulation of :: shown in [Listing 22.3](#), you can check how the definition of fruits shown in [Listing 22.2](#) works out type-wise: in that definition the type parameter U of :: is instantiated to Fruit. The lower-bound constraint of U is satisfied, because the list apples has type List[Apple]

and Fruit is a supertype of Apple. The argument to the :: is new Orange, which conforms to type Fruit. Therefore, the method application is type-correct with result type List[Fruit]. [Figure 22.2](#) illustrates the structure of the lists that result from executing the code shown in [Listing 22.3](#).

In fact, the polymorphic definition of :: with the lower bound T is not only convenient; it is also necessary to render the definition of class List type-correct. This is because Lists are defined to be covariant. Assume for a moment that we had defined :: like this:

```
// A thought experiment (which wouldn't work)
```

```
def ::(x: T): List[T] = new scala::(x, this)
```

You saw in [Chapter 19](#) that method parameters count as contravariant positions, so the list element type T is in contravariant position in the definition above. But then List cannot be declared covariant in T. The lower bound

[U >: T] thus kills two birds with one stone: it removes a typing problem, and it leads to a :: method that's more flexible to use.

The list concatenation method :: is defined in a similar way to :::, as shown in [Listing 22.4](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 22.2](#)

### [Chapter 22 · Implementing Lists](#)

493

```
def :::[U >: T](prefix: List[U]): List[U] =  
  if (prefix.isEmpty) this  
  else prefix.head :: prefix.tail :: this
```

[Listing 22.4](#) · The definition of method :: in class List.

Like cons, concatenation is polymorphic. The result type is “widened”

as necessary to include the types of all list elements. Note also that again the order of the arguments is swapped between an infix operation and an explicit method call. Because both :: and :: end in a colon, they both bind to the right and are both right associative. For instance, the else part of the definition of :: shown in [Listing 22.4](#) contains infix operations of both :: and :::. These infix operations can be expanded to equivalent method calls as follows:

prefix.head :: prefix.tail ::: this  
equals (because :: and :::: are right-associative)  
prefix.head :: (prefix.tail ::: this)  
equals (because :: binds to the right)  
(prefix.tail ::: this) :::(prefix.head)  
equals (because :::: binds to the right)  
this ::::(prefix.tail) :::(prefix.head)

## 22.2

### The ListBuffer class

The typical access pattern for a list is recursive. For instance, to increment every element of a list without using map you could write: def incAll(xs: List[Int]): List[Int] = xs match {

```
case List() => List()  
case x :: xs1 => x + 1 :: incAll(xs1)  
}
```

One shortcoming of this program pattern is that it is not tail recursive. Note that the recursive call to incAll above occurs inside a :: operation. Therefore each recursive call requires a new stack frame. On today's virtual ma-

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 22.2](#)

[Chapter 22](#) · [Implementing Lists](#)

This means that you cannot apply incAll to lists of much more than about 30,000 to 50,000 elements. This is a pity.

How do you write a version of incAll that can work on lists of arbitrary size (as much as heap-capacity allows)? One approach is to use a loop: for (x <- xs) // ??

But what should go in the loop body? Note that where incAll above constructs the list by prepending elements to the result of the recursive call, the loop needs to append new elements at the end of the result list. One, very inefficient possibility is to use :::, the list append operator: var result = List[Int]()

```
// a very inefficient approach  
for (x <- xs) result = result ::: List(x + 1)  
result
```

This has terrible efficiency, though. Because ::: takes time proportional to the length of its first operand, the whole operation takes time proportional to the square of the length of the list. This is clearly unacceptable.

A better alternative is to use a list buffer. List buffers let you accumulate the elements of a list. To do this, you use an operation such as “buf += elem”, which appends the element elem at the end of the list buffer buf. Once you are done appending elements, you can turn the buffer into a list using the toList operation.

ListBuffer is a class in package `scala.collection.mutable`. To use the simple name only, you can import ListBuffer from its package: import `scala.collection.mutable.ListBuffer`

Using a list buffer, the body of incAll can now be written as follows: val buf = new ListBuffer[Int]

```
for (x <- xs) buf += x + 1
```

```
buf.toList
```

This is a very efficient way to build lists. In fact, the list buffer implementation is organized so that both the append operation ( $+=$ ) and the `toList` operation take (very short) constant time.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 22.3](#)

### [Chapter 22 · Implementing Lists](#)

495

22.3

#### The List class in practice

The implementations of list methods given in [Section 22.1](#) are concise and clear, but suffer from the same stack overflow problem as the non-tail recursive implementation of `incAll`. Therefore, most methods in the real implementation of class `List` avoid recursion and use loops with list buffers instead. For example, [Listing 22.5](#) shows the real implementation of `map` in class `List`:

```
final override def map[U](f: T => U): List[U] = {  
    val b = new ListBuffer[U]  
    var these = this  
    while (!these.isEmpty) {  
        b += f(these.head)  
        these = these.tail  
    }  
    b.toList
```

```
}
```

Listing 22.5 · The definition of method map in class List.

This revised implementation traverses the list with a simple loop, which is highly efficient. A tail recursive implementation would be similarly efficient, but a general recursive implementation would be slower and less scalable. But what about the operation `b.toList` at the end? What is its complexity? In fact, the call to the `toList` method takes only a small number of cycles, which is independent of the length of the list.

To understand why, take a second look at class `::`, which constructs nonempty lists. In practice, this class does not quite correspond to its idealized definition given previously in [Section 22.1](#). The real definition is shown in

### [Listing 22.6.](#)

There's one peculiarity: the `tl` argument is a var! This means that it is possible to modify the tail of a list after the list is constructed. However, because the variable `tl` has the modifier `private[scala]`, it can be accessed only from within package `scala`. Client code outside this package can neither read nor write `tl`.

Since the `ListBuffer` class is contained in a subpackage of package `scala`, `scala.collection.mutable`, `ListBuffer` can access the `tl` field

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 22.3](#)

[Chapter 22 · Implementing Lists](#)

496

```
final case class ::[U](hd: U,  
                      private[scala] var tl: List[U]) extends List[U] {
```

```
def head = hd  
def tail = tl  
override def isEmpty: Boolean = false  
}
```

Listing 22.6 · The definition of the :: subclass of List.

of a cons cell. In fact the elements of a list buffer are represented as a list and appending new elements involves a modification of tl field of the last :: cell in that list. Here's the start of class ListBuffer: package scala.collection.immutable

```
final class ListBuffer[T] extends Buffer[T] {  
  
  private var start: List[T] = Nil  
  
  private var last0: ::[T] = _  
  
  private var exported: Boolean = false
```

...

You see three private fields that characterize a ListBuffer: start

points to the list of all elements stored in the buffer last0

points to the last :: cell in that list

exported

indicates whether the buffer has been turned into

a list using a toList operation

The toList operation is very simple:

```
override def toList: List[T] = {  
    exported = !start.isEmpty  
    start  
}
```

It returns the list of elements referred to by start and also sets exported to true if that list is nonempty. So toList is very efficient, because it does not copy the list which is stored in a ListBuffer. But what happens if the list is further extended after the toList operation? Of course, once a list

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 22.4](#)

### [Chapter 22 · Implementing Lists](#)

497

is returned from toList, it must be immutable. However, appending to the last0 element will modify the list which is referred to by start.

To maintain the correctness of the list buffer operations, you need to work on a fresh list instead. This is achieved by the first line in the implementation of the += operation:

```
override def +=(x: T) {  
    if (exported) copy()  
    if (start.isEmpty) {  
        last0 = new scala:::(x, Nil)  
        start = last0  
    } else {
```

```
val last1 = last0

last0 = new scala:::(x, Nil)

last1.tl = last0

}

}
```

You see that `+=` copies the list pointed to by `start` if `exported` is true. So, in the end, there is no free lunch. If you want to go from lists which can be extended at the end to immutable lists, there needs to be some copying.

However, the implementation of `ListBuffer` is such that copying is necessary only for list buffers that are further extended after they have been turned into lists. This case is quite rare in practice. Most use cases of list buffers add elements incrementally and then do one `toList` operation at the end. In such cases, no copying is necessary.

## 22.4

### Functional on the outside

The previous section showed key elements of the implementation of Scala’s `List` and `ListBuffer` classes. You saw that lists are purely functional on the “outside” but have an imperative implementation using list buffers on the “inside.” This is a typical strategy in Scala programming: trying to combine purity with efficiency by carefully delimiting the effects of impure operations. You might ask, why insist on purity? Why not just open up the definition of lists, making the `tail` field, and maybe also the `head` field, mutable? The disadvantage of such an approach is that it would make programs

## [Chapter 22 · Implementing Lists](#)

498

much more fragile. Note that constructing lists with `::` re-uses the tail of the constructed list. So when you write:

```
val ys = 1 :: xs
```

```
val zs = 2 :: xs
```

the tails of lists `ys` and `zs` are shared; they point to the same data structure.

This is essential for efficiency; if the list `xs` was copied every time you added a new element onto it, this would be much slower. Because sharing is pervasive, changing list elements, if it were possible, would be quite dangerous.

For instance, taking the code above, if you wanted to truncate list `ys` to its first two elements by writing:

```
ys.drop(2).tail = Nil
```

```
// can't do this in Scala!
```

you would also truncate lists `zs` and `xs` as a side effect. Clearly, it would be quite difficult to keep track of what gets changed. That's why Scala opts for pervasive sharing and no mutation for lists. The `ListBuffer` class still allows you to build up lists imperatively and incrementally, if you wish to. But since list buffers are not lists, the types keep mutable buffers and immutable lists separate.

The design of Scala's `List` and `ListBuffer` is quite similar to what's done in Java's pair of classes `String` and `StringBuffer`. This is no coincidence. In both situations the designers wanted to maintain a pure immutable data structure but also wanted to provide an efficient way to construct this structure incrementally. For Java and Scala strings, `StringBuffers` (or, in Java 5, `StringBuilder`s) provide a way to construct a string incrementally.

For Scala's lists, you have a choice: You can either construct lists incrementally by adding elements to the beginning of a list using `::`, or you use a list buffer for adding elements to the end. Which one is preferable depends on the situation. Usually, `::` lends itself well to recursive algorithms in the divide-and-conquer style. List buffers are often used in a more traditional loop-based style.

## 22.5

### Conclusion

In this chapter, you saw how lists are implemented in Scala. List is one of the most heavily used data structures in Scala, and it has a refined implementation. List's two subclasses, Nil and `::`, are both case classes. Instead of

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 22.5](#)

[Chapter 22](#) · [Implementing Lists](#)

499

recursing through this structure, however, many core list methods are implemented using a ListBuffer. ListBuffer, in turn, is carefully implemented so that it can efficiently build lists without allocating extraneous memory.

It is functional on the outside, but uses mutation internally to speed up the common case where a buffer is discarded after `toList` is been called. After studying all of this, you now know the list classes inside and out, and you might have learned an implementation trick or two.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

Chapter 23

For Expressions Revisited

[Chapter 16](#) demonstrated that higher-order functions such as map, flatMap, and filter provide powerful constructions for dealing with lists. But sometimes the level of abstraction required by these functions makes a program a bit hard to understand. Here's an example. Say you are given a list of persons, each defined as an instance of a class Person. Class Person has fields indicating the person's name, whether (s)he is male, and his/her children.

Here's the class definition:

```
scala> case class Person(name: String,  
isMale: Boolean,  
children: Person*)
```

Here's a list of some sample persons:

```
val lara = Person("Lara", false)  
val bob = Person("Bob", true)  
val julie = Person("Julie", false, lara, bob)  
val persons = List(lara, bob, julie)
```

Now, say you want to find out the names of all pairs of mothers and their children in that list. Using map, flatMap and filter, you can formulate the following query:

```
scala> persons filter (p => !p.isMale) flatMap (p => (p.children map (c =>  
(p.name, c.name))))  
  
res5: List[(String, String)] = List((Julie,Lara),  
(Julie,Bob))
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 23.1](#)

## Chapter 23 · For Expressions Revisited

501

The query does its job, but it's not exactly trivial to write or understand. Is there a simpler way? In fact, there is. Remember the for expressions in

[Section 7.3?](#) Using a for expression, the same example can be written as follows:

```
scala> for (p <- persons; if !p.isMale; c <- p.children) yield (p.name,  
c.name)
```

```
res6: List[(String, String)] = List((Julie,Lara),  
(Julie,Bob))
```

The result of this expression is exactly the same as the result of the previous expression. What's more, most readers of the code would likely find the for expression much clearer than the previous query, which used the higher-order functions, map, flatMap, and filter.

However, the two queries are not as dissimilar as it might seem. In fact, it turns out that the Scala compiler will translate the second query into the first one. More generally, all for expressions that yield a result are translated by the compiler into combinations of invocations of the higher-order methods map, flatMap, and filter. All for loops without yield are translated into a smaller set of higher-order functions: just filter and foreach.

In this chapter, you'll find out first about the precise rules of writing for expressions. After that, you'll see how they can make combinatorial problems easier to solve. Finally, you'll learn how for expressions are translated, and how as a result, for expressions can help you "grow" the Scala language into new application domains.

23.1

For expressions

Generally, a for expression is of the form:

for ( *seq* ) yield *expr*

Here, *seq* is a sequence of generators, definitions and filters, with semicolons between successive elements. An example is the for expression:  
for (p <- persons; n = p.name; if (n startsWith "To")) yield n

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 23.1

### Chapter 23 · For Expressions Revisited

502

The for expression above contains one generator, one definition, and one filter. As mentioned in [Section 7.3](#), you can also enclose the sequence in braces instead of parentheses, then the semicolons become optional: for {

p <- persons

// a generator

n = p.name

// a definition

if (n startsWith "To")

// a filter

} yield n

A generator is of the form:

*pat* <- *expr*

The expression `expr` typically returns a list, even though you will see later that this can be generalized. The pattern `pat` gets matched one-by-one against all elements of that list. If the match succeeds, the variables in the pattern get bound to the corresponding parts of the element, just the way it is described in [Chapter 15](#). But if the match fails, no `MatchError` is thrown. Instead, the element is simply discarded from the iteration.

In the most common case, the pattern `pat` is just a variable `x`, as in `x <- expr`. In that case, the variable `x` simply iterates over all elements returned by `expr`.

A definition is of the form:

`pat = expr`

This definition binds the pattern `pat` to the value of `expr`. So it has the same effect as a `val` definition:

`val x = expr`

The most common case is again where the pattern is a simple variable `x`, e.g., `x = expr`. This defines `x` as a name for the value `expr`.

A filter is of the form:

`if expr`

Here, `expr` is an expression of type Boolean. The filter drops from the iteration all elements for which `expr` returns false.

Every `for` expression starts with a generator. If there are several generators in a `for` expression, later generators vary more rapidly than earlier ones.

You can verify this easily with the following simple test:

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 23.2](#)

## Chapter 23 · For Expressions Revisited

503

```
scala> for (x <- List(1, 2); y <- List("one", "two")) yield (x, y)  
res0: List[(Int, java.lang.String)] =  
List((1,one), (1,two), (2,one), (2,two))
```

23.2

The n-queens problem

A particularly suitable application area of for expressions are combinatorial puzzles. An example of such a puzzle is the 8-queens problem: Given a standard chess-board, place eight queens such that no queen is in check from any other (a queen can check another piece if they are on the same column, row, or diagonal). To find a solution to this problem, it's actually simpler to generalize it to chess-boards of arbitrary size. Hence, the problem is to place N queens on a chess-board of  $N \times N$  squares, where the size N is arbitrary.

We'll start numbering cells at one, so the upper-left cell of an  $N \times N$  board has coordinate (1, 1), and the lower-right cell has coordinate (N, N).

To solve the N-queens problem, note that you need to place a queen in each row. So you could place queens in successive rows, each time checking that a newly placed queen is not in check from any other queens that have already been placed. In the course of this search, it might arrive that a queen that needs to be placed in row k would be in check in all fields of that row from queens in row 1 to k – 1. In that case, you need to abort that part of the search in order to continue with a different configuration of queens in columns 1 to k – 1.

An imperative solution to this problem would place queens one by one, moving them around on the board. But it looks difficult to come up with a scheme that really tries all possibilities.

A more functional approach represents a solution directly, as a value. A solution consists of a list of coordinates, one for each queen placed on the board. Note, however, that a full solution can not be found in a single step.

It needs to be built up gradually, by occupying successive rows with queens.

This suggests a recursive algorithm. Assume you have already generated all solutions of placing  $k$  queens on a board of size  $N \times N$ , where  $k$  is less than  $N$ . Each such solution can be presented by a list of length  $k$  of coordinates (row, column), where both row and column numbers range from 1 to  $N$ . It's convenient to treat these partial solution lists as stacks, where the coordinates of the queen in row  $k$  come first in the list, followed by the coordinates of

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 23.2](#)

### [Chapter 23 · For Expressions Revisited](#)

504

the queen in row  $k - 1$ , and so on. The bottom of the stack is the coordinate of the queen placed in the first row of the board. All solutions together are represented as a list of lists, with one element for each solution.

Now, to place the next queen in row  $k + 1$ , generate all possible extensions of each previous solution by one more queen. This yields another list of solution lists, this time of length  $k + 1$ . Continue the process until you have obtained all solutions of the size of the chess-board  $N$ . This algorithmic idea is embodied in function `placeQueens` below:

```
def queens(n: Int): List[List[(Int, Int)]] = {  
    def placeQueens(k: Int): List[List[(Int, Int)]] = {  
        if (k == 0)
```

```

List(List())
else
for {
queens <- placeQueens(k - 1)
column <- 1 to n
queen = (k, column)
if isSafe(queen, queens)
} yield queen :: queens
placeQueens(n)
}

```

The outer function `queens` in the program above simply calls `placeQueens` with the size of the board `n` as its argument. The task of the function application `placeQueens(k)` is to generate all partial solutions of length `k` in a list.

Every element of the list is one solution, represented by a list of length `k`. So `placeQueens` returns a list of lists.

If the parameter `k` to `placeQueens` is 0, this means that it needs to generate all solutions of placing zero queens on zero rows. There is exactly one such solution: place no queen at all. This is represented as a solution by the empty list. So if `k` is zero, `placeQueens` returns `List(List())`, a list consisting of a single element that is the empty list. Note that this is quite different from the empty list `List()`. If `placeQueens` returns `List()`, this means no solutions, instead of a single solution consisting of no placed queens.

In the other case, where `k` is not zero, all the work of `placeQueens` is done in a for expression. The first generator of that for expression iterates

## [Section 23.2](#)

### [Chapter 23 · For Expressions Revisited](#)

505

through all solutions of placing  $k - 1$  queens on the board. The second generator iterates through all possible columns on which the  $k$ 'th queen might be placed. The third part of the for expression defines the newly considered queen position to be the pair consisting of row  $k$  and each produced column. The fourth part of the for expression is a filter which checks with `isSafe` whether the new queen is safe from check of all previous queens (the definition of `isSafe` will be discussed a bit later).

If the new queen is not in check from any other queens, it can form part of a partial solution, so `placeQueens` generates with `queen :: queens` a new solution. If the new queen is not safe from check, the filter returns false, so no solution is generated.

The only remaining bit is the `isSafe` method, which is used to check whether a given queen is in check from any other element in a list of queens.

Here is its definition:

```
def isSafe(queen: (Int, Int), queens: List[(Int, Int)]) =  
    queens forall (q => !inCheck(queen, q))  
  
def inCheck(q1: (Int, Int), q2: (Int, Int)) =  
    q1._1 == q2._1 ||  
    // same row  
    q1._2 == q2._2 ||
```

```
// same column
```

$(q1._1 - q2._1).abs == (q1._2 - q2._2).abs$  // on diagonal

The isSafe method expresses that a queen is safe with respect to some other queens if it is not in check from any other queen. The inCheck method expresses that queens q1 and q2 are mutually in check. It returns true in one of three cases:

1. If the two queens have the same row coordinate,
2. If the two queens have the same column coordinate,
3. If the two queens are on the same diagonal, i.e., the difference between their rows and the difference between their columns are the same.

The first case, that the two queens have the same row coordinate, cannot happen in the application because placeQueens already takes care to place each queen in a different row. So you could remove the test without changing the functionality of the program as a whole.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 23.3](#)

### [Chapter 23 · For Expressions Revisited](#)

506

23.3

#### Querying with for expressions

The for notation is essentially equivalent to common operations of database query languages. For instance, say you are given a database named books, represented as a list of books, where Book is defined as follows: case class Book(title: String, authors: String\*)

Here is a small example database, represented as an in-memory list: val books: List[Book] =

List(

Book(  
"Structure and Interpretation of Computer Programs",  
"Abelson, Harold", "Sussman, Gerald J."  
)  
Book(  
"Principles of Compiler Design",  
"Aho, Alfred", "Ullman, Jeffrey"  
)  
Book(  
"Programming in Modula-2",  
"Wirth, Niklaus"  
)  
Book(  
"Elements of ML Programming",  
"Ullman, Jeffrey"  
)  
Book(  
"The Java Language Specification", "Gosling, James",  
"Joy, Bill", "Steele, Guy", "Bracha, Gilad"

)

)

Then, to find the titles of all books whose author's last name is "Gosling":  
scala> for (b <- books; a <- b.authors

if a startsWith "Gosling")

yield b.title

res0: List[String] = List(The Java Language Specification)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 23.3](#)

[Chapter 23 · For Expressions Revisited](#)

507

Or, to find the titles of all books that have the string "Program" in their title:  
scala> for (b <- books if (b.title indexOf "Program") >= 0) yield b.title

res4: List[String] = List(Structure and Interpretation of Computer Programs,  
Programming in Modula-2, Elements

of ML Programming)

Or, to find the names of all authors that have written at least two books in  
the database:

scala> for (b1 <- books; b2 <- books if b1 != b2; a1 <- b1.authors; a2 <-  
b2.authors if a1 == a2)

yield a1

res5: List[String] = List(Ullman, Jeffrey, Ullman, Jeffrey) The last solution  
is not yet perfect, because authors will appear several times in the list of

results. You still need to remove duplicate authors from result lists. This can be achieved with the following function:

```
scala> def removeDuplicates[A] (xs: List[A]): List[A] = {
```

```
  if (xs.isEmpty) xs
  else
    xs.head :: removeDuplicates(
      xs.tail filter (x => x != xs.head)
    )
}
```

```
removeDuplicates: [A](List[A])List[A]
```

```
scala> removeDuplicates(res5)
res6: List[java.lang.String] = List(Ullman, Jeffrey)
```

It's worth noting that the last expression in method `removeDuplicates` can be equivalently expressed using a `for` expression:

```
xs.head :: removeDuplicates(
  for (x <- xs.tail if x != xs.head) yield x
)
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 23.4](#)

[Chapter 23 · For Expressions Revisited](#)

## 23.4

### Translation of for expressions

Every for expression can be expressed in terms of the three higher-order functions map, flatMap and filter. This section describes the translation scheme, which is also used by the Scala compiler.

#### Translating for expressions with one generator

First, assume you have a simple for expression:

`for (x <- expr 1) yield expr 2`

where `x` is a variable. Such an expression is translated to: `expr 1.map(x => expr 2)`

Translating for expressions starting with a generator and a filter Now, consider for expressions that combine a leading generator with some other elements. A for expression of the form:

`for (x <- expr 1 if expr 2) yield expr 3`

is translated to:

`for (x <- expr 1 filter (x => expr 2)) yield expr 3`

This translation gives another for expression that is shorter by one element than the original, because an if element is transformed into an application of filter on the first generator expression. The translation then continues with this second expression, so in the end you obtain:

`expr 1 filter (x => expr 2) map (x => expr 3)` The same translation scheme also applies if there are further elements following the filter. If `seq` is an arbitrary sequence of generators, definitions and filters, then:

`for (x <- expr 1 if expr 2; seq) yield expr 3`

is translated to:

## [Section 23.4](#)

### [Chapter 23 · For Expressions Revisited](#)

509

for (x <- *expr* 1 filter *expr* 2; *seq*) yield *expr* 3

Then translation continues with the second expression, which is again shorter by one element than the original one.

Translating for expressions starting with two generators The next case handles for expressions that start with two filters, as in: for (x <- *expr* 1; y <- *expr* 2; *seq*) yield *expr* 3

Again, assume that *seq* is an arbitrary sequence of generators, definitions and filters. In fact, *seq* might also be empty, and in that case there would not be a semicolon after *expr* 2. The translation scheme stays the same in each case.

The for expression above is translated to an application of flatMap: *expr* 1.flatMap(x => for (y <- *expr* 2; *seq*) yield *expr* 3) This time, there is another for expression in the function value passed to flatMap. That for expression (which is again simpler by one element than the original) is in turn translated with the same rules.

The three translation schemes given so far are sufficient to translate all for expressions that contain just generators and filters, and where generators bind only simple variables. Take for instance the query, “find all authors who have published at least two books,” from [Section 23.3](#):

```
for (b1 <- books; b2 <- books if b1 != b2;  
     a1 <- b1.authors; a2 <- b2.authors if a1 == a2)  
     yield a1
```

This query translates to the following map/flatMap/filter combination:  
books flatMap (b1 =>

books filter (b2 => b1 != b2) flatMap (b2 =>

b1.authors flatMap (a1 =>

b2.authors filter (a2 => a1 == a2) map (a2 =>

a1))))

The translation scheme presented so far does not yet handle generators that bind whole patterns instead of simple variables. It also does not yet cover definitions. These two aspects will be explained in the next two subsections.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 23.4

### Chapter 23 · For Expressions Revisited

510

Translating patterns in generators

The translation scheme becomes more complicated if the left hand side of generator is a pattern, pat, other than a simple variable. Still relatively easy to handle is the case where the for expression binds a tuple of variables.

In that case, almost the same scheme as for single variables applies. A for expression of the form:

for ((x1, ..., xn) <- *expr* 1) yield *expr* 2

translates to:

*expr*.map { case (x1, ..., xn) => *expr* 2 }

Things become a bit more involved if the left hand side of the generator is an arbitrary pattern pat instead of a single variable or a tuple. In this case:  
`for (pat <- expr 1) yield expr 2`

translates to:

```
expr 1 filter {  
  case pat => true  
  case _ => false  
} map {  
  case pat => expr 2  
}  
}
```

That is, the generated items are first filtered and only those that match pat are mapped. Therefore, it's guaranteed that a pattern-matching generator will never throw a MatchError

The scheme above only treated the case where the for expression contains a single pattern-matching generator. Analogous rules apply if the for expression contains other generators, filters, or definitions. Because these additional rules don't add much new insight, they are omitted from discussion here. If you are interested, you can look them up in the Scala Language Specification [[Ode08](#)].

## Translating definitions

The last missing situation is where a for expression contains embedded definitions. Here's a typical case:

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 23.4](#)

[Chapter 23 · For Expressions Revisited](#)

`for (x <- expr 1; y = expr 2; seq) yield expr 3`

Assume again that *seq* is a (possibly empty) sequence of generators, definitions, and filters. This expression is translated to the following one:  
`for ((x, y) <- for (x <- expr 1) yield (x, expr 2); seq) yield expr 3`

So you see that *expr* 2 is evaluated each time there is a new x value being generated. This re-evaluation is necessary, because *expr* 2 might refer to x and so needs to be re-evaluated for changing values of x. For you as a programmer the conclusion is that it's probably not a good idea to have definitions embedded in for expressions that do not refer to variables bound by some preceding generator, because re-evaluating such expressions would be wasteful. For instance, instead of:

`for (x <- 1 to 1000; y = expensiveComputationNotInvolvingX) yield x * y`

it's usually better to write:

`val y = expensiveComputationNotInvolvingX`

`for (x <- 1 to 1000) yield x * y`

### Translating for loops

The previous subsections showed how for expressions that contain a `yield` are translated. What about for loops that simply perform a side effect without returning anything? Their translation is similar, but simpler than for expressions. In principle, wherever the previous translation scheme used a `map` or a `flatMap` in the translation, the translation scheme for for loops uses just a `foreach`. For instance, the expression:

`for (x <- expr 1) body`

translates to:

`expr 1 foreach (x => body)`

A larger example is the expression:

for ( $x \leftarrow \text{expr} 1$ ; if  $\text{expr} 2$ ;  $y \leftarrow \text{expr} 3$ ) *body*

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 23.5

### Chapter 23 · For Expressions Revisited

512

This expression translates to:

$\text{expr} 1 \text{ filter } (x \Rightarrow \text{expr} 2) \text{ foreach } (x \Rightarrow \text{expr} 3 \text{ foreach } (y \Rightarrow \text{body}))$

For example, the following expression sums up all elements of a matrix represented as a list of lists:

var sum = 0

for ( $xs \leftarrow xss$ ;  $x \leftarrow xs$ )  $sum += x$

This loop is translated into two nested foreach applications: var sum = 0

$xss \text{ foreach } (xs \Rightarrow$

$xs \text{ foreach } (x \Rightarrow$

$sum += x))$

23.5

Going the other way

The previous section showed that for expressions can be translated into applications of the higher-order functions map, flatMap, and filter. In fact, you could equally well go the other way: every application of a map, flatMap, or filter can be represented as a for expression. Here are

implementations of the three methods in terms of for expressions. The methods are contained in an object Demo, to distinguish them from the standard operations on Lists. To be concrete, the three functions all take a List as parameter, but the translation scheme would work just as well with other collection types:

```
object Demo {  
  
  def map[A, B](xs: List[A], f: A => B): List[B] =  
    for (x <- xs) yield f(x)  
  
  def flatMap[A, B](xs: List[A], f: A => List[B]): List[B] =  
    for (x <- xs; y <- f(x)) yield y  
  
  def filter[A](xs: List[A], p: A => Boolean): List[A] =  
    for (x <- xs if p(x)) yield x  
  
}
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 23.6](#)

### [Chapter 23 · For Expressions Revisited](#)

513

Not surprisingly, the translation of the for expression used in the body of Demo.map will produce a call to map in class List. Similarly, Demo.flatMap and Demo.filter translate to flatMap and filter in class List.

So this little demonstration has shown that for expressions really are equivalent in their expressiveness to applications of the three functions map, flatMap, and filter.

23.6

## Generalizing for

Because the translation of for expressions only relies on the presence of methods map, flatMap, and filter, it is possible to apply the for notation to a large class of data types.

You have already seen for expressions over lists and arrays. These are supported because lists, as well as arrays, define operations map, flatMap, and filter. Because they define a foreach method as well, for loops over these data types are also possible.

Besides lists and arrays, there are also many other types in the Scala standard library that support the same four methods and therefore allow for expressions. Examples are ranges, iterators, streams, and all implementations of sets. It's also perfectly possible for your own data types to support for expressions by defining the necessary methods. To support the full range of for expressions and for loops, you need to define map, flatMap, filter, and foreach as methods of your data type. But it's also possible to define a subset of these methods, and thereby support a subset of all possible for expressions or loops. Here are the precise rules:

- If your type defines just map, it allows for expressions consisting of a single generator.
- If it defines flatMap as well as map, it allows for expressions consisting of several generators.
- If it defines foreach, it allows for loops (both with single and multiple generators).
- If it defines filter, it allows for filter expressions starting with an if in the for expression.

The translation of for expressions happens before type checking. This allows for maximal flexibility, because it is only required that the result of

## Section 23.6

### Chapter 23 · For Expressions Revisited

514

expanding a for expression type checks. Scala defines no typing rules for the for expressions themselves, and does not require map, flatMap, filter, or foreach to have any particular type signatures.

Nevertheless, there is a typical setup that captures the most common intention of the higher order methods to which for expressions translate.

Say you have a parameterized class, C, which typically would stand for some sort of collection. Then it's quite natural to pick the following type signatures for map, flatMap, filter, and foreach:

```
abstract class C[A] {  
  
  def map[B](f: A => B): C[B]  
  
  def flatMap[B](f: A => C[B]): C[B]  
  
  def filter(p: A => Boolean): C[A]  
  
  def foreach(b: A => Unit): Unit  
  
}
```

That is, the map function takes a function from the collection's element type A to some other type B. It produces a new collection of the same kind C, but with B as the element type. The flatMap method takes a function f from A to some C-collection of Bs and produces a C-collection of Bs. The filter method takes a predicate function from the collection's element type A to Boolean. It produces a collection of the same type as the one on which it is invoked. Finally, the foreach method takes a function from A to Unit, and produces a Unit result.

Concentrating on just the first three functions, the following facts are noteworthy. In functional programming, there's a general concept called a monad, which can explain a large number of types with computations, ranging from collections, to computations with state and I/O, backtracking computations, and transactions, to name but a few. You can formulate functions map, flatMap, and filter on a monad, and, if you do, they end up having exactly the types given above. Furthermore, you can characterize every monad by map, flatMap, and filter, plus a “unit” constructor that produces a monad from an element value. In an object-oriented language, this “unit”

constructor is simply an instance constructor or a factory method. Therefore, map, flatMap and filter can be seen as an object-oriented version of the functional concept of monad. Because for expressions are equivalent to applications of these three methods, they can be seen as syntax for monads.

All this suggests that the concept of for expression is something more general than just iteration over a collection, and indeed it is. For instance,

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 23.7](#)

### [Chapter 23 · For Expressions Revisited](#)

515

for expressions also play an important role in asynchronous I/O, or as an alternative notation for optional values. Watch out in the Scala libraries for occurrences of map, flatMap, and filter—wherever they are present, for expressions suggest themselves as a concise way of manipulating elements of the type.

23.7

Conclusion

In this chapter, you were given a peek under the hood of for expressions and for loops. You learned that they translate into applications of a standard set of higher-order methods. As a consequence of this, you saw that for expressions are really much more general than mere iterations over collections, and that you can design your own classes to support them.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 24

### Extractors

By now you have probably grown accustomed to the concise way data can be decomposed and analyzed using pattern matching. This chapter shows you how to generalize this concept further. Until now, constructor patterns were linked to case classes. For instance, `Some(x)` is a valid pattern because `Some` is a case class. Sometimes you might wish that you could write patterns like this without creating an associated case class. In fact, you might wish to be able to create your own kinds of patterns. Extractors give you a way to do so. This chapter explains what extractors are and how you can use them to define patterns that are decoupled from an object's representation.

#### 24.1

##### An example: Extracting email addresses

To illustrate the problem extractors solve, imagine that you need to analyze strings that represent email addresses. Given a string, you want to decide whether it is an email address or not, and, if it is, you want to access the user and domain parts of the address. The traditional way to do this uses three helper functions:

```
def isEmail(s: String): Boolean
```

```
def domain(s: String): String
```

```
def user(s: String): String
```

With these functions, you could parse a given string s as follows: if (isEMail(s)) println(user(s) + " AT "+ domain(s) else println("not an email address")

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 24.2

### Chapter 24 · Extractors

517

This works, but is kind of clumsy. What's more, things would become more complicated if you combined several such tests. For instance you might want to find two successive strings in a list that are both email addresses with the same user. You can try this yourself with the access functions defined previously to see what would be involved.

You saw already in [Chapter 15](#) that pattern matching is ideal for attacking problems like this. Let's assume for the moment that you could match a string with a pattern:

EMail(user, domain)

The pattern would match if the string contained an embedded at sign (@). In that case it would bind variable user to the part of the string before the @

and variable domain to the part after it. Postulating a pattern like this, the previous expression could be written more clearly like this: s match {

```
case EMail(user, domain) => println(user + " AT "+ domain) case _ =>  
  println("not an email address")
```

}

The more complicated problem of finding two successive email addresses with the same user part would translate to the following pattern: ss match {

```
case EMail(u1, d1) :: EMail(u2, d2) :: _ if (u1 == u2) => ...
```

...

}

This is much more legible than anything that could be written with access functions. However, the problem is that strings are not case classes; they do not have a representation that conforms to EMail(user, domain). This is where Scala's extractors come in: they let you define new patterns for pre-existing types, where the pattern need not follow the internal representation of the type.

## 24.2

### Extractors

An extractor in Scala is an object that has a method called unapply as one of its members. The purpose of that unapply method is to match a value and

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### [Section 24.2](#)

#### [Chapter 24](#) · Extractors

518

take it apart. Often, the extractor object also defines a dual method apply for building values, but this is not required. As an example, [Listing 24.1](#) shows an extractor object for email addresses:

```
object EMail {  
    // The injection method (optional)  
  
    def apply(user: String, domain: String) = user + "@" + domain  
  
    // The extraction method (mandatory)  
  
    def unapply(str: String): Option[(String, String)] = {
```

```
val parts = str split "@"
if (parts.length == 2) Some(parts(0), parts(1)) else None
}
}
```

**Listing 24.1** · The EMail string extractor object.

This object defines both apply and unapply methods. The apply method has the same meaning as always: it turns EMail into an object that can be applied to arguments in parentheses in the same way a method is applied. So you can write EMail("John", "epfl.ch") to construct the string

"John@epfl.ch". To make this more explicit, you could also let EMail inherit from Scala's function type, like this:

```
object EMail extends (String, String) => String { ... }
```

#### Note

The "(String, String) => String" portion of the previous object declaration means the same as Function2[String, String, String], which declares an abstract apply method that EMail implements. As a result of this declaration, you could, for example, pass EMail to a method expecting a Function2[String, String, String].

The unapply method is what turns EMail into an extractor. In a sense, it reverses the construction process of apply. Where apply takes two strings and forms an email address string out of them, unapply takes an email address and returns potentially two strings: the user and the domain of the address. But unapply must also handle the case where the given string is not an email address. That's why unapply returns an Option-type over pairs of strings. Its result is either Some(user, domain) if the string str is an email

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 24.2](#)

## Chapter 24 · Extractors

519

address with the given user and domain parts,1 or None, if str is not an email address. Here are some examples:

unapply("John@epfl.ch")

equals

Some("John", "epfl.ch")

unapply("John Doe")

equals

None

Now, whenever pattern matching encounters a pattern referring to an extractor object, it invokes the extractor's unapply method on the selector expression. For instance, executing the code:

```
selectorString match { case EMail(user, domain) => ... }
```

would lead to the call:

```
EMail.unapply(selectorString)
```

As you saw previously, this call to EMail.unapply will return either None or Some(u, d), for some values u for the user part of the address and d for the domain part. In the None case, the pattern does not match, and the system tries another pattern or fails with a MatchError exception. In the Some(u, d) case, the pattern matches and its variables are bound to the elements of the returned value. In the previous match, user would be bound to u and domain would be bound to d.

In the EMail pattern matching example, the type String of the selector expression, selectorString, conformed to unapply's argument type (which in

the example was also String). This is quite common, but not necessary. It would also be possible to use the EMail extractor to match selector expressions for more general types. For instance, to find out whether an arbitrary value x was an email address string, you could write: val x: Any = ...

```
x match { case EMail(user, domain) => ... }
```

Given this code, the pattern matcher will first check whether the given value x conforms to String, the parameter type of EMail's unapply method. If it does conform, the value is cast to String and pattern matching proceeds as before. If it does not conform, the pattern fails immediately.

<sup>1</sup>As demonstrated here, where Some is applied to the tuple, (user, domain), you can leave off one pair of parentheses when passing a tuple to a function that takes a single argument. Thus, Some(user, domain) means the same as Some((user, domain)).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 24.3](#)

### [Chapter 24 · Extractors](#)

520

In object EMail, the apply method is called an injection, because it takes some arguments and yields an element of a given set (in our case: the set of strings that are email addresses). The unapply method is called an extraction, because it takes an element of the same set and extracts some of its parts (in our case: the user and domain substrings). Injections and extractions are often grouped together in one object, because then you can use the object's name for both a constructor and a pattern, which simulates the convention for pattern matching with case classes. However, it is also possible to define an extraction in an object without a corresponding injection. The object itself is called an extractor, independently of whether it has an apply method or not.

If an injection method is included, it should be the dual to the extraction method. For instance, a call of:

```
EMail.unapply(EMail.apply(user, domain))
```

should return:

```
Some(user, domain)
```

i.e., the same sequence of arguments wrapped in a Some. Going in the other direction means running first the unapply and then the apply, as shown in the following code:

```
EMail.unapply(obj) match {  
  case Some(u, d) => EMail.apply(u, d)  
}
```

In that code, if the match on obj succeeds, you'd expect to get back that same object from the apply. These two conditions for the duality of apply and unapply are good design principles. They are not enforced by Scala, but it's recommended to keep to them when designing your extractors.

## 24.3

### Patterns with zero or one variables

The unapply method of the previous example returned a pair of element values in the success case. This is easily generalized to patterns of more than two variables. To bind N variables, an unapply would return an N-element tuple, wrapped in a Some.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 24.3](#)

[Chapter 24 · Extractors](#)

The case where a pattern binds just one variable is treated differently, however. There is no one-tuple in Scala. To return just one pattern element, the unapply method simply wraps the element itself in a Some. For example, the extractor object shown in [Listing 24.2](#) defines apply and unapply for strings that consist of the same substring appearing twice in a row: object Twice {

```
def apply(s: String): String = s + s

def unapply(s: String): Option[String] = {
    val length = s.length / 2
    val half = s.substring(0, length)
    if (half == s.substring(length)) Some(half) else None
}
```

*Listing 24.2 · The Twice string extractor object.*

It's also possible that an extractor pattern does not bind any variables. In that case the corresponding unapply method returns a boolean—true for success and false for failure. For instance, the extractor object shown in

[Listing 24.3](#) characterizes strings consisting of all uppercase characters: object UpperCase {

```
def unapply(s: String): Boolean = s.toUpperCase == s
}
```

*Listing 24.3 · The UpperCase string extractor object.*

This time, the extractor only defines an unapply, but not an apply. It would make no sense to define an apply, as there's nothing to construct.

The following userTwiceUpper function applies all previously defined extractors together in its pattern matching code:

```
def userTwiceUpper(s: String) = s match {  
    case EMail(Twice(x @UpperCase()), domain) =>  
        "match: "+ x + " in domain "+ domain case _ =>  
        "no match"  
}
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 24.4](#)

### [Chapter 24 · Extractors](#)

522

The first pattern of this function matches strings that are email addresses whose user part consists of two occurrences of the same string in uppercase letters. For instance:

```
scala> userTwiceUpper("DIDI@hotmail.com")  
  
res0: java.lang.String = match: DI in domain hotmail.com scala>  
userTwiceUpper("DIDO@hotmail.com")  
  
res1: java.lang.String = no match  
  
scala> userTwiceUpper("didi@hotmail.com")  
  
res2: java.lang.String = no match
```

Note that `UpperCase` in function `userTwiceUpper` takes an empty parameter list. This cannot be omitted as otherwise the match would test for equality with the object `UpperCase!`! Note also that, even though `UpperCase()` itself does not bind any variables, it is still possible to associate a variable with the whole pattern matched by it. To do this, you use the standard scheme of variable binding explained in [Section 15.2](#): the form `x @UpperCase()` associates the variable `x` with the pattern matched by `UpperCase()`. For instance, in the first `userTwiceUpper` invocation above, `x` was bound to

"DI", because that was the value against which the `UpperCase()` pattern was matched.

## 24.4

### Variable argument extractors

The previous extraction methods for email addresses all returned a fixed number of element values. Sometimes, this is not flexible enough. For example, you might want to match on a string representing a domain name, so that every part of the domain is kept in a different sub-pattern. This would let you express patterns such as the following:

```
dom match {  
    case Domain("org", "acm") => println("acm.org")  
    case Domain("com", "sun", "java") => println("java.sun.com")  
    case Domain("net", _) =>  
        println("a .net domain")  
}
```

In this example things were arranged so that domains are expanded in reverse order—from the top-level domain down to the sub-domains. This was

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 24.4](#)

[Chapter 24](#) · Extractors

done so that you could better profit from sequence patterns. You saw in [Section 15.2](#) that a sequence wildcard pattern, `_*`, at the end of an argument list matches any remaining elements in a sequence. This feature is more useful if the top-level domain comes first, because then you can use sequence wildcards to match sub-domains of arbitrary depth.

The question remains how an extractor can support vararg matching as shown in the previous example, where patterns can have a varying number of sub-patterns. The unapply methods encountered so far are not sufficient, because they each return a fixed number of sub-elements in the success case. To handle this case, Scala lets you define a different extraction method specifically for vararg matching. This method is called `unapplySeq`. To see how it is written, have a look at the `Domain` extractor, shown in [Listing 24.4](#):

```
object Domain {
    // The injection method (optional)
    def apply(parts: String*): String =
        parts.reverse.mkString(".")

    // The extraction method (mandatory)
    def unapplySeq(whole: String): Option[Seq[String]] =
        Some(whole.split("\\.").reverse)
}
```

[Listing 24.4](#) · The `Domain` string extractor object.

The `Domain` object defines an `unapplySeq` method that first splits the string into parts separated by periods. This is done using Java's `split` method on strings, which takes a regular expression as its argument. The result of `split`

is an array of substrings. The result of unapplySeq is then that array with all elements reversed and wrapped in a Some.

The result type of an unapplySeq must conform to Option[Seq[T]], where the element type T is arbitrary. As you saw in [Section 17.2](#), Seq is an important class in Scala's collection hierarchy. It's a common superclass of several classes describing different kinds of sequences: Lists, Arrays, RichString, and several others.

For symmetry, Domain also has an apply method that builds a domain string from a variable argument parameter of domain parts starting with the top-level domain. As always, the apply method is optional.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 24.4](#)

### [Chapter 24 · Extractors](#)

524

You can use the Domain extractor to get more detailed information out of email strings. For instance, to search for an email address named "tom" in some ".com" domain, you could write the following function:

```
def isTomInDotCom(s: String): Boolean = s match {
```

```
    case EMail("tom", Domain("com", _*)) => true
    case _ => false
}
```

This gives the expected results:

```
scala> isTomInDotCom("tom@sun.com")
```

```
res3: Boolean = true
```

```
scala> isTomInDotCom("peter@sun.com")
```

```
res4: Boolean = false
```

```
scala> isTomInDotCom("tom@acm.org")
```

```
res5: Boolean = false
```

It's also possible to return some fixed elements from an unapplySeq together with the variable part. This is expressed by returning all elements in a tuple, where the variable part comes last, as usual. As an example,

### [Listing 24.5](#)

shows a new extractor for emails where the domain part is already expanded into a sequence:

```
object ExpandedEMail {  
  
  def unapplySeq(email: String)  
    : Option[(String, Seq[String])] = {  
  
    val parts = email split "@"  
  
    if (parts.length == 2)  
  
      Some(parts(0), parts(1).split("\\.").reverse)  
    else  
      None  
  
  }  
}
```

[Listing 24.5 · The ExpandedEMail extractor object.](#)

The unapplySeq method in ExpandedEMail returns an optional value of a pair (a Tuple2). The first element of the pair is the user part. The second

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 24.5](#)

## Chapter 24 · Extractors

525

element is a sequence of names representing the domain. You can match on this as usual:

```
scala> val s = "tom@support.epfl.ch"
```

```
s: java.lang.String = tom@support.epfl.ch
```

```
scala> val ExpandedEMail(name, topdom, subdoms @ _*) = s name: String  
= tom
```

```
topdom: String = ch
```

```
subdoms: Seq[String] = List(epfl, support)
```

24.5

Extractors and sequence patterns

You saw in [Section 15.2](#) that you can access the elements of a list or an array using sequence patterns such as:

```
List()
```

```
List(x, y, _*)
```

```
Array(x, 0, 0, _)
```

In fact, these sequence patterns are all implemented using extractors in the standard Scala library. For instance, patterns of the form `List(...)` are possible because the `scala.List` companion object is an extractor that defines an `unapplySeq` method. [Listing 24.6](#) shows the relevant definitions: package `scala`

```
object List {
```

```
def apply[T](elems: T*) = elems.toList  
  
def unapplySeq[T](x: List[T]): Option[Seq[T]] = Some(x)  
  
...  
}
```

Listing 24.6 · Hiding a primary constructor by making it private.

The List object contains an apply method that takes a variable number of arguments. That's what lets you write expressions such as: List()

List(1, 2, 3)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 24.6](#)

[Chapter 24 · Extractors](#)

526

It also contains an unapplySeq method that returns all elements of the list as a sequence. That's what supports List(...) patterns. Very similar definitions exist in the object scala.Array. These support analogous injections and extractions for arrays.

24.6

Extractors versus case classes

Even though they are very useful, case classes have one shortcoming: they expose the concrete representation of data. This means that the name of the class in a constructor pattern corresponds to the concrete representation type of the selector object. If a match against:

case C(...)

succeeds, you know that the selector expression is an instance of class C.

Extractors break this link between data representations and patterns. You have seen in the examples in this section that they enable patterns that have nothing to do with the data type of the object that's selected on. This property is called representation independence. In open systems of large size, representation independence is very important because it allows you to change an implementation type used in a set of components without affecting clients of these components.

If your component had defined and exported a set of case classes, you'd be stuck with them because client code could already contain pattern matches against these case classes. Renaming some case classes or changing the class hierarchy would affect client code. Extractors do not share this problem, because they represent a layer of indirection between a data representation and the way it is viewed by clients. You could still change a concrete representation of a type, as long as you update all your extractors with it.

Representation independence is an important advantage of extractors over case classes. On the other hand, case classes also have some advantages of their own over extractors. First, they are much easier to set up and to define, and they require less code. Second, they usually lead to more efficient pattern matches than extractors, because the Scala compiler can optimize patterns over case classes much better than patterns over extractors. This is because the mechanisms of case classes are fixed, whereas an unapply or unapplySeq method in an extractor could do almost anything. Third, if your case classes inherit from a sealed base class, the Scala compiler will check

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 24.7](#)

[Chapter 24](#) · Extractors

your pattern matches for exhaustiveness and will complain if some combination of possible values is not covered by a pattern. No such exhaustiveness checks are available for extractors.

So which of the two methods should you prefer for your pattern matches?

It depends. If you write code for a closed application, case classes are usually preferable because of their advantages in conciseness, speed and static checking. If you decide to change your class hierarchy later, the application needs to be refactored, but this is usually not a problem. On the other hand, if you need to expose a type to unknown clients, extractors might be preferable because they maintain representation independence.

Fortunately, you need not decide right away. You could always start with case classes and then, if the need arises, change to extractors. Because patterns over extractors and patterns over case classes look exactly the same in Scala, pattern matches in your clients will continue to work.

Of course, there are also situations where it's clear from the start that the structure of your patterns does not match the representation type of your data. The email addresses discussed in this chapter were one such example.

In that case, extractors are the only possible choice.

## 24.7

### Regular expressions

One particularly useful application area of extractors are regular expressions.

Like Java, Scala provides regular expressions through a library, but extractors make it much nicer to interact with them.

### Forming regular expressions

Scala inherits its regular expression syntax from Java, which in turn inherits most of the features of Perl. We assume you know that syntax already; if not, there are many accessible tutorials, starting with the Javadoc

documentation of class `java.util.regex.Pattern`. Here are just some examples that should be enough as refreshers:

`ab?`

An ‘a’, possibly followed by a ‘b’.

`\d+`

A number consisting of one or more digits

represented by `\d`.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 24.7](#)

[Chapter 24 · Extractors](#)

528

`[a-dA-D]\w*`

A word starting with a letter between a and d in lower or upper case, followed by a sequence of zero or more “word characters” denoted by `\w`. (A word character is a letter, digit, or underscore.)

`(-)?(\d+)(\.\d*)?`

A number consisting of an optional minus sign, followed by one or more digits, optionally followed by a period and zero or more

digits. The number contains three groups, i.e.,

the minus sign, the part before the decimal

point, and the fractional part including the

decimal point. Groups are enclosed in paren-

theses.

Scala's regular expression class resides in package `scala.util.matching`.

```
scala> import scala.util.matching.Regex
```

A new regular expression value is created by passing a string to the `Regex` constructor. For instance:

```
scala> val Decimal = new Regex("(-)?(\\\d+)(\\.\\\\d*)?") Decimal:  
scala.util.matching.Regex = (-)?(\d+)(.\d*)?
```

Note that, compared to the regular expression for decimal numbers given previously, every backslash appears twice in the string above. This is because in Java and Scala a single backslash is an escape character in a string literal, not a regular character that shows up in the string. So instead of '`\`' you need to write '`\\`' to get a single backslash in the string.

If a regular expression contains many backslashes this might be a bit painful to write and to read. Scala's raw strings provide an alternative. As you saw in [Section 5.2](#), a raw string is a sequence of characters between triple quotes. The difference between a raw and a normal string is that all characters in a raw string appear exactly as they are typed. This includes backslashes, which are not treated as escape characters. So you could write equivalently and somewhat more legibly:

```
scala> val Decimal = new Regex("""(-)?(\d+)(.\d*)?""") Decimal:  
scala.util.matching.Regex = (-)?(\d+)(.\d*)?
```

## Section 24.7

### Chapter 24 · Extractors

529

As you can see from the interpreter's output, the generated result value for Decimal is exactly the same as before.

Another, even shorter way to write a regular expression in Scala is this:

```
scala> val Decimal = """(-)?(\d+)(\.\d*)?""".r Decimal:  
scala.util.matching.Regex = (-)?(\d+)(\.\d*)?
```

In other words, simply append a .r to a string to obtain a regular expression.

This is possible because there is a method named r in class RichString, which converts a string to a regular expression. The method is defined as shown in [Listing 24.7](#):

```
package scala.runtime  
  
import scala.util.matching.Regex  
  
class RichString(self: String) ... {  
  
    ...  
  
    def r = new Regex(self)  
  
}
```

[Listing 24.7](#) · How the r method is defined in RichString.

Searching for regular expressions

You can search for occurrences of a regular expression in a string using several different operators:

```
regex findFirstIn str
```

Finds first occurrence of regular expression regex in string str, returning the result in an Option type.

regex findAllIn str

Finds all occurrences of regular expression regex in string str, returning the results in an Iterator.

regex findPrefixOf str

Finds an occurrence of regular expression regex at the start of string str, returning the result in an Option type.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 24.7

### Chapter 24 · Extractors

530

For instance, you could define the input sequence below and then search decimal numbers in it:

```
scala> val Decimal = """(-)?(\d+)(\.\d*)?""".r Decimal:  
scala.util.matching.Regex = (-)?(\d+)(\.\d*)?
```

```
scala> val input = "for -1.0 to 99 by 3"
```

```
input: java.lang.String = for -1.0 to 99 by 3
```

```
scala> for (s <- Decimal findAllIn input)
```

```
    println(s)
```

```
-1.0
```

```
99
```

3

```
scala> Decimal findFirstIn input  
res1: Option[String] = Some(-1.0)  
  
scala> Decimal findPrefixOf input  
res2: Option[String] = None
```

## Extracting with regular expressions

What's more, every regular expression in Scala defines an extractor. The extractor is used to identify substrings that are matched by the groups of the regular expression. For instance, you could decompose a decimal number string as follows:

```
scala> val Decimal(sign, integerpart, decimalpart) = "-1.23"  
sign: String = -  
integerpart: String = 1  
decimalpart: String = .23
```

In this example, the pattern, `Decimal(...)`, is used in a `val` definition, as described in [Section 15.7](#). What happens here is that the `Decimal` regular expression value defines an `unapplySeq` method. That method matches every string that corresponds to the regular expression syntax for decimal numbers.

If the string matches, the parts that correspond to the three groups in the regular expression `(-)?(\d+)(\.\d*)?` are returned as elements of the pattern and are then matched by the three pattern variables `sign`, `integerpart`, and `decimalpart`. If a group is missing, the element value is set to null, as can be seen in the following example:

## Section 24.8

### Chapter 24 · Extractors

531

```
scala> val Decimal(sign, integerpart, decimalpart) = "1.0"
```

```
sign: String = null
```

```
integerpart: String = 1
```

```
decimalpart: String = .0
```

It's also possible to mix extractors with regular expression searches in a for expression. For instance, the following expression decomposes all decimal numbers it finds in the input string:

```
scala> for (Decimal(s, i, d) <- Decimal findAllIn input) println("sign: "+ s  
+ ", integer: "+  
i + ", decimal: "+ d)
```

```
sign: -, integer: 1, decimal: .0
```

```
sign: null, integer: 99, decimal: null
```

```
sign: null, integer: 3, decimal: null
```

24.8

### Conclusion

In this chapter you saw how to generalize pattern matching with extractors.

Extractors let you define your own kinds of patterns, which need not correspond to the type of the expressions you select on. This gives you more flexibility in the kinds of patterns you can use for matching. In effect it's like having different possible views on the same data. It also gives you a

layer between a type's representation and the way clients view it. This lets you do pattern matching while maintaining representation independence, a property which is very useful in large software systems.

Extractors are one more element in your tool box that let you define flexible library abstractions. They are used heavily in Scala's libraries, for instance, to enable convenient regular expression matching.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 25

### Annotations

Annotations are structured information added to program source code. Like comments, they can be sprinkled throughout a program and attached to any variable, method, expression, or other program element. Unlike comments, they have structure, thus making them easier to machine process.

This chapter shows how to use annotations in Scala. It shows their general syntax and how to use several standard annotations.

This chapter does not show how to write new annotation processing tools, because it is beyond the scope of this book. [Chapter 29](#) shows one technique, but not the only one. Instead, this chapter focuses on how to use annotations, because it is more common to use annotations than to define new annotation processors.

#### 25.1

##### Why have annotations?

There are many things you can do with a program other than compiling and running it. Some examples are:

1. Automatic generation of documentation as with Scaladoc.
2. Pretty printing code so that it matches your preferred style.

3. Checking code for common errors such as opening a file but, on some control paths, never closing it.

4. Experimental type checking, for example to manage side effects or ensure ownership properties.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 25.2

### Chapter 25 · Annotations

533

Such tools are called [meta-programming](#) tools, because they are programs that take other programs as input. Annotations support these tools by letting the programmer sprinkle directives to the tool throughout their source code. Such directives let the tools be more effective than if they could have no user input. For example, annotations can improve the previously listed tools as follows:

1. A documentation generator could be instructed to document certain methods as deprecated.
2. A pretty printer could be instructed to skip over parts of the program that have been carefully hand formatted.
3. A checker for non-closed files could be instructed to ignore a particular file that has been manually verified to be closed.
4. A side-effects checker could be instructed to verify that a specified method has no side effects.

In all of these cases, it would in theory be possible for the programming language to provide ways to insert the extra information. In fact, most of these are directly supported in some language or another. However, there are too many such tools for one language to directly support them all. Further, all of this information is completely ignored by the compiler, which after all just wants to make the code run.

Scala's philosophy in cases like this is to include the minimum, orthogonal support in the core language such that a wide variety of meta-programming tools can be written. In this case, that minimum support is a system of annotations. The compiler understands just one feature, annotations, but it doesn't attach any meaning to individual annotations. Each meta-programming tool can then define and use its own specific annotations.

## 25.2

### Syntax of annotations

A typical use of an annotation looks like this:

```
@deprecated def bigMistake() = //...
```

The annotation is the `@deprecated` part, and it applies to the entirety of the `bigMistake` method (not shown—it's too embarrassing). In this case,

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 25.2](#)

[Chapter 25](#) · [Annotations](#)

534

the method is being marked as something the author of `bigMistake` wishes you not to use. Maybe `bigMistake` will be removed entirely from a future version of the code.

In the previous example, a method is annotated as `@deprecated`. Annotations are allowed in other places too. Annotations are allowed on any kind of declaration or definition, including vals, vars, defs, classes, objects, traits, and types. The annotation applies to the entirety of the declaration or definition that follows it:

```
@deprecated class QuickAndDirty {
```

```
//...
```

}

Annotations can also be applied to an expression, as with the @unchecked annotation for pattern matching (see [Chapter 15](#)). To do so, place a colon (:) after the expression and then write the annotation. Syntactically, it looks like the annotation is being used as a type:

```
(e: @unchecked) match {
```

```
// non-exhaustive cases...
```

}

Finally, annotations can be placed on types. Annotated types are described later in this chapter.

So far the annotations shown have been simply an at sign followed by an annotation class. Such simple annotations are common and useful, but annotations have a richer general form:

```
@annot(exp1, exp2, ...) {val name1=const1, ..., val namen=constn}
```

The annot specifies the class of annotation. All annotations must include that much. The exp parts are arguments to the annotation. For annotations like

@deprecated that do not need any arguments, you would normally leave off the parentheses, but you can write @deprecated() if you like. For annotations that do have arguments, place the arguments in parentheses, for example, @serial(1234).

The precise form of the arguments you may give to an annotation depends on the particular annotation class. Most annotation processors only let you supply immediate constants such as 123 or "hello". The compiler itself supports arbitrary expressions, however, so long as they type check.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 25.3](#)

## Chapter 25 · Annotations

535

Some annotation classes can make use of this, for example, to let you refer to other variables that are in scope:

```
@cool val normal = "Hello"
```

```
@coolerThan(normal) val fonzy = "Heeyyy"
```

The name=const pairs in the general syntax are available for more complicated annotations that have optional arguments. These arguments are optional, and they can be specified in any order. To keep things simple, the part to the right-hand side of the equals sign must be a constant.

25.3

### Standard annotations

Scala includes several standard annotations. They are for features that are used widely enough to merit putting in the language specification, but that are not fundamental enough to merit their own syntax. Over time, there should be a trickle of new annotations that are added to the standard in just the same way.

### Deprecation

Sometimes you write a class or method that you later wish you had not. Once it is available, though, code written by other people might call the method.

Thus, you cannot simply delete the method, because this would cause other people's code to stop compiling.

Deprecation lets you gracefully remove a method or class that turns out to be a mistake. You mark the method or class as deprecated, and then anyone who calls that method or class will get a deprecation warning. They had better heed this warning and update their code! The idea is that after a

suitable amount of time has passed, you feel safe in assuming that all reasonable clients will have stopped accessing the deprecated class or method and thus that you can safely remove it.

You mark a method as deprecated simply by writing `@deprecated` before it. For example:

```
@deprecated def bigMistake() =  
//...
```

Such an annotation will cause the Scala compiler to emit deprecation warnings whenever Scala code accesses the method.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 25.3](#)

### [Chapter 25 · Annotations](#)

536

Volatile fields

Concurrent programming does not mix well with shared mutable state. For this reason, the focus of Scala's concurrency support is message passing and a minimum of shared mutable state. See [Chapter 30](#) for the details.

Nonetheless, sometimes programmers want to use mutable state in their concurrent programs. The `@volatile` annotation helps in such cases. It informs the compiler that the variable in question will be used by multiple threads. Such variables are implemented so that reads and writes to the variable are slower, but accesses from multiple threads behave more predictably.

The `@volatile` keyword gives different guarantees on different platforms. On the Java platform, however, you get the same behavior as if you wrote the field in Java code and marked it with the Java `volatile` modifier.

## Binary serialization

Many languages include a framework for binary [serialization](#). A serialization framework helps you convert objects into a stream of bytes and vice versa. This is useful if you want to save objects to disk or send them over the network. XML can help with the same goals (see [Chapter 26](#)), but it has different trade offs regarding speed, space usage, flexibility, and portability.

Scala does not have its own serialization framework. Instead, you should use a framework from your underlying platform. What Scala does is provide three annotations that are useful for a variety of frameworks. Also, the Scala compiler for the Java platform interprets these annotations in the Java way (see [Chapter 29](#)).

The first annotation indicates whether a class is serializable at all. Most classes are serializable, but not all. A handle to a socket or GUI window, for example, cannot be serialized. By default, a class is not considered serializable. You should add a `@Serializable` annotation to any class you would like to be serializable.

The second annotation helps deal with serializable classes changing as time goes by. You can attach a serial number to the current version of a class by adding an annotation like `@SerialVersionUID(1234)`, where 1234

should be replaced by your serial number of choice. The framework should store this number in the generated byte stream. When you later reload that byte stream and try to convert it to an object, the framework can check that the current version of the class has the same version number as the version

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 25.4](#)

[Chapter 25](#) · [Annotations](#)

in the byte stream. If you want to make a serialization-incompatible change to your class, then you can change the version number. The framework will then automatically refuse to load old instances of the class.

Finally, Scala provides a `@transient` annotation for fields that should not be serialized at all. If you mark a field as `@transient`, then the framework should not save the field even when the surrounding object is serialized.

When the object is loaded, the field will be restored to the default value for the type of the field annotated as `@transient`.

### Automatic get and set methods

Scala code normally does not need explicit get and set methods for fields, because Scala blends the syntax for field access and method invocation.

Some platform-specific frameworks do expect get and set methods, however. For that purpose, Scala provides the `@scala.reflect.BeanProperty` annotation. If you add this annotation to a field, the compiler will automatically generate get and set methods for you. If you annotate a field named `crazy`, the get method will be named `getCrazy` and the set method will be named `setCrazy`.

The generated get and set methods are only available after a compilation pass completes. Thus, you cannot call these get and set methods from code you compile at the same time as the annotated fields. This should not be a problem in practice, because in Scala code you can access the fields directly. This feature is intended to support frameworks that expect regular get and set methods, and typically you do not compile the framework and the code that uses it at the same time.

### Unchecked

The `@unchecked` annotation is interpreted by the compiler during pattern matches. It tells the compiler not to worry if the match expression seems to leave out some cases. See [Section 15.5](#) for details.

## Conclusion

This chapter described the platform-independent aspects of annotations that you will most commonly need to know about. First of all it covered the syntax of annotations, because using annotations is far more common than defining them.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### [Section 25.4](#)

#### [Chapter 25 · Annotations](#)

538

introducing new ones. Second it showed how to use several annotations that are supported by the standard Scala compiler, including `@deprecated`, `@volatile`,

`@serializable`, `@BeanProperty`, and `@unchecked`.

[Chapter 29](#) gives additional, Java-specific information on annotations.

It covers annotations only available when targeting Java, additional meanings of standard annotations when targeting Java, how to interoperate with Java-based annotations, and how to use Java-based mechanisms to define and process annotations in Scala.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 26

### Working with XML

This chapter introduces Scala's support for XML. After discussing semi-structured data in general, it shows the essential functionality in Scala for manipulating XML: how to make nodes with XML literals, how to save and load XML to files, and how to take apart XML nodes using query methods.

and pattern matching. This chapter is just a brief introduction to what is possible with XML, but it shows enough to get you started.

## 26.1

### Semi-structured data

XML is a form of [semi-structured data](#). It is more structured than plain strings, because it organizes the contents of the data into a tree. Plain XML is less structured than the objects of a programming language, though, as it admits free-form text between tags and it lacks a type system.<sup>1</sup>

Semi-structured data is very helpful any time you need to serialize program data for saving in a file or shipping across a network. Instead of converting structured data all the way down to bytes, you convert it to and from semi-structured data. You then use pre-existing library routines to convert between semi-structured data and binary data, saving your time for more important problems.

There are many forms of semi-structured data, but XML is the most widely used on the Internet. There are XML tools on most operating systems, and most programming languages have XML libraries available. Its popularity is self-reinforcing. The more tools and libraries are developed<sup>1</sup> There are type systems for XML, such as XML Schemas, but they are beyond the scope of this book.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 26.2](#)

[Chapter 26 · Working with XML](#)

540

in response to XML's popularity, the more likely software engineers are to choose XML as part of their formats. If you write software that communicates over the Internet, then sooner or later you will need to interact with some service that speaks XML.

For all of these reasons, Scala includes special support for processing XML. This chapter shows you Scala's support for constructing XML, processing it with regular methods, and processing it with Scala's pattern matching. In addition to these nuts and bolts, the chapter shows along the way several common idioms for using XML in Scala.

## 26.2

### XML overview

XML is built out of two basic elements, text and tags.<sup>2</sup> Text is, as usual, any sequence of characters. Tags, written like `<pod>`, consist of a less-than sign, an alphanumeric label, and a greater than sign. Tags can be start or end tags.

An end tag looks just like a start tag except that it has a slash just before the tag's label, like this: `</pod>`.

Start and end tags must match each other, just like parentheses. Any start tag must eventually be followed by an end tag with the same label. Thus the following is illegal:

```
// Illegal XML
```

One `<pod>`, two `<pod>`, three `<pod>` zoo Further, the contents of any two matching tags must itself be valid XML.

You cannot have two pairs of matching tags overlap each other:

```
// Also illegal
```

`<pod>Three <peas> in the </pod></peas>` You could, however, write it like this:

`<pod>Three <peas></peas> in the </pod>` Since tags are required to match in this way, XML is structured as nested elements. Each pair of matching start and end tags forms an element, and elements may be nested within each other. In the above example, the entirety of `<pod>Three <peas></peas>` in the `</pod>` is an element, and

<peas></peas> is an element nested within it.

The full story is more complicated, but this is enough to be effective with XML.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 26.3

### Chapter 26 · Working with XML

541

Those are the basics. Two other things you should know are, first, there is a shorthand notation for a start tag followed immediately by its matching end tag. Simply write one tag with a slash put after the tag's label. Such a tag comprises an empty element. Using an empty element, the previous example could just as well be written as follows:

<pod>Three <peas/> in the </pod>

Second, start tags can have attributes attached to them. An attribute is a name-value pair written with an equals sign in the middle. The attribute name itself is plain, unstructured text, and the value is surrounded by either double quotes ("") or single quotes (''). Attributes look like this:

<pod peas="3" strings="true"/> 26.3

### XML literals

Scala lets you type in XML as a [literal](#) anywhere that an expression is valid.

Simply type a start tag and then continue writing XML content. The compiler will go into an XML-input mode and will read content as XML until it sees the end tag matching the start tag you began with:

```
scala> <a>
```

This is some XML.

Here is a tag: <atag/>

```
</a>
```

res0: scala.xml.Elem =

```
<a>
```

This is some XML.

Here is a tag: <atag></atag>

```
</a>
```

The result of this expression is of type Elem, meaning it is an XML element with a label (“a”) and children (“This is some XML. . . ,” etc.). Some other important XML classes are:

- Class Node is the abstract superclass of all XML node classes.
- Class Text is a node holding just text. For example, the “stuff” part of <a>stuff</a> is of class Text.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 26.3

### Chapter 26 · Working with XML

542

- Class NodeSeq holds a sequence of nodes. Many methods in the XML library process NodeSeqs in places you might expect them to process individual Nodes. You can still use such methods with individual nodes, however, since Node extends from NodeSeq. This may sound weird, but it works out well for XML. You can think of an individual Node as a one-element NodeSeq.

You are not restricted to writing out the exact XML you want, character for character. You can evaluate Scala code in the middle of an XML literal by using curly braces ({} ) as an escape. Here is a simple example:

```
scala> <a> {"hello" + ", world"} </a>
res1: scala.xml.Elem = <a> hello, world </a>
```

A braces escape can include arbitrary Scala content, including further XML

literals. Thus, as the nesting level increases, your code can switch back and forth between XML and ordinary Scala code. Here's an example:

```
scala> val yearMade = 1955
```

```
yearMade: Int = 1955
```

```
scala>
```

```
<a> { if (yearMade < 2000) <old>{yearMade}</old> else
xml.NodeSeq.Empty }
```

```
</a>
```

```
res2: scala.xml.Elem =
```

```
<a> <old>1955</old>
```

```
</a>
```

If the code inside the curly braces evaluates to either an XML node or a sequence of XML nodes, those nodes are inserted directly as is. In the above example, if yearMade is less than 2000, it is wrapped in `<old>` tags and added to the `<a>` element. Otherwise, nothing is added. Note in the above example that "nothing" as an XML node is denoted with `xml.NodeSeq.Empty`.

An expression inside a brace escape does not have to evaluate to an XML node. It can evaluate to any Scala value. In such a case, the result is converted to a string and inserted as a text node:

```
scala> <a> {3 + 4} </a>
```

```
res3: scala.xml.Elem = <a> 7 </a>
```

Any <, >, and & characters in the text will be escaped if you print the node back out:

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 26.4

### Chapter 26 · Working with XML

543

```
scala> <a> {"</a>potential security hole<a>"} </a> res4: scala.xml.Elem =  
<a> &lt;/a&gt;potential security hole&lt;a&gt; </a>
```

To contrast, if you create XML with low-level string operations, you will run into traps such as the following:

```
scala> "<a>" + "</a>potential security hole<a>" + "</a>"
```

```
res5: java.lang.String = <a></a>potential security hole<a></a>
```

What happens here is that a user-supplied string has included XML tags of its own, in this case </a> and <a>. This behavior can allow some nasty surprises for the original programmer, because it allows the user to affect the resulting XML tree outside of the space provided for the user inside the <a> element.

You can prevent this entire class of problems by always constructing XML using XML literals, not string appends.

26.4

## Serialization

You have now seen enough of Scala's XML support to write the first part of a serializer: conversion from internal data structures to XML. All you need

for this are XML literals and their brace escapes.

As an example, suppose you are implementing a database to keep track of your extensive collection of vintage Coca-Cola thermometers. You might make the following internal class to hold entries in the catalog: abstract class CCTherm {

```
val description: String  
val yearMade: Int  
val dateObtained: String  
val bookPrice: Int  
// in US cents  
val purchasePrice: Int  
// in US cents  
val condition: Int  
// 1 to 10  
override def toString = description  
}
```

This is a straightforward, data-heavy class that holds various pieces of information such as when the thermometer was made, when you got it, and how much you paid for it.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 26.4](#)

[Chapter 26 · Working with XML](#)

To convert instances of this class to XML, simply add a `toXML` method that uses XML literals and brace escapes, like this:

```
abstract class CCTerm {  
  
  ...  
  
  def toXML =  
  
    <cctherm>  
  
    <description>{description}</description>  
  
    <yearMade>{yearMade}</yearMade>  
  
    <dateObtained>{dateObtained}</dateObtained>  
  
    <bookPrice>{bookPrice}</bookPrice>  
  
    <purchasePrice>{purchasePrice}</purchasePrice>  
  
    <condition>{condition}</condition>  
  
  </cctherm>  
  
}
```

Here is the method in action:

```
scala> val therm = new CCTerm {  
  
  val description = "hot dog #5"  
  
  val yearMade = 1952  
  
  val dateObtained = "March 14, 2006"  
  
  val bookPrice = 2199
```

```
val purchasePrice = 500  
val condition = 9  
}
```

therm: CCTerm = hot dog #5

```
scala> therm.toXML
```

res6: scala.xml.Elem =

```
<cctherm>  
<description>hot dog #5</description>  
<yearMade>1952</yearMade>  
<dateObtained>March 14, 2006</dateObtained>  
<bookPrice>2199</bookPrice>  
<purchasePrice>500</purchasePrice>  
<condition>9</condition>  
</cctherm>
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 26.5](#)

[Chapter 26 · Working with XML](#)

545

Note

The “new CCTerm” expression in the previous example works even though CCTerm is an abstract class, because this syntax actually

instantiates an anonymous subclass of CCTherm. Anonymous classes were described in [Section 20.5](#).

By the way, if you want to include a curly brace ('{' or '}') as XML text, as opposed to using them to escape to Scala code, simply write two curly braces in a row:

```
scala> <a> {{{brace yourself!}}} </a>
```

```
res7: scala.xml.Elem = <a> {{brace yourself!}} </a> 26.5
```

Taking XML apart

Among the many methods available for the XML classes, there are three in particular that you should be aware of. They allow you to take apart XML

without thinking too much about the precise way XML is represented in Scala. These methods are based on the XPath language for processing XML.

As is common in Scala, you can write them directly in Scala code instead of needing to invoke an external tool.

Extracting text.

By calling the text method on any XML node you re-

trieve all of the text within that node, minus any element tags: 

```
scala> <a> Sounds <tag/> good </a>.text
```

 res8: String = Sounds

good

Any encoded characters are decoded automatically:

```
scala> <a> input ---&gt; output </a>.text
```

 res9: String =

input ---> output

Extracting sub-elements.

If you want to find a sub-element by tag name,

simply call \ with the name of the tag:

```
scala> <a><b><c>hello</c></b></a> \ "b"
```

```
res10: scala.xml.NodeSeq = <b><c>hello</c></b>
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 26.6

### Chapter 26 · Working with XML

546

You can do a “deep search” and look through sub-sub-elements, etc., by using \\ instead of the \\ operator:

```
scala>
```

```
<a><b><c>hello</c></b></a> \ "c"
```

```
res11: scala.xml.NodeSeq =
```

```
scala>
```

```
<a><b><c>hello</c></b></a> \\ "c"
```

```
res12: scala.xml.NodeSeq = <c>hello</c>
```

```
scala>
```

```
<a><b><c>hello</c></b></a> \ "a"
```

```
res13: scala.xml.NodeSeq =
```

```
scala>
```

```
<a><b><c>hello</c></b></a> \\ "a"
```

```
res14: scala.xml.NodeSeq = <a><b><c>hello</c></b></a> Note
```

Scala uses \ and \\ instead of XPath's / and //. The reason is that //

starts a comment in Scala! Thus, some other symbol has to be used, and using the other kind of slashes works well.

Extracting attributes.

You can extract tag attributes using the same \ and

```
\\ methods. Simply put an at sign (@) before the attribute name: scala> val  
joe = <employee
```

```
name="Joe"
```

```
rank="code monkey"
```

```
serial="123"/>
```

```
joe: scala.xml.Elem = <employee rank="code monkey" name="Joe"
```

```
serial="123"></employee>
```

```
scala>
```

```
joe \\ "@name"
```

```
res15: scala.xml.NodeSeq = Joe
```

```
scala>
```

```
joe \\ "@serial"
```

```
res16: scala.xml.NodeSeq = 123
```

26.6

Deserialization

Using the previous methods for taking XML apart, you can now write the dual of a serializer, a parser from XML back into your internal data struc-

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 26.7

### Chapter 26 · Working with XML

547

tures. For example, you can parse back a CCTerm instance by using the following code:

```
def fromXML(node: scala.xml.Node): CCTerm =  
  
new CCTerm {  
  
  val description  
  = (node \ "description").text  
  
  val yearMade  
  = (node \ "yearMade").text.toInt  
  
  val dateObtained  
  = (node \ "dateObtained").text  
  
  val bookPrice  
  = (node \ "bookPrice").text.toInt  
  
  val purchasePrice = (node \ "purchasePrice").text.toInt val condition  
  = (node \ "condition").text.toInt  
  
}
```

This code searches through an input XML node, named node, to find each of the six pieces of data needed to specify a CCTerm. The data that is text is extracted with .text and left as is. Here is this method in action:

```
scala> val node = therm.toXML
```

```
node: scala.xml.Elem =
```

```
<cctherm>
```

```
<description>hot dog #5</description>
```

```
<yearMade>1952</yearMade>
```

```
<dateObtained>March 14, 2006</dateObtained>
```

```
<bookPrice>2199</bookPrice>
```

```
<purchasePrice>500</purchasePrice>
```

```
<condition>9</condition>
```

```
</cctherm>
```

```
scala> fromXML(node)
```

```
res15: CCTerm = hot dog #5
```

26.7

## Loading and saving

There is one last part needed to write a data serializer: conversion between XML and streams of bytes. This last part is the easiest, because there are library routines that will do it all for you. You simply have to call the right routine on the right data.

To convert XML to a string, all you need is `toString`. The presence of a workable `toString` is why you can experiment with XML in the Scala shell.

## Section 26.7

### Chapter 26 · Working with XML

548

However, it is better to use a library routine and convert all the way to bytes.

That way, the resulting XML can include a directive that specifies which character encoding was used. If you encode the string to bytes yourself, then the onus is on you to keep track of the character encoding.

To convert from XML to a file of bytes, you can use the `XML.saveFull` command. The important pieces you must choose are a file name, a node to be saved, and a character encoding. The fourth argument is whether to write an XML declaration at the top that includes the character encoding. The fifth argument is the “document type” of this XML, a subject beyond the scope of this chapter. You can specify `null` to leave the document type unspecified: `scala.xml.XML.saveFull("therm1.xml", node, "UTF-8", true, null)` After running the above command, the resulting file `therm1.xml` looks like the following:

```
<?xml version='1.0' encoding='UTF-8'?>  
<cctherm>  
<description>hot dog #5</description>  
<yearMade>1952</yearMade>  
<dateObtained>March 14, 2006</dateObtained>  
<bookPrice>2199</bookPrice>  
<purchasePrice>500</purchasePrice>
```

```
<condition>9</condition>
```

```
</cctherm>
```

Loading is simpler than saving, because the file includes everything the loader needs to know. Simply call XML.loadFile on a file name: scala> val loadnode = xml.XML.loadFile("therm1.xml") loadnode: scala.xml.Elem =

```
<cctherm>
```

```
<description>hot dog #5</description>
```

```
<yearMade>1952</yearMade>
```

```
<dateObtained>March 14, 2006</dateObtained>
```

```
<bookPrice>2199</bookPrice>
```

```
<purchasePrice>500</purchasePrice>
```

```
<condition>9</condition>
```

```
</cctherm>
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 26.8

### Chapter 26 · Working with XML

549

```
scala> fromXML(loadnode)
```

```
res14: CCTherm = hot dog #5
```

Those are the basic methods you need. There are many variations on these loading and saving methods, including methods for reading and writing to various kinds of readers, writers, input and output streams.

## 26.8

### Pattern matching on XML

So far you have seen how to dissect XML using text and the XPath-like methods, \ and \\. These are good when you know exactly what kind of XML structure you are taking apart. Sometimes, though, there are a few possible structures the XML could have. Maybe there are multiple kinds of records within the data, for example because you have extended your thermometer collection to include clocks and sandwich plates. Maybe you simply want to skip over any white space between tags. Whatever the reason, you can use the pattern matcher to sift through the possibilities.

An XML pattern looks just like an XML literal. The main difference is that if you insert a {} escape, then the code inside the {} is not an expression but a pattern. A pattern embedded in {} can use the full Scala pattern language, including binding new variables, performing type tests, and ignoring content using the \_ and \_\* patterns. Here is a simple example:

```
def proc(node: scala.xml.Node): String =
```

```
node match {  
  case <a>{contents}</a> => "It's an a: "+ contents  
  case <b>{contents}</b> => "It's a b: "+ contents  
  case _ => "It's something else."  
}
```

This function has a pattern match with three cases. The first case looks for an  element whose contents consist of a single sub-node. It binds those contents to a variable named contents and then evaluates the code to the right of the associated right arrow (=>). The second case does the same thing but looks for a  **instead of an , and the third case matches anything not matched by any other case. Here is the function in use:**

```
scala> proc(<a>apple</a>)
```

```
res16: String = It's an a: apple
```

## Section 26.8

### Chapter 26 · Working with XML

550

```
scala> proc(<b>banana</b>)
```

```
res17: String = It's a b: banana
```

```
scala> proc(<c>cherry</c>)
```

```
res18: String = It's something else.
```

Most likely this function is not exactly what you want, because it looks precisely for contents consisting of a single sub-node within the `<a>` or `<b>`.

Thus it will fail to match in cases like the following: `scala> proc(<a>a <em>red</em> apple</a>)` `res19: String = It's something else.`

```
scala> proc(<a/>)
```

```
res20: String = It's something else.
```

If you want the function to match in cases like these, you can match against a sequence of nodes instead of a single one. The pattern for “any sequence” of XML nodes is written `'_*'`. Visually, this sequence looks like the wildcard pattern `(_)` followed by a regex-style Kleene star `(*)`. Here is the updated function that matches a sequence of sub-elements instead of a single sub-element:

```
def proc(node: scala.xml.Node): String =
```

```
node match {
```

```
case <a>{contents @ _ *}</a> => "It's an a: " + contents
case <b>{contents @ _ *}</b> => "It's a b: " + contents
case _ => "It's something else."
```

}

Notice that the result of the `_*` is bound to the `contents` variable by using the `@` pattern described in [Section 15.2](#). Here is the new version in action:

```
scala> proc(<a>a <em>red</em> apple</a>) res21: String = It's an a:
```

```
ArrayBuffer(a ,
```

```
<em>red</em>,
```

```
apple)
```

```
scala> proc(<a/>)
```

```
res22: String = It's an a: Array()
```

As a final tip, be aware that XML patterns work very nicely with `for` expressions as a way to iterate through some parts of an XML tree while ignoring other parts. For example, suppose you wish to skip over the white space between records in the following XML structure:

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 26.8](#)

[Chapter 26](#) · [Working with XML](#)

551

```
val catalog =
```

```
<catalog>
```

```
<cctherm>
```

```
<description>hot dog #5</description>
```

```
<yearMade>1952</yearMade>
```

```
<dateObtained>March 14, 2006</dateObtained>
```

```
<bookPrice>2199</bookPrice>  
  
<purchasePrice>500</purchasePrice>  
  
<condition>9</condition>  
  
</cctherm>  
  
<cctherm>  
  
<description>Sprite Boy</description>  
  
<yearMade>1964</yearMade>  
  
<dateObtained>April 28, 2003</dateObtained>  
  
<bookPrice>1695</bookPrice>  
  
<purchasePrice>595</purchasePrice>  
  
<condition>5</condition>  
  
</cctherm>  
  
</catalog>
```

Visually, it looks like there are two nodes inside the `<catalog>` element.

Actually, though, there are five. There is white space before, after, and between the two elements! If you do not consider this white space, you might incorrectly process the thermometer records as follows: catalog match {

```
case <catalog>{therms @ _*}</catalog> => for (therm <- therms)  
    println("processing: "+  
        (therm \ "description").text)
```

}

processing:

processing: hot dog #5

processing:

processing: Sprite Boy

processing:

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 26.9](#)

### [Chapter 26 · Working with XML](#)

552

Notice all of the lines that try to process white space as if it were a true thermometer record. What you would really like to do is ignore the white space and process only those sub-nodes that are inside a <cctherm> element.

You can describe this subset using the pattern <cctherm>{\_\*}</cctherm>, and you can restrict the for expression to iterating over items that match that pattern:

```
catalog match {  
    case <catalog>{therms @ _*}</catalog> => for (therm @ <cctherm>{_*}  
        </cctherm>  
        <-  
        therms)  
        println("processing: "+
```

```
(therm \ "description").text)
```

```
}
```

processing: hot dog #5

processing: Sprite Boy

26.9

## Conclusion

This chapter has only scratched the surface of what you can do with XML.

There are many other extensions, libraries, and tools you could learn about, some customized for Scala, some made for Java but usable in Scala, and some language-neutral. What you should walk away from this chapter with is how to use semi-structured data for interchange, and how to access semi-structured data via Scala's XML support.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 27

### Modular Programming Using Objects

In [Chapter 1](#), we claimed that one way Scala is a scalable language is that you can use the same techniques to construct small as well as large programs. Up to now in this book we've focused primarily on programming in the small: designing and implementing the smaller program pieces out of which you can construct a larger program.<sup>1</sup> The other side of the story is programming in the large: organizing and assembling the smaller pieces into larger programs, applications, or systems. We touched on this subject when we discussed packages and access modifiers in [Chapter 13](#). In short, packages and access modifiers enable you to organize a large program using packages as modules, where a module is a “smaller program piece” with a well defined interface and a hidden implementation.

While the division of programs into packages is already quite helpful, it is limited because it provides no way to abstract. You cannot reconfigure a package two different ways within the same program, and you cannot inherit between packages. A package always includes one precise list of contents, and that list is fixed until you change the code.

In this chapter, we'll discuss how you can use Scala's object-oriented features to make a program more modular. We'll first show how a simple singleton object can be used as a module, and then we'll show how you can use traits and classes as abstractions over modules. These abstractions can be reconfigured into multiple modules, even multiple times within the same program. Finally, we'll show a pragmatic technique for using traits to divide a module across multiple files.

<sup>1</sup>This terminology was introduced in DeRemer, et. al., “Programming-in-the-large versus programming-in-the-small.” [\[DeR75\]](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 27.1](#)

### [Chapter 27 · Modular Programming Using Objects](#)

554

27.1

#### The problem

As a program grows in size, it becomes increasingly important to organize it in a modular way. First, being able to compile different modules that make up the system separately helps different teams work independently. In addition, being able to unplug one implementation of a module and plug in another is useful, because it allows different configurations of a system to be used in different contexts, such as unit testing on a developer's desktop, integration testing, staging, and deployment.

For example, you may have an application that uses a database and a message service. As you write code, you may want to run unit tests on your desktop that use mock versions of both the database and message service, which simulate these services sufficiently for testing without needing to talk across the network to a shared resource. During integration testing, you may want to use a mock message service but a live developer database. During staging and certainly during deployment, your organization will likely want to use live versions of both the database and message service.

Any technique that aims to facilitate this kind of modularity needs to provide a few essentials. First, there should be a module construct that provides a good separation of interface and implementation. Second, there should be a way to replace one module with another that has the same interface without changing or recompiling the modules that depend on the replaced one.

Lastly, there should be a way to wire modules together. This wiring task can be thought of as configuring the system.

One approach to solving this problem is dependency injection, a technique supported on the Java platform by frameworks such as Spring and Guice, which are popular in the enterprise Java community.<sup>2</sup> Spring, for example, essentially allows you to represent the interface of a module as a Java interface and implementations of the module as Java classes. You can specify dependencies between modules and “wire” an application together via external XML configuration files. Although you can use Spring with Scala and thereby use Spring’s approach to achieving system-level modularity of your Scala programs, with Scala you have some alternatives enabled by the language itself. In the remainder of this chapter, we’ll show how to use objects as modules to achieve the desired “in the large” modularity without using an external framework.

<sup>2</sup>Fowler, “Inversion of control containers and the dependency injection pattern.” [\[Fow04\]](#)

## Chapter 27 · Modular Programming Using Objects

555

27.2

A recipe application

Imagine you are building an enterprise web application that will allow users to manage recipes. You want to partition the software into layers, including a domain layer and an application layer. In the domain layer, you'll define domain objects, which will capture business concepts and rules and encapsulate state that will be persisted to an external relational database. In the application layer, you'll provide an API organized in terms of the services the application offers to clients (including the user interface layer). The application layer will implement these services by coordinating tasks and delegating the work to the objects of the domain layer.<sup>3</sup>

Imagine also that you want to be able to plug in real or mock versions of certain objects in each of these layers, so that you can more easily write unit tests for your application. To achieve this goal, you can treat the objects you want to mock as modules. In Scala, there is no need for objects to be

“small” things, no need to use some other kind of construct for “big” things like modules. One of the ways Scala is a scalable language is that the same constructs are used for structures both small and large. For example, since one of the “things” you want to mock in the domain layer is the object that represents the relational database, you'll make that one of the modules. In the application layer, you'll treat a “database browser” object as a module. The database will hold all of the recipes that a person has collected. The browser will help search and browse that database, for example, to find every recipe that includes an ingredient you have on hand.

The first thing to do is to model foods and recipes. To keep things simple, a food will simply have a name, as shown in [Listing 27.1](#). A recipe will simply have a name, a list of ingredients, and some instructions, as shown in and [Listing 27.2](#).

```
package org.stairwaybook.recipe

abstract class Food(val name: String) {

    override def toString = name

}
```

Listing 27.1 · A simple Food entity class.

The naming of these layers follows that of Evans, Domain-Driven Design.  
[\[Eva03\]](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 27.2](#)

[Chapter 27 · Modular Programming Using Objects](#)

556

```
package org.stairwaybook.recipe

class Recipe(

    val name: String,
    val ingredients: List[Food],
    val instructions: String

) {

    override def toString = name

}
```

Listing 27.2 · Simple Recipe entity class.

The Food and Recipe classes shown in [Listings 27.1 and 27.2](#) represent entities that will be persisted in the database.<sup>4</sup> [Listing 27.3](#) shows some singleton instances of these classes, which can be used when writing tests:

```
package org.stairwaybook.recipe
```

```
object Apple extends Food("Apple")
```

```
object Orange extends Food("Orange")
```

```
object Cream extends Food("Cream")
```

```
object Sugar extends Food("Sugar")
```

```
object FruitSalad extends Recipe(
```

```
    "fruit salad",
```

```
    List(Apple, Orange, Cream, Sugar),
```

```
    "Stir it all together."
```

```
)
```

[Listing 27.3 · Food and Recipe examples for use in tests.](#)

Scala uses objects for modules, so you can start modularizing your program by making two singleton objects to serve as the mock implementations of the database and browser modules during testing. Because it is a mock, <sup>4</sup>These entity classes are simplified to keep the example uncluttered with too much real-world detail. Nevertheless, transforming these classes into entities that could be persisted with Hibernate or the Java Persistence Architecture, for example, would require only a few modifications, such as adding a private Long id field and a no-arg constructor, placing `scala.reflect.BeanProperty` annotations on the fields, specifying appropriate mappings via annotations or a separate XML file, and so on.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 27.2](#)

## Chapter 27 · Modular Programming Using Objects

557

```
package org.stairwaybook.recipe

object SimpleDatabase {

    def allFoods = List(Apple, Orange, Cream, Sugar)

    def foodNamed(name: String): Option[Food] =
        allFoods.find(_.name == name)

    def allRecipes: List[Recipe] = List(FruitSalad)

}

object SimpleBrowser {

    def recipesUsing(food: Food) =
        SimpleDatabase.allRecipes.filter(recipe =>
            recipe.ingredients.contains(food))

}
```

Listing 27.4 · Mock database and browser modules.

the database module is backed by a simple in-memory list. Implementations of these objects are shown in [Listing 27.4](#). You can use this database and browser as follows:

```
scala> val apple = SimpleDatabase.foodNamed("Apple").get apple: Food =
Apple

scala> SimpleBrowser.recipesUsing(apple)
```

```
res0: List[Recipe] = List(fruit salad)
```

To make things a little more interesting, suppose the database sorts foods into categories. To implement this, you can add a FoodCategory class and a list of all categories in the database, as shown in [Listing 27.5](#). Notice in this last example that the private keyword, so useful for implementing classes, is also useful for implementing modules. Items marked private are part of the implementation of a module, and thus are particularly easy to change without affecting other modules.

At this point, many more facilities could be added, but you get the idea.

Programs can be divided into singleton objects, which you can think of as modules. This is no big news, but it becomes very useful when you consider abstraction.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 27.3](#)

### [Chapter 27 · Modular Programming Using Objects](#)

558

```
package org.stairwaybook.recipe
```

```
object SimpleDatabase {
```

```
    def allFoods = List(Apple, Orange, Cream, Sugar)
```

```
    def foodNamed(name: String): Option[Food] =
```

```
        allFoods.find(_.name == name)
```

```
    def allRecipes: List[Recipe] = List(FruitSalad)
```

```
    case class FoodCategory(name: String, foods: List[Food]) private var
        categories = List(
```

```
FoodCategory("fruits", List(Apple, Orange)),  
FoodCategory("misc", List(Cream, Sugar)))  
  
def allCategories = categories  
}  
  
object SimpleBrowser {  
  
  def recipesUsing(food: Food) =  
    SimpleDatabase.allRecipes.filter(recipe =>  
      recipe.ingredients.contains(food))  
  
  def displayCategory(category: SimpleDatabase.FoodCategory) {  
    println(category)  
  }  
}
```

Listing 27.5 · Database and browser modules with categories added.

## 27.3

### Abstraction

Although the examples shown so far did manage to partition your application into separate database and browser modules, the design is not yet very

“modular.” The problem is that there is essentially a “hard link” from the browser module to the database modules:

```
SimpleDatabase.allRecipes.filter(recipe => ...
```

Because the SimpleBrowser module mentions the SimpleDatabase module by name, you won't be able to plug in a different implementation of the database module without modifying and recompiling the browser module.

In addition, although there's no hard link from the SimpleDatabase module

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 27.3

### Chapter 27 · Modular Programming Using Objects

559

```
abstract class Browser {  
  
    val database: Database  
  
    def recipesUsing(food: Food) =  
  
        database.allRecipes.filter(recipe =>  
  
            recipe.ingredients.contains(food))  
  
    def displayCategory(category: database.FoodCategory) {  
  
        println(category)  
  
    }  
  
}
```

Listing 27.6 · A Browser class with an abstract database val.

to the SimpleBrowser module,<sup>5</sup> there's no clear way to enable the user interface layer, for example, to be configured to use different implementations of the browser module.

When making these modules more pluggable, however, it is important to avoid duplicating code, because much code can likely be shared by different implementations of the same module. For example, suppose you want the same code base to support multiple recipe databases, and you want to be able to create a separate browser for each of these databases. You would like to reuse the browser code for each of the instances, because the only thing different about the browsers is which database they refer to. Except for the database implementation, the rest of the code can be reused character for character. How can the program be arranged to minimize repetitive code?

How can the code be made reconfigurable, so that you can configure it using either database implementation?

The answer is a familiar one: if a module is an object, then a template for a module is a class. Just like a class describes the common parts of all its instances, a class can describe the parts of a module that are common to all of its possible configurations.

The browser definition therefore becomes a class, instead of an object, and the database to use is specified as an abstract member of the class, as shown in [Listing 27.6](#). The database also becomes a class, including as much as possible that is common between all databases, and declaring the missing This is good, because each of these architectural layers should depend only on layers below them.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 27.3](#)

[Chapter 27 · Modular Programming Using Objects](#)

560

parts that a database must define. In this case, all database modules must define methods for `allFoods`, `allRecipes`, and `allCategories`, but since they can use an arbitrary definition, the methods must be left abstract in the

Database class. The foodNamed method, by contrast, can be defined in the abstract Database class, as shown in [Listing 27.7](#):

```
abstract class Database {  
  
  def allFoods: List[Food]  
  
  def allRecipes: List[Recipe]  
  
  def foodNamed(name: String) =  
    allFoods.find(f => f.name == name)  
  
  case class FoodCategory(name: String, foods: List[Food])  
  def allCategories: List[FoodCategory]  
  
}
```

[Listing 27.7](#) · A Database class with abstract methods.

The SimpleDatabase object must be updated to inherit from the abstract Database class, as shown in [Listing 27.8](#):

```
object SimpleDatabase extends Database {  
  
  def allFoods = List(Apple, Orange, Cream, Sugar)  
  
  def allRecipes: List[Recipe] = List(FruitSalad)  
  
  private var categories = List(  
  
    FoodCategory("fruits", List(Apple, Orange)),  
  
    FoodCategory("misc", List(Cream, Sugar)))  
  
  def allCategories = categories  
  
}
```

[Listing 27.8](#) · The SimpleDatabase object as a Database subclass.

Then, a specific browser module is made by instantiating the Browser class and specifying which database to use, as shown in [Listing 27.9](#).

You can use these more pluggable modules the same as before: scala> val apple = SimpleDatabase.foodNamed("Apple").get apple: Food = Apple

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 27.4](#)

### [Chapter 27 · Modular Programming Using Objects](#)

561

```
object SimpleBrowser extends Browser {  
    val database = SimpleDatabase  
}  
}
```

[Listing 27.9](#) · The SimpleBrowser object as a Browser subclass.

```
scala> SimpleBrowser.recipesUsing(apple)  
res1: List[Recipe] = List(fruit salad)
```

Now, however, you can create a second mock database, and use the same browser class with it, as shown in [Listing 27.10](#):

```
object StudentDatabase extends Database {  
    object FrozenFood extends Food("FrozenFood")  
    object HeatItUp extends Recipe(  
        "heat it up",
```

```
List(FrozenFood),  
"Microwave the 'food' for 10 minutes.")  
  
def allFoods = List(FrozenFood)  
  
def allRecipes = List(HeatItUp)  
  
def allCategories = List(  
  FoodCategory("edible", List(FrozenFood)))  
}  
  
object StudentBrowser extends Browser {  
  val database = StudentDatabase  
}
```

Listing 27.10 · A student database and browser.

27.4

## Splitting modules into traits

Often a module is too large to fit comfortably into a single file. When that happens, you can use traits to split a module into separate files. For example, suppose you wanted to move categorization code out of the main Database file and into its own. You could create a trait for the code as shown in [List-](#)

[ing 27.11.](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 27.4](#)

[Chapter 27 · Modular Programming Using Objects](#)

```
trait FoodCategories {  
  
  case class FoodCategory(name: String, foods: List[Food]) def  
  allCategories: List[FoodCategory]  
  
}
```

*Listing 27.11 · A trait for food categories.*

Now class Database can mix in the FoodCategories trait instead of defining FoodCategory and allCategories itself, as shown in [Listing 27.12:](#)

```
abstract class Database extends FoodCategories {  
  
  def allFoods: List[Food]  
  
  def allRecipes: List[Recipe]  
  
  def foodNamed(name: String) =  
  
    allFoods.find(f => f.name == name)  
  
}
```

*Listing 27.12 · A Database class that mixes in the FoodCategories trait.*

Continuing in this way, you might try and divide SimpleDatabase into two traits, one for foods and one for recipes. This would allow you to define SimpleDatabase, for example, as shown in [Listing 27.13:](#)

```
object SimpleDatabase extends Database  
  
  with SimpleFoods with SimpleRecipes
```

*Listing 27.13 · A SimpleDatabase object composed solely of mixins.*

The SimpleFoods trait could look as shown in [Listing 27.14:](#)

```
trait SimpleFoods {  
    object Pear extends Food("Pear")  
    def allFoods = List(Apple, Pear)  
    def allCategories = Nil  
}
```

Listing 27.14 · A SimpleFoods trait.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 27.4

### Chapter 27 · Modular Programming Using Objects

563

So far so good, but unfortunately, a problem arises if you try to define a SimpleRecipes trait like this:

```
trait SimpleRecipes { // Does not compile  
    object FruitSalad extends Recipe(  
        "fruit salad",  
        List(Apple, Pear),  
        // Uh oh  
        "Mix it all together."  
    )  
    def allRecipes = List(FruitSalad)  
}
```

The problem here is that `Pear` is located in a different trait from the one that uses it, so it is out of scope. The compiler has no idea that `SimpleRecipes` is only ever mixed together with `SimpleFoods`.

There is a way you can tell this to the compiler, however. Scala provides the [self type](#) for precisely this situation. Technically, a self type is an assumed type for this whenever this is mentioned within the class. Pragmatically, a self type specifies the requirements on any concrete class the trait is mixed into. If you have a trait that is only ever used when mixed in with another trait or traits, then you can specify that those other traits should be assumed.

In the present case, it is enough to specify a self type of `SimpleFoods`, as shown in [Listing 27.15](#):

```
trait SimpleRecipes {  
    this: SimpleFoods =>  
    object FruitSalad extends Recipe(  
        "fruit salad",  
        List(Apple, Pear),  
        // Now Pear is in scope  
        "Mix it all together."  
    )  
    def allRecipes = List(FruitSalad)  
}
```

[Listing 27.15](#) · A `SimpleRecipes` trait with a self type.

Given the new self type, `Pear` is now available. Implicitly, the reference to `Pear` is thought of as `this.Pear`. This is safe, because any concrete class that mixes in `SimpleRecipes` must also be a subtype of `SimpleFoods`,

## [Section 27.5](#)

### [Chapter 27 · Modular Programming Using Objects](#)

564

which means that Pear will be a member. Abstract subclasses and traits do not have to follow this restriction, but since they cannot be instantiated with new, there is no risk that the this.Pear reference will fail.

27.5

#### Runtime linking

One final feature of Scala modules is worth emphasizing: they can be linked together at runtime, and you can decide which modules will link to which depending on runtime computations. For example, [Listing 27.16](#) shows a small program that chooses a database at runtime and then prints out all the apple recipes in it:

```
object GotApples {  
  
  def main(args: Array[String]) {  
  
    val db: Database =  
  
      if(args(0) == "student")  
  
        StudentDatabase  
  
      else  
  
        SimpleDatabase  
  
    object browser extends Browser {  
  
      val database = db  
    }  
  }  
}
```

```
}

val apple = SimpleDatabase.foodNamed("Apple").get for(recipe <-
browser.recipesUsing(apple))

println(recipe)

}

}
```

Listing 27.16 · An app that dynamically selects a module implementation.

Now, if you use the simple database, you will find a recipe for fruit salad. If you use the student database, you will find no recipes at all using apples:

```
$ scala GotApples simple
```

```
fruit salad
```

```
$ scala GotApples student
```

```
$
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 27.6](#)

[Chapter 27 · Modular Programming Using Objects](#)

565

Configuring with Scala code

You may wonder if you are not backslicing to the hard links problem of the original examples in this chapter, because the GotApples object shown in [Listing 27.16](#) contains hard links to both StudentDatabase and SimpleDatabase. The difference here is that the hard links are localized in one file that can be replaced.

Every modular application needs some way to specify the actual module implementations to use in a particular situation. This act of “configuring” the application will by definition involve the naming of concrete module implementations. For example, in a Spring application, you configure by naming implementations in an external XML file. In Scala, you can configure via Scala code itself. One advantage to using Scala source over XML for configuration is that the process of running your configuration file through the Scala compiler should uncover any misspellings in it prior to its actual use.

## 27.6

### Tracking module instances

Despite using the same code, the different browser and database modules created in the previous section really are separate modules. This means that each module has its own contents, including any nested classes.

FoodCategory in SimpleDatabase, for example, is a different class from FoodCategory in StudentDatabase!

```
scala> val category = StudentDatabase.allCategories.head category:  
StudentDatabase.FoodCategory =
```

```
FoodCategory(edible,List(FrozenFood))
```

```
scala> SimpleBrowser.displayCategory(category)
```

```
<console>:12: error: type mismatch;
```

```
found
```

```
: StudentDatabase.FoodCategory
```

```
required: SimpleBrowser.database.FoodCategory
```

```
SimpleBrowser.displayCategory(category)
```

If instead you prefer all FoodCategorys to be the same, you can accomplish this by moving the definition of FoodCategory outside of any class or trait.

## Section 27.6

### Chapter 27 · Modular Programming Using Objects

566

The choice is yours, but as it is written, each Database gets its own, unique FoodCategory class.

The two FoodCategory classes shown in the previous example really are different, so the compiler is correct to complain. Sometimes, though, you may encounter a case where two types are the same but the compiler can't verify it. You will see the compiler complaining that two types are not the same, even though you as the programmer know they perfectly well are.

In such cases you can often fix the problem using singleton types. For example, in the GotApples program, the type checker does not know that db and browser.database are the same. This will cause type errors if you try to pass categories between the two objects:

```
object GotApples {  
    // same definitions...  
  
    for (category <- db.allCategories)  
        browser.displayCategory(category)  
  
    // ...  
}
```

GotApples2.scala:14: error: type mismatch;

found

: db.FoodCategory

required: browser.database.FoodCategory

browser.displayCategory(category)

One error found

To avoid this error, you need to inform the type checker that they are the same object. You can do this by changing the definition of browser.database as shown in [Listing 27.17](#):

```
object browser extends Browser {  
    val database: db.type = db  
}
```

[Listing 27.17 · Using a singleton type.](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 27.7](#)

[Chapter 27 · Modular Programming Using Objects](#)

567

This definition is the same as before except that database has the funny-looking type db.type. The “.type” on the end means that this is a singleton type. A singleton type is extremely specific and holds only one object, in this case, whichever object is referred to by db. Usually such types are too specific to be useful, which is why the compiler is reluctant to insert them automatically. In this case, though, the singleton type allows the compiler to know that db and browser.database are the same object, enough information to eliminate the type error.

27.7

Conclusion

This chapter has shown how to use Scala's objects as modules. In addition to simple static modules, this approach gives you a variety of ways to create abstract, reconfigurable modules. There are actually even more abstraction techniques than shown, because anything that works on a class, also works on a class used to implement a module. As always, how much of this power you use should be a matter of taste.

Modules are part of programming in the large, and thus are hard to experiment with. You need a large program before it really makes a difference.

Nonetheless, after reading this chapter you know which Scala features to think about when you want to program in a modular style. Think about these techniques when you write your own large programs, and recognize these coding patterns when you see them in other people's code.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 28

### Object Equality

Comparing two values for equality is ubiquitous in programming. It is also more tricky than it looks at first glance. This chapter looks at object equality in detail and gives some recommendations to consider when you design your own equality tests.

#### 28.1

##### Equality in Scala

As mentioned in [Section 11.2](#), the definition of equality is different in Scala and Java. Java has two equality comparisons: the `==` operator, which is the natural equality for value types and object identity for reference types, and the `equals` method, which is (user-defined) canonical equality for reference types. This convention is problematic, because the more natural symbol, `==`, does not always correspond to the natural notion of equality. When

programming in Java, a common pitfall for beginners is to compare objects with ==

when they should have been compared with equals. For instance, comparing two strings x and y using “x == y” might well yield false in Java, even if x and y have exactly the same characters in the same order.

Scala also has an equality method signifying object identity, but it is not used much. That kind of equality, written “x eq y”, is true if x and y reference the same object. The == equality is reserved in Scala for the

“natural” equality of each type. For value types, == is value comparison, just like in Java. For reference types, == is the same as equals in Scala. You can redefine the behavior of == for new types by overriding the equals method, which is always inherited from class Any. The inherited equals, which takes effect unless overridden, is object identity, as is the case in Java. So equals

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 28.2](#)

### [Chapter 28 · Object Equality](#)

569

(and with it, ==) is by default the same as eq, but you can change its behavior by overriding the equals method in the classes you define. It is not possible to override == directly, as it is defined as a final method in class Any. That is, Scala treats == as if it were defined as follows in class Any:

```
final def == (that: Any): Boolean =
```

```
if (null eq this) {null eq that} else {this equals that}
```

28.2

Writing an equality method

How should the equals method be defined? It turns out that writing a correct equality method is surprisingly difficult in object-oriented languages. In fact, after studying a large body of Java code, the authors of a 2007 paper concluded that almost all implementations of equals methods are faulty.<sup>1</sup>

This is problematic, because equality is at the basis of many other things.

For one, a faulty equality method for a type C might mean that you cannot reliably put an object of type C in a collection. You might have two elements elem1, elem2 of type C which are equal, i.e., “elem1 equals elem2” yields true. Nevertheless, with commonly occurring faulty implementations of the equals method, you could still see behavior like the following:

```
var hashSet: Set[C] = new collection.immutable.HashSet
```

```
hashSet += elem1
```

```
hashSet contains elem2
```

```
// returns false!
```

Here are four common pitfalls<sup>2</sup> that can cause inconsistent behavior when overriding equals:

1. Defining equals with the wrong signature.
2. Changing equals without also changing hashCode.
3. Defining equals in terms of mutable fields.
4. Failing to define equals as an equivalence relation.

These four pitfalls are discussed in the remainder of this section.

1Vaziri, et al., “Declarative Object Identity Using Relation Types” [[Vaz07](#)]

2All but the third of these pitfalls are described in the context of Java in the book, Effective Java Second Edition, by Joshua Bloch. [[Blo08](#)]

## Section 28.2

### Chapter 28 · Object Equality

570

Pitfall #1: Defining equals with the wrong signature.

Consider adding an equality method to the following class of simple points:

```
class Point(val x: Int, val y: Int) { ... }
```

A seemingly obvious, but wrong way would be to define it like this:

```
// An utterly wrong definition of equals
```

```
def equals(other: Point): Boolean =
```

```
this.x == other.x && this.y == other.y
```

What's wrong with this method? At first glance, it seems to work OK:

```
scala> val p1, p2 = new Point(1, 2)
```

```
p1: Point = Point@62d74e
```

```
p2: Point = Point@254de0
```

```
scala> val q = new Point(2, 3)
```

```
q: Point = Point@349f8a
```

```
scala> p1 equals p2
```

```
res0: Boolean = true
```

```
scala> p1 equals q
```

```
res1: Boolean = false
```

However, trouble starts once you start putting points into a collection:

```
scala> import scala.collection.mutable._
```

```
import scala.collection.mutable._
```

```
scala> val coll = HashSet(p1)
```

```
coll: scala.collection.mutable.Set[Point] =
```

```
Set(Point@62d74e)
```

```
scala> coll contains p2
```

```
res2: Boolean = false
```

How to explain that coll does not contain p2, even though p1 was added to it, and p1 and p2 are equal objects? The reason becomes clear in the following interaction, where the precise type of one of the compared points is masked. Define p2a as an alias of p2, but with type Any instead of Point:

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 28.2](#)

[Chapter 28 · Object Equality](#)

571

```
scala> val p2a: Any = p2
```

```
p2a: Any = Point@254de0
```

Now, were you to repeat the first comparison, but with the alias p2a instead of p2, you would get:

```
scala> p1 equals p2a
```

```
res3: Boolean = false
```

What went wrong? In fact, the version of equals given previously does not override the standard method equals, because its type is different. Here is the type of the equals method as it is defined in the root class Any:<sup>3</sup>

```
def equals(other: Any): Boolean
```

Because the equals method in Point takes a Point instead of an Any as an argument, it does not override equals in Any. Instead, it is just an overloaded alternative. Now, overloading in Scala and in Java is resolved by the static type of the argument, not the run-time type. So as long as the static type of the argument is Point, the equals method in Point is called. However, once the static argument is of type Any, the equals method in Any is called instead. This method has not been overridden, so it is still implemented by comparing object identity. That's why the comparison “p1 equals p2a”

yields false even though points p1 and p2a have the same x and y values.

That's also why the contains method in HashSet returned false. Since that method operates on generic sets, it calls the generic equals method in Object instead of the overloaded variant in Point.

A better equals method is the following:

```
// A better definition, but still not perfect  
  
override def equals(other: Any) = other match {  
  
    case that: Point => this.x == that.x && this.y == that.y  
    case _ => false  
}
```

Now equals has the correct type. It takes a value of type Any as parameter and it yields a Boolean result. The implementation of this method uses a 3If you write a lot of Java, you might expect the argument to this method to be type Object instead of type Any. Don't worry about it. It is the same equals method. The compiler simply makes it appear to have type Any.

## Section 28.2

### Chapter 28 · Object Equality

572

pattern match. It first tests whether the other object is also of type Point.

If it is, it compares the coordinates of the two points and returns the result.

Otherwise the result is false.

A related pitfall is to define `==` with a wrong signature. Normally, if you try to redefine `==` with the correct signature, which takes an argument of type Any, the compiler will give you an error because you try to override a final method of type Any. However, newcomers to Scala sometimes make two errors at once: They try to override `==` and they give it the wrong signature.

For instance:

```
def ==(other: Point): Boolean = // Don't do this!
```

In that case, the user-defined `==` method is treated as an overloaded variant of the same-named method class Any, and the program compiles. However, the behavior of the program would be just as dubious as if you had defined `equals` with the wrong signature.

Pitfall #2: Changing `equals` without also changing `hashCode` If you repeat the comparison of p1 and p2a with the latest definition of Point defined previously, you will get true, as expected. However, if you repeat the `HashSet.contains` test, you will probably still get false.

```
scala> val p1, p2 = new Point(1, 2)
```

```
p1: Point = Point@670f2b
```

```
p2: Point = Point@14f7c0
```

```
scala> HashSet(p1) contains p2
```

res4: Boolean = false

In fact, this outcome is not 100% certain. You might also get true from the experiment. If you do, you can try with some other points with coordinates 1 and 2. Eventually, you'll get one which is not contained in the set.

What goes wrong here is that Point redefined equals without also redefining hashCode.

Note that the collection in the example above is a HashSet. This means elements of the collection are put in “hash buckets” determined by their hash code. The contains test first determines a hash bucket to look in and then compares the given elements with all elements in that bucket. Now, the last version of class Point did redefine equals, but it did not at the same time

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 28.2](#)

### [Chapter 28 · Object Equality](#)

573

redefine hashCode. So hashCode is still what it was in its version in class AnyRef: some transformation of the address of the allocated object. The hash codes of p1 and p2 are almost certainly different, even though the fields of both points are the same. Different hash codes mean with high probability different hash buckets in the set. The contains test will look for a matching element in the bucket which corresponds to p2's hash code. In most cases, point p1 will be in another bucket, so it will never be found. p1 and p2 might also end up by chance in the same hash bucket. In that case the test would return true.

The problem was that the last implementation of Point violated the contract on hashCode as defined for class Any:<sup>4</sup>

If two objects are equal according to the equals method, then calling the hashCode method on each of the two objects must produce the same integer

result.

In fact, it's well known in Java that hashCode and equals should always be redefined together. Furthermore, hashCode may only depend on fields that equals depends on. For the Point class, the following would be a suitable definition of hashCode:

```
class Point(val x: Int, val y: Int) {  
    override def hashCode = 41 * (41 + x) + y  
  
    override def equals(other: Any) = other match {  
        case that: Point => this.x == that.x && this.y == that.y  
        case _ => false  
    }  
}
```

This is just one of many possible implementations of hashCode. Adding the constant 41 to one integer field x, multiplying the result with the prime number 41, and adding to that result the other integer field y gives a reasonable distribution of hash codes at a low cost in running time and code size. We'll provide more guidance on writing hashCode later in this chapter.

Adding hashCode fixes the problems of equality when defining classes like Point. However, there are still other trouble spots to watch out for.

<sup>4</sup>The text of Any's hashCode contract is inspired by the Javadoc documentation of class java.lang.Object.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 28.2](#)

[Chapter 28](#) · [Object Equality](#)

### Pitfall #3: Defining equals in terms of mutable fields

Consider the following slight variation of class Point: class Point(var x: Int, var y: Int) { // Problematic

```
override def hashCode = 41 * (41 + x) + y
```

```
override def equals(other: Any) = other match {
```

```
  case that: Point => this.x == that.x && this.y == that.y
  case _ => false
```

```
}
```

```
}
```

The only difference is that the fields x and y are now vars instead of vals.

The equals and hashCode methods are now defined in terms of these mutable fields, so their results change when the fields change. This can have strange effects once you put points in collections:

```
scala> val p = new Point(1, 2)
```

```
p: Point = Point@2b
```

```
scala> val coll = HashSet(p)
```

```
coll: scala.collection.mutable.Set[Point] = Set(Point@2b)
scala> coll
contains p
```

```
res5: Boolean = true
```

Now, if you change a field in point p, does the collection still contain the point? We'll try it:

```
scala> p.x += 1
```

```
scala> coll contains p
```

res7: Boolean = false

This looks strange. Where did p go? More strangeness results if you check whether the elements iterator of the set contains p:

scala> coll.elements contains p

res8: Boolean = true

So here's a set that does not contain p, yet p is among the elements of the set!

What happened, of course, is that after the change to the x field, the point p ended up in the wrong hash bucket of the set coll. That is, its original

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 28.2](#)

[Chapter 28](#) · [Object Equality](#)

575

hash bucket no longer corresponded to the new value of its hash code. In a manner of speaking, the point p “dropped out of sight” in the set coll even though it still belonged to its elements.

The lesson to be drawn from this example is that when equals and hashCode depend on mutable state, it causes problems for potential users.

If they put such objects into collections, they have to be careful never to modify the depended-on state, and this is tricky. If you need a comparison that takes the current state of an object into account, you should usually name it something else, not equals. Considering the last definition of Point, it would have been preferable to omit a redefinition of hashCode and to name the comparison method equalContents, or some other name different from equals. Point would then have inherited the default implementation of equals and hashCode. So p would have stayed locatable in coll even after the modification to its x field.

Pitfall #4: Failing to define equals as an equivalence relation The contract of the equals method in scala.Any specifies that equals must implement an equivalence relation on non-null objects:<sup>5</sup>

- It is reflexive: for any non-null value x , the expression x.equals(x) should return true.
- It is symmetric: for any non-null values x and y, x.equals(y) should return true if and only if y.equals(x) returns true.
- It is transitive: for any non-null values x, y, and z, if x.equals(y) returns true and y.equals(z) returns true, then x.equals(z) should return true.
- It is consistent: for any non-null values x and y, multiple invocations of x.equals(y) should consistently return true or consistently return false, provided no information used in equals comparisons on the objects is modified.
- For any non-null value x, x.equals(null) should return false.

5As with hashCode, Any's equals contract is based on the contract of equals in java.lang.Object.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 28.2](#)

[Chapter 28 · Object Equality](#)

576

The definition of equals developed so far for class Point satisfies the contract for equals. However, things become more complicated once subclasses are considered. Say there is a subclass ColoredPoint of Point that adds a field color of type Color. Assume Color is defined as an enumeration, as presented in [Section 20.8:](#)

object Color extends Enumeration {

```
val Red, Orange, Yellow, Green, Blue, Indigo, Violet = Value  
}
```

ColoredPoint overrides equals to take the new color field into account: class ColoredPoint(x: Int, y: Int, val color: Color.Value) extends Point(x, y) { // Problem: equals not symmetric

```
override def equals(other: Any) = other match {  
    case that: ColoredPoint =>  
        this.color == that.color && super.equals(that)  
    case _ => false  
}  
}
```

This is what many programmers would likely write. Note that in this case, class ColoredPoint need not override hashCode. Because the new definition of equals on ColoredPoint is stricter than the overridden definition in Point (meaning it equates fewer pairs of objects), the contract for hashCode stays valid. If two colored points are equal, they must have the same coordinates, so their hash codes are guaranteed to be equal as well.

Taking the class ColoredPoint by itself, its definition of equals looks OK. However, the contract for equals is broken once points and colored points are mixed. Consider:

```
scala> val p = new Point(1, 2)  
p: Point = Point@2b  
scala> val cp = new ColoredPoint(1, 2, Color.Red)  
cp: ColoredPoint = ColoredPoint@2b
```

```
scala> p equals cp
```

```
res8: Boolean = true
```

```
scala> cp equals p
```

```
res9: Boolean = false
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 28.2](#)

### [Chapter 28 · Object Equality](#)

577

The comparison “p equals cp” invokes p’s equals method, which is defined in class Point. This method only takes into account the coordinates of the two points. Consequently, the comparison yields true. On the other hand, the comparison “cp equals p” invokes cp’s equals method, which is defined in class ColoredPoint. This method returns false, because p is not a ColoredPoint. So the relation defined by equals is not symmetric.

The loss in symmetry can have unexpected consequences for collections.

Here’s an example:

```
scala> HashSet[Point](p) contains cp
```

```
res10: Boolean = true
```

```
scala> HashSet[Point](cp) contains p
```

```
res11: Boolean = false
```

So even though p and cp are equal, one contains test succeeds whereas the other one fails.

How can you change the definition of equals so that it becomes symmetric? Essentially there are two ways. You can either make the relation more general or more strict. Making it more general means that a pair of two objects, x and y, is taken to be equal if either comparing x with y or comparing y with x yields true. Here's code that does this:

```
class ColoredPoint(x: Int, y: Int, val color: Color.Value) extends Point(x, y) { //  
  Problem: equals not transitive  
  override def equals(other: Any) = other  
  match {
```

case that: ColoredPoint =>

(this.color == that.color) && super.equals(that)

case that: Point =>

that.equals(this)

case \_ =>

false

}

}

The new definition of equals in ColoredPoint has one more case than the old one: If the other object is a Point but not a ColoredPoint, the method forwards to the equals method of Point. This has the desired effect of making equals symmetric. Now, both “cp.equals(p)” and “p.equals(cp)”

result in true. However, the contract for equals is still broken. Now the

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 28.2](#)

[Chapter 28 · Object Equality](#)

problem is that the new relation is no longer transitive! Here's a sequence of statements that demonstrates this. Define a point and two colored points of different colors, all at the same position:

```
scala> val redp = new ColoredPoint(1, 2, Color.Red)
```

```
redp: ColoredPoint = ColoredPoint@2b
```

```
scala> val bluep = new ColoredPoint(1, 2, Color.Blue) bluep: ColoredPoint  
= ColoredPoint@2b
```

Taken individually, redp is equal to p and p is equal to bluep: scala> redp == p

```
res12: Boolean = true
```

```
scala> p == bluep
```

```
res13: Boolean = true
```

However, comparing redp and bluep yields false:

```
scala> redp == bluep
```

```
res14: Boolean = false
```

Hence, the transitivity clause of equals's contract is violated.

Making the equals relation more general seems to lead to a dead end.

We'll try to make it stricter instead. One way to make equals stricter is to always treat objects of different classes as different. That could be achieved by modifying the equals methods in classes Point and ColoredPoint. In class Point, you could add an extra comparison that checks whether the run-time class of the other Point is exactly the same as this Point's class, as follows:

```
// A technically valid, but unsatisfying, equals method class Point(val x: Int,  
val y: Int) {
```

```
override def hashCode = 41 * (41 + x) + y  
override def equals(other: Any) = other match {  
    case that: Point =>  
        this.x == that.x && this.y == that.y && this.getClass == that.getClass  
    case _ => false  
}  
}
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 28.2](#)

### [Chapter 28 · Object Equality](#)

579

You can then revert class ColoredPoint's implementation back to the version that previously had violated the symmetry requirement:<sup>6</sup>

```
class ColoredPoint(x: Int, y: Int, val color: Color.Value) extends Point(x, y)  
{  
    override def equals(other: Any) = other match {  
        case that: ColoredPoint =>  
            (this.color == that.color) && super.equals(that)  
        case _ => false  
    }  
}
```

Here, an instance of class Point is considered to be equal to some other instance of the same class only if the objects have the same coordinates and they have the same run-time class, meaning .getClass on either object returns the same value. The new definitions satisfy symmetry and transitivity because now every comparison between objects of different classes yields false. So a colored point can never be equal to a point. This convention looks reasonable, but one could argue that the new definition is too strict.

Consider the following slightly roundabout way to define a point at coordinates (1, 2):

```
scala> val pAnon = new Point(1, 1) { override val y = 2 }
```

```
pAnon: Point = $anon$1@2b
```

Is pAnon equal to p? The answer is no because the java.lang.Class objects associated with p and pAnon are different. For p it is Point, whereas for pAnon it is an anonymous class of Point. But clearly, pAnon is just another point at coordinates (1, 2). It does not seem reasonable to treat it as being different from p.

So it seems we are stuck. Is there a sane way to redefine equality on several levels of the class hierarchy while keeping its contract? In fact, there is such a way, but it requires one more method to redefine together with equals and hashCode. The idea is that as soon as a class redefines equals (and hashCode), it should also explicitly state that objects of this class are never equal to objects of some superclass that implement a different equality

6Given the new implementation of equals in Point, this version of ColoredPoint no longer violates the symmetry requirement.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 28.2](#)

[Chapter 28](#) · [Object Equality](#)

method. This is achieved by adding a method `canEqual` to every class that redefines `equals`. Here's the method's signature:

```
def canEqual(other: Any): Boolean
```

The method should return true if the other object is an instance of the class in which `canEqual` is (re)defined, false otherwise. It is called from `equals` to make sure that the objects are comparable both ways. [Listing 28.1](#) shows a new (and final) implementation of class `Point` along these lines: class `Point(val x: Int, val y: Int) {`

```
    override def hashCode = 41 * (41 + x) + y
```

```
    override def equals(other: Any) = other match {
```

```
        case that: Point =>
```

```
            (that canEqual this) &&
```

```
            (this.x == that.x) && (this.y == that.y)
```

```
        case _ =>
```

```
            false
```

```
}
```

```
    def canEqual(other: Any) = other.isInstanceOf[Point]
```

```
}
```

[Listing 28.1](#) · A superclass `equals` method that calls `canEqual`.

The `equals` method in this version of class `Point` contains the additional requirement that the other object can equal this one, as determined by the `canEqual` method. The implementation of `canEqual` in `Point` states that all instances of `Point` can be equal.

[Listing 28.2](#) shows the corresponding implementation of `ColoredPoint`.

It can be shown that the new definition of Point and ColoredPoint keeps the contract of equals. Equality is symmetric and transitive. Comparing a Point to a ColoredPoint always yields false. Indeed, for any point p and colored point cp, “p equals cp” will return false because “cp canEqual p”

will return false. The reverse comparison, “cp equals p”, will also return false, because p is not a ColoredPoint, so the first pattern match in the body of equals in ColoredPoint will fail.

On the other hand, instances of different subclasses of Point can be equal, as long as none of the classes redefines the equality method. For in-

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 28.2](#)

### [Chapter 28 · Object Equality](#)

581

```
class ColoredPoint(x: Int, y: Int, val color: Color.Value) extends Point(x, y)
{
```

```
    override def hashCode = 41 * super.hashCode + color.hashCode
    override def equals(other: Any) = other match {
```

```
        case that: ColoredPoint =>
```

```
            (that canEqual this) &&
```

```
            super.equals(that) && this.color == that.color
```

```
        case _ =>
```

```
            false
```

```
}
```

```
    override def canEqual(other: Any) =
```

```
other.isInstanceOf[ColoredPoint]
```

```
}
```

Listing 28.2 · A subclass equals method that calls canEqual.

stance, with the new class definitions, the comparison of p and pAnon would yield true. Here are some examples:

```
scala> val p = new Point(1, 2)
```

```
p: Point = Point@6bc
```

```
scala> val cp = new ColoredPoint(1, 2, Color.Indigo) cp: ColoredPoint =  
ColoredPoint@11421
```

```
scala> val pAnon = new Point(1, 1) { override val y = 2 }
```

```
pAnon: Point = $anon$1@6bc
```

```
scala> val coll = List(p)
```

```
coll: List[Point] = List(Point@6bc)
```

```
scala> coll contains p
```

```
res0: Boolean = true
```

```
scala> coll contains cp
```

```
res1: Boolean = false
```

```
scala> coll contains pAnon
```

```
res2: Boolean = true
```

These examples demonstrate that if a superclass equals implementation defines and calls canEqual, then programmers who implement subclasses can

## [Section 28.3](#)

### [Chapter 28 · Object Equality](#)

582

decide whether or not their subclasses may be equal to instances of the superclass. Because ColoredPoint overrides canEqual, for example, a colored point may never be equal to a plain-old point. But because the anonymous subclass referenced from pAnon does not override canEqual, its instance can be equal to a Point instance.

One potential criticism of the canEqual approach is that it violates the Liskov Substitution Principle (LSP). For example, the technique of implementing equals by comparing run-time classes, which led to the inability to define a subclass whose instances can equal instances of the superclass, has been described as a violation of the LSP.<sup>7</sup> The reasoning is that the LSP states you should be able to use (substitute) a subclass instance where a superclass instance is required. In the previous example, however, “coll contains cp”

returned false even though cp’s x and y values matched those of the point in the collection. Thus it may seem like a violation of the LSP, because you can’t use a ColoredPoint here where a Point is expected. We believe this is the wrong interpretation, though, because the LSP doesn’t require that a subclass behaves identically to its superclass, just that it behaves in a way that fulfills the contract of its superclass.

The problem with writing an equals method that compares run-time classes is not that it violates the LSP, but that it doesn’t give you a way to create a subclass whose instances can equal superclass instances. For example, had we used the run-time class technique in the previous example,

“coll contains pAnon” would have returned false, and that’s not what we wanted. By contrast, we really did want “coll contains cp” to return false, because by overriding equals in ColoredPoint, we were basically saying that

an indigo-colored point at coordinates (1, 2) is not the same thing as an uncolored point at (1, 2). Thus, in the previous example we were able to pass two different Point subclass instances to the collection's contains method, and we got back two different answers, both correct.

## 28.3

### Defining equality for parameterized types

The equals methods in the previous examples all started with a pattern match that tested whether the type of the operand conformed to the type of the class containing the equals method. When classes are parameterized, this scheme needs to be adapted a little bit. As an example, consider binary trees. [Blo08]

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### [Section 28.3](#)

#### [Chapter 28 · Object Equality](#)

583

trees. The class hierarchy shown in [Listing 28.3](#) defines an abstract class Tree for a binary tree, with two alternative implementations: an EmptyTree object and a Branch class representing non-empty trees. A non-empty tree is made up of some element elem and a left and right child tree. The type of its element is given by a type parameter T.

```
trait Tree[+T] {  
    def elem: T  
    def left: Tree[T]  
    def right: Tree[T]  
}
```

```

object EmptyTree extends Tree[Nothing] {

    def elem =  

        throw new NoSuchElementException("EmptyTree.elem")  

    def left =  

        throw new NoSuchElementException("EmptyTree.left")  

    def right =  

        throw new NoSuchElementException("EmptyTree.right")  

}

class Branch[+T](  

    val elem: T,  

    val left: Tree[T],  

    val right: Tree[T]  

) extends Tree[T]

```

Listing 28.3 · Hierarchy for binary trees.

We'll now add equals and hashCode methods to these classes. For class Tree itself there's nothing to do, because we assume that these methods are implemented separately for each implementation of the abstract class. For object EmptyTree, there's still nothing to do because the default implementations of equals and hashCode that EmptyTree inherits from AnyRef work just fine. After all, an EmptyTree is only equal to itself, so equality should be reference equality, which is what's inherited from AnyRef.

But adding equals and hashCode to Branch requires some work. A Branch value should only be equal to other Branch values, and only if the two values have equal elem, left and right fields. It's natural to apply

## Section 28.3

### Chapter 28 · Object Equality

584

the schema for equals that was developed in the previous sections of this chapter. This would give:

```
class Branch[T](  
    val elem: T,  
    val left: Tree[T],  
    val right: Tree[T]  
) extends Tree[T] {  
  
    override def equals(other: Any) = other match {  
        case that: Branch[T] => this.elem == that.elem && this.left == that.left &&  
            this.right == that.right  
        case _ => false  
    }  
}
```

Compiling this example, however, gives an indication that “unchecked” warnings occurred. Compiling again with the -unchecked option reveals the following problem:

```
$ fsc -unchecked Tree.scala
```

Tree.scala:14: warning: non variable type-argument T in type pattern is unchecked since it is eliminated by erasure

case that: Branch[T] => this.elem == that.elem && As the warning says, there is a pattern match against a Branch[T] type, yet the system can only check that the other reference is (some kind of) Branch; it cannot check that the element type of the tree is T. You encountered in [Chapter 19](#) the reason for this: element types of parameterized types are eliminated by the compiler's erasure phase; they are not available to be inspected at run-time.

So what can you do? Fortunately, it turns out that you need not necessarily check that two Branches have the same element types when comparing them. It's quite possible that two Branches with different element types are equal, as long as their fields are the same. A simple example of this would be the Branch that consists of a single Nil element and two empty subtrees.

It's plausible to consider any two such Branches to be equal, no matter what static types they have:

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 28.3](#)

[Chapter 28](#) · [Object Equality](#)

585

scala> val b1 = new Branch[List[String]](Nil,

EmptyTree, EmptyTree)

b1: Branch[List[String]] = Branch@2f1eb9

scala> val b2 = new Branch[List[Int]](Nil,

EmptyTree, EmptyTree)

b2: Branch[List[Int]] = Branch@be55d1

```
scala> b1 == b2
```

```
res0: Boolean = true
```

The positive result of the comparison above was obtained with the implementation of equals on Branch shown previously. This demonstrates that the element type of the Branch was not checked—if it had been checked, the result would have been false.

Note that one can disagree which of the two possible outcomes of the comparison would be more natural. In the end, this depends on the mental model of how classes are represented. In a model where type-parameters are present only at compile-time, it's natural to consider the two Branch values b1 and b2 to be equal. In an alternative model where a type parameter forms part of an object's value, it's equally natural to consider them different. Since Scala adopts the type erasure model, type parameters are not preserved at run time, so that b1 and b2 are naturally considered to be equal.

There's only a tiny change needed to formulate an equals method that does not produce an unchecked warning: instead of an element type T, use a lower case letter, such as t:

```
case that: Branch[t] => this.elem == that.elem && this.left == that.left &&  
this.right == that.right
```

Recall from [Section 15.2](#) that a type parameter in a pattern starting with a lower-case letter represents an unknown type. Hence, the pattern match:  
case that: Branch[t] =>

will succeed for Branch values of any type. The type parameter t represents the unknown element type of the Branch. It can also be replaced by an underscore, as in the following case, which is equivalent to the previous one: case that: Branch[\_] =>

## Section 28.3

### Chapter 28 · Object Equality

586

The only thing that remains is to define for class Branch the other two methods, hashCode and canEqual, which go with equals. Here's a possible implementation of hashCode:

```
override def hashCode: Int =
```

```
41 * (
```

```
41 * (
```

```
41 + elem.hashCode
```

```
) + left.hashCode
```

```
) + right.hashCode
```

This is only one of many possible implementations. As shown previously, the principle is to take hashCode values of all fields, and to combine them using additions and multiplications by some prime number. Here's an implementation of method canEqual in class Branch:

```
def canEqual(other: Any) = other match {
```

```
case that: Branch[_] => true
```

```
case _ => false
```

```
}
```

The implementation of the canEqual method used a typed pattern match. It would also be possible to formulate it with isInstanceOf: def canEqual(other: Any) = other.isInstanceOf[Branch[\_]]

If you feel like nit-picking (and we encourage you to do so!), you might wonder what the occurrence of the underscore in the type above signifies. After all, `Branch[_]` is technically a type parameter of a method, not a type pattern, so how is it possible to leave some parts of it undefined? The answer to that question is found in the next chapter: `Branch[_]` is a shorthand for a so-called existential type, which is roughly speaking a type with some unknown parts in it. So even though technically the underscore stands for two different things in a pattern match and in a type parameter of a method call, in essence the meaning is the same: it lets you label something that is unknown. The final version of `Branch` is shown in [Listing 28.4](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 28.4](#)

### [Chapter 28](#) · [Object Equality](#)

587

```
class Branch[T](
```

```
    val elem: T,
```

```
    val left: Tree[T],
```

```
    val right: Tree[T]
```

```
) extends Tree[T] {
```

```
    override def equals(other: Any) = other match {
```

```
        case that: Branch[_] => (that canEqual this) && this.elem == that.elem &&
```

```
        this.left == that.left &&
```

```
        this.right == that.right
```

```
        case _ => false
```

```
}

def canEqual(other: Any) = other.isInstanceOf[Branch[_]]

override def hashCode: Int =  
  41 * (  
    41 * (  
      41 + elem.hashCode  
    ) + left.hashCode  
  ) + right.hashCode  
}
```

Listing 28.4 · A parameterized type with equals and hashCode.

## 28.4

### Recipes for equals and hashCode

In this section, we'll provide step-by-step recipes for creating equals and hashCode methods that should suffice for most situations. As an illustration, we'll use the methods of class Rational, shown in [Listing 28.5](#). To create this class, we removed the mathematical operator methods from the version of class Rational shown in [Listing 6.5](#) on [page 145](#). We also made a minor enhancement to `toString` and modified the initializers of `numer` and `denom` to normalize all fractions to have a positive denominator (i.e., to transform 1 to -1). Here's the recipe for overriding `equals`:

-2

2

1. If you're going to override `equals` in a non-final class, you should create a `canEqual` method. If the inherited definition of `equals` is from `AnyRef` (that

is, equals was not redefined higher up in the class

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 28.4](#)

### [Chapter 28 · Object Equality](#)

588

```
class Rational(n: Int, d: Int) {  
    require(d != 0)  
  
    private val g = gcd(n.abs, d.abs)  
  
    val numer = (if (d < 0) -n else n) / g  
  
    val denom = d.abs / g  
  
    private def gcd(a: Int, b: Int): Int =  
        if (b == 0) a else gcd(b, a % b)  
  
    override def equals(other: Any): Boolean =  
        other match {  
            case that: Rational =>  
                (that canEqual this) &&  
                numer == that.numer &&  
                denom == that.denom  
            case _ => false  
        }  
}
```

```

def canEqual(other: Any): Boolean =
  other.isInstanceOf[Rational]

override def hashCode: Int =
  41 * (
    41 + numer
  ) + denom

override def toString =
  if (denom == 1) numer.toString else numer + "/" + denom
}

```

Listing 28.5 · Class Rational with equals and hashCode.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 28.4](#)

[Chapter 28 · Object Equality](#)

589

hierarchy), the definition of canEqual will be new, otherwise it will override a previous definition of a method with the same name. The only exception to this requirement is for final classes that redefine the equals method inherited from AnyRef. For them the subclass anomaly described in [Section 28.2](#) cannot arise; consequently they need not define canEqual. The type of the object passed to canEqual should be Any:

```
def canEqual(other: Any): Boolean =
```

2. The canEqual method should yield true if the argument object is an instance of the current class (i.e., the class in which canEqual is defined),

false otherwise:

```
other.isInstanceOf[Rational]
```

3. In the equals method, make sure you declare the type of the object passed as an Any:

```
override def equals(other: Any): Boolean =
```

4. Write the body of the equals method as a single match expression.

The selector of the match should be the object passed to equals: other match {

```
// ...
```

```
}
```

5. The match expression should have two cases. The first case should declare a typed pattern for the type of the class on which you're defining the equals method:

case that: Rational =>

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 28.4](#)

[Chapter 28 · Object Equality](#)

590

6. In the body of this case, write an expression that logical-ands together the individual expressions that must be true for the objects to be equal. If the equals method you are overriding is not that of AnyRef, you will most likely want to include an invocation of the superclass's equals method:

```
super.equals(that) &&
```

If you are defining equals for a class that first introduced canEqual, you should invoke canEqual on the argument to the equality method, passing this as the argument:

(that canEqual this) &&

Overriding redefinitions of equals should also include the canEqual invocation, unless they contain a call to super.equals. In the latter case, the canEqual test will already be done by the superclass call.

Lastly, for each field relevant to equality, verify that the field in this object is equal to the corresponding field in the passed object: numer == that.numer &&

denom == that.denom

7. For the second case, use a wildcard pattern that yields false: case \_ => false

If you adhere to the preceding recipe, equality is guaranteed to be an equivalence relation, as is required by the equals contract.

For hashCode, you can usually achieve satisfactory results if you use the following recipe, which is similar to a recipe recommended for Java classes in Effective Java.<sup>8</sup> Include in the calculation each field in your object that is used to determine equality in the equals method (the “relevant” fields).

For each relevant field, no matter its type, you can calculate a hash code by invoking hashCode on it. To calculate a hash code for the entire object, add 8Bloch, Effective Java Second Edition. [[Blo08](#)]

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 28.4](#)

[Chapter 28](#) · [Object Equality](#)

41 to the first field's hash code, multiply that by 41, add the second field's hash code, multiply that by 41, add the third field's hash code, multiply that by 41, and so on, until you've done this for all relevant fields.

For example, to implement the hash code for an object that has five relevant fields named a, b, c, d, and e, you would write:

```
override def hashCode: Int =
```

```
 41 * (  
    41 * (  
        41 * (  
            41 * (  
                41 + a.hashCode  
            ) + b.hashCode  
        ) + c.hashCode  
    ) + d.hashCode  
) + e.hashCode
```

If you wish, you can leave off the hashCode invocation on fields of type Int, Short, Byte, and Char. The hash code for an Int is the value of the Int, as are the hash codes of Shorts, Bytes, and Chars when automatically widened to Int. Given numer or denom are Ints, therefore, we implemented Rational's hashCode method like this:

```
override def hashCode: Int =
```

```
 41 * (  
    41 + numer
```

) + denom

The number 41 was selected for the multiplications because it is an odd prime. You could use another number, but it should be an odd prime to minimize the potential for information loss on overflow. The reason we added 41

to the innermost value is to reduce the likelihood that the first multiplication will result in zero, under the assumption that it is more likely the first field used will be zero than -41. The number 41 was chosen for the addition only for looks. You could use any non-zero integer.

If the equals method invokes super.equals(that) as part of its calculation, you should start your hashCode calculation with an invocation of super.hashCode. For example, had Rational's equals method invoked super.equals(that), its hashCode would have been:

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 28.4](#)

[Chapter 28 · Object Equality](#)

592

override def hashCode: Int =

41 \* (

41 \* (

super.hashCode

) + numer

) + denom

One thing to keep in mind as you write hashCode methods using this approach is that your hash code will only be as good as the hash codes you

build it out of, namely the hash codes you obtain by calling hashCode on the relevant fields of your object. Sometimes you may need to do something extra besides just calling hashCode on the field to get a useful hash code for that field. For example, if one of your fields is a collection, you probably want a hash code for that field that is based on all the elements contained in the collection. If the field is a List, Set, Map, or tuple, you can simply call hashCode on the field, because equals and hashCode are overridden in those classes to take into account the contained elements. However the same is not true for Arrays, which do not take elements into account when calculating a hash code. Thus for an array, you should treat each element of the array like an individual field of your object, calling hashCode on each element explicitly, or passing the array to one of the hashCode methods in singleton object java.util.Arrays.

Lastly, if you find that a particular hash code calculation is harming the performance of your program, you can consider caching the hash code. If the object is immutable, you can calculate the hash code when the object is created and store it in a field. You can do this by simply overriding hashCode with a val instead of a def, like this:

```
override val hashCode: Int =
```

```
41 * (
```

```
41 + numer
```

```
) + denom
```

This approach trades off memory for computation time, because each instance of the immutable class will have one more field to hold the cached hash code value.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 28.5](#)

[Chapter 28 · Object Equality](#)

593

28.5

## Conclusion

In retrospect, defining a correct implementation of equals has been surprisingly subtle. You must be careful about the type signature; you must override hashCode; you should avoid dependencies on mutable state; and you should implement and use a canEqual method if your class is non-final. Given how difficult it is to implement a correct equality method, you might prefer to define your classes of comparable objects as case classes. That way, the Scala compiler will add equals and hashCode methods with the right properties automatically.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 29

### Combining Scala and Java

Scala code is often used in tandem with large Java programs and frameworks. Since Scala is highly compatible with Java, most of the time you can combine the languages without worrying very much. For example, standard frameworks such as Swing, Servlets, and JUnit are known to work just fine with Scala. Nonetheless, from time to time you will run into some issue with combining Java and Scala.

This chapter describes two aspects of combining Java and Scala. First, it discusses how Scala is translated to Java, which is especially important if you call Scala code from Java. Second, it discusses the use of Java annotations in Scala, an important feature if you want to use Scala with an existing Java framework.

29.1

### Using Scala from Java

Most of the time you can think of Scala at the source code level. However, you will have a richer understanding of how the system works if you know something about its translation. Further, if you call Scala code from Java, you will need to know what Scala code looks like from a Java point of view.

## General rules

Scala is implemented as a translation to standard Java bytecodes. As much as possible, Scala features map directly onto the equivalent Java features.

Scala classes, methods, strings, exceptions, for example, are all compiled to the same in Java bytecode as their Java counterparts.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### [Section 29.1](#)

#### [Chapter 29 · Combining Scala and Java](#)

595

To make this happen required an occasional hard choice in the design of Scala. For example, it might have been nice to resolve overloaded methods at run time, using run-time types, rather than at compile time. Such a design would break with Java's, however, making it much trickier to mesh Java and Scala. In this case, Scala stays with Java's overloading resolution, and thus Scala methods and method calls can map directly to Java methods and method calls.

For other features Scala has its own design. For example, traits have no equivalent in Java. Similarly, while both Scala and Java have generic types, the details of the two systems clash. For language features like these, Scala code cannot be mapped directly to a Java construct, so it must be encoded using some combination of the structures Java does have.

For these features that are mapped indirectly, the encoding is not fixed.

There is an ongoing effort to make the translations as simple as possible, so by the time you read this, some details may be different than at the time of writing. You can find out what translation your current Scala compiler uses by examining the “.class” files with tools like javap.

Those are the general rules. Consider now some special cases.

### Value types

A value type like Int can be translated in two different ways to Java. Whenever possible, the compiler translates a Scala Int to a Java int to get better performance. Sometimes this is not possible, though, because the compiler is not sure whether it is translating an Int or some other data type. For example, a particular List[Any] might hold only Ints, but the compiler has no way to be sure.

In cases like this, where the compiler is unsure whether an object is a value type or not, the compiler uses objects and relies on wrapper classes.

Wrapper classes such as, for example, java.lang.Integer allow a value type to be wrapped inside a Java object and thereby manipulated by code that needs objects.<sup>1</sup>

### Singleton objects

Java has no exact equivalent to a singleton object, but it does have static methods. The Scala translation of singleton objects uses a combination of

<sup>1</sup>The implementation of value types was discussed in detail in [Section 11.2](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 29.1](#)

[Chapter 29 · Combining Scala and Java](#)

596

static and instance methods. For every Scala singleton object, the compiler will create a Java class for the object with a dollar sign added to the end.

For a singleton object named App, the compiler produces a Java class named App\$. This class has all the methods and fields of the Scala singleton object.

The Java class also has a single static field named MODULE\$ to hold the one instance of the class that is created at run time.

As a full example, suppose you compile the following singleton object:

```
object App {
```

```
    def main(args: Array[String]) {
```

```
        println("Hello, world!")
```

```
}
```

```
}
```

Scala will generate a Java App\$ class with the following fields and methods: \$ javap App\$

```
public final class App$ extends java.lang.Object
```

```
implements scala.ScalaObject{
```

```
    public static final App$ MODULE$;
```

```
    public static {};
```

```
    public App$();
```

```
    public void main(java.lang.String[]);
```

```
    public int $tag();
```

```
}
```

That's the translation for the general case. An important special case is if you have a “standalone” singleton object, one which does not come with a

class of the same name. For example, you might have a singleton object named App, and not have any class named App. In that case, the compiler will create a Java class named App that has a static forwarder method for each method of the Scala singleton object:

```
$ javap App
```

Compiled from "App.scala"

```
public final class App extends java.lang.Object{  
    public static final int $tag();  
    public static final void main(java.lang.String[]);  
}
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 29.2](#)

### [Chapter 29 · Combining Scala and Java](#)

597

To contrast, if you did have a class named App, Scala would create a corresponding Java App class to hold the members of the App class you defined.

In that case it would not add any forwarding methods for the same-named singleton object, and Java code would have to access the singleton via the MODULE\$ field.

Traits as interfaces

Compiling any trait creates a Java interface of the same name. This interface is usable as a Java type, and it lets you call methods on Scala objects through variables of that type.

Implementing a trait in Java is another story. In the general case it is not practical. One special case is important, however. If you make a Scala trait that includes only abstract methods, then that trait will be translated directly to a Java interface, with no other code to worry about. Essentially this means that you can write a Java interface in Scala syntax if you like.

## 29.2

### Annotations

Scala's general annotations system is discussed in [Chapter 25](#). This section discusses Java-specific aspects of annotations.

#### Additional effects from standard annotations

Several annotations cause the compiler to emit extra information when targeting the Java platform. When the compiler sees such an annotation, it first processes it according to the general Scala rules, and then it does something extra for Java.

#### Deprecation

For any method or class marked `@deprecated`, the compiler will add Java's own deprecation annotation to the emitted code. Because of this, Java compilers can issue deprecation warnings when Java code accesses deprecated Scala methods.

#### Volatile fields

Likewise, any field marked `@volatile` in Scala is given the Java `volatile` modifier in the emitted code. Thus, volatile fields in Scala behave exactly according to Java's semantics, and accesses to volatile fields

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 29.2](#)

[Chapter 29](#) · [Combining Scala and Java](#)

are sequenced precisely according to the rules specified for volatile fields in the Java memory model.

## Serialization

Scala's three standard serialization annotations are all translated to Java equivalents. A `@serializable` class has Java's `Serializable` interface added to it. A `@SerialVersionUID(1234L)` annotation is converted to the following Java field definition:

```
// Java serial version marker  
  
private final static long serialVersionUID = 1234L
```

Any variable marked `@transient` is given the Java `transient` modifier.

## Exceptions thrown

Scala does not check that thrown exceptions are caught. That is, Scala has no equivalent to Java's `throws` declarations on methods. All Scala methods are translated to Java methods that declare no thrown exceptions.<sup>2</sup>

The reason this feature is omitted from Scala is that the Java experience with it has not been purely positive. Because annotating methods with `throws` clauses is a heavy burden, too many developers write code that swallows and drops exceptions, just to get the code to compile without adding all those `throws` clauses. They may intend to improve the exception handling later, but experience shows that all too often time-pressed programmers will never come back and add proper exception handling. The twisted result is that this well-intentioned feature often ends up making code less reliable.

A large amount of production Java code swallows and hides runtime exceptions, and the reason it does so is to satisfy the compiler.

Sometimes when interfacing to Java, however, you may need to write Scala code that has Java-friendly annotations describing which exceptions your

methods may throw. For example, each method in an RMI remote interface is required to mention `java.io.RemoteException` in its throws clause. Thus, if you wish to write an RMI remote interface as a Scala trait with abstract methods, you would need to list `RemoteException` in the throws clauses for those methods. To accomplish this, all you have to do is mark your methods with `@throws` annotations. For example, the Scala class shown in [Listing 29.1](#) has a method marked as throwing `IOException`.

The reason it all works is that the Java bytecode verifier does not check the declarations, anyway! The Java compiler checks, but not the verifier.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 29.2](#)

### [Chapter 29 · Combining Scala and Java](#)

599

```
import java.io._

class Reader(fname: String) {

    private val in =
        new BufferedReader(new FileReader(fname))

    @throws(classOf[IOException])

    def read() = in.read()

}
```

[Listing 29.1](#) · A Scala method that declares a Java throws clause.

Here is how it looks from Java:

```
$ javap Reader
```

Compiled from "Reader.scala"

```
public class Reader extends java.lang.Object implements
scala.ScalaObject{

public Reader(java.lang.String);

public int read()

throws java.io.IOException;

public int $tag();

}

$
```

Note that the read method indicates with a Java throws clause that it may throw an IOException.

## Java annotations

Existing annotations from Java frameworks can be used directly in Scala code. Any Java framework will see the annotations you write just as if you were writing in Java.

A wide variety of Java packages use annotations. As an example, consider JUnit 4. JUnit is a framework for writing automated tests and for running those tests. The latest version, JUnit 4, uses annotations to indicate which parts of your code are tests. The idea is that you write a lot of tests for your code, and then you run those tests whenever you change the source code. That way, if your changes add a new bug, one of the tests will fail and you will find out immediately.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 29.2](#)

[Chapter 29 · Combining Scala and Java](#)

Writing a test is easy. You simply write a method in a top-level class that exercises your code, and you use an annotation to mark the method as a test.

It looks like this:

```
import org.junit.Test  
  
import org.junit.Assert.assertEquals  
  
class SetTest {  
  
    @Test  
  
    def testMultiAdd {  
  
        val set = Set() + 1 + 2 + 3 + 1 + 2 + 3  
  
        assertEquals(3, set.size)  
  
    }  
  
}
```

The `testMultiAdd` method is a test. This test adds multiple items to a set and makes sure that each is added only once. The `assertEquals` method, which comes as part of the JUnit API, checks that its two arguments are equal. If they are different, then the test fails. In this case, the test verifies that repeatedly adding the same numbers does not increase the size of a set.

The test is marked using the annotation `org.junit.Test`. Note that this annotation has been imported, so it can be referred to as simply `@Test` instead of the more cumbersome `@org.junit.Test`.

That's all there is to it. The test can be run using any JUnit test runner.

Here it is being run with the command-line test runner: \$ scala -cp junit-4.3.1.jar:. org.junit.runner.JUnitCore SetTest JUnit version 4.3.1

.

Time: 0.023

OK (1 test)

Writing your own annotations

To make an annotation that is visible to Java reflection, you must use Java notation and compile it with javac. For this use case, writing the annotation in Scala does not seem helpful, so the standard compiler does not support it. The reasoning is that the Scala support would inevitably fall short of the

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 29.2](#)

[Chapter 29](#) · [Combining Scala and Java](#)

601

full possibilities of Java annotations, and further, Scala will probably one day have its own reflection, in which case you would want to access Scala annotations with Scala reflection.

Here is an example annotation:

```
import java.lang.annotation.*;  
  
{@Retention(RetentionPolicy.RUNTIME)  
  
@Target(ElementType.METHOD)  
  
public @interface Ignore { } }
```

After compiling the above with javac, you can use the annotation as follows: object Tests {

```
@Ignore

def testData = List(0, 1, -1, 5, -5)

def test1 {

    assert(testData == (testData.head :: testData.tail))

}

def test2 {

    assert(testData.contains(testData.head))

}

}
```

In this example, test1 and test2 are supposed to be test methods, but testData should be ignored even though its name starts with “test”.

To see when these annotations are present, you can use the Java reflection APIs. Here is sample code to show how it works:

```
for {

    method <- Tests.getClass.getMethods

    if method.getName.startsWith("test")

    if method.getAnnotation(classOf[Ignore]) == null

    }

    println("found a test method: " + method)
```

}

Here, the reflective methods `getClass` and `getMethods` are used to inspect all the fields of the input object's class. These are normal reflection methods.

The annotation-specific part is the use of method `getAnnotation`. As of

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 29.3](#)

[Chapter 29 · Combining Scala and Java](#)

602

Java 1.5, many reflection objects have a `getAnnotation` method for searching for annotations of a specific type. In this case, the code looks for an annotation of our new `Ignore` type. Since this is a Java API, success is indicated by whether the result is null or is an actual annotation object.

Here is the code in action:

```
$ javac Ignore.java  
$ scalac Tests.scala  
$ scalac FindTests.scala  
$ scala FindTests
```

found a test method: public void Tests\$.test2()

found a test method: public void Tests\$.test1()

As an aside, notice that the methods are in class `Tests$` instead of class `Tests` when viewed with Java reflection. As described at the beginning of the chapter, the implementation of a Scala singleton object is placed in a Java class with a dollar sign added to the end of its name. In this case, the implementation of `Tests` is in the Java class `Tests$`.

Be aware that when you use Java annotations you have to work within their limitations. For example, you can only use constants, not expressions, in the arguments to annotations. You can support `@serial(1234)` but not

`@serial(x * 2)`, because `x * 2` is not a constant.

29.3

## Existential types

All Java types have a Scala equivalent. This is necessary so that Scala code can access any legal Java class. Most of the time the translation is straightforward. Pattern in Java is Pattern in Scala, and `Iterator<Component>` in Java is `Iterator[Component]` in Scala. For some cases, though, the Scala types you have seen so far are not enough. What can be done with Java wildcard types such as `Iterator<?>` or `Iterator<? extends Component>?`

What can be done about raw types like `Iterator`, where the type parameter is omitted? For wildcard types and raw types, Scala uses an extra kind of type called an [existential type](#).

Existential types are a fully supported part of the language, but in practice they are mainly used when accessing Java types from Scala. This section gives a brief overview of how existential types work, but mostly this is only

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 29.3](#)

[Chapter 29 · Combining Scala and Java](#)

603

useful so that you can understand compiler error messages when your Scala code accesses Java code.

The general form of an existential type is as follows:

```
type forSome { declarations }
```

The type part is an arbitrary Scala type, and the declarations part is a list of abstract vals and types. The interpretation is that the declared variables and types exist but are unknown, just like abstract members of a class. The type is then allowed to refer to the declared variables and types even though it is unknown what they refer to.

Take a look at some concrete examples. A Java Iterator<?> would be written in Scala as:

```
Iterator[T] forSome { type T }
```

Read this from left to right. This is an Iterator of T's for some type T. The type T is unknown, and could be anything, but it is known to be fixed for this particular Iterator. Similarly, a Java Iterator<? extends Component> would be viewed in Scala as:

```
Iterator[T] forSome { type T <: Component }
```

This is an Iterator of T, for some type T that is a subtype of Component. In this case T is still unknown, but now it is sure to be a subtype of Component.

By the way, there is a shorter way to write these examples. If you write `Iterator[_]`, it means the same thing as `Iterator[T] forSome { type T }`.

This is placeholder syntax for existential types, and is similar in spirit to the placeholder syntax for function literals that was described in [Section 8.5](#). If you use an underscore (`_`) in place of an expression, then Scala treats this as a placeholder and makes a function literal for you. For types it works similarly.

If you use an underscore in place of a type, Scala makes an existential type for you. Each underscore becomes one type parameter in a `forSome` clause, so if you use two underscores in the same type, you will get the effect of a `forSome` clause with two types in it.

You can also insert upper and lower bounds when using this placeholder syntax. Simply add them to the underscore instead of in the forSome clause.

The type Iterator[\_ <: Component] is the same as this one, which you just saw:

```
Iterator[T] forSome { type T <: Component }
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 29.3

### Chapter 29 · Combining Scala and Java

604

Enough about the existential types themselves. How do you actually use them? Well, in simple cases, you use an existential type just as if the forSome were not there. Scala will check that the program is sound even though the types and values in the forSome clause are unknown. For example, suppose you had the following Java class:

```
// This is a Java class with wildcards

public class Wild {

    Collection<?> contents() {

        Collection<String> stuff = new Vector<String>(); stuff.add("a");

        stuff.add("b");

        stuff.add("see");

        return stuff;

    }

}
```

If you access this in Scala code you will see that it has an existential type:  
scala> val contents = (new Wild).contents

```
contents: java.util.Collection[?0] forSome { type ?0 } =
```

```
[a, b, see]
```

If you want to find out how many elements are in this collection, you can simply ignore the existential part and call the size method as normal: scala> contents.size()

```
res0: Int = 3
```

In more complicated cases, existential types can be more awkward, because there is no way to name the existential type. For example, suppose you wanted to create a mutable Scala set and initialize it with the elements of contents:

```
import scala.collection.mutable.Set  
  
val iter = (new Wild).contents.iterator  
  
val set = Set.empty[???]  
  
// what type goes here?  
  
while (iter.hasMore)  
  
set += iter.next()
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 29.3](#)

[Chapter 29 · Combining Scala and Java](#)

A problem strikes on the third line. There is no way to name the type of elements in the Java collection, so you cannot write down a satisfactory type for set. To work around this kind of problem, here are two tricks you should consider:

1. When passing an existential type into a method, move type parameters from the forSome clause to type parameters of the method. Inside the body of the method, you can use the type parameters to refer to the types that were in the forSome clause.
2. Instead of returning an existential type from a method, return an object that has abstract members for each of the types in the forSome clause.

(See [Chapter 20](#) for information on abstract members.) Using these two tricks together, the previous code can be written as follows: import scala.collection.mutable.Set

```
import java.util.Collection

abstract class SetAndType {

    type Elem

    val set: Set[Elem]

}

def javaSet2ScalaSet[T](jset: Collection[T]): SetAndType = {

    val sset = Set.empty[T]

    // now T can be named!

    val iter = jset.iterator

    while (iter.hasNext)

        sset += iter.next()

}
```

```
return new SetAndType {  
    type Elem = T  
    val set = sset  
}  
}
```

You can see why Scala code normally does not use existential types. To do anything sophisticated with them, you tend to convert them to use abstract members. So you may as well use abstract members to begin with.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 29.4](#)

### [Chapter 29 · Combining Scala and Java](#)

606

29.4

#### Conclusion

Most of the time, you can ignore how Scala is implemented and simply write and run your code. Sometimes it is nice to “look under the hood,” however, so this chapter has gone into three aspects of Scala’s implementation on the Java platform: what the translation looks like, how Scala and Java annotations work together, and how Scala’s existential types let you access Java wildcard types. These topics are important whenever you use Scala and Java together.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 30

### Actors and Concurrency

Sometimes it helps in designing a program to specify that things happen independently, in parallel, concurrently. Java includes support for concurrency, and although this support is sufficient, it turns out to be quite difficult to get right in practice as programs get larger and more complex. Scala augments Java's native support by adding actors. Actors provide a concurrency model that is easier to work with and can, therefore, help you avoid many of the difficulties of using Java's native concurrency model. This chapter will show you the basics of how to use Scala's actors library and provide an extended example that transforms the single-threaded circuit simulation code of [Chapter 18](#) into a multi-threaded version.

## 30.1

### Trouble in paradise

The Java platform comes with a built-in threading model based on shared data and locks. Each object is associated with a logical monitor, which can be used to control multi-threaded access to data. To use this model, you decide what data will be shared by multiple threads and mark as “synchronized”

sections of the code that access, or control access to, the shared data. The Java runtime employs a locking mechanism to ensure that only one thread at a time enters synchronized sections guarded by the same lock, thereby enabling you to orchestrate multi-threaded access to the shared data.

Unfortunately, programmers have found it very difficult to reliably build robust multi-threaded applications using the shared data and locks model, especially as applications grow in size and complexity. The problem is that at each point in the program, you must reason about what data you are mod-

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 30.2](#)

[Chapter 30 · Actors and Concurrency](#)

ifying or accessing that might be modified or accessed by other threads, and what locks are being held. At each method call, you must reason about what locks it will try to hold, and convince yourself that it will not deadlock while trying to obtain them. Compounding the problem, the locks you reason about are not fixed at compile time, because the program is free to create new locks at run time as it progresses.

Making things worse, testing is not reliable with multi-threaded code.

Since threads are non-deterministic, you might successfully test a program one thousand times, yet still the program could go wrong the first time it runs on a customer's machine. With shared data and locks, you must get the program correct through reason alone.

Moreover, you can't solve the problem by over-synchronizing either. It can be just as problematic to synchronize everything as it is to synchronize nothing. The problem is that new lock operations remove possibilities for race conditions, but simultaneously add possibilities for deadlocks. A correct lock-using program must have neither race conditions nor deadlocks, so you cannot play it safe by overdoing it in either direction.

Java 5 introduced `java.util.concurrent`, a library of concurrency utilities that provides higher level abstractions for concurrent programming.

Using the concurrency utilities makes multi-threaded programming far less error prone than rolling your own abstractions with Java's low-level synchronization primitives. Nevertheless, the concurrent utilities are also based on the shared data and locks model, and as a result do not solve the fundamental difficulties of using that model.

Scala's actors library does address the fundamental problem by providing an alternative, share-nothing, message-passing model that programmers tend to find much easier to reason about. Actors are a good first tool of choice when designing concurrent software, because they can help you avoid the deadlocks and race conditions that are easy to fall into when using the shared data and locks model.

## Actors and message passing

An actor is a thread-like entity that has a mailbox for receiving messages.

To implement an actor, you subclass `scala.actors.Actor` and implement the `act` method. An example is shown in [Listing 30.1](#). This actor doesn't do anything with its mailbox. It just prints a message five times and quits.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### Section 30.2

#### Chapter 30 · Actors and Concurrency

609

```
import scala.actors._

object SillyActor extends Actor {

    def act() {

        for (i <- 1 to 5) {

            println("I'm acting!")

            Thread.sleep(1000)

        }
    }
}
```

[Listing 30.1](#) · A simple actor.

You start an actor by invoking its `start` method, similar to the way you start a Java thread:

```
scala> SillyActor.start()
```

I'm acting!

```
res4: scala.actors.Actor = SillyActor$@1945696
```

```
scala> I'm acting!
```

I'm acting!

I'm acting!

I'm acting!

Notice that the “I’m acting!” output is interleaved with the Scala shell’s output. This interleaving is due to the SillyActor actor running independently from the thread running the shell. Actors run independently from each other, too. For example, given this second actor:

```
import scala.actors._

object SeriousActor extends Actor {
    def act() {
        for (i <- 1 to 5) {
            println("To be or not to be.")
            Thread.sleep(1000)
        }
    }
}
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 30.2

### Chapter 30 · Actors and Concurrency

610

You could run two actors at the same time, like this:

```
scala> SillyActor.start(); SeriousActor.start()
```

```
res3: scala.actors.Actor = seriousActor$@1689405
```

scala> To be or not to be.

I'm acting!

You can also create an actor using a utility method named actor in object `scala.actors.Actor`:

```
scala> import scala.actors.Actor._
```

```
scala> val seriousActor2 = actor {
```

```
for (i <- 1 to 5)
```

```
    println("That is the question.")  
    Thread.sleep(1000)  
}
```

scala> That is the question.

The val definition above creates an actor that executes the actions defined in the block following the actor method. The actor starts immediately when it is defined. There is no need to call a separate start method.

All well and good. You can create actors and they run independently.

How do they work together, though? How do they communicate without using shared memory and locks? Actors communicate by sending each other

[messages](#). You send a message by using the ! method, like this: scala> SillyActor ! "hi there"

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 30.2](#)

[Chapter 30 · Actors and Concurrency](#)

611

Nothing happens in this case, because SillyActor is too busy acting to process its messages, and so the "hi there" message sits in its mailbox

unread.

[Listing 30.2](#) shows a new, more sociable, actor that waits for a message in its mailbox and prints out whatever it receives. It receives a message by calling receive, passing in a partial function.<sup>1</sup>

```
val echoActor = actor {  
    while (true) {  
        receive {  
            case msg =>  
                println("received message: " + msg)  
        }  
    }  
}
```

Listing 30.2 · An actor that calls receive.

When an actor sends a message, it does not block, and when an actor receives a message, it is not interrupted. The sent message waits in the receiving actor's mailbox until the actor calls receive. You can see this behavior illustrated here:

```
scala> echoActor ! "hi there"  
  
received message: hi there  
  
scala> echoActor ! 15  
  
scala> received message: 15
```

As discussed in [Section 15.7](#), a partial function (an instance of trait PartialFunction) is not a full function—i.e., it might not be defined over all

input values. In addition to an apply method that takes one argument, a partial function offers an isDefinedAt method, which also takes one argument. The isDefinedAt method will return true if the partial function can “handle” the passed value. Such values are safe to pass to apply. If you pass a value to apply for which isDefinedAt would return false, however, apply will throw an exception.

1As described in [Section 15.7](#), a partial function literal is expressed as a series of match alternatives or “cases.” It looks like a match expression without the match keyword.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 30.3](#)

### [Chapter 30 · Actors and Concurrency](#)

612

An actor will only process messages matching one of the cases in the partial function passed to receive. For each message in the mailbox, receive will first invoke isDefinedAt on the passed partial function to determine whether it has a case that will match and handle the message. The receive method will choose the first message in the mailbox for which isDefinedAt returns true, and pass that message to the partial function’s apply method.

The partial function’s apply method will handle the message. For example, echoActor’s apply method will print "received message: " followed by the message object’s toString result. If the mailbox contains no message for which isDefinedAt returns true, the actor on which receive was invoked will block until a matching message arrives.

For example, here is an actor that handles only messages of type Int: scala>  
val intActor = actor {

receive {

case x: Int => // I only want Ints

```
    println("Got an Int: "+ x)  
  }  
}  
  
intActor: scala.actors.Actor =  
  
scala.actors.Actor$$anon$1@34ba6b
```

If you send a String or Double, for example, the intActor will silently ignore the message:

```
scala> intActor ! "hello"
```

```
scala> intActor ! Math.Pi
```

But if you pass an Int, you'll get a response printed out: `scala> intActor ! 12`

Got an Int: 12

30.3

## Treating native threads as actors

The actor subsystem manages one or more native threads for its own use. So long as you work with an explicit actor that you define, you do not need to think much about how they map to threads.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### Section 30.4

#### Chapter 30 · Actors and Concurrency

613

The other direction is also supported by the subsystem: every native thread is also usable as an actor. However, you cannot use `Thread.current` directly,

because it does not have the necessary methods. Instead, you should use Actor.self if you want to view the current thread as an actor.

This facility is especially useful for debugging actors from the interactive shell. Here's an example:

```
scala> import scala.actors.Actor._
```

```
import scala.actors.Actor._
```

```
scala> self ! "hello"
```

```
scala> self.receive { case x => x }
```

```
res6: Any = hello
```

The receive method returns the value computed by the partial function passed to it. In this case, the partial function returns the message itself, and so the received message ends up being printed out by the interpreter shell.

If you use this technique, it is better to use a variant of receive called receiveWithin. You can then specify a timeout in milliseconds. If you use receive in the interpreter shell, then the receive will block the shell until a message arrives. In the case of self.receive, this could mean waiting forever! Instead, use receiveWithin with some timeout value: scala> self.receiveWithin(1000) { case x => x } // wait a sec!

```
res7: Any = TIMEOUT
```

30.4

## Better performance through thread reuse

Actors are implemented on top of normal Java threads. As described so far, in fact, every actor must be given its own thread, so that all the act methods get their turn.

Unfortunately, despite their light-sounding name, threads are not all that cheap in Java. Threads consume enough memory that typical Java virtual

machines, which can host millions of objects, can have only thousands of threads. Worse, switching threads often takes hundreds if not thousands of processor cycles. If you want your program be as efficient as possible, then it is important to be sparing with thread creation and switching.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 30.4

### Chapter 30 · Actors and Concurrency

614

To help you conserve threads, Scala provides an alternative to the usual receive method called react. Like receive, react takes a partial function. Unlike receive, however, react does not return after it finds and processes a message. Its result type is Nothing. It evaluates the message handler and that's it.<sup>2</sup>

Because the react method does not need to return, the implementation does not need to preserve the call stack of the current thread. Instead, the library can reuse the current thread for the next actor that wakes up. This approach is so effective that if every actor in a program uses react instead of receive, only a single thread is necessary in principle to host all of the program's actors (to be sure, if your computer has several processor cores, the actors subsystem will use enough threads to utilize all cores when it can).

In practice, programs will need at least a few receive's, but you should try to use react whenever possible so as to  
conserve threads.

Because react does not return, the message handler you pass it must now both process that message and arrange to do all of the actor's remaining work. A common way to do this is to have a top-level work method—such as act itself—that the message handler calls when it finishes. [Listing 30.3](#)

shows an example that uses this approach.

The actor shown in [Listing 30.3](#) waits for strings that are host names, and if there is one, returns an IP address for that host name. Here's an example:

```
scala> NameResolver.start()
```

```
res0: scala.actors.Actor = NameResolver$@90d6c5
```

```
scala> NameResolver ! ("www.scala-lang.org", self) scala>
self.receiveWithin(0) { case x => x }
```

```
res2: Any = Some(www.scala-lang.org/128.178.154.102)
```

```
scala> NameResolver ! ("wwwwww.scala-lang.org", self) scala>
self.receiveWithin(0) { case x => x }
```

```
res4: Any = None
```

Behind the scenes, react will throw an exception after its done.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 30.4](#)

[Chapter 30 · Actors and Concurrency](#)

615

```
object NameResolver extends Actor {
    import java.net.{InetAddress, UnknownHostException}
    def act() {
        react {
            case (name: String, actor: Actor) =>
                actor ! getIp(name)
            act()
        }
    }
}
```

```

case "EXIT" =>

  println("Name resolver exiting.")

  // quit

  case msg =>

    println("Unhandled message: "+ msg)

    act()

  }

}

def getIp(name: String): Option[InetAddress] = {

  try {

    Some(InetAddress.getByName(name))

  } catch {

    case _:UnknownHostException => None

  }

}

}

```

Listing 30.3 · An actor that calls react.

Writing an actor to use react instead of receive is challenging, but pays off in performance. Because react does not return, the calling actor's call stack can be discarded, freeing up the thread's resources for a different actor.

At the extreme, if all of the actors of a program use react, then they can be implemented on a single thread.

This coding pattern is so common with event-based actors, there is special support in the library for it. The Actor.loop function executes a block of code repeatedly, even if the code calls react. NameResolver's act method can be rewritten to use loop as shown in [Listing 30.4](#). The one difference in behavior between this act method and that of [Listing 30.3](#) is

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 30.5](#)

### [Chapter 30 · Actors and Concurrency](#)

616

that this one does not handle "EXIT" by quitting. Instead, this actor will loop and react to messages forever.

```
def act() {  
    loop {  
        react {  
            case (name: String, actor: Actor) =>  
                actor ! getIp(name)  
            case msg =>  
                println("Unhandled message: " + msg)  
        }  
    }  
}
```

**Listing 30.4 · An actor's act method that uses loop.**

30.5

## Good actors style

At this point you have seen everything you need to write your own actors.

Simply using these methods takes you only so far, however. The point of them is that they support an actors style of concurrent programming. To the extent you can write in this style, your code will be easier to debug and will have fewer deadlocks and race conditions. This section provides some guidelines for programming in an actors style.

### Actors should not block

A well written actor does not block while processing a message. The problem is that while the actor blocks, some other actor might make a request on it that it could handle. If the actor is blocked on the first request, it will not even notice the second request. In the worst case, a deadlock can even result, with multiple actors blocked as they each wait for some other blocked actor to respond.

Instead of blocking, the actor should arrange for some message to arrive designating that action is ready to be taken. Often this rearrangement will require the help of other actors. For example, instead of calling Thread.sleep

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 30.5](#)

[Chapter 30 · Actors and Concurrency](#)

617

How react works

A return type of Nothing indicates a function will never return normally, but instead will always complete abruptly with an exception. And indeed, this is true of react. The actual implementation of react is not as simple as the following description, and subject to change, but conceptually you can think of react as working like this: When you call start on an actor, the start method will in some way arrange things such that some thread will eventually call act on that actor. If that act method invokes react, the react method will look in the actor's mailbox for a message the passed partial function can handle.

(It does this the same way as receive, by passing candidate messages to the partial function's isDefinedAt method.) If it finds a message that can be handled, react will schedule the handling of that message for later execution and throw an exception. If it doesn't find one, it will place the actor in "cold storage," to be resurrected if and when it gets more messages in its mailbox, and throw an exception. In either case, react will complete abruptly with this exception, and so will act. The thread that invoked act will catch the exception, forget about the actor, and move on to other duties.

This is why if you want react to handle more than the first message, you'll need to call act again from inside your partial function, or use some other means to get react invoked again.

directly and blocking the current actor, you could create a helper actor that sleeps and then sends a message back when enough time has elapsed: actor {

```
Thread.sleep(time)
```

```
mainActor ! "WAKEUP"
```

```
}
```

This helper actor does indeed block, but since it will never receive a message, it is OK in this case. The main actor remains available to answer new requests. The emoteLater method, shown in [Listing 30.5](#), demonstrates the use of this idiom. It creates a new actor that will do the sleep so that the main actor does not block. To ensure that it sends the "Emote" message to

## Section 30.5

### Chapter 30 · Actors and Concurrency

618

```
val sillyActor2 = actor {
```

```
    def emoteLater() {
```

```
        val mainActor = self
```

```
        actor {
```

```
            Thread.sleep(1000)
```

```
            mainActor ! "Emote"
```

```
}
```

```
}
```

```
        var emoted = 0
```

```
        emoteLater()
```

```
        loop {
```

```
            react {
```

```
                case "Emote" =>
```

```
                    println("I'm acting!")
```

```
                    emoted += 1
```

```
                    if (emoted < 5)
```

```
emoteLater()  
  
case msg =>  
  
println("Received: "+ msg)  
  
}  
  
}  
  
}
```

Listing 30.5 · An actor that uses a helper actor to avoid blocking itself.

the correct actor, it is careful to evaluate self in the scope of the main actor instead of the scope of the helper actor.

Because this actor does not block in sleep—its helper actor does—it can continue to do other work while waiting for its next time to emote. Unlike the earlier silly actor, this one will continue to print out messages while it waits for its next input:

```
scala> sillyActor2 ! "hi there"
```

```
scala> Received: hi there
```

```
I'm acting!
```

```
I'm acting!
```

```
I'm acting!
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 30.5](#)

[Chapter 30 · Actors and Concurrency](#)

## Communicate with actors only via messages

The key way the actors model addresses the difficulties of the shared data and locks model is by providing a safe space—the actor’s act method—where you can think sequentially. Put another way, actors allow you to write a multi-threaded program as a bunch of independent single-threaded programs that communicate with each other via asynchronous messaging. This simplification works, however, only so long as messages are the only way you let your actors communicate.<sup>3</sup>

For example, a GoodActor could include a reference to itself in a message to a BadActor, to identify itself as the source of that message. If BadActor invokes some arbitrary method on GoodActor instead of sending it a message with ‘!’, however, problems may ensue. The invoked method might read private instance data in GoodActor, which may have been written by a different thread. As a result, you would need to ensure that both the BadActor thread’s reading of the instance data and the GoodActor thread’s writing of it are synchronized on the same lock. The GoodActor’s private instance data has become shared data that must be guarded by a lock. As soon as you go around the message passing scheme between actors, therefore, you drop back down into the shared data and locks model, with all the difficulties you were trying to avoid in the first place by using the actors model.

On the other hand, this does not mean that you should never go around message passing. Although shared data and locks is very difficult to get right, it is not impossible. One difference between Scala’s approach to actors and that of Erlang, in fact, is that Scala gives you the option to combine the actors and shared data and locks models in the same program.

As an example, imagine you wanted multiple actors to share a common mutable map. Since the map is mutable, the pure actors approach would be to create an actor that “owns” the mutable map and define a set of messages that allows other actors to access it. You could define a message for putting a key-value pair into the shared map, getting a value given a key, and so on, for all the operations you need to do on the map. In addition, you’d need to define messages for sending asynchronous responses to actors that made queries of the map. Another option, however, is to pass a thread-safe map,

such as ConcurrentHashMap from the Java Concurrency Utilities, in a message to multiple actors, and let those actors use that map directly.

<sup>3</sup>Another benefit is that a message send ensures the message object is safely published to other threads, as described in Goetz, et. al., Java Concurrency in Practice, p. 49. [[Goe06](#)]

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 30.5](#)

### [Chapter 30 · Actors and Concurrency](#)

620

Although it would be far easier and safer to implement a shared map via actors than to implement something like ConcurrentHashMap yourself, since ConcurrentHashMap already exists, you may judge it easier and as low risk to use that than to implement your own shared map with an actor.

This would also mean that your responses from the shared map could be synchronous, whereas with actors they would need to be asynchronous. Scala's actors library gives you the choice.

If you're considering shared data and locks

When considering whether to combine the actors model with the shared data and locks model, it is helpful to recall the words of Harry Callahan, played by Clint Eastwood in the 1971 movie Dirty Harry: I know what you're thinking. "Did he fire six shots or only five?" Well, to tell you the truth, in all this excitement I kind of lost track myself.

But being as this is a .44 Magnum, the most powerful handgun in the world, and would blow your head clean off, you've got to ask yourself one question: Do I feel lucky? Well, do ya, punk?

Prefer immutable messages

Because Scala’s actors model provides what amounts to a single-threaded environment inside each actor’s act method, you need not worry about whether the objects you use in the implementation of this method are thread-safe. You can use unsynchronized, mutable objects to your hearts content in an act method, for example, because each act method is effectively confined to one thread.<sup>4</sup> This is why the actors model is called a share-nothing model—

the data is confined to one thread rather than being shared by many.

There is one exception to the share-nothing rule, however: the data inside objects used to send messages between actors is “shared” by multiple actors.

As a result, you do have to worry about whether message objects are thread-safe. And in general, they should be.

<sup>4</sup>When using react, different messages could potentially be handled by different threads, but if so they will be handled sequentially and with sufficient synchronization to allow you to program under the simplifying assumption that each act method is confined to a single thread.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 30.5](#)

[Chapter 30 · Actors and Concurrency](#)

621

The best way to ensure that message objects are thread-safe is to only use immutable objects for messages. Instances of any class that has only val fields, which themselves refer only to immutable objects, are immutable. An easy way to define such message classes, of course, is as case classes. So long as you don’t explicitly add var fields to a case class and ensure the val fields are all immutable types, your case class will by definition be immutable. It will also be convenient for pattern matching in the partial functions passed to react or receive. You can also use as messages instances

of regular (non-case) immutable classes that you define. Or you can use instances of the many immutable classes provided in the Scala API, such as tuples, strings, lists, immutable sets and maps, and so on.

Now, if an actor sends a mutable, unsynchronized object as a message, and never reads or writes that object thereafter, it would work, but it's just asking for trouble. A future maintainer may not realize the object is shared and write to it, thereby creating a hard to find concurrency bug.

In general, it is best to arrange your data such that every unsynchronized, mutable object is “owned,” and therefore accessed by, only one actor. You can arrange for objects to be transferred from one actor to another if you like, but you need to make sure that at any given time, it is clear which actor owns the object and is allowed to access it. In other words, when you design an actors-based system, you need to decide which parts of mutable memory are assigned to which actor. All other actors that access a mutable data structure must send messages to the data structure’s owner and wait for a message to come back with a reply.

If you do find you have a mutable object you want to continue using as well as send in a message to another actor, you should make and send an copy of it instead. While you’re at it, you may want to make it immutable.

For example, because arrays are mutable and unsynchronized, any array you use should be accessed by one actor at a time. If you want to continue using an array as well as send it to another actor, you should send a copy. For example, if the array itself holds only immutable objects, you can make a copy with `arr.clone`. But you should also consider using `arr.toList`, and send the resulting immutable list instead.

Immutable objects are convenient in many cases, but they really shine for parallel systems, because they are the easiest, lowest risk way to design thread-safe objects. When you design a program that might involve parallelism in the future, whether using actors or not, you should try especially hard to make data structures immutable.

## Section 30.5

### Chapter 30 · Actors and Concurrency

622

Make messages self-contained

When you return a value from a method, the caller is in a good position to remember what it was doing before it called the method. It can take the response value and then continue whatever it was doing.

With actors, things are trickier. When one actor makes a request of another, the response might come not come for a long time. The calling actor should not block, but should continue to do any other work it can while it waits for the response. A difficulty, then, is interpreting the response when it finally does come back. Can the actor remember what it was doing when it made the request?

One way to simplify the logic of an actors program is to include redundant information in the messages. If the request is an immutable object, you can even cheaply include a reference to the request in the return value! For example, the IP-lookup actor would be better if it returned the host name in addition to the IP address found for it. It would make this actor slightly longer, but it should simplify the logic of any actor making requests on it:

```
def act() {  
    loop {  
        react {  
            case (name: String, actor: Actor) =>  
                actor ! (name, getIp(name))  
        }  
    }  
}
```

}

Another way to increase redundancy in the messages is to make a case class for each kind of message. While such a wrapper is not strictly necessary in many cases, it makes an actors program much easier to understand. Imagine a programmer looking at a send of a string, for example: lookerUpper ! ("www.scala-lang.org", self)

It can be difficult to figure out which actors in the code might respond. It is much easier if the code looks like this:

```
case class LookupIP(hostname: String, requester: Actor) lookerUpper !
LookupIP("www.scala-lang.org", self)
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 30.6](#)

### [Chapter 30 · Actors and Concurrency](#)

623

```
import scala.actors.Actor._

import java.net.{InetAddress, UnknownHostException}

case class LookupIP(name: String, respondTo: Actor)

case class LookupResult(
    name: String,
    address: Option[InetAddress]
)

object NameResolver2 extends Actor {

    def act() {
```

```

loop {

react {

case LookupIP(name, actor) =>

actor ! LookupResult(name, getIp(name))

}

}

}

def getIp(name: String): Option[InetAddress] = {

// As before (in Listing 30.3)

}

}

```

Listing 30.6 · An actor that uses case classes for messages.

Now, the programmer can search for `LookupIP` in the source code, probably finding very few possible responders. [Listing 30.6](#) shows an updated name-resolving actor that uses case classes instead of tuples for its messages.

## 30.6

A longer example: Parallel discrete event

simulation

As a longer example, suppose you wanted to parallelize the discrete event simulation of [Chapter 18](#). Each participant in the simulation could run as its own actor, thus allowing you to speed up a simulation by using more processors. This section will walk you through the process, using code based on a parallel circuit simulator developed by Philipp Haller.

## Section 30.6

### Chapter 30 · Actors and Concurrency

624

#### Overall Design

Most of the design from [Chapter 18](#) works fine for both sequential and parallel discrete event simulation. There are events, and they happen at designated times, processing an event can cause new events to be scheduled, and so forth. Likewise, a circuit simulation can be implemented as a discrete event simulation by making gates and wires participants in the simulation, and changes in the wires the events of the simulation. The one thing that would be nice to change would be to run the events in parallel. How can the design be rearranged to make this happen?

The key idea is to make each simulated object an actor. Each event can then be processed by the actor where most of that event's state lies. For circuit simulation, the update of a gate's output can be processed by the actor corresponding to that gate. With this arrangement, events will naturally be handled in parallel.

In code, it is likely that there will be some common behavior between different simulated objects. It makes sense, then, to define a trait `Simulant` that can be mixed into to any class to make it a simulated object. Wires, gates, and other simulated objects can mix in this trait.

```
trait Simulant extends Actor
```

```
class Wire extends Simulant
```

So far so good, but there are a few design issues to work out, several of which do not have a single, obviously best answer. For this chapter, we present a reasonable choice for each design issue that keeps the code concise.

There are other solutions possible, though, and trying them out would make for good practice for anyone wanting experience programming with actors.

The first design issue is to figure out how to make the simulation participants stay synchronized with the simulated time. That is, participant A should not race ahead and process an event at time tick 100 until all other actors have finished with time tick 99. To see why this is essential, imagine for a moment that simulant A is working at time 90 while simulant B is working at time 100. It might be that participant A is about to send a message that changes B's state at time 91. B will not learn this until too late, because it has already processed times 92 to 99. To avoid this problem, the design approach used in this chapter is that no simulant should process events for time n until all other simulants are finished with time n – 1.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 30.6](#)

### [Chapter 30 · Actors and Concurrency](#)

625

That decision raises a new question, though: how do simulants know when it's safe to move forward? A straightforward approach is to have a “clock” actor that keeps track of the current time and tells the simulation participants when it is time to move forward. To keep the clock from moving forward before all simulants are ready, the clock can ping actors at carefully chosen times to make sure they have received and processed all messages for the current time tick. There will be Ping methods that the clock sends the simulants, and Pong messages that the simulants send back when they are ready for the clock to move forward.

case class Ping(time: Int)

case class Pong(time: Int, from: Actor)

Note that these messages could be defined as having no fields. However, the time and from fields add a little bit of redundancy to the system. The time field holds the time of a ping, and it can be used to connect a Pong with its associated Ping. The from field is the sender of a Pong. The sender of a Ping is always the clock, so it does not have a from field. All of this information is unnecessary if the program is behaving perfectly, but it can simplify the logic in some places, and it can greatly help in debugging if the program has any errors.

One question that arises is how a simulant knows it has finished with the current time tick. Simulants should not respond to a Ping until they have finished all the work for that tick, but how do they know? Maybe another actor has made a request to it that has not yet arrived. Maybe a message one actor has sent another has not been processed yet.

It simplifies the answer to this question to add two constraints. First, assume that simulants never send each other messages directly, but instead only schedule events on each other. Second, they never post events for the current time tick, but only for times at least one tick into the future. These two constraints are significant, but they appear tolerable for a typical simulation. After all, there is normally some non-zero propagation delay whenever two components of a system interact with each other. Further, at worst, time ticks can be made to correspond to shorter time intervals, and information that will be needed in the future can be sent ahead of time.

Other arrangements are possible. Simulants could be allowed to send messages directly to each other. However, if they do so, then there would need to be a more sophisticated mechanism for deciding when it is safe for an actor to send back a Pong. Each simulant should delay responding to a

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 30.6](#)

[Chapter 30 · Actors and Concurrency](#)

Ping until any other simulants it has made requests to are finished processing those requests. To ensure this property, you would need the simulants to pass each other some extra information. For now, assume that simulants don't communicate with each other except via the simulation's agenda.

Given that decision, there may as well be a single agenda of work items, and that agenda may as well be held by the clock actor. That way, the clock can wait to send out pings until it has sent out requests for all work items at the current time. Actors then know that whenever they receive a Ping, they have already received from the clock all work items that need to happen at the current time tick. It is thus safe when an actor receives a Ping to immediately send back a Pong, because no more work will be arriving during the current time tick. Taking this approach, a Clock has the following state: class Clock extends Actor {

```
private var running = false
```

```
private var currentTime = 0
```

```
private var agenda: List[WorkItem] = List()
```

```
}
```

The final design issue to work out is how a simulation is set up to begin with. A natural approach is to create the simulation with the clock stopped, add all the simulants, connect them all together, and then start the clock. The subtlety is that you need to be absolutely sure that everything is connected before you start the clock running! Otherwise, some parts of the simulation will start running before they are fully formed.

How do you know when the simulation is fully assembled and ready to start? There are again multiple ways to approach this problem. The simple way adopted in this chapter is to avoid sending message to actors while setting the simulation up. That way, once the last method call returns, you know that the simulation is entirely constructed. The resulting coding pattern is that you use regular method calls to set the simulation up, and you use actor message sends while the simulation is running.

Given the preceding decisions, the rest of the design is straightforward.

A WorkItem can be defined much like in [Chapter 18](#), in that it holds a time and an action. For the parallel simulation, however, the action itself has a different encoding. In [Chapter 18](#), actions are represented as zero-argument functions. For parallel simulation, it is more natural to use a target actor and a message to be sent to that actor:

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 30.6](#)

### [Chapter 30 · Actors and Concurrency](#)

627

case class WorkItem(time: Int, msg: Any, target: Actor) Likewise, the afterDelay method for scheduling a new work item becomes an AfterDelay message that can be sent to the clock. Just as with the WorkItem class, the zero-argument action function is replaced by a message and a target actor:

case class AfterDelay(delay: Int, msg: Any, target: Actor) Finally, it will prove useful to have messages requesting the simulation to start and stop:

case object Start

case object Stop

That's it for the overall design. There is a Clock class holding a current time and an agenda, and a clock only advances the clock after it has pinged all of its simulants to be sure they are ready. There is a Simulant trait for simulation participants, and these communicate with their fellow simulants by sending work items to the clock to add to its agenda. The next section will take a look now at how to implement these core classes.

## Implementing the simulation framework

There are two things that need implementing for the core framework: the Clock class and the Simulant trait. Consider the Clock class, first. The

necessary state of a clock is as follows:

```
class Clock extends Actor {  
  
    private var running = false  
  
    private var currentTime = 0  
  
    private var agenda: List[WorkItem] = List()  
  
    private var allSimulants: List[Actor] = List()  
  
    private var busySimulants: Set[Actor] = Set.empty
```

A clock starts out with running set to false. Once the simulation is fully initialized, the clock will be sent the Start message and running will become true. This way, the simulation stays frozen until all of its pieces have been connected together as desired. It also means that, since all of the simulants are also frozen, it is safe to use regular method calls to set things up instead of needing to use actor message sends.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 30.6

### Chapter 30 · Actors and Concurrency

628

A clock may as well go ahead and start running as an actor once it is created. This is safe, because it will not actually do anything until it receives a Start message:

start()

A clock also keeps track of the current time (currentTime), the list of participants managed by this clock (allSimulants), and the list of participants that are still working on the current time tick (busySimulants). A list is used to hold allSimulants, because it is only iterated through, but a

set is used for busySimulants because items will be removed from it in an unpredictable order. Once the simulator starts running, it will only advance to a new time when busySimulants is empty, and whenever it advances the clock, it will set busySimulants to allSimulants.

To set up a simulation, there is going to be a need for a method to add new simulants to a clock. It may as well be added right now: def add(sim: Simulant) {

```
allSimulants = sim :: allSimulants  
}
```

That's the state of a clock. Now look at its activity. Its main loop alternates between two responsibilities: advancing the clock, and responding to messages. Once the clock advances, it can only advance again when at least one message has been received, so it is safe to define the main loop as an alternation between these two activities:

```
def act() {  
    loop {  
        if (running && busySimulants.isEmpty)  
            advance()  
        reactToOneMessage()  
    }  
}
```

The advancement of time has a few parts beyond simply incrementing the currentTime. First, if the agenda is empty, and the simulation is not just starting, then the simulation should exit. Second, assuming the agenda is non-empty, all work items for time currentTime should now take place.

## Section 30.6

### Chapter 30 · Actors and Concurrency

629

Third, all simulants should be put on the busySimulants list and sent Pings.

The clock will not advance again until all Pings have been responded to:

```
def advance() {
```

```
    if (agenda.isEmpty && currentTime > 0) {
```

```
        println("## Agenda empty.
```

```
        Clock exiting at time "+
```

```
        currentTime+".")
```

```
        self ! Stop
```

```
        return
```

```
}
```

```
        currentTime += 1
```

```
        println("Advancing to time "+currentTime)
```

```
        processCurrentEvents()
```

```
        for (sim <- allSimulants)
```

```
            sim ! Ping(currentTime)
```

```
            busySimulants = Set.empty ++ allSimulants
```

```
}
```

Processing the current events is simply a matter of processing all events at the top of the agenda whose time is `currentTime`:

```
private def processCurrentEvents() {  
  
    val todoNow = agenda.takeWhile(_.time <= currentTime) agenda =  
    agenda.drop(todoNow.length)  
  
    for (WorkItem(time, msg, target) <- todoNow) {  
  
        assert(time == currentTime)  
  
        target ! msg  
  
    }  
  
}
```

There are three steps in this method. First, the items that need to occur at the current time are selected using `takeWhile` and saved into the `val todoNow`.

Second, those items are dropped from the agenda by using `drop`. Finally, the items to do now are looped through and sent the target message. The `assert` is included just to guarantee that the scheduler's logic is sound.

Given this ground work, handling the messages that a clock can receive is straightforward. An `AfterDelay` message causes a new item to be added to the work queue. A `Pong` causes a simulant to be removed from the list of

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 30.6](#)

[Chapter 30 · Actors and Concurrency](#)

busy simulants. Start causes the simulation to begin, and Stop causes the clock to stop:

```
def reactToOneMessage() {  
  
    react {  
  
        case AfterDelay(delay, msg, target) =>  
  
            val item = WorkItem(currentTime + delay, msg, target)  
  
            agenda = insert(agenda, item)  
  
        case Pong(time, sim) =>  
  
            assert(time == currentTime)  
  
            assert(busySimulants contains sim)  
  
            busySimulants -= sim  
  
        case Start => running = true  
  
        case Stop =>  
  
            for (sim <- allSimulants)  
  
                sim ! Stop  
  
            exit()  
  
    }  
}
```

The insert method, not shown, is exactly like that of [Listing 18.8](#). It inserts its argument into the agenda while being careful to keep the agenda sorted.

That's the complete implementation of Clock. Now consider how to implement Simulant. Boiled down to its essence, a Simulant is any actor that understands and cooperates with the simulation messages Stop and Ping.

Its act method can therefore be as simple as this:

```
def act() {  
    loop {  
        react {  
            case Stop => exit()  
            case Ping(time) =>  
                if (time == 1) simStarting()  
                clock ! Pong(time, self)  
            case msg => handleSimMessage(msg)  
        }  
    }  
}
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 30.6](#)

[Chapter 30 · Actors and Concurrency](#)

631

trait Simulant extends Actor {

```

val clock: Clock

def handleSimMessage(msg: Any)

def simStarting() { }

def act() {

loop {

react {

case Stop => exit()

case Ping(time) =>

if (time == 1) simStarting()

clock ! Pong(time, self)

case msg => handleSimMessage(msg)

}

}

}

start()

}

```

**Listing 30.7 · The Simulant trait.**

Whenever a simulant receives Stop, it exits. If it receives a Ping, it responds with a Pong. If the Ping is for time 1, then simStarting is called before the Pong is sent back, allowing subclasses to define behavior that should happen when the simulation starts running. Any other message must be

interpreted by subclasses, so it defers to an abstract handleSimMessage method.

There are two abstract members of a simulant: handleSimMessage and clock. A simulant must know its clock so that it can reply to Ping messages and schedule new work items. Putting it all together, the Simulant trait is as shown in [Listing 30.7](#). Note that a simulant goes ahead and starts running the moment it is created. This is safe and convenient, because it will not actually do anything until its clock sends it a message, and that should not happen until the simulation starts and the clock receives a Start message.

That completes the framework for parallel event simulation. Like its sequential cousin in [Chapter 18](#), it takes surprisingly little code.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 30.6](#)

### [Chapter 30 · Actors and Concurrency](#)

632

#### Implementing a circuit simulation

Now that the simulation framework is complete, it's time to work on the implementation of circuits. A circuit has a number of wires and gates, which will be simulants, and a clock for managing the simulation. A wire holds a boolean signal—either high (true) or low (false). Gates are connected to a number of wires, some of which are inputs and others outputs. Gates compute a signal for their output wires based on the state of their input wires.

Since the wire, gates, etc., of a circuit are only used for that particular circuit, their classes can be defined as members of a Circuit class, just as with the currency objects of [Section 20.9](#). The overall Circuit class will therefore have a number of members:

```
class Circuit {
```

```
val clock = new Clock

// simulation messages

// delay constants

// Wire and Gate classes and methods

// misc. utility methods

}
```

Now look at each of these members, one group at a time. First, there are the simulation messages. Once the simulation starts running, wires and gates can only communicate via message sends, so they will need a message type for each kind of information they want to send each other. There are only two such kinds of information. Gates need to tell their output wires to change state, and wires need to inform the gates they are inputs to whenever their state changes:

```
case class SetSignal(sig: Boolean)

case class SignalChanged(wire: Wire, sig: Boolean)
```

Next, there are several delays that must be chosen. Any work item scheduled with the simulation framework—including propagation of a signal to or from a wire—must be scheduled at some time in the future. It is unclear what the precise delays should be, so those delays are worth putting into vals. This way, they can be easily adjusted in the future:

```
val WireDelay = 1
```

```
val InverterDelay = 2
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 30.6](#)

[Chapter 30 · Actors and Concurrency](#)

```
val OrGateDelay = 3
```

```
val AndGateDelay = 3
```

At this point it is time to look at the Wire and Gate classes. Consider wires, first. A wire is a simulant that has a current signal state (high or low) and a list of gates that are observing that state. It mixes in the Simulant trait, so it also needs to specify a clock to use:

```
class Wire(name: String, init: Boolean) extends Simulant {

  def this(name: String) { this(name, false) }

  def this() { this("unnamed") }

  val clock = Circuit.this.clock

  clock.add(this)

  private var sigVal = init

  private var observers: List[Actor] = List()
```

The class also needs a handleSimMessage method to specify how it should respond to simulation messages. The only message a wire should receive is SetSignal, the message for changing a wire's signal. The response should be that if the signal is different from the current signal, the current state changes, and the new signal is propagated:

```
def handleSimMessage(msg: Any) {

  msg match {

    case SetSignal(s) =>

      if (s != sigVal) {
```

```
sigVal = s

signalObservers()

}

}

}

def signalObservers() {

for (obs <- observers)

clock ! AfterDelay(


WireDelay,


SignalChanged(this, sigVal),


obs)

}


```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 30.6](#)

### [Chapter 30 · Actors and Concurrency](#)

634

The above code shows how changes in a wire's signal are propagated to any gates watching it. It's also important to pass the initial state of a wire to any observing gates. This only needs to be done once, when the simulation starts up. After that, gates can simply store the result of the most recent SignalChanged they have received. Sending out the initial signal when the simulation starts is as simple as providing a simStarting() method: override def simStarting() { signalObservers() }

There are now just a few more odds and ends about wires. Wires need a method for connecting new gates, and they could use a nice `toString` method:

```
def addObserver(obs: Actor) {  
    observers = obs :: observers  
}  
  
override def toString = "Wire(" + name + ")"
```

That is everything you need for wires. Now consider gates, the other major class of objects in a circuit. There are three fundamental gates that would be nice to define: And, Or, and Not. All of these share a lot of behavior, so it is worth defining an abstract Gate class to hold the commonality.

A difficulty in defining this Gate class is that some gates have two input wires (And, Or) while others have just one (Not). It would be possible to model this difference explicitly. However, it simplifies the code to think of all gates as having two inputs, where Not gates simply ignore their second input. The ignored second input can be set to some dummy wire that never changes state from false:

private object DummyWire extends Wire("dummy") Given this trick, the gate class will come together straightforwardly. It mixes in the Simulant trait, and its one constructor accepts two input wires and one output wire:

```
abstract class Gate(in1: Wire, in2: Wire, out: Wire)  
extends Simulant {
```

There are two abstract members of Gate that specific subclasses will have to fill in. The most obvious is that different kinds of gates compute a dif-

## Chapter 30 · Actors and Concurrency

635

ferent function of their inputs. Thus, there should be an abstract method for computing an output based on inputs:

```
def computeOutput(s1: Boolean, s2: Boolean): Boolean
```

Second, different kinds of gates have different propagation delays. Thus, the delay of the gate should be an abstract val:

```
val delay: Int
```

The delay could be a def, but making it a val encodes the fact that a particular gate's delay should never change.

Because Gate mixes in Simulant, it is required to specify which clock it is using. As with Wire, Gate should specify the clock of the enclosing Circuit. For convenience, the Gate can go ahead and add itself to the clock when it is constructed:

```
val clock = Circuit.this.clock
```

```
clock.add(this)
```

Similarly, it makes sense to go ahead and connect the gate to the two input wires, using regular method calls:

```
in1.addObserver(this)
```

```
in2.addObserver(this)
```

The only local state of a gate is the most recent signal on each of its input wires. This state needs to be stored, because wires only send a signal when the state changes. If one input wire changes, only that one wire's state will be sent to the gate, but the new output will need to be computed from both wires' states:

```
var s1, s2 = false
```

Now look at how gates respond to simulation messages. There is only one message they need to handle, and that's the SignalChanged message indicating that one of the input wires has changed. When a SignalChanged arrives, two things need to be done. First, the local notion of the wire states need to be updated according to the change. Second, the new output needs to be computed and then sent out to the output wire with a SetSignal message:

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 30.6](#)

### [Chapter 30 · Actors and Concurrency](#)

636

```
def handleSimMessage(msg: Any) {  
    msg match {  
        case SignalChanged(w, sig) =>  
            if (w == in1)  
                s1 = sig  
            if (w == in2)  
                s2 = sig  
            clock ! AfterDelay(delay,  
                SetSignal(computeOutput(s1, s2)),  
                out)  
    }  
}
```

```
}
```

Given this abstract Gate class, it is now easy to define specific kinds of gates.

As with the sequential simulation in [Chapter 18](#), the gates can be created as side effects of calling some utility methods. All the methods need to do is create a Gate and fill in the appropriate delay and output computation.

Everything else is common to all gates and is handled in the Gate class:

```
def orGate(in1: Wire, in2: Wire, output: Wire) =
```

```
    new Gate(in1, in2, output) {
```

```
        val delay = OrGateDelay
```

```
        def computeOutput(s1: Boolean, s2: Boolean) = s1 || s2
```

```
}
```

```
def andGate(in1: Wire, in2: Wire, output: Wire) =
```

```
    new Gate(in1, in2, output) {
```

```
        val delay = AndGateDelay
```

```
        def computeOutput(s1: Boolean, s2: Boolean) = s1 && s2
```

```
}
```

In the case of Not gates, a dummy wire will be specified as the second input.

This is an implementation detail from the point of view of a caller creating a Not gate, so the inverter method only takes one input wire instead of two:

```
def inverter(input: Wire, output: Wire) =
```

```
    new Gate(input, DummyWire, output) {
```

```
val delay = InverterDelay

def computeOutput(s1: Boolean, ignored: Boolean) = !s1

}
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 30.6](#)

### [Chapter 30 · Actors and Concurrency](#)

637

At this point the library can simulate circuits, but, as described in [Chapter 18](#), it is useful to add a wire-probing utility so that you can watch the circuit evolve. Without such a utility, the simulation would have no way to know which wires are worth logging and which are more like implementation details.

Define a probe method that takes a Wire as an argument and then prints out a line of text whenever that wire's signal changes. The method can be implemented by simply making a new simulant that connects itself to a specified wire. This simulant can respond to SignalChanged messages by printing out the new signal:

```
def probe(wire: Wire) = new Simulant {
```

```
    val clock = Circuit.this.clock
```

```
    clock.add(this)
```

```
    wire.addObserver(this)
```

```
    def handleSimMessage(msg: Any) {
```

```
        msg match {
```

```

case SignalChanged(w, s) =>
    println("signal " + w + " changed to " + s)
}

}
}

```

That is the bulk of the Circuit class. Callers should create an instance of Circuit, create a bunch of wires and gates, call probe on a few wires of interest, and then start the simulation running. The one piece missing is how the simulation is started, and that can be as simple as sending the clock a Start message:

```
def start() { clock ! Start }
```

More complicated circuit components can be built from methods just as it was explained previously in [Chapter 18](#). For instance [Listing 30.8](#) shows again the half adder and full adder components that were already introduced then. Their implementation stays the same, but as a small variation they are now packaged in a trait, named Adders, whereas in [Chapter 18](#) they were contained in an abstract class. Because the trait is marked as extending Circuit, it can directly access members of Circuit such as Wire and orGate. Using the trait then looks like this:

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 30.6](#)

[Chapter 30 · Actors and Concurrency](#)

638

trait Adders extends Circuit {

```
def halfAdder(a: Wire, b: Wire, s: Wire, c: Wire) {
```

```

val d, e = new Wire
orGate(a, b, d)
andGate(a, b, c)
inverter(c, e)
andGate(d, e, s)
}

def fullAdder(a: Wire, b: Wire, cin: Wire,
sum: Wire, cout: Wire) {
    val s, c1, c2 = new Wire
    halfAdder(a, cin, s, c1)
    halfAdder(b, s, sum, c2)
    orGate(c1, c2, cout)
}
}

```

Listing 30.8 · Adder components.

```
val circuit = new Circuit with Adders
```

This circuit variable holds a circuit that has all of the methods of Circuit and all of the methods of Adders. Note that with this coding pattern, based on a trait instead of a class, you set the stage to provide multiple component sets. Users mix in whichever component sets they plan to use, like this: val circuit =

```
new Circuit
```

with Adders

with Multiplexers

with FlipFlops

with MultiCoreProcessors

Trying it all out

That's the whole framework. It includes a simulation framework, a circuit simulation class, and a small library of standard adder components. Here is

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 30.6](#)

[Chapter 30 · Actors and Concurrency](#)

639

a simple demo object that uses it:

```
object Demo {  
  
  def main(args: Array[String]) {  
  
    val circuit = new Circuit with Adders  
  
    import circuit._  
  
    val ain = new Wire("ain", true)  
  
    val bin = new Wire("bin", false)  
  
    val cin = new Wire("cin", true)  
  
    val sout = new Wire("sout")  
  
    val cout = new Wire("cout")  
  }  
}
```

```
probe(ain)
probe(bin)
probe(cin)
probe(sout)
probe(cout)
fullAdder(ain, bin, cin, sout, cout)
circuit.start()
}
}
```

This example creates a circuit that includes the Adders trait. It immediately imports all of the circuit's members, thus allowing easy accesses to methods like probe and fullAdder. Without the import, it would be necessary to write circuit.probe(ain) instead of just probe(ain).

The example then creates five wires. Three will be used as inputs (ain, bin, and cin), and two will be used as outputs (sout, cout). The three input wires are given arbitrary initial signals of true, false, and true. These inputs correspond to adding 1 to 0, with a carry in of 1.

The probe method gets applied to all five externally visible wires, so any changes in their state can be observed as the simulation runs. Finally the wires are plugged into a full adder, and the simulation is started. The output of the simulation is as follows:

Advancing to time 1

Advancing to time 2

signal Wire(cout) changed to false

signal Wire(cin) changed to true

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 30.7

### Chapter 30 · Actors and Concurrency

640

signal Wire(ain) changed to true

signal Wire(sout) changed to false

signal Wire(bin) changed to false

Advancing to time 3

Advancing to time 4

Advancing to time 5

Advancing to time 6

Advancing to time 7

Advancing to time 8

Advancing to time 9

Advancing to time 10

signal Wire(cout) changed to true

Advancing to time 11

Advancing to time 12

Advancing to time 13

Advancing to time 14

Advancing to time 15

Advancing to time 16

Advancing to time 17

Advancing to time 18

signal Wire(sout) changed to true

Advancing to time 19

Advancing to time 20

Advancing to time 21

signal Wire(sout) changed to false

\*\* Agenda empty.

Clock exiting at time 21.

As expected, with inputs of 1, 0, and 1 (true, false and true), the outputs are a carry of 1 and sum of 0 (cout is true, and sout is false).

30.7

## Conclusion

Concurrent programming gives you great power. It lets you simplify your code, and it lets you take advantage of multiple processors. It is therefore unfortunate that the most widely used concurrency primitives, threads, locks, and monitors, are such a minefield of deadlocks and race conditions.

The actors style provides a way out of the minefield, letting you write concurrent programs without having such a great risk of deadlocks and race

## [Section 30.7](#)

### [Chapter 30 · Actors and Concurrency](#)

641

conditions. This chapter has introduced several fundamental constructs for working with actors in Scala, including how to create actors, how to send and receive messages, and how to conserve threads with react, among other nuts and bolts. It then showed you how to use these constructs as part of a general actors style.

## Chapter 31

### Combinator Parsing

Occasionally, you may need to process a small, special-purpose language.

For example, you may need to read configuration files for your software, and you want to make them easier to modify by hand than XML.

Alternatively, maybe you want to support an input language in your program, such as search terms with boolean operators (computer, find me a movie “with

‘space ships’ and without ‘love stories’”). Whatever the reason, you are going to need a parser. You need a way to convert the input language into some data structure your software can process.

Essentially, you have only a few choices. One choice is to roll your own parser (and lexical analyzer). If you are not an expert, this is hard. If you are an expert, it is still time consuming.

An alternative choice is to use a parser generator. There exist quite a few of these generators. Some of the better known are Yacc and Bison for parsers written in C and ANTLR for parsers written in Java. You’ll probably also

need a scanner generator such as Lex, Flex, or JFlex to go with it. This might be the best solution, except for a couple of inconveniences. You need to learn new tools, including their—sometimes obscure—error messages. You also need to figure out how to connect the output of these tools to your program.

This might limit the choice of your programming language, and complicate your tool chain.

This chapter presents a third alternative. Instead of using the standalone domain specific language of a parser generator, you will use an internal domain specific language, or internal DSL for short. The internal DSL will consist of a library of parser combinators—functions and operators defined in Scala that will serve as building blocks for parsers. These building blocks

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 31.1](#)

### [Chapter 31 · Combinator Parsing](#)

643

will map one to one to the constructions of a context-free grammar, to make them easy to understand.

This chapter introduces only one language feature that was not explained before: this aliasing, in [Section 31.6](#). The chapter does, however, heavily use several other features that were explained in previous chapters. Among others, parameterized types, abstract types, functions as objects, operator overloading, by-name parameters, and implicit conversions all play important roles. The chapter shows how these language elements can be combined in the design of a very high-level library.

The concepts explained in this chapter tend to be a bit more advanced than previous chapters. If you have a good grounding in compiler construction, you'll profit from it reading this chapter, because it will help you put things

better in perspective. However, the only prerequisite for understanding this chapter is that you know about regular and context-free grammars.

If you don't, the material in this chapter can also safely be skipped.

### 31.1

#### Example: Arithmetic expressions

We'll start with an example. Say you want to construct a parser for arithmetic expressions consisting of floating-point numbers, parentheses, and the binary operators +, -, \*, and /. The first step is always to write down a grammar for the language to be parsed. Here's the grammar for arithmetic expressions: expr

::=

term {"+" term | "-"} term}.

term

::=

factor {"\*" factor | "/" factor}.

factor

::=

floatingPointNumber | "(" expr ")".

Here, | denotes alternative productions, and { ... } denotes repetition (zero or more times). And although there's no use of it in this example, [ ... ]

denotes an optional occurrence.

This context-free grammar defines formally a language of arithmetic expressions. Every expression (represented by expr) is a term, which can be followed by a sequence of + or - operators and further terms. A term is a

factor, possibly followed by a sequence of \* or / operators and further factors. A factor is either a numeric literal or an expression in parentheses.

Note that the grammar already encodes the relative precedence of operators.

For instance, \* binds more tightly than +, because a \* operation gives a term,

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 31.1

### Chapter 31 · Combinator Parsing

644

whereas a + operation gives an expr, and exprs can contain terms but a term can contain an expr only when the latter is enclosed in parentheses.

Now that you have defined the grammar, what's next? If you use Scala's combinator parsers, you are basically done! You only need to perform some systematic text replacements and wrap the parser in a class, as shown in

#### Listing 31.1:

```
import scala.util.parsing.combinator._

class Arith extends JavaTokenParsers {

  def expr: Parser[Any] = term~rep(("+"~term | "-"~term) def term:
    Parser[Any] = factor~rep("*"~factor | "/"~factor) def factor: Parser[Any] =
      floatingPointNumber | "("~expr~")"

}
```

Listing 31.1 · An arithmetic expression parser.

The parsers for arithmetic expressions are contained in a class that inherits from the trait JavaTokenParsers. This trait provides the basic machinery for

writing a parser and also provides some primitive parsers that recognize some word classes: identifiers, string literals and numbers. In the example in [Listing 31.1](#) you need only the primitive floatingPointNumber parser, which is inherited from this trait.

The three definitions in class Arith represent the productions for arithmetic expressions. As you can see, they follow very closely the productions of the context-free grammar. In fact, you could generate this part automatically from the context-free grammar, by performing a number of simple text replacements:

1. Every production becomes a method, so you need to prefix it with def.
2. The result type of each method is Parser[Any], so you need to change the ::= symbol to “: Parser[Any] =”. You’ll find out later in this chapter what the type Parser[Any] signifies, and also how to make it more precise.
3. In the grammar, sequential composition was implicit, but in the program it is expressed by an explicit operator: ~. So you need to insert a ~ between every two consecutive symbols of a production. In the example in [Listing 31.1](#) we chose not to write any spaces around the ~

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 31.2](#)

### [Chapter 31 · Combinator Parsing](#)

645

operator. That way, the parser code keeps closely to the visual appearance of the grammar—it just replaces spaces by ~ characters.

4. Repetition is expressed rep( . . . ) instead of { . . . }. Analogously (though not shown in the example), option is expressed opt( . . . ) instead of [ . . . ].
5. The period (.) at the end of each production is omitted—you can, however, write a semicolon (;) if you prefer.

That's all there is to it. The resulting class Arith defines three parsers, expr, term and factor, which can be used to parse arithmetic expressions and their parts.

## 31.2

### Running your parser

You can exercise your parser with the following small program: object ParseExpr extends Arith {

```
def main(args: Array[String]) {  
  
    println("input : " + args(0))  
  
    println(parseAll(expr, args(0)))  
  
}  
  
}
```

The ParseExpr object defines a main method that parses the first command-line argument passed to it. It prints the original input argument, and then prints its parsed version. Parsing is done by the expression: parseAll(expr, input)

This expression applies the parser, expr, to the given input. It expects that all of the input matches, i.e., that there are no characters trailing a parsed expression. There's also a method parse, which allows you to parse an input prefix, leaving some remainder unread.

You can run the arithmetic parser with the following command: \$ scala ParseExpr "2 \* (3 + 7)"

input: 2 \* (3 + 7)

```
[1.12] parsed: ((2~List((*~(((~((3~List())~List((+  
~(7~List()))))))~))))~List())
```

## [Section 31.3](#)

### [Chapter 31 · Combinator Parsing](#)

646

The output tells you that the parser successfully analyzed the input string up to position [1.12]. That means the first line and the twelfth column—in other words, the whole input string—was parsed. Disregard for the moment the result after “parsed:”. It is not very useful, and you will find out later how to get more specific parser results.

You can also try to introduce some input string that is not a legal expression. For instance, you could write one closing parenthesis too many:

```
$ scala ParseExpr "2 * (3 + 7))"
```

input: 2 \* (3 + 7))

[1.12] failure: `-' expected but `)' found

2 \* (3 + 7))

^

Here, the expr parser parsed everything until the final closing parenthesis, which does not form part of the arithmetic expression. The parseAll method then issued an error message, which said that it expected a - operator at the point of the closing parenthesis. You’ll find out later in this chapter why it produced this particular error message, and how you can improve it.

31.3

#### Basic regular expression parsers

The parser for arithmetic expressions made use of another parser, named floatingPointNumber. This parser, which was inherited from Arith’s supertrait, JavaTokenParsers, recognizes a floating point number in the

format of Java. But what do you do if you need to parse numbers in a format that's a bit different from Java's? In this situation, you can use a regular expression parser.

The idea is that you can use any regular expression as a parser. The regular expression parses all strings that it can match. Its result is the parsed string. For instance, the regular expression parser shown in [Listing 31.2](#)

describes Java's identifiers:

```
object MyParsers extends RegexParsers {  
    val ident: Parser[String] = """[a-zA-Z_]\w*""".r  
}
```

Listing 31.2 · A regular expression parser for Java identifiers.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 31.4](#)

[Chapter 31 · Combinator Parsing](#)

647

The MyParsers object of [Listing 31.2](#) inherits from trait RegexParsers, whereas Arith inherited from JavaTokenParsers. Scala's parsing combinators are arranged in a hierarchy of traits, which are all contained in package `scala.util.parsing.combinator`. The top-level trait is `Parsers`, which defines a very general parsing framework for all sorts of input. One level below is trait `RegexParsers`, which requires that the input is a sequence of characters and provides for regular expression parsing. Even more specialized is trait `JavaTokenParsers`, which implements parsers for basic classes of words (or tokens) as they are defined in Java.

31.4

Another example: JSON

JSON, the JavaScript Object Notation, is a popular data interchange format.

In this section, we'll show you how to write a parser for it. Here's a grammar that describes the syntax of JSON:

value

::=

obj | arr | stringLiteral |

floatingPointNumber |

"null" | "true" | "false".

obj

::=

"{" [ members ] "}".

arr

::=

"[" [ values ] "]".

members

::=

member { "," member }.

member

::=

stringLiteral ":" value.

values

::=

value {" , " value }.

A JSON value is an object, array, string, number, or one of the three reserved words null, true, or false. A JSON object is a (possibly empty) sequence of members separated by commas and enclosed in braces. Each member is a string/value pair where the string and the value are separated by a colon. Finally, a JSON array is a sequence of values separated by commas and enclosed in square brackets. As an example, [Listing 31.3](#) contains an address-book formatted as a JSON object.

Parsing such data is straightforward when using Scala's parser combinators. The complete parser is shown in [Listing 31.4](#). This parser follows the same structure as the arithmetic expression parser. It is again a straightforward mapping of the productions of the JSON grammar. The productions use one shortcut that simplifies the grammar: The repsep combinator parses a (possibly empty) sequence of terms that are separated by a given separator

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 31.4](#)

### [Chapter 31 · Combinator Parsing](#)

648

{

"address book": {

    "name": "John Smith",

    "address": {

        "street": "10 Market Street",

        "city"

```
: "San Francisco, CA",
```

```
"zip"
```

```
: 94111
```

```
},
```

```
"phone numbers": [
```

```
"408 338-4238",
```

```
"408 111-6892"
```

```
]
```

```
}
```

```
}
```

Listing 31.3 · Data in JSON format.

string. For instance, in the example in [Listing 31.4.](#), repsep(member, ",") parses a comma-separated sequence of member terms. Otherwise, the productions in the parser correspond exactly to the productions in the grammar, as was the case for the arithmetic expression parsers.

```
import scala.util.parsing.combinator._
```

```
class JSON extends JavaTokenParsers {
```

```
def value : Parser[Any] = obj | arr |
```

```
stringLiteral |
```

```
floatingPointNumber |
```

```
"null" | "true" | "false"
```

```
def obj
: Parser[Any] = "{"~repsep(member, ",")~"}"

def arr
: Parser[Any] = "["~repsep(value, ",")~"]"

def member: Parser[Any] = stringLiteral~":"~value

}
```

Listing 31.4 · A simple JSON parser.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 31.5](#)

### [Chapter 31 · Combinator Parsing](#)

649

To try out the JSON parsers, we'll change the framework a bit, so that the parser operates on a file instead of on the command line: import  
java.io.FileReader

```
object ParseJSON extends JSON {

def main(args: Array[String]) {

val reader = new FileReader(args(0))

println(parseAll(value, reader))

}

}
```

The main method in this program first creates a `FileReader` object. It then parses the characters returned by that reader according to the value production of the JSON grammar. Note that `parseAll` and `parse` exist in overloaded variants: both can take a character sequence or alternatively an input reader as second argument.

If you store the “address book” object shown in [Listing 31.3](#) into a file named `address-book.json` and run the `ParseJSON` program on it, you should get:

```
$ scala ParseJSON address-book.json
```

```
[13.4] parsed: (({~List((({"address book"~:)~(({{~List(((  
"name"~:)~"John Smith"), ("address"~:)~(({{~List(((  
"street"~:)~"10 Market Street"), ("city"~:)~"San Francisco  
, ("zip"~:)~94111))))~}})), ("phone numbers"~:)~(([~  
List("408 338-4238", "408 111-6892"))~]))~})))~}) 31.5
```

Parser output

The `ParseJSON` program successfully parsed the JSON address book. However, the parser output looks strange. It seems to be a sequence composed of bits and pieces of the input glued together with lists and `~` combinations.

This output is not very useful. It is less readable for humans than the input, but it is also too disorganized to be easily analyzable by a computer. It’s time to do something about this.

To figure out what to do, you need to know first what the individual parsers in the combinator frameworks return as a result (provided they succeed in parsing the input). Here are the rules:

## Section 31.5

### Chapter 31 · Combinator Parsing

650

1. Each parser written as a string (such as: "{" or ":" or "null") returns the parsed string itself.
2. Regular expression parsers such as """[a-zA-Z\_]\w\*""".r also return the parsed string itself. The same holds for regular expression parsers such as stringLiteral or floatingPointNumber, which are inherited from trait JavaTokenParsers.
3. A sequential composition P~Q returns the results of both P and of Q.

These results are returned in an instance of a case class that is also written ~. So if P returns "true" and Q returns "?", then the sequential composition P~Q returns ~("true", "?"), which prints as (true~?).

4. An alternative composition P | Q returns the result of either P or Q, whichever one succeeds.
5. A repetition rep(P) or repsep(P, separator) returns a list of the results of all runs of P.
6. An option opt(P) returns an instance of Scala's Option type. It returns Some(R) if P succeeds with result R and None if P fails.

With these rules you can now deduce why the parser output appeared as it did in the previous examples. However, the output is still not very convenient.

It would be much better to map a JSON object into an internal Scala representation that represents the meaning of the JSON value. A more natural representation would be as follows:

- A JSON object is represented as a Scala map of type Map[String, Any]. Every member is represented as a key/value binding in the map.

- A JSON array is represented as a Scala list of type `List[Any]`.
- A JSON string is represented as a Scala `String`.
- A JSON numeric literal is represented as a Scala `Double`.
- The values `true`, `false`, and `null` are represented as the Scala values with the same names.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 31.5

### Chapter 31 · Combinator Parsing

651

To produce to this representation, you need to make use of one more combination form for parsers: `^`.

The `^` operator transforms the result of a parser. Expressions using this operator have the form `P ^ f` where `P` is a parser and `f` is a function. `P ^ f` parses the same sentences as just `P`. Whenever `P` returns with some result `R`, the result of `P ^ f` is `f(R)`.

As an example, here is a parser that parses a floating point number and converts it to a Scala value of type `Double`:

`floatingPointNumber ^ (_.toDouble)`

And here is a parser that parses the string "true" and returns Scala's boolean `true` value:

`"true" ^ (x => true)`

Now for more advanced transformations. Here's a new version of a parser for JSON objects that returns a Scala Map:

`def obj: Parser[Map[String, Any]] = // Can be improved`

```
">{"~repsep(member, ",")~}" ^^  
{ case {"~ms~"} => Map() ++ ms }
```

Remember that the `~` operator produces as its result an instance of a case class with the same name: `~`. Here's a definition of that class—it's an inner class of trait Parsers:

```
case class ~[+A, +B](x: A, y: B) {  
  override def toString = "(" + x + "~~" + y + ")"  
}
```

The name of the class is intentionally the same as the name of the sequence combinator method, `~`. That way, you can match parser results with patterns that follow the same structure as the parsers themselves. For instance, the pattern `">{"~ms~"}"` matches a result string `"{"` followed by a result variable `ms`, which is followed in turn by a result string `"}"`. This pattern corresponds exactly to what is returned by the parser on the left of the `^^`.

In its desugared versions where the `~` operator comes first, the same pattern reads `~(~("{}", ms), "{}")`, but this is much less legible.

The purpose of the `">{"~ms~"}"` pattern is to strip off the braces so that you can get at the list of members resulting from the `repsep(member, ",")`

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 31.5](#)

### [Chapter 31 · Combinator Parsing](#)

652

parser. In cases like these there is also an alternative that avoids producing unnecessary parser results that are immediately discarded by the pattern match. The alternative makes use of the `~>` and `<~` parser combinators. Both express sequential composition like `~`, but `~>` keeps only the result of

its right operand, whereas `<~` keeps only the result of its left operand. Using these combinators, the JSON object parser can be expressed more succinctly: `def obj: Parser[Map[String, Any]] =`

```
">{"~> repsep(member, ",") <~"}" ^~ (Map() ++ _)
```

[Listing 31.5](#) shows a full JSON parser that returns meaningful results. If you run this parser on the `address-book.json` file, you will get the following result (after adding some newlines and indentation): `$ scala JSON1Test address-book.json`

```
[14.1] parsed: Map(  
  address book -> Map(  
    name -> John Smith,  
    address -> Map(  
      street -> 10 Market Street,  
      city -> San Francisco, CA,  
      zip -> 94111),  
    phone numbers -> List(408 338-4238, 408 111-6892)  
  )  
)
```

This is all you need to know in order to get started writing your own parsers. As an aide to memory, [Table 31.1](#) lists the parser combinators that were discussed so far.

### Symbolic versus alphanumeric names

Many of the parser combinators in [Table 31.1](#) use symbolic names. This has both advantages and disadvantages. On the minus side, symbolic names

take time to learn. Users who are unfamiliar with Scala's combinator parsing libraries are probably mystified what `~`, `~>`, or `^` mean. On the plus side, symbolic names are short, and can be chosen to have the “right” precedences and associativities. For instance, the parser combinators `~`, `^`, and `|` are chosen intentionally in decreasing order of precedence. A typical grammar

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 31.5

### Chapter 31 · Combinator Parsing

653

```
import scala.util.parsing.combinator._

class JSON1 extends JavaTokenParsers {

  def obj: Parser[Map[String, Any]] =
    "{" ~> repsep(member, ",") <~ "}" ^~ (Map() ++ _)
    def arr: Parser[List[Any]] =
      "[" ~> repsep(value, ",") <~ "]"
    def member: Parser[(String, Any)] =
      stringLiteral~":"~value ^^
        { case name~":"~value => (name, value) }
    def value: Parser[Any] = (
      obj
      | arr
      | stringLiteral
```

```

| floatingPointNumber ^^ (_.toDouble)

| "null"

^^ (x => null)

| "true"

^^ (x => true)

| "false" ^^ (x => false)

)
}

```

Listing 31.5 · A full JSON parser that returns meaningful results.

Table 31.1 · Summary of parser combinators

"..."

literal

"...".r

regular expression

P~Q

sequential composition

P <~ Q, P ~> Q

sequential composition; keep left/right only

P | Q

alternative

$\text{opt}(P)$

option

$\text{rep}(P)$

repetition

$\text{repsep}(P, Q)$

interleaved repetition

$P \wedge f$

result conversion

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 31.5

### Chapter 31 · Combinator Parsing

654

Turning off semicolon inference

Note that the body of the value parser in [Listing 31.5](#) is enclosed in parentheses. This is a little trick to disable semicolon inference in parser expressions. You saw in [Section 4.2](#) that Scala assumes there's a semicolon between any two lines that can be separate statements syntactically, unless the first line ends in an infix operator, or the two lines are enclosed in parentheses or square brackets. Now, you could have written the `|` operator at the end of each alternative instead of at the beginning of the following one, like this:

```
def value: Parser[Any] =
```

```
  obj |
```

```
arr |  
stringLiteral |
```

...

In that case, no parentheses around the body of the value parser would have been required. However, some people prefer to see the `|` operator at the beginning of the second alternative rather than at the end of the first. Normally, this would lead to an unwanted semicolon between the two lines, like this:

```
obj;  
// semicolon implicitly inserted  
| arr
```

The semicolon changes the structure of the code, causing it to fail compilation. Putting the whole expression in parentheses avoids the semicolon and makes the code compile correctly.

production is composed of alternatives that have a parsing part and a transformation part. The parsing part usually contains several sequential items separated by `~` operators. With the chosen precedences of `~`, `^`, and `|` you can write such a grammar production without needing any parentheses.

Furthermore, symbolic operators take less visual real estate than alphabetic ones. That's important for a parser because it lets you concentrate on the grammar at hand, instead of the combinators themselves. To see the dif-

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 31.6](#)

[Chapter 31 · Combinator Parsing](#)

ference, imagine for a moment that sequential composition ( $\sim$ ) was called andThen and alternative (!) was called orElse. The arithmetic expression parsers in [Listing 31.1](#) on [page 644](#) would look as follows: class ArithHypothetical extends JavaTokenParsers {

```
def expr: Parser[Any]
```

```
=
```

```
term andThen rep(("+" andThen term) orElse  
("-" andThen term))
```

```
def term: Parser[Any]
```

```
=
```

```
factor andThen rep(("*" andThen factor) orElse ("/" andthen factor))
```

```
def factor: Parser[Any] =
```

```
floatingPointNumber orElse
```

```
("(" andThen expr andThen "))")
```

```
}
```

You notice that the code becomes much longer, and that it's hard to "see" the grammar among all those operators and parentheses. On the other hand, somebody new to combinator parsing could probably figure out better what the code is supposed to do.

## 31.6

### Implementing combinator parsers

The previous sections have shown that Scala's combinator parsers provide a convenient means for constructing your own parsers. Since they are nothing

more than a Scala library, they fit seamlessly into your Scala programs. So it's very easy to combine a parser with some code that processes the results it delivers, or to rig a parser so that it takes its input from some specific source (say, a file, a string, or a character array).

How is this achieved? In the rest of this chapter you'll take a look "under the hood" of the combinator parser library. You'll see what a parser is, and how the primitive parsers and parser combinators encountered in previous sections are implemented. You can safely skip these parts if all you want to do is write some simple combinator parsers. On the other hand, reading the rest of this chapter should give you a deeper understanding of combinator parsers in particular, and of the design principles of a combinator domain-specific language in general.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 31.6](#)

### [Chapter 31 · Combinator Parsing](#)

656

Choosing between symbolic and alphabetic names

As guidelines for choosing between symbolic and alphabetic names we recommend the following:

- Use symbolic names in cases where they already have a universally established meaning. For instance, nobody would recommend writing `add` instead of `+` for numeric addition.
- Otherwise, give preference to alphabetic names if you want your code to be understandable to casual readers.
- You can still choose symbolic names for domain-specific libraries, if this gives clear advantages in legibility and you do not expect anyway that a casual reader without a firm grounding in the domain would be able understand the code immediately.

In the case of parser combinators we are looking at a highly domain-specific language, which casual readers may have trouble understanding even with alphabetic names. Furthermore, symbolic names give clear advantages in legibility for the expert. So we believe their use is warranted in this application.

The core of Scala's combinator parsing framework is contained in the trait `scala.util.parsing.combinator.Parsers`. This trait defines the `Parser` type as well as all fundamental combinators. Except where stated explicitly otherwise, the definitions explained in the following two subsections all reside in this trait. That is, they are assumed to be contained in a trait definition that starts as follows:

```
package scala.util.parsing.combinator

trait Parsers {

    ... // code goes here unless otherwise stated
}
```

A `Parser` is in essence just a function from some input type to a parse result.

As a first approximation, the type could be written as follows: type `Parser[T] = Input => ParseResult[T]`

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 31.6](#)

[Chapter 31 · Combinator Parsing](#)

657

Parser input

Sometimes, a parser reads a stream of tokens instead of a raw sequence of characters. A separate lexical analyzer is then used to convert a stream of

raw characters into a stream of tokens. The type of parser inputs is defined as follows:

```
type Input = Reader[Elem]
```

The class Reader comes from the package `scala.util.parsing.input`. It is similar to a Stream, but also keeps track of the positions of all the elements it reads. The type `Elem` represents individual input elements. It is an abstract type member of the `Parsers` trait:

```
type Elem
```

This means that subclasses and subtraits of `Parsers` need to instantiate class `Elem` to the type of input elements that are being parsed. For instance, `RegexParsers` and `JavaTokenParsers` fix `Elem` to be equal to `Char`. But it would also be possible to set `Elem` to some other type, such as the type of tokens returned from a separate lexer.

## Parser results

A parser might either succeed or fail on some given input. Consequently class `ParseResult` has two subclasses for representing success and failure:  
sealed abstract class `ParseResult[+T]`

```
case class Success[T](result: T, in: Input)
```

```
extends ParseResult[T]
```

```
case class Failure(msg: String, in: Input)
```

```
extends ParseResult[Nothing]
```

The `Success` case carries the result returned from the parser in its `result` parameter. The type of parser results is arbitrary; that's why `ParseResult`, `Success`, and `Parser` are all parameterized with a type parameter `T`. The type parameter represents the kinds of results returned by a given parser.

`Success` also takes a second parameter, `in`, which refers to the input immediately following the part that the parser consumed. This field is

needed for chaining parsers, so that one parser can operate after another. Note that this is a purely functional approach to parsing. Input is not read as a side effect,

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 31.6

### Chapter 31 · Combinator Parsing

658

but it is kept in a stream. A parser analyzes some part of the input stream, and then returns the remaining part in its result.

The other subclass of ParseResult is Failure. This class takes as a parameter a message that describes why the parser failed. Like Success, Failure also takes the remaining input stream as a second parameter. This is needed not for chaining (the parser won't continue after a failure), but to position the error message at the correct place in the input stream.

Note that parse results are defined to be covariant in the type parameter T. That is, a parser returning Strings as result, say, is compatible with a parser returning AnyRefs.

#### The Parser class

The previous characterization of parsers as functions from inputs to parse results was a bit oversimplified. The previous examples showed that parsers also implement methods such as ~ for sequential composition of two parsers and | for their alternative composition. So Parser is in reality a class that inherits from the function type Input => ParseResult[T] and additionally defines these methods:

abstract class Parser[+T] extends (Input => ParseResult[T])

{ p =>

// An unspecified method that defines

```
// the behavior of this parser.  
  
def apply(in: Input): ParseResult[T]  
  
def ~ ...  
  
def | ...  
  
...  
  
}
```

Since parsers are (i.e., inherit from) functions, they need to define an apply method. You see an abstract apply method in class Parser, but this is just for documentation, as the same method is in any case inherited from the parent type  $\text{Input} \Rightarrow \text{ParseResult}[T]$  (recall that this type is an abbreviation for `scala.Function1[Input, ParseResult[T]]`). The apply method still needs to be implemented in the individual parsers that inherit from the abstract Parser class. These parsers will be discussed after the following section on this aliasing.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 31.6

### Chapter 31 · Combinator Parsing

659

Aliasing this

The body of the Parser class starts with a curious expression: abstract class `Parser[+T]` extends ... { `p =>`

A clause such as “`id =>`” immediately after the opening brace of a class template defines the identifier `id` as an alias for `this` in the class. It’s as if you had written:

```
val id = this
```

in the class body, except that the Scala compiler knows that `id` is an alias for this. For instance, you could access an object-private member `m` of the class using either `id.m` or `this.m`; the two are completely equivalent. The first expression would not compile if `id` were just defined as a `val` with `this` as its right hand side, because in that case the Scala compiler would treat `id` as a normal identifier.

You saw syntax like this in [Section 27.4](#), where it was used to give a `self`

`type` to a trait. Aliasing can also be a good abbreviation when you need to access the `this` of an outer class. Here's an example:

```
class Outer { outer =>  
  
  class Inner {  
  
    println(Outer.this eq outer) // prints: true  
  
  }  
  
}
```

The example defines two nested classes, `Outer` and `Inner`. Inside `Inner` the `this` value of the `Outer` class is referred to twice, using different expressions. The first expression shows the Java way of doing things: You can prefix the reserved word `this` with the name of an outer class and a period; such an expression then refers to the `this` of the outer class. The second expression shows the alternative that Scala gives you. By introducing an alias named `outer` for `this` in class `Outer`, you can refer to this alias directly also in inner classes. The Scala way is more concise, and can also improve clarity, if you choose the name of the alias well. You'll see examples of this in [pages 660 and 661](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 31.6](#)

[Chapter 31 · Combinator Parsing](#)

## Single-token parsers

Class Parsers defines a generic parser elem that can be used to parse any single token:

```
def elem(kind: String, p: Elem => Boolean) =  
  
new Parser[Elem] {  
  
def apply(in: Input) =  
  
if (p(in.first)) Success(in.first, in.rest)  
  
else Failure(kind + " expected", in)  
  
}
```

This parser takes two parameters: a kind string describing what kind of token should be parsed and a predicate p on Elems, which indicates whether an element fits the class of tokens to be parsed.

When applying the parser elem(kind, p) to some input in, the first element of the input stream is tested with predicate p. If p returns true, the parser succeeds. Its result is the element itself, and its remaining input is the input stream starting just after the element that was parsed. On the other hand, if p returns false, the parser fails with an error message that indicates what kind of token was expected.

## Sequential composition

The elem parser only consumes a single element. To parse more interesting phrases, you can string parsers together with the sequential composition operator ~. As you have seen before,  $P \sim Q$  is a parser that applies first the P parser to a given input string. Then, if P succeeds, the Q parser is applied to the input that's left after P has done its job.

The  $\sim$  combinator is implemented as a method in class Parser. Its definition is shown in [Listing 31.6](#). The method is a member of the Parser class. Inside this class, p is specified by the “ $p \Rightarrow$ ” part as an alias of this, so p designates the left operand (or: receiver) of  $\sim$ . Its right operand is represented by parameter q. Now, if  $p \sim q$  is run on some input in, first p is run on in and the result is analyzed in a pattern match. If p succeeds, q is run on the remaining input in1. If q also succeeds, the parser as a whole succeeds.

Its result is a  $\sim$  object containing both the result of p (i.e., x) and the result of q (i.e., y). On the other hand, if either p or q fails the result of  $p \sim q$  is the Failure object returned by p or q.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 31.6

### Chapter 31 · Combinator Parsing

661

abstract class Parser[+T] ... { p =>

...

def  $\sim$  [U](q: => Parser[U]) = new Parser[T~U] {

def apply(in: Input) = p(in) match {

case Success(x, in1) =>

q(in1) match {

case Success(y, in2) => Success(new  $\sim$ (x, y), in2)

case failure => failure

}

```
case failure => failure
```

```
}
```

```
}
```

Listing 31.6 · The  $\sim$  combinator method.

The result type of  $\sim$  is a parser that returns an instance of the case class  $\sim$

with elements of types T and U. The type expression  $T \sim U$  is just a more legible shorthand for the parameterized type  $\sim[T, U]$ . Generally, Scala always interprets a binary type operation such as  $A \text{ op } B$ , as the parameterized type  $\text{op}[A, B]$ . This is analogous to the situation for patterns, where an binary pattern  $P \text{ op } Q$  is also interpreted as an application, i.e.,  $\text{op}(P, Q)$ .

The other two sequential composition operators,  $\langle\sim\rangle$  and  $\sim\rangle$ , could be defined just like  $\sim$ , only with some small adjustment in how the result is computed. A more elegant technique, though, is to define them in terms of  $\sim$

as follows:

```
def <~ [U](q: => Parser[U]): Parser[T] =
```

```
(p~q) ^^ { case x~y => x }
```

```
def ~> [U](q: => Parser[U]): Parser[U] =
```

```
(p~q) ^^ { case x~y => y }
```

### Alternative composition

An alternative composition  $P \mid Q$  applies either P or Q to a given input. It first tries P. If P succeeds, the whole parser succeeds with the result of P.

Otherwise, if P fails, then Q is tried on the same input as P. The result of Q is then the result of the whole parser.

## [Section 31.6](#)

### [Chapter 31 · Combinator Parsing](#)

662

Here is a definition of `|` as a method of class Parser:

```
def | (q: => Parser[T]) = new Parser[T] {  
    def apply(in: Input) = p(in) match {  
        case s1 @ Success(_, _) => s1  
        case failure => q(in)  
    }  
}
```

Note that if P and Q both fail, then the failure message is determined by Q.

This subtle choice is discussed later, in [Section 31.9](#).

Dealing with recursion

Note that the `q` parameter in methods `~` and `|` is by-name—its type is preceded by `=>`. This means that the actual parser argument will be evaluated only when `q` is needed, which should only be the case after `p` has run. This makes it possible to write recursive parsers like the following one which parses a number enclosed by arbitrarily many parentheses: `def parens = floatingPointNumber | "(" ~parens ~")"`

If `|` and `~` took [by-value parameters](#), this definition would immediately cause a stack overflow without reading anything, because the value of `parens` occurs in the middle of its right-hand side.

## Result conversion

The last method of class Parser converts a parser's result. The parser  $P \wedge f$  succeeds exactly when  $P$  succeeds. In that case it returns  $P$ 's result converted using the function  $f$ . Here is the implementation of this method:

```
def ^^ [U](f: T => U): Parser[U] = new Parser[U] {
```

```
    def apply(in: Input) = p(in) match {
```

```
        case Success(x, in1) => Success(f(x), in1)
```

```
        case failure => failure
```

```
}
```

```
}
```

```
} // end Parser
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### Section 31.6

#### Chapter 31 · Combinator Parsing

663

Parsers that don't read any input

There are also two parsers that do not consume any input: success and failure. The parser `success(result)` always succeeds with the given result. The parser `failure(msg)` always fails with error message `msg`.

Both are implemented as methods in trait `Parsers`, the outer trait that also contains class `Parser`:

```
def success[T](v: T) = new Parser[T] {
```

```
    def apply(in: Input) = Success(v, in)
```

```

}

def failure(msg: String) = new Parser[Nothing] {

def apply(in: Input) = Failure(msg, in)

}

```

## Option and repetition

Also defined in trait Parsers are the option and repetition combinators opt, rep, and repsep. They are all implemented in terms of sequential composition, alternative, and result conversion:

```

def opt[T](p: => Parser[T]): Parser[Option[T]] = (
  p ^^ Some(_)
  | success(None)
)

def rep[T](p: Parser[T]): Parser[List[T]] = (
  p ~ rep(p) ^^ { case x ~ xs => x :: xs }
  | success(List())
)

def repsep[T, U](p: Parser[T],
  q: Parser[U]): Parser[List[T]] = (
  p ~ rep(q ~> p) ^^ { case r ~ rs => r :: rs }
  | success(List())
)
```

```
} // end Parsers
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 31.7](#)

### [Chapter 31 · Combinator Parsing](#)

664

31.7

String literals and regular expressions

The parsers you saw so far made use of string literals and regular expressions to parse single words. The support for these comes from `RegexParsers`, a subtrait of `Parsers`:

```
trait RegexParsers extends Parsers {
```

This trait is more specialized than trait `Parsers` in that it only works for inputs that are sequences of characters:

```
type Elem = Char
```

It defines two methods, `literal` and `regex`, with the following signatures:

```
implicit def literal(s: String): Parser[String] = ...
```

```
implicit def regex(r: Regex): Parser[String] = ...
```

Note that both methods have an `implicit` modifier, so they are automatically applied whenever a `String` or `Regex` is given but a `Parser` is expected. That's why you can write string literals and regular expressions directly in a grammar, without having to wrap them with one of these methods.

For instance, the parser `"(~expr~)"` will be automatically expanded to `literal("(")~expr~literal(")")`.

The RegexParsers trait also takes care of handling white space between symbols. To do this, it calls a method named handleWhiteSpace before running a literal or regex parser. The handleWhiteSpace method skips the longest input sequence that conforms to the whitespace regular expression, which is defined by default as follows:

```
protected val whitespace = """\s+""".r  
} // end RegexParsers
```

If you prefer a different treatment of white space, you can override the whitespace val. For instance, if you want white space not to be skipped at all, you can override whitespace with the empty regular expression: object MyParsers extends RegexParsers {

```
override val whitespace = "".r  
...  
}
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 31.8

### Chapter 31 · Combinator Parsing

665

31.8

#### Lexing and parsing

The task of syntax analysis is often split into two phases. The lexer phase recognizes individual words in the input and classifies them into some token classes. This phase is also called lexical analysis. This is followed by a syntactical analysis phase that analyzes sequences of tokens. Syntactical analysis is also sometimes just called parsing, even though this is slightly imprecise, as lexical analysis can also be regarded as a parsing problem.

The Parsers trait as described in the previous section can be used for either phase, because its input elements are of the abstract type Elem. For lexical analysis, Elem would be instantiated to Char, meaning the individual characters that make up a word are being parsed. The syntactical analyzer would in turn instantiate Elem to the type of token returned by the lexer.

Scala's parsing combinators provide several utility classes for lexical and syntactic analysis. These are contained in two sub-packages, one for each kind of analysis:

`scala.util.parsing.combinator.lexical`

`scala.util.parsing.combinator.syntactical`

If you want to split your parser into a separate lexer and syntactical analyzer, you should consult the Scaladoc documentation for these packages. But for simple parsers, the regular expression based approach shown in previously this chapter is usually sufficient.

## 31.9

### Error reporting

There's one final topic that was not covered yet: how does the parser issue an error message? Error reporting for parsers is somewhat of a black art. One problem is that when a parser rejects some input, it generally has encountered many different failures. Each alternative parse must have failed, and recursively so at each choice point. Which of the usually numerous failures should be emitted as error message to the user?

Scala's parsing library implements a simple heuristic: among all failures, the one that occurred at the latest position in the input is chosen. In other words, the parser picks the longest prefix that is still valid and issues an error message that describes why parsing the prefix could not be continued further. If there are several failure points at that latest position, the one that was visited last is chosen.

## Section 31.9

### Chapter 31 · Combinator Parsing

666

For instance, consider running the JSON parser on a faulty address book which starts with the line:

```
{ "name": John,
```

The longest legal prefix of this phrase is “{ “name”: ”. So the JSON parser will flag the word John as an error. The JSON parser expects a value at this point, but John is an identifier, which does not count as a value (presumably, the author of the document had forgotten to enclose the name in quotation marks). The error message issued by the parser for this document is:

[1.13] failure: "false" expected but identifier John found

```
{ "name": John,
```

^

The part that “false” was expected comes from the fact that "false" is the last alternative of the production for value in the JSON grammar. So this was the last failure at this point. Users who know the JSON grammar in detail can reconstruct the error message, but for non-experts this error message is probably surprising and can also be quite misleading.

A better error message can be engineered by adding a “catch-all” failure point as last alternative of a value production:

```
def value: Parser[Any] =
```

```
obj | arr | stringLit | floatingPointNumber | "null" |
```

"true" | "false" | failure("illegal start of value") This addition does not change the set of inputs that are accepted as valid documents. What it does

is improve the error messages, because now it will be the explicitly added failure that comes as last alternative and therefore gets reported:

[1.13] failure: illegal start of value

```
{ "name": John,
```

```
^
```

The implementation of the “latest possible” scheme of error reporting uses a field named `lastFailure`: in trait `Parsers` to mark the failure that occurred at the latest position in the input:

```
var lastFailure: Option[Failure] = None
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 31.10](#)

[Chapter 31 · Combinator Parsing](#)

667

The field is initialized to `None`. It is updated in the constructor of the `Failure` class:

```
case class Failure(msg: String, in: Input)  
extends ParseResult[Nothing] {  
  if (lastFailure.isDefined &&  
      lastFailure.get.in.pos <= in.pos)  
    lastFailure = Some(this)  
}
```

```

The field is read by the phrase method, which emits the final error message
if the parser failed. Here is the implementation of phrase in trait Parsers: def
phrase[T](p: Parser[T]) = new Parser[T] {

    lastFailure = None

    def apply(in: Input) = p(in) match {

        case s @ Success(out, in1) =>
            if (in1.atEnd) s
            else Failure("end of input expected", in1)

        case f : Failure =>
            lastFailure
    }
}

```

The phrase method runs its argument parser p. If p succeeds with a completely consumed input, the success result of p is returned. If p succeeds but the input is not read completely, a failure with message “end of input expected” is returned. If p fails, the failure or error stored in lastFailure is returned. Note that the treatment of lastFailure is non-functional; it is updated as a side effect by the constructor of Failure and by the phrase method itself. A functional version of the same scheme would be possible, but it would require threading the lastFailure value though every parser result, no matter whether this result is a Success or a Failure.

## 31.10

### Backtracking versus LL(1)

The parser combinators employ backtracking to choose between different parsers in an alternative. In an expression  $P \mid Q$ , if P fails, then Q is run on

## [Section 31.10](#)

### [Chapter 31 · Combinator Parsing](#)

668

the same input as P. This happens even if P has parsed some tokens before failing. In this case the same tokens will be parsed again by Q.

Backtracking imposes only a few restrictions on how to formulate a grammar so that it can be parsed. Essentially, you just need to avoid left-recursive productions. A production such as:

expr

::=

expr "+" term | term.

will always fail because expr immediately calls itself and thus never progresses any further.<sup>1</sup> On the other hand, backtracking is potentially costly because the same input can be parsed several times. Consider for instance the production:

expr

::=

term "+" expr | term.

What happens if the expr parser is applied to an input such as  $(1 + 2) * 3$

which constitutes a legal term? The first alternative would be tried, and would fail when matching the + sign. Then the second alternative would be tried on the same term and this would succeed. In the end the term ended up being parsed twice.

It is often possible to modify the grammar so that backtracking can be avoided. For instance, in the case of arithmetic expressions, either one of the following productions would work:

expr

::=

term [ "+" expr ].

expr

::=

term {"+" term}.

Many languages admit so-called “LL(1)” grammars.<sup>2</sup> When a combinator parser is formed from such a grammar, it will never backtrack, i.e., the input position will never be reset to an earlier value. For instance, the grammars for arithmetic expressions and JSON terms earlier in this chapter are both LL(1), so the backtracking capabilities of the parser combinator framework are never exercised for inputs from these languages.

The combinator parsing framework allows you to express the expectation that a grammar is LL(1) explicitly, using a new operator  $\sim!$ . This operator is like sequential composition  $\sim$  but it will never backtrack to “un-read” input<sup>1</sup>. There are ways to avoid stack overflows even in the presence of left-recursion, but this requires a more refined parsing combinator framework, which to date has not been implemented.

2Aho, et. al., Compilers: Principles, Techniques, and Tools. [[Aho86](#)]

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 31.11](#)

[Chapter 31 · Combinator Parsing](#)

elements that have already been parsed. Using this operator, the productions in the arithmetic expression parser could alternatively be written as follows:

```
def expr
```

```
: Parser[Any] =
```

```
term ~! rep("+" ~! term | "-" ~! term) def term
```

```
: Parser[Any] =
```

```
factor ~! rep("*" ~! factor | "/" ~! factor) def factor: Parser[Any] =
```

"(" ~! expr ~! ")" | floatingPointNumber One advantage of an LL(1) parser is that it can use a simpler input technique.

Input can be read sequentially, and input elements can be discarded once they are read. That's another reason why LL(1) parsers are usually more efficient than backtracking parsers.

## 31.11

### Conclusion

You have now seen all the essential elements of Scala's combinator parsing framework. It's surprisingly little code for something that's genuinely useful.

With the framework you can construct parsers for a large class of context-free grammars. The framework lets you get started quickly, but it is also customizable to new kinds of grammars and input methods. Being a Scala library, it integrates seamlessly with the rest of the language. So it's easy to integrate a combinator parser in a larger Scala program.

One downside of combinator parsers is that they are not very efficient, at least not when compared with parsers generated from special purpose tools such as Yacc or Bison. There are two reasons for this. First, the backtracking method used by combinator parsing is itself not very efficient. Depending on the grammar and the parse input, it might yield an exponential slow-down due to repeated backtracking. This can be fixed by

making the grammar LL(1) and by using the committed sequential composition operator,  $\sim!$ .

The second problem affecting the performance of combinator parsers is that they mix parser construction and input analysis in the same set of operations. In effect, a parser is generated anew for each input that's parsed.

This problem can be overcome, but it requires a different implementation of the parser combinator framework. In an optimizing framework, a parser would no longer be represented as a function from inputs to parse results.

Instead, it would be represented as a tree, where every construction step was

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 31.11](#)

### [Chapter 31 · Combinator Parsing](#)

670

represented as a case class. For instance, sequential composition could be represented by a case class Seq, alternative by Alt, and so on. The “outermost” parser method, phrase, could then take this symbolic representation of a parser and convert it to highly efficient parsing tables, using standard parser generator algorithms.

What's nice about all this is that from a user perspective nothing changes compared to plain combinator parsers. Users still write parsers in terms of ident, floatingPointNumber,  $\sim$ ,  $!$ , and so on. They need not be aware that these methods generate a symbolic representation of a parser instead of a parser function. Since the phrase combinator converts these representations into real parsers, everything works as before.

The advantage of this scheme with respect to performance is two-fold.

First, you can now factor out parser construction from input analysis. If you were to write:

```
val jsonParser = phrase(value)
```

and then apply jsonParser to several different inputs, the jsonParser would be constructed only once, not every time an input is read.

Second, the parser generation can use efficient parsing algorithms such as LALR(1).<sup>3</sup> These algorithms usually lead to much faster parsers than parsers that operate with backtracking.

At present, such an optimizing parser generator has not yet been written for Scala. But it would be perfectly possible to do so. If someone contributes such a generator, it will be easy to integrate into the standard Scala library.

Even postulating that such a generator will exist at some point in the future, however, there are reasons for keeping the current parser combinator framework around. It is much easier to understand and to adapt than a parser generator, and the difference in speed would often not matter in practice, unless you want to parse very large inputs.

3Aho, et. al., Compilers: Principles, Techniques, and Tools. [[Aho86](#)]

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 32

### GUI Programming

In this chapter you'll learn how to develop in Scala applications that use a graphical user interface (GUI). The applications we'll develop are based on a Scala library that provides access to Java's Swing framework of GUI classes.

Conceptually, the Scala library resembles the underlying Swing classes, but hides much of their complexity. You'll find out that developing GUI applications using the framework is actually quite easy.

Even with Scala's simplifications, a framework like Swing is quite rich, with many different classes and many methods in each class. To find your way in such a rich library, it helps to use an IDE such as Scala's Eclipse

plugin. The advantage is that the IDE can show you interactively with its command completion which classes are available in a package and which methods are available for objects you reference. This speeds up your learning considerably when you first explore an unknown library space.

## 32.1

### A first Swing application


As a first Swing application, we'll start with a window containing a single button. To program with Swing, you need to import various classes from Scala's Swing API package:

```
import scala.swing._
```

[Listing 32.1](#) shows the code of your first Swing application in Scala. If you compile and run that file, you should see a window as shown on the left of

[Figure 32.1](#). The window can be resized to a larger size as shown on the right of [Figure 32.1](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

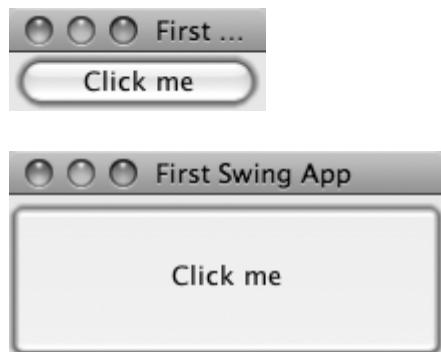

### [Section 32.1](#)

### [Chapter 32 · GUI Programming](#)

672

Figure 32.1 · A simple Swing application: initial (left) and resized (right).

```
import scala.swing._

object First SwingApp extends SimpleGUIApplication {

    def top = new MainFrame {

        title = "First Swing App"

        contents = new Button {

            text = "Click me"

        }
    }
}
```

Listing 32.1 · A simple Swing application in Scala.

If you analyze the code in [Listing 32.1](#) line by line, you'll notice the following elements:

```
object First SwingApp extends SimpleGUIApplication {
```

In the first line after the import, the First SwingApp object inherits from `scala.swing.SimpleGUIApplication`. This is different from traditional command-line applications, which may inherit from `scala.Application`.

The `SimpleGUIApplication` class already defines a main method that contains some setup code for Java's Swing framework. The main method then proceeds to call the `top` method, which you supply:

```
def top = new MainFrame {
```

The next line implements the `top` method. This method contains the code that defines your top-level GUI component. This is usually some kind of Frame—i.e., a window that can contain arbitrary data. In [Listing 32.1](#),

## [Section 32.1](#)

### [Chapter 32 · GUI Programming](#)

673

we chose a MainFrame as the top-level component. A MainFrame is like a normal Swing Frame except that closing it will also close the whole GUI application.

```
title = "First Swing App"
```

Frames have a number of attributes. Two of the most important are the frame's title, which will be written in the title bar, and its contents, which will be displayed in the window itself. In Scala's Swing API, such attributes are modeled as properties. You know from [Section 18.2](#) that properties are encoded in Scala as pairs of getter and setter methods. For instance, the title property of a Frame object is modeled as a getter method: def title: String

and a setter method:

```
def title_=(s: String)
```

It is this setter method that gets invoked by the above assignment to title.

The effect of the assignment is that the chosen title is shown in the header of the window. If you leave it out, the window will have an empty title.

```
contents = new Button {
```



The top frame is the root component of the Swing application. It is a Container, which means that further components can be defined in it. Every Swing container has a contents property, which allows you to get and set the components it contains. The getter contents of this property has type Seq[Component], indicating that a component can in general have several objects as its contents. Frames, however, always have just a single component as their contents. This component is set and potentially changed

using the setter `contents_=`. For example, in [Listing 32.1](#) a single Button constitutes the contents of the top frame.

```
text = "Click me"
```

The button also gets a title, in this case “Click me.”

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

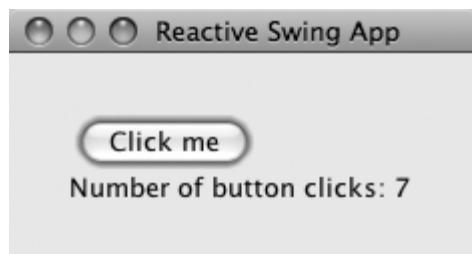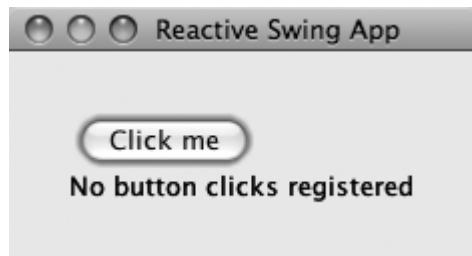

## [Section 32.2](#)

### [Chapter 32 · GUI Programming](#)

674

Figure 32.2 · A reactive Swing application: initial (left) after clicks (right).

```
import scala.swing._  
  
object SecondSwingApp extends SimpleGUIApplication {  
  
  def top = new MainFrame {  
  
    title = "Second Swing App"  
  
    val button = new Button {
```

```
text = "Click me"  
}  
  
val label = new Label {  
  
    text = "No button clicks registered"  
}  
  
contents = new BoxPanel(Orientation.Vertical) {  
  
    contents += button  
  
    contents += label  
  
    border = Swing.EmptyBorder(30, 30, 10, 30)  
}  
}  
}  
}
```

Listing 32.2 · Component assembly on a panel.

## 32.2

### Panels and layouts

As next step, we'll add some text as a second content element to the top frame of the application. The left part of [Figure 32.2](#) shows what the application should look like.

You saw in the last section that a frame contains exactly one child component. Hence, to make a frame with both a button and a label, you need to

## Section 32.2

### Chapter 32 · GUI Programming

675

create a different container component that holds both. That's what panels are used for. A Panel is a container that displays all the components it contains according to some fixed layout rules. There are a number of different possible layouts that are implemented by various subclasses of class Panel, ranging from simple to quite intricate. In fact, one of the hardest parts of a complex GUI application can be getting the layouts right —it's not easy to come up with something that displays reasonably well on all sorts of devices and for all window sizes.

[Listing 32.2](#) shows a complete implementation. In this class, the two sub-components of the top frame are named button and label. The button is defined as before. The label is a displayed text field that can't be edited:

```
val label = new Label {
```

```
    text = "No button clicks registered"
```

```
}
```

The code in [Listing 32.2](#) picks a simple vertical layout where components are stacked on top of each other in a BoxPanel:

```
contents = new BoxPanel(Orientation.Vertical) {
```

The contents property of the BoxPanel is an (initially empty) buffer, to which the button and label elements are added with the `+=` operator:

```
contents += button
```

```
contents += label
```

We also add a border around the two objects by assigning to the border property of the panel:

```
border = Swing.EmptyBorder(30, 30, 10, 30)
```

As is the case with other GUI components, borders are represented as objects. `EmptyBorder` is a factory method in object `Swing` that takes four parameters indicating the width of the borders on the top, right, bottom, and left sides of the objects to be drawn.

Simple as it is, the example has already shown the basic way to structure a GUI application. It is built from components, which are instances of `scala.swing` classes such as `Frame`, `Panel`, `Label` or `Button`. Components have properties, which can be customized by the application. `Panel` components can contain several other components in their `contents` property, so that in the end a GUI application consists of a tree of components.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 32.3

### Chapter 32 · GUI Programming

676

32.3

#### Handling events

On the other hand, the application still misses an essential property. If you run the code in [Listing 32.2](#) and click on the displayed button, nothing happens. In fact, the application is completely static; it does not react in any way to user events except for the close button of the top frame, which terminates the application. So as a next step, we'll refine the application so that it displays together with the button a label that indicates how often the button was clicked. The right part of [Figure 32.2](#) contains a snapshot of what the application should look like after a few button clicks.

To achieve this behavior, you need to connect a user-input event (the button was clicked) with an action (the displayed label is updated). Java and Scala have fundamentally the same "publish/subscribe" approach to event handling: Components may be publishers and/or subscribers. A publisher

publishes events. A subscriber subscribes with a publisher to be notified of any published events. Publishers are also called “event sources,” and subscribers are also called “event listeners”. For instance a Button is an event source, which publishes an event, ButtonClicked, indicating that the button was clicked.

In Scala, subscribing to an event source source is done by the call `listenTo(source)`. There’s also a way to unsubscribe from an event source using `deafTo(source)`. In the current example application, the first thing to do is to get the top frame to listen to its button, so that it gets notified of any events that the button issues. To do that you need to add the following call to the body of the top frame:

```
listenTo(button)
```

Being notified of events is only half the story; the other half is handling them.

It is here that the Scala Swing framework is most different from (and radically simpler than) the Java Swing API’s. In Java, signaling an event means calling a “notify” method in an object that has to implement some Listener interfaces. Usually, this involves a fair amount of indirection and boilerplate code, which makes event-handling applications hard to write and read.

By contrast, in Scala, an event is a real object that gets sent to subscribing components much like messages are sent to actors. For instance, pressing a button will create an event which is an instance of the following case class:  
`case class ButtonClicked(source: Button)`

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 32.3](#)

[Chapter 32 · GUI Programming](#)

The parameter of the case class refers to the button that was clicked. As with all other Scala Swing events, this event class is contained in a package named `scala.swing.event`.

To have your component react to incoming events you need to add a handler to a property called `reactions`. Here's the code that does this:

```
var nClicks = 0
```

```
reactions += {  
    case ButtonClicked(b) =>  
        nClicks += 1  
  
        label.text = "Number of button clicks: " + nClicks  
}
```

The first line above defines a variable, `nClicks`, which holds the number of times a button was clicked. The remaining lines add the code between braces as a handler to the `reactions` property of the top frame. Handlers are functions defined by pattern matching on events, much like an actor's receive blocks are defined by pattern matching on messages. The handler above matches events of the form `ButtonClicked(b)`, i.e., any event which is an instance of class `ButtonClicked`. The pattern variable `b` refers to the actual button that was clicked. The action that corresponds to this event in the code above increments `nClicks` and updates the text of the label.

Generally, a handler is a `PartialFunction` that matches on events and performs some actions. It is also possible to match on more than one kind of event in a single handler by using multiple cases.

The `reactions` property implements a collection, just like the `contents` property does. Some components come with predefined reactions. For instance, a `Frame` has a predefined reaction that it will close if the user presses the close button on the upper right. If you install your own reactions by adding them with `+=` to the `reactions` property, the reactions you define will be considered in addition to the standard ones. Conceptually, the

handlers installed in reactions form a stack. In the current example, if the top frame receives an event, the first handler tried will be the one that matches on ButtonClicked, because it was the last handler installed for the frame.

If the received event is of type ButtonClicked, the code associated with the pattern will be invoked. After that code has completed, the system will search for further handlers in the event stack that might also be applicable.

If the received event is not of type ButtonClicked, the event is immedi-

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

### [Section 32.3](#)

#### [Chapter 32 · GUI Programming](#)

678

```
import scala.swing._
```

```
import scala.swing.event._
```

```
object ReactiveSwingApp extends SimpleGUIApplication {
```

```
    def top = new MainFrame {
```

```
        title = "Reactive Swing App"
```

```
        val button = new Button {
```

```
            text = "Click me"
```

```
}
```

```
        val label = new Label {
```

```
            text = "No button clicks registered"
```

```

}

contents = new BoxPanel(Orientation.Vertical) {

    contents += button

    contents += label

    border = Swing.EmptyBorder(30, 30, 10, 30)

}

listenTo(button)

var nClicks = 0

reactions += {

    case ButtonClicked(b) =>

        nClicks += 1

        label.text = "Number of button clicks: " + nClicks

    }

}

}

```

Listing 32.3 · Implementing a reactive Swing application.


ately propagated to the rest of the installed handler stack. It's also possible to remove handlers from the reaction property, using the `-=` operator.

[Listing 32.3](#) shows the completed application, including reactions. The code illustrates the essential elements of a GUI application in Scala's Swing framework: The application consists of a tree of components, starting with the top frame. The components shown in the code are Frame, BoxPanel,

Button, and Label, but there are many other kinds of components defined in the Swing libraries. Each component is customized by setting attributes.

Two important attributes are contents, which fixes the children of a component in the tree, and reactions, which determines how the component reacts to events.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

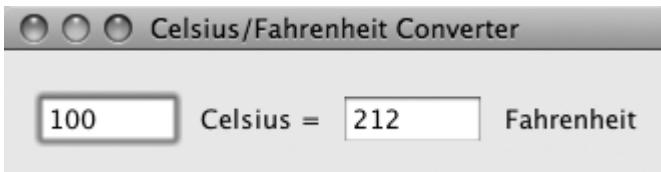

## Section 32.4

### Chapter 32 · GUI Programming

679

Figure 32.3 · A converter between degrees Celsius and Fahrenheit.

ponent in the tree, and reactions, which determines how the component reacts to events.

32.4

#### Example: Celsius/Fahrenheit converter

As another example, we'll write a GUI program that converts between temperature degrees in Celsius and Fahrenheit. The user interface of the program is shown in [Figure 32.3](#). It consists of two text fields (shown in white) with a label following each. One text field shows temperatures in degrees Celsius, the other in degrees Fahrenheit. Each of the two fields can be edited by the user of the application. Once the user has changed the temperature in either field, the temperature in the other field should automatically update.

[Listing 32.4](#) shows the complete code that implements this application.

The imports at the top of the code use a short-hand:

```
import swing._
```

```
import event._
```

This is in fact equivalent to the imports used before:

```
import scala.swing._
```

```
import scala.swing.event._
```

The reason you can use the shorthand is that packages nest in Scala. Because package `scala.swing` is contained in package `scala`, and everything in that package imported automatically, you can write just `swing` to refer to the package. Likewise, package `scala.swing.event`, is contained as subpackage `event` in package `scala.swing`. Because you have imported everything in `scala.swing` in the first import, you can refer to the `event` package with just `event` thereafter.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 32.4](#)

### [Chapter 32 · GUI Programming](#)

680

```
import swing._
```

```
import event._
```

```
object TempConverter extends SimpleGUIApplication {
```

```
    def top = new MainFrame {
```

```
        title = "Celsius/Fahrenheit Converter"
```

```
        object celsius extends TextField { columns = 5 }
```

```
        object fahrenheit extends TextField { columns = 5 }
```

```
contents = new FlowPanel {  
    contents += celsius  
    contents += new Label(" Celsius  
    =  
    ")  
    contents += fahrenheit  
    contents += new Label(" Fahrenheit")  
    border = Swing.EmptyBorder(15, 10, 10, 10)  
}  
  
listenTo(celsius, fahrenheit)  
reactions += {  
    case EditDone(`fahrenheit`) =>  
        val f = fahrenheit.text.toInt  
        val c = (f - 32) * 5 / 9  
        celsius.text = c.toString  
    case EditDone(`celsius`) =>  
        val c = celsius.text.toInt  
        val f = c * 9 / 5 + 32  
        fahrenheit.text = f.toString  
}
```

```
}
```

```
}
```

Listing 32.4 · An implementation of the temperature converter.

The two components celsius and fahrenheit in TempConverter are objects of class TextField. A TextField in Swing is a component that lets you edit a single line of text. It has a default width, which is given in the columns property measured in characters (set to 5 for both fields).

The contents of TempConverter are assembled into a panel, which includes the two text fields and two labels that explain what the fields are.

The panel is of class FlowPanel, which means it displays all its elements

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 32.5

### Chapter 32 · GUI Programming

681

one after another, in one or more rows, depending on the width of the frame.

The reactions of TempConverter are defined by a handler that contains two cases. Each case matches an EditDone event for one of the two text fields. Such an event gets issued when a text field has been edited by the user. Note the form of the patterns, which include back ticks around the element names:

```
case EditDone(`celsius`)
```

As was explained in [Section 15.2](#), the back ticks around celsius ensure that the pattern matches only if the source of the event was the celsius object. If you had omitted the back ticks and just written case EditDone(celsius), the pattern would have matched every event of class EditDone. The changed

field would then be stored in the pattern variable celsius. Obviously, this is not what you want. Alternatively, you could have defined the two `TextField` objects starting with upper case characters, i.e., `Celsius` and `Fahrenheit`.

In that case you could have matched them directly without back ticks, as in case `EditDone(Celsius)`.

The two actions of the `EditDone` events convert one quantity to another.

Each starts by reading out the contents of the modified field and converting it to an `Int`. It then applies the formula for converting one temperature degree to the other, and stores the result back as a string in the other text field.

## 32.5

### Conclusion

This chapter has given you a first taste of GUI programming, using Scala's wrappers for the Swing framework. It has shown how to assemble GUI components, how to customize their properties, and how to handle events. For space reasons, we could discuss only a small number of simple components.

There are many more kinds of components. You can find out about them by consulting the Scala documentation of the package `scala.swing`. The next section will develop an example of a more complicated Swing application.

There are also many tutorials on the original Java Swing framework, on which the Scala wrapper is based.<sup>1</sup> The Scala wrappers resemble the underlying Swing classes, but try to simplify concepts where possible and make them more uniform. The simplification makes extensive use of the properties of the Scala language. For instance, Scala's emulation of properties and `1See`, for instance, The Java Tutorials. [[Jav](#)]

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 32.5](#)

## [Chapter 32 · GUI Programming](#)

682

its operator overloading allow convenient property definitions using assignments and `+=` operations. Its “everything is an object” philosophy makes it possible to inherit the main method of a GUI application. The method can thus be hidden from user applications, including the boilerplate code for setting things up that comes with it. Finally, and most importantly, Scala’s first-class functions and pattern matching make it possible to formulate event handling as the reactions component property, which greatly simplifies life for the application developer.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Chapter 33

### The SCells Spreadsheet

In the previous chapters you saw many different constructs of the Scala programming language. In this chapter you’ll see how these constructs play together in the implementation of a sizable application. The task is to write a spreadsheet application, which will be named SCells.

There are several reasons why this task is interesting. First, everybody knows spreadsheets, so it is easy to understand what the application should do. Second, spreadsheets are programs that exercise a large range of different computing tasks. There’s the visual aspect, where a spreadsheet is seen as a rich GUI application. There’s the symbolic aspect, having to do with formulas and how to parse and interpret them. There’s the calculational aspect, dealing with how to update possibly large tables incrementally. There’s the reactive aspect, where spreadsheets are seen as programs that react in intricate ways to events. Finally, there’s the component aspect where the application is constructed as a set of reusable components. All these aspects will be treated in depth in this chapter.

33.1


## The visual framework

We'll start by writing the basic visual framework of the application. [Figure 33.1](#) shows the first iteration of the user interface.

You can see that a spreadsheet is a scrollable table. It has rows going from 0 to 99 and columns going from A to Z. You express this in Swing by defining a spreadsheet as a ScrollPane containing a Table. [Listing 33.1](#) shows the code.

The spreadsheet component shown in [Listing 33.1](#) is defined in package org.stairwaybook.scells, which will contain all classes, traits, and

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

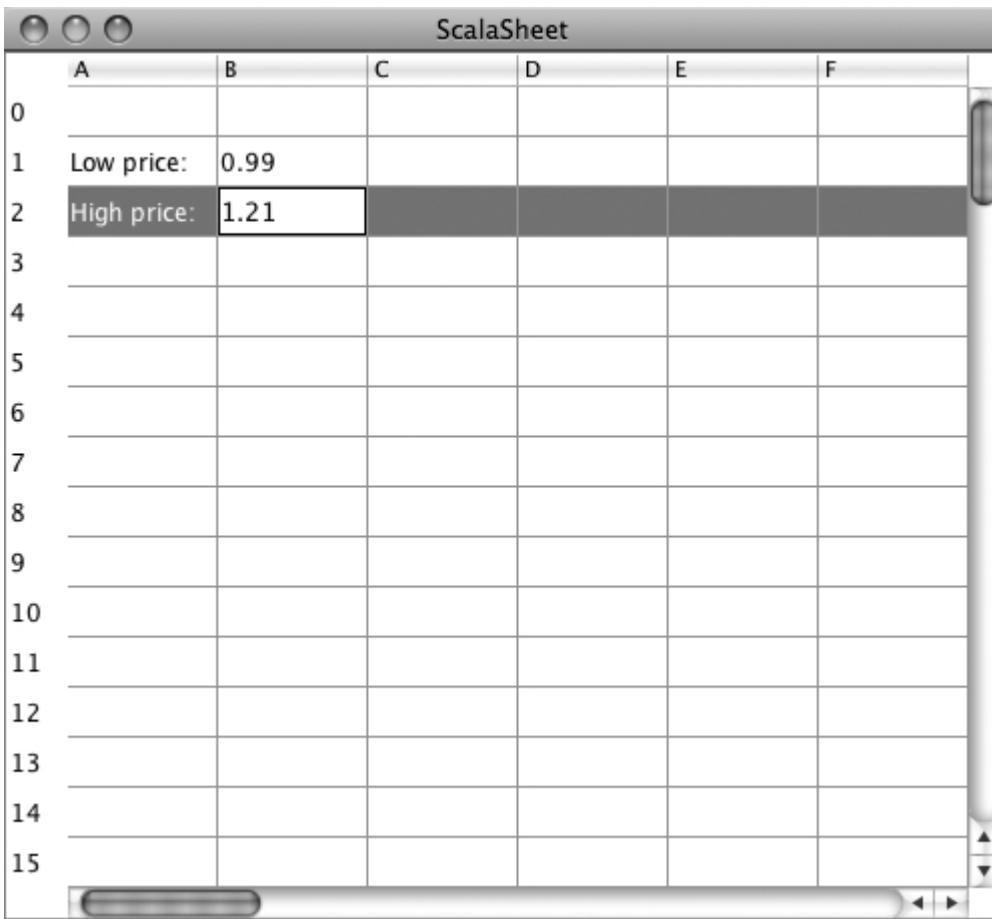

[Section 33.1](#)

## Chapter 33 · The SCells Spreadsheet

684

Figure 33.1 · A simple spreadsheet table.

objects needed for the application. It imports from package `scala.swing` essential elements of Scala's Swing wrapper. `Spreadsheet` itself is a class that takes height and width (in numbers of cells) as parameters. The class extends `ScrollPane`, which gives it the scroll-bars at the bottom and right in

[Figure 33.1](#). It contains two sub-components named `table` and `rowHeader`.

The `table` component is an instance of an anonymous subclass of class `scala.swing.Table`. The four lines in its body set some of its attributes: `rowHeight` for the height of a table row in points, `autoResizeMode` to turn auto-sizing the table off, `showGrid` to show a grid of lines between cells, and `gridColor` to set the color of the grid to a dark gray.

The `rowHeader` component, which contains the row-number headers at the left of the spreadsheet in [Figure 33.1](#), is a `ListView` that displays in its

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 33.1](#)

[Chapter 33 · The SCells Spreadsheet](#)

685

```
package org.stairwaybook.scells
```

```
import swing._
```

```
class Spreadsheet(val height: Int, val width: Int)
```

```
extends ScrollPane {
```

```
    val table = new Table(height, width) {
```

```

rowHeight = 25

autoResizeMode = Table.AutoResizeMode.Off

showGrid = true

gridColor = new java.awt.Color(150, 150, 150)

}

val rowHeader =  

    new ListView((0 until height) map (_.toString)) {  

        fixedCellWidth = 30  

        fixedCellHeight = table.rowHeight  

    }

viewportView = table  

rowHeaderView = rowHeader  

}

```

**Listing 33.1 ·** Code for spreadsheet in [Figure 33.1.](#)

elements the strings 0 through 99. The two lines in its body fix the width of a cell to be 30 points and the height to be the same as the table's rowHeight.

The whole spreadsheet is assembled by setting two fields in ScrollPane.

The field viewportView is set to the table, and the field rowHeaderView is set to the rowHeader list. The difference between the two views is that a view port of a scroll pane is the area that scrolls with the two bars, whereas the row header on the left stays fixed when you move the horizontal scroll bar. By some quirk, Swing already supplies by default a column header at the top of the table, so there's no need to define one explicitly.

To try out the rudimentary spreadsheet shown in [Listing 33.1](#), you just need to define a main program that creates Spreadsheet component. Such a program is shown in [Listing 33.2](#).

The Main program inherits from SimpleGUIApplication, which takes care of all the low-level details that need to be set up before a Swing application can be run. You only need to define the top-level window of the appli-

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 33.2](#)

### [Chapter 33 · The SCells Spreadsheet](#)

686

```
package org.stairwaybook.scells

import swing._

object Main extends SimpleGUIApplication {

    def top = new MainFrame {
        title = "ScalaSheet"

        contents = new Spreadsheet(100, 26)
    }
}
```

[Listing 33.2 · The main program for the spreadsheet application.](#)

cation in the top method. In our example, top is a MainFrame that has two elements defined: its title, set to “ScalaSheet,” and its contents, set to an instance of class Spreadsheet with 100 rows and 26 columns. That’s all. If you launch this application with scala org.stairwaybook.scells.Main, you should see the spreadsheet in [Figure 33.1](#).

## 33.2

### Disconnecting data entry and display

If you play a bit with the spreadsheet written so far, you'll quickly notice that the output that's displayed in a cell is always exactly what you entered in the cell. A real spreadsheet does not behave like that. In a real spreadsheet, you would enter a formula and you'd see its value. So what is entered into a cell is different from what is displayed.

As a first step to a real spreadsheet application, you should concentrate on disentangling data entry and display. The basic mechanism for display is contained in the rendererComponent method of class Table.

By default, rendererComponent always displays what's entered. If you want to change that, you need to override rendererComponent to do something different. [Listing 33.3](#) shows a new version of Spreadsheet with a rendererComponent method.

The rendererComponent method overrides a default method in class Table. It takes four parameters. The isSelected and hasFocus parameters are Booleans that indicate whether the cell has been selected and whether it has focus, meaning that keyboard events will go into into the cell. The remaining two parameters, row and column, give the cell's coordinates.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 33.2](#)

[Chapter 33 · The SCells Spreadsheet](#)

687

```
package org.stairwaybook.scells
```

```
import swing._
```

```
class Spreadsheet(val height: Int, val width: Int)
```

```

extends ScrollPane {

    val cellModel = new Model(height, width)

    import cellModel._

    val table = new Table(height, width) {
        // settings as before...

        override def rendererComponent(isSelected: Boolean,
            hasFocus: Boolean, row: Int, column: Int): Component =
            if (hasFocus) new TextField(userData(row, column))
            else

        new Label(cells(row)(column).toString) {
            xAlignment = Alignment.Right
        }
    }

    def userData(row: Int, column: Int): String = {
        val v = this(row, column)
        if (v == null) "" else v.toString
    }
}

// rest as before...
}

```

Listing 33.3 · A spreadsheet with a rendererComponent method.

The new rendererComponent method checks whether the cell has input focus. If hasFocus is true, the cell is used for editing. In this case you want to display an editable TextField that contains the data the user has entered so far. This data is returned by the helper method userData, which displays the contents of the table at a given row and column. The contents are retrieved by the call this(row, column).<sup>1</sup> The userData method also takes care to display a null element as the empty string instead of “null”.

<sup>1</sup>Although “this(row, column)” may look similar to a constructor invocation, it is in this case an invocation of the apply method on the current Table instance.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 33.2

### Chapter 33 · The SCells Spreadsheet

688

```
package org.stairwaybook.scells

class Model(val height: Int, val width: Int) {

    case class Cell(row: Int, column: Int)

    val cells = new Array[Array[Cell]](height, width)

    for (i <- 0 until height; j <- 0 until width)

        cells(i)(j) = new Cell(i, j)

}
```

**Listing 33.4 · First version of the Model class.**

So far so good. But what should be displayed if the cell does not have focus? In a real spreadsheet this would be the value of a cell. Thus, there are really two tables at work. The first table, named table contains what the user

entered. A second “shadow” table contains the internal representation of cells and what should be displayed. In the spreadsheet example, this table is a two-dimensional array called `cells`. If a cell at a given row and column does not have editing focus, the `rendererComponent` method will display the element `cells(row)(column)`. The element cannot be edited, so it should be displayed in a `Label` instead of in an editable `TextField`.

It remains to define the internal array of cells. You could do this directly in the `Spreadsheet` class, but it’s generally preferable to separate the view of a GUI component from its internal model. That’s why in the example above the `cells` array is defined in a separate class named `Model`. The model is integrated into the `Spreadsheet` by defining a value `cellModel` of type `Model`. The import clause that follows this `val` definition makes the members of `cellModel` available inside `Spreadsheet` without having to prefix them. [Listing 33.4](#) shows a first simplified version of a `Model` class.

The class defines an inner class, `Cell`, and a two-dimensional array, `cells`, of `Cell` elements. Each element is initialized to be a fresh `Cell`.

That’s it. If you compile the modified `Spreadsheet` class with the `Model` trait and run the `Main` application you should see a window as in [Figure 33.2](#).

The objective of this section was to arrive at a design where the displayed value of a cell is different from the string that was entered into it. This objective has clearly been met, albeit in a very crude way. In the new spreadsheet you can enter anything you want into a cell, but it will always display just its coordinates once it loses focus. Clearly, we are not done yet.

ScalaSheet

	A	B	C	D	E	F
0	Cell(0,0)	Cell(0,1)	Cell(0,2)	Cell(0,3)	Cell(0,4)	Cell(0,5)
1	Cell(1,0)	Cell(1,1)	Cell(1,2)	Cell(1,3)	Cell(1,4)	Cell(1,5)
2	Cell(2,0)	Cell(2,1)	Cell(2,2)	Cell(2,3)	Cell(2,4)	Cell(2,5)
3	Cell(3,0)	Cell(3,1)	Cell(3,2)	Cell(3,3)	Cell(3,4)	Cell(3,5)
4	Cell(4,0)	Cell(4,1)	Cell(4,2)	Cell(4,3)	Cell(4,4)	Cell(4,5)
5	Cell(5,0)	Cell(5,1)	Cell(5,2)	Cell(5,3)	Cell(5,4)	Cell(5,5)
6	Cell(6,0)	Cell(6,1)	Cell(6,2)	Cell(6,3)	Cell(6,4)	Cell(6,5)
7	Cell(7,0)	Cell(7,1)	Cell(7,2)	Cell(7,3)	Cell(7,4)	Cell(7,5)
8	Cell(8,0)	Cell(8,1)	Cell(8,2)	Cell(8,3)	Cell(8,4)	Cell(8,5)
9	Cell(9,0)	Cell(9,1)	Cell(9,2)	Cell(9,3)	Cell(9,4)	Cell(9,5)
10	Cell(10,0)	Cell(10,1)		Cell(10,3)	Cell(10,4)	Cell(10,5)
11	Cell(11,0)	Cell(11,1)	Cell(11,2)	Cell(11,3)	Cell(11,4)	Cell(11,5)
12	Cell(12,0)	Cell(12,1)	Cell(12,2)	Cell(12,3)	Cell(12,4)	Cell(12,5)
13	Cell(13,0)	Cell(13,1)	Cell(13,2)	Cell(13,3)	Cell(13,4)	Cell(13,5)
14	Cell(14,0)	Cell(14,1)	Cell(14,2)	Cell(14,3)	Cell(14,4)	Cell(14,5)
15	Cell(15,0)	Cell(15,1)	Cell(15,2)	Cell(15,3)	Cell(15,4)	Cell(15,5)

## Section 33.3

### Chapter 33 · The SCells Spreadsheet

689

Figure 33.2 · Cells displaying themselves.

33.3

Formulas

In reality, a spreadsheet cell holds two things: An actual value and a formula to compute this value. There are three types of formulas in a spreadsheet: 1. Numeric values such as 1.22, -3, or 0.

2. Textual labels such as Annual sales, Deprecation, or total.

3. Formulas that compute a new value from the contents of cells, such as “=add(A1,B2)”, or “=sum(mul(2, A2), C1:D16)”

A formula that computes a value always starts with an equals sign and is followed by an arithmetic expression. The SCells spreadsheet has a particularly simple and uniform convention for arithmetic expressions: every

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 33.3](#)

### [Chapter 33 · The SCells Spreadsheet](#)

690

expression is an application of some function to a list of arguments. The function name is an identifier such as add for binary addition, or sum for summation of an arbitrary number of operands. A function argument can be a number, a reference to a cell, a reference to a range of cells such as C1:D16, or another function application. You’ll see later that SCells has an open architecture that makes it easy to install your own functions via mixin composition.

The first step to handling formulas is writing down the types that represent them. As you might expect, the different kinds of formulas are represented by case classes. [Listing 33.5](#) shows the contents of a file named Formulas.scala, where these case classes are defined:

```
package org.stairwaybook.scells

trait Formula

case class Coord(row: Int, column: Int) extends Formula {

    override def toString = ('A' + column).toChar.toString + row
}
```

```

case class Range(c1: Coord, c2: Coord) extends Formula {

override def toString = c1.toString + ":" + c2.toString

}

case class Number(value: Double) extends Formula {

override def toString = value.toString

}

case class Textual(value: String) extends Formula {

override def toString = value

}

case class Application(function: String,
arguments: List[Formula]) extends Formula {

override def toString =

function + arguments.mkString(", ", ", ")

}

object Empty extends Textual("")

```

Listing 33.5 · Classes representing formulas.

The root of the class hierarchy shown in [Listing 33.5](#) is a trait `Formula`.

This trait has five case classes as children:

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 33.4](#)

## Chapter 33 · The SCells Spreadsheet

691

Coord

for cell coordinates such as A3,

Range

for cell ranges such as A3:B17,

Number

for floating-point numbers such as 3.1415,

Textual

for textual labels such as Deprecation,

Application

for function applications such as sum(A1,A2).

Each case class overrides the `toString` method so that it displays its kind of formula in the standard way shown above. For convenience there's also an `Empty` object that represents the contents of an empty cell. The `Empty` object is an instance of the `Textual` class with an empty string argument.

33.4

Parsing formulas

In the previous section you saw the different kinds of formulas and how they display as strings. In this section you'll see how to reverse the process: that is, how to transform a user input string into a `Formula` tree. The rest of this section explains one by one the different elements of a class `FormulaParsers`, which contains the parsers that do the transformation.

The class builds on the combinator framework given in [Chapter 31](#). Specifically, formula parsers are an instance of the RegexParsers class explained in that chapter:

```
package org.stairwaybook.scells

import scala.util.parsing.combinator._

object FormulaParsers extends RegexParsers {
```

The first two elements of the FormulaParser class are auxiliary parsers for identifiers and decimal numbers:

```
def ident: Parser[String] = """[a-zA-Z_]\w*""".r def decimal: Parser[String] = """-?\d+(\.\d*)?""".r As you can see from the first regular expression above, an identifier starts with a letter or underscore. This is followed by an arbitrary number of
```

“word” characters represented by the regular expression code \w, which recognizes letters, digits or underscores. The second regular expression describes decimal numbers, which consist of an optional minus sign, one or more digits that are represented by regular expression code \d, and an optional decimal part consisting of a period followed by zero or more digits.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 33.4](#)

[Chapter 33 · The SCells Spreadsheet](#)

692

The next element of class FormulaParsers is the cell parser, which recognizes the coordinates of a cell, such as C11 or B2. It first calls a regular expression parser that determines the form of a coordinate: a single letter followed by one or more digits. The string returned from that parser is then converted to a cell coordinate by separating the letter from the numerical part and converting the two parts to indices for the cell’s column and row: def cell: Parser[Coord] =

```
"""[A-Za-z]\d+""".r ^ { s => val column = s.charAt(0) - 'A'  

  val row = s.substring(1).toInt  

  Coord(row, column)  

}
```

Note that the cell parser is a bit restrictive in that it allows only column coordinates consisting of a single letter. Hence the number of spreadsheet columns is in effect restricted to be at most 26, because further columns cannot be parsed. It's a good idea to generalize the parser so that it accepts cells with several leading letters. This is left as an exercise to you.

The range parser recognizes a range of cells. Such a range is composed of two cell coordinates with a colon between them:

```
def range: Parser[Range] =  

  cell~":"cell ^ {  

    case c1~":"c2 => Range(c1, c2)  

}
```

The number parser recognizes a decimal number, which is converted to a Double and wrapped in an instance of the Number class: def number: Parser[Number] =

```
decimal ^ (d => Number(d.toDouble))
```

The application parser recognizes a function application. Such an application is composed of an identifier followed by a list of argument expressions in parentheses:

```
def application: Parser[Application] =  

  ident~("("~repsep(expr, ",")~")" ^ {
```

```
case f~"(~ps~)" => Application(f, ps)
```

```
}
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 33.4](#)

### [Chapter 33 · The SCells Spreadsheet](#)

693

The expr parser recognizes a formula expression—either a top-level formula following an ‘=’, or an argument to a function. Such a formula expression is defined to be a cell, a range of cells, a number, or an application: def expr: Parser[Formula] =

```
range | cell | number | application
```

This definition of the expr parser contains a slight oversimplification because ranges of cells should only appear as function arguments; they should not be allowed as top-level formulas. You could change the formula grammar so that the two uses of expressions are separated, and ranges are excluded syntactically from top-level formulas. In the spreadsheet presented here such an error is instead detected once an expression is evaluated.

The textual parser recognizes an arbitrary input string, as long as it does not start with an equals sign (recall that strings that start with ‘=’ are considered to be formulas):

```
def textual: Parser[Textual] =
```

```
"""[^=].*""".r ^ Textual
```

The formula parser recognizes all kinds of legal inputs into a cell. A formula is either a number, or a textual entry, or a formula starting with an equals sign:

```
def formula: Parser[Formula] =
```

```
number | textual | "=" ~> expr
```

This concludes the grammar for spreadsheet cells. The final method `parse` uses this grammar in a method that converts an input string into a Formula tree:

```
def parse(input: String): Formula =  
  parseAll(formula, input) match {  
    case Success(e, _) => e  
    case f: NoSuccess => Textual("[+" + f.msg + "]")  
  }  
} //end FormulaParsers
```

The `parse` method parses all of the input with the formula parser. If that succeeds, the resulting formula is returned. If it fails, a `Textual` object with an error message is returned instead.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 33.4](#)

### [Chapter 33 · The SCells Spreadsheet](#)

694

```
package org.stairwaybook.scells  
  
import swing._  
  
import event._  
  
class Spreadsheet(val height: Int, val width: Int) ... {  
  
  val table = new Table(height, width) {  
  
    ...
```

```

reactions += {

  case TableUpdated(table, rows, column) =>

    for (row <- rows)

      cells(row)(column).formula =

        FormulaParsers.parse(userData(row, column))

    }

}

}

```

**Listing 33.6 · A spreadsheet that parses formulas.**

That's everything there is to parsing formulas. The only thing that remains is to integrate the parser into the spreadsheet. To do this, you can enrich the Cell class in class Model by a formula field: case class Cell(row: Int, column: Int) {

```

var formula: Formula = Empty

override def toString = formula.toString

}

```

In the new version of the Cell class, the `toString` method is defined to display the cell's formula. That way you can check whether formulas have been correctly parsed.

The last step in this section is to integrate the parser into the spreadsheet.

Parsing a formula happens as a reaction to the user's input into a cell. A completed cell input is modeled in the Swing library by a `TableUpdated` event.

The TableUpdated class is contained in package `scala.swing.event`. The event is of the form:

`TableUpdated(table, rows, column)`

It contains the table that was changed, as well as a set of coordinates of affected cells given by rows and column. The rows parameter is a range

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

ScalaSheet					
	A	B	C	D	E
0					
1	test data	10.0			
2		11.0			
3		12.0			
4		13.0			
5		14.0			
6		15.0			
7		prod(B1:B6)			
8		=add(1,X)			
9					
10					
11					
12					
13					
14					
15					

## [Section 33.4](#)

[Chapter 33](#) · [The SCells Spreadsheet](#)

695

Figure 33.3 · Cells displaying their formulas.

value of type Range[Int].<sup>2</sup> The column parameter is an integer. So in general a TableUpdated event can refer to several affected cells, but they would be on a consecutive range of rows and share the same column.

Once a table is changed, the affected cells need to be re-parsed. To react to a TableUpdated event, you add a case to the reactions value of the table component, as is shown in [Listing 33.6](#). Now, whenever the table is edited the formulas of all affected cells will be updated by parsing the corresponding user data. When compiling the classes discussed so far and launching the scells.Main application you should see a spreadsheet application like the one shown in [Figure 33.3](#). You can edit cells by typing into them. After editing is done, a cell displays the formula it contains. You can 2Range[Int] is also the type of a Scala expression such as “1 to N”.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 33.5](#)

### [Chapter 33 · The SCells Spreadsheet](#)

696

also try to type some illegal input such as the one reading =add(1, X) in the field that has the editing focus in [Figure 33.3](#). Illegal input will show up as an error message. For instance, once you’d leave the edited field in

[Figure 33.3](#) you should see the error message [`(' expected] in the cell (to see all of the error message you might need to widen the column by dragging the separation between the column headers to the right).

33.5

## Evaluation

Of course, in the end a spreadsheet should evaluate formulas, not just display them. In this section, we’ll add the necessary components to achieve this.

What's needed is a method, evaluate, which takes a formula and returns the value of that formula in the current spreadsheet, represented as a Double. We'll place this method in a new trait, Evaluator. The method needs to access the cells field in class Model to find out about the current values of cells that are referenced in a formula. On the other hand, the Model class needs to call evaluate. Hence, there's a mutual dependency between the Model and the Evaluator. A good way to express such mutual dependencies between classes was shown in [Chapter 27](#): you use inheritance in one direction and self types in the other.

In the spreadsheet example, class Model inherits from Evaluator and thus gains access to its evaluation method. To go the other way, class Evaluator defines its self type to be Model, like this: package org.stairwaybook.scells

```
trait Evaluator { this: Model => ...}
```

That way, the this value inside class Evaluator is assumed to be Model and the cells array is accessible by writing either cells or this.cells.

Now that the wiring is done, we'll concentrate on defining the contents of class Evaluator. [Listing 33.7](#) shows the implementation of the evaluate method. As you might expect, the method contains a pattern match over the different types of formulas. For a coordinate Coord(row, column), it returns the value of the cells array at that coordinate. For a number Number(v), it returns the value v. For a textual label Textual(s), it returns zero. Finally, for an application Application(function, arguments), it computes the values of all arguments, retrieves a function object correspond-

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 33.5](#)

[Chapter 33 · The SCells Spreadsheet](#)

697

```
def evaluate(e: Formula): Double = try {
```

```

e match {

  case Coord(row, column) =>
    cells(row)(column).value

  case Number(v) =>
    v

  case Textual(_) =>
    0

  case Application(function, arguments) =>
    val argvals = arguments flatMap evalList
    operations(function)(argvals)

}

} catch {

  case ex: Exception => Math.NaN_DOUBLE

}

```

Listing 33.7 · The evaluate method of trait Evaluator.

ing to the function name from an operations table and applies that function to all argument values.

The operations table maps function names to function objects. It is defined as follows:

```

type Op = List[Double] => Double

val operations = new collection.mutable.HashMap[String, Op]

```

As you can see from this definition, operations are modeled as functions from lists of values to values. The Op type introduces a convenient alias for the type of an operation.

The computation in evaluate is wrapped in a try-catch to guard against input errors. There are actually quite a few things that can go wrong when evaluating a cell formula: coordinates might be out of range; function names might be undefined; functions might have the wrong number of arguments; arithmetic operations might be illegal or overflow. The reaction to any of these errors is the same: a “not-a-number” value is returned. The returned value, Math.NaN\_DOUBLE is the IEEE representation for a computation that does not have a representable floating-point value. This might happen because of an overflow or a division by zero, for example. The evaluate

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 33.5](#)

### [Chapter 33 · The SCells Spreadsheet](#)

698

method of [Listing 33.7](#) chooses to return the same value also for all other kinds of errors. The advantage of this scheme is that it’s simple to understand and doesn’t require much code to implement. Its disadvantage is that all kinds of errors are lumped together, so a spreadsheet user does not get any detailed feedback on what went wrong. If you wish you can experiment with more refined ways of representing errors in the SCells application.

The evaluation of arguments is different from the evaluation of top-level formulas. Arguments may be lists whereas top-level functions may not. For instance, the argument expression A1:A3 in sum(A1:A3) returns the values of cells A1, A2, A3 in a list. This list is then passed to the sum operation. It’s also possible to mix lists and single values in argument expressions, for instance the operation sum(A1:A3, 1.0, C7), which would sum up five values.

To handle arguments that might evaluate to lists, there's another evaluation function, called evalList. This function takes a formula and returns a list of values. Here is its definition:

```
private def evalList(e: Formula): List[Double] = e match {  
    case Range(_, _) => references(e) map (_.value)  
    case _ => List(evaluate(e))  
}
```

If the formula argument passed to evalList is a Range, the returned value is a list consisting of the values of all cells referenced by the range. For every other formula the result is a list consisting of the single result value of that formula. The cells referenced by a formula are computed by a third function, references. Here is its definition:

```
def references(e: Formula): List[Cell] = e match {  
    case Coord(row, column) =>  
        List(cells(row)(column))  
    case Range(Coord(r1, c1), Coord(r2, c2)) =>  
        for (row <- (r1 to r2).toList; column <- c1 to c2) yield cells(row)(column)  
    case Application(function, arguments) =>  
        arguments flatMap references  
    case _ =>  
        List()  
}
```

} // end Evaluator

## Section 33.6

### Chapter 33 · The SCells Spreadsheet

699

The references method is actually more general than needed right now in that it computes the list of cells referenced by any sort of formula, not just a Range formula. It will turn out later that the added functionality is needed to compute the sets of cells that need updating. The body of the method is a straightforward pattern match on kinds of formulas. For a coordinate Coord(row, column), it returns a single-element list containing the cell at that coordinate. For a range expression Range(coord1, coord2), it returns all cells between the two coordinates, computed by a for expression.

For a function application Application(function, arguments), it returns the cells referenced by each argument expression, concatenated via flatMap into a single list. For the other two types of formulas, Textual and Number, it returns an empty list.

33.6

#### Operation libraries

The class Evaluator itself defines no operations that can be performed on cells: its operations table is initially empty. The idea is to define such operations in other traits, which are then mixed into the Model class.

#### Listing 33.8

shows an example trait that implements common arithmetic operations:  
package org.stairwaybook.scells

```
trait Arithmetic { this: Evaluator =>
```

```
operations += (
```

```
"add"
```

```

-> { case List(x, y) => x + y },
"sub"

-> { case List(x, y) => x - y },
"div"

-> { case List(x, y) => x / y },
"mul"

-> { case List(x, y) => x * y },
"mod"

-> { case List(x, y) => x % y },
"sum"

-> { xs => (0.0 /: xs)(_ + _) },
"prod" -> { xs => (1.0 /: xs)(_ * _) }

)
}

```

Listing 33.8 · A library for arithmetic operations.

Interestingly, this trait has no exported members. The only thing it does is populate the operations table during its initialization. It gets access to

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 33.6](#)

[Chapter 33 · The SCells Spreadsheet](#)

that table by using a self type Evaluator, i.e., by the same technique the Arithmetic class uses to get access to the model.

Of the seven operations that are defined by the Arithmetic trait, five are binary operations and two take an arbitrary number of arguments. The binary operations all follow the same schema. For instance, the addition operation add is defined by the expression:

```
{ case List(x, y) => x + y }
```

That is, it expects an argument list consisting of two elements x and y and returns the sum of x and y. If the argument list contains a number of elements different from two, a MatchError is thrown. This corresponds to the general

“let it crash” philosophy of SCell’s evaluation model, where incorrect input is expected to lead to a runtime exception that then gets caught by the try-catch inside the evaluation method.

The last two operations, sum and prod, take a list of arguments of arbitrary length and insert a binary operation between successive elements. So they are instances of the “fold left” schema that’s expressed in class List by the /: operation. For instance, to sum a list of numbers List(x, y, z), the operation computes  $0 + x + y + z$ . The first operand, 0, is the result if the list is empty.

You can integrate this operation library into the spreadsheet application by mixing the Arithmetic trait into the Model class, like this: package org.stairwaybook.scells

```
class Model(val height: Int, val width: Int)  
  
extends Evaluator with Arithmetic {  
  
case class Cell(row: Int, column: Int) {  
  
var formula: Formula = Empty  
  
def value = evaluate(formula)
```

```

override def toString = formula match {

  case Textual(s) => s

  case _ => value.toString

}

}

... // rest as before

}

```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

ScalaSheet					
	A	B	C	D	E
0					
1	Test data	10.0	20.0		
2		11.0	21.0		
3		12.0	22.0		
4		13.0	23.0		
5		46.0	=sum(C1:C4)		
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					

[Section 33.6](#)

## Chapter 33 · The SCells Spreadsheet

701

Figure 33.4 · Cells that evaluate.

Another change in the Model class concerns the way cells display themselves. In the new version, the displayed value of a cell depends on its formula. If the formula is a Textual field, the contents of the field are displayed literally. In all other cases, the formula is evaluated and the result value of that evaluation is displayed.

If you compile the changed traits and classes and relaunch the Main program you get something that starts to resemble a real spreadsheet. [Figure 33.4](#) shows an example. You can enter formulas into cells and get them to evaluate themselves. For instance, once you close the editing focus on cell C5 in [Figure 33.4](#), you should see 86.0, the result of evaluating the formula sum(C1:C4).

However, there's a crucial element still missing. If you change the value

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 33.7](#)

## Chapter 33 · The SCells Spreadsheet

702

of cell C1 in [Figure 33.4](#) from 20 to 100, the sum in cell C5 will not be automatically updated to 166. You'll have to click on C5 manually to see a change in its value. What's still missing is a way to have cells recompute their values automatically after a change.

33.7

Change propagation

If a cell's value has changed, all cells that depend on that value should have their results recomputed and redisplayed. The simplest way to achieve this would be to recompute the value of every cell in the spreadsheet after each change. However such an approach does not scale well as the spreadsheet grows in size.

A better approach is to recompute the values of only those cells that refer to a changed cell in their formula. The idea is to use an event-based publish/subscribe framework for change propagation: once a cell gets assigned a formula, it will subscribe to be notified of all value changes in cells to which the formula refers. A value change in one of these cells will trigger a re-evaluation of the subscriber cell. If such a re-evaluation causes a change in the value of the cell, it will in turn notify all cells that depend on it. The process continues until all cell values have stabilized, i.e., there are no more changes in the values of any cell.<sup>3</sup>

The publish/subscribe framework is implemented in class Model using the standard event mechanism of Scala's Swing framework. Here's a new (and final) version of this class:

```
package org.stairwaybook.scells  
import swing._  
  
class Model(val height: Int, val width: Int)  
  
extends Evaluator with Arithmetic {
```

Compared to the previous version of Model, this version adds a new import of swing.\_, which makes Swing's event abstractions directly available.

The main modifications of class Model concern the nested class Cell.

Class Cell now inherits from Publisher, so that it can publish events. The event-handling logic is completely contained in the setters of two properties: value and formula. Here is Cell's new version:

<sup>3</sup>This assumes that there are no cyclic dependencies between cells. We discuss dropping this assumption at the end of this chapter.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Section 33.7

### Chapter 33 · The SCells Spreadsheet

703

```
case class Cell(row: Int, column: Int) extends Publisher {  
  override def toString = formula match {  
    case Textual(s) => s  
    case _ => value.toString  
  }  
}
```

To the outside, it looks like value and formula are two variables in class Cell. Their actual implementation is in terms of two private fields that are equipped with public getters, value and formula, and setters, value\_= and formula\_=. Here are the definitions implementing the value property:

```
private var v: Double = 0
```

```
def value: Double = v  
  
def value_=(w: Double) {  
  if (!(v == w || v.isNaN && w.isNaN)) {  
    v = w  
    publish(ValueChanged(this))  
  }  
}
```

}

The value\_= setter assigns a new value w to the private field v. If the new value is different from the old one, it also publishes a ValueChanged event with the cell itself as argument. Note that the test whether the value has changed is a bit tricky because it involves the value NaN. The Java spec says that NaN is different from every other value, including itself! Therefore, a test whether two values are the same has to treat NaN specially: two values v, w are the same if they are equal with respect to ==, or they are both the value NaN, i.e., v.isNaN and w.isNaN both yield true.

Whereas the value\_= setter does the publishing in the publish/subscribe framework, the formula\_= setter does the subscribing:

```
private var f: Formula = Empty  
  
def formula: Formula = f  
  
def formula_=(f: Formula) {  
    for (c <- references(formula)) deafTo(c)  
    this.f = f  
    for (c <- references(formula)) listenTo(c)  
    value = evaluate(f)  
}
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Section 33.7](#)

[Chapter 33 · The SCells Spreadsheet](#)

If a cell is assigned a new formula, it first unsubscribes with `deafTo` from all cells referenced by the previous formula value. It then stores the new formula in the private variable `f` and subscribes with `listenTo` to all cells referenced by it. Finally, it recomputes its value using the new formula.

The last piece of code in the revised class `Cell` specifies how to react to a `ValueChanged` event:

```
reactions += {  
    case ValueChanged(_) => value = evaluate(formula)  
}  
} // end class Cell
```

The `ValueChanged` class is also contained in class `Model`: `case class ValueChanged(cell: Cell) extends event.Event`. The rest of class `Model` is as before:

```
val cells = new Array[Array[Cell]](height, width)  
for (i <- 0 until height; j <- 0 until width)  
    cells(i)(j) = new Cell(i, j)  
} // end class Model
```

The spreadsheet code is now almost complete. The final piece missing is the re-display of modified cells. So far, all value propagation concerned the internal `Cell` values only; the visible table was not affected. One way to change this would be to add a `redraw` command to the `value_=` setter. However, this would undermine the strict separation between model and view that you have seen so far. A more modular solution is to notify the table of all `ValueChanged` events and let it do the redrawing itself. [Listing 33.9](#) shows the final spreadsheet component, which implements this scheme.

Class Spreadsheet of [Listing 33.9](#) has only two new revisions. First, the table component now subscribes with listenTo to all cells in the model.

Second, there's a new case in the table's reactions: if it is notified of a ValueChanged(cell) event, it demands a redraw of the corresponding cell with a call of updateCell(cell.row, cell.column).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 33.7](#)

### [Chapter 33 · The SCells Spreadsheet](#)

705

```
package org.stairwaybook.scells

import swing._, event._

class Spreadsheet(val height: Int, val width: Int)
  extends ScrollPane {

  val cellModel = new Model(height, width)

  import cellModel._

  val table = new Table(height, width) {
    ... // settings as in Listing 33.1

    override def rendererComponent(
      isSelected: Boolean, hasFocus: Boolean,
      row: Int, column: Int) =
      ... // as in Listing 33.3
```

```

def userData(row: Int, column: Int): String =
  ... // as in Listing 33.3

  reactions += {

    case TableUpdated(table, rows, column) =>
      for (row <- rows)
        cells(row)(column).formula =
          FormulaParsers.parse(userData(row, column))

    case ValueChanged(cell) =>
      updateCell(cell.row, cell.column)

  }

  for (row <- cells; cell <- row) listenTo(cell)

}

val rowHeader = new ListView(0 until height) {
  fixedCellWidth = 30
  fixedCellHeight = table.rowHeight
}

viewportView = table
rowHeaderView = rowHeader
}

```

[Listing 33.9](#) · The finished spreadsheet component.

## Section 33.8

### Chapter 33 · The SCells Spreadsheet

706

33.8

#### Conclusion

The spreadsheet developed in this chapter is fully functional, even though at some points it adopts the simplest solution to implement rather than the most convenient one for the user. That way, it could be written in just under 200 lines of code. Nevertheless, the architecture of the spreadsheet makes modifications and extensions easy. In case you would like to experiment with the code a bit further, here are some suggestions of what you could change or add:

1. You could make the spreadsheet resizable, so that the number of rows and columns can be changed interactively.
2. You could add new kinds of formulas, for instance binary operations, or other functions.
3. You might think about what to do when cells refer recursively to themselves. For instance, if cell A1 holds the formula  $\text{add}(B1, 1)$  and cell B1 holds the formula  $\text{mul}(A1, 2)$ , a re-evaluation of either cell will trigger a stack-overflow. Clearly, that's not a very good solution. As alternatives, you could either disallow such a situation, or just compute one iteration each time one of the cells is touched.
4. You could enhance error handling, giving more detailed messages describing what went wrong.
5. You could add a formula entry field at the top of the spreadsheet, so that long formulas could be entered more conveniently.

At the beginning of this book we stressed the scalability aspect of Scala.

We claimed that the combination of Scala's object-oriented and functional constructs makes it suitable for programs ranging from small scripts to very large systems. The spreadsheet presented here is clearly still a small system, even though it would probably take up much more than 200 lines in most other languages. Nevertheless, you can see many of the details that make Scala scalable at play in this application.

The spreadsheet uses Scala's classes and traits with their mixin composition to combine its components in flexible ways. Recursive dependencies between components are expressed using self types. The need for static state is completely eliminated—the only top-level components that are not classes

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Section 33.8](#)

### [Chapter 33 · The SCells Spreadsheet](#)

707

are formula trees and formula parsers, and both of these are purely functional. The application also uses higher-order functions and pattern matching extensively, both for accessing formulas and for event handling. So it is a good showcase of how functional and object-oriented programming can be combined smoothly.

One important reason why the spreadsheet application is so concise is that it can base itself on powerful libraries. The parser combinator library provides in effect an internal domain-specific language for writing parsers.

Without it, parsing formulas would have been much more difficult. The event handling in Scala's Swing libraries is a good example of the power of control abstractions. If you know Java's Swing libraries, you probably appreciate the conciseness of Scala's reactions concept, particularly when compared to the tedium of writing notify methods and implementing

listener interfaces in the classical publish/subscribe design pattern. So the spreadsheet demonstrates the benefits of extensibility, where high-level libraries can be made to look just like language extensions.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Appendix A

### Scala scripts on Unix and Windows

If you’re on some flavor of Unix, you can run a Scala script as a shell script by prepending a “pound bang” directive at the top of the file. For example, type the following into a file named helloarg:

```
#!/bin/sh

exec scala "$0" "$@"

!#
// Say hello to the first argument

println("Hello, "+ args(0) +"!")
```

The initial #!/bin/sh must be the very first line in the file. Once you set its execute permission:

```
$ chmod +x helloarg
```

You can run the Scala script as a shell script by simply saying: \$ ./helloarg globe

If you’re on Windows, you can achieve the same effect by naming the file helloarg.bat and placing this at the top of your script:

```
::#!@echo off
```

```
call scala %0 %*
```

```
goto :eof
```

```
::#!#
```

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Glossary

**algebraic data type** A type defined by providing several alternatives, each of which comes with its own constructor. It usually comes with a way to decompose the type through pattern matching. The concept is found in specification languages and functional programming languages. Algebraic data types can be emulated in Scala with case classes.

**alternative** A branch of a match expression. It has the form “case pattern => expression.” Another name for alternative is case.

**annotation** An annotation appears in source code and is attached to some part of the syntax. Annotations are computer processable, so you can use them to effectively add an extension to Scala.

**anonymous class** An anonymous class is a synthetic subclass generated by the Scala compiler from a new expression in which the class or trait name is followed by curly braces. The curly braces contains the body of the anonymous subclass, which may be empty. However, if the name following new refers to a trait or class that contains abstract members, these must be made concrete inside the curly braces that define the body of the anonymous subclass.

**anonymous function** Another name for function literal.

**apply** You can apply a method, function, or closure to arguments, which means you invoke it on those arguments.

**argument** When a function is invoked, an argument is passed for each parameter of that function. The parameter is the variable that refers to the

argument. The argument is the object passed at invocation time. In addition, applications can take (command line) arguments that show up in the `Array[String]` passed to main methods of singleton objects.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Glossary](#)

710

**assign** You can assign an object to a variable. Afterwards, the variable will refer to the object.

**auxiliary constructor** Extra constructors defined inside the curly braces of the class definition, which look like method definitions named `this`, but with no result type.

**block** One or more expressions and declarations surrounded by curly braces.

When the block evaluates, all of its expressions and declarations are processed in order, and then the block returns the value of the last expression as its own value. Blocks are commonly used as the bodies of functions, for expressions, while loops, and any other place where you want to group a number of statements together. More formally, a block is an encapsulation construct for which you can only see side effects and a result value. The curly braces in which you define a class or object do not, therefore, form a block, because fields and methods (which are defined inside those curly braces) are visible from the outside. Such curly braces form a template.

**bound variable** A bound variable of an expression is a variable that's both used and defined inside the expression. For instance, in the function literal expression `(x: Int) => (x, y)`, both variables `x` and `y` are used, but only `x` is bound, because it is defined in the expression as an `Int` and the sole argument to the function described by the expression.

**by-name parameter** A parameter that is marked with a `=>` in front of the parameter type, e.g., `(x: => Int)`. The argument corresponding to a by-name parameter is evaluated not before the method is invoked, but each time the parameter is referenced by name inside the method. If a parameter is not by-name, it is by-value.

**by-value parameter** A parameter that is not marked with a `=>` in front of the parameter type, e.g., `(x: Int)`. The argument corresponding to a by-value parameter is evaluated before the method is invoked. By-value parameters contrast with by-name parameters.

**class** Defined with the `class` keyword, a class may either be abstract or concrete, and may be parameterized with types and values when instantiated. In “`new Array[String](2)`”, the class being instantiated

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Glossary](#)

711

is `Array` and the type of the value that results is `Array[String]`. A class that takes type parameters is called a type constructor. A type can be said to have a class as well, as in: the class of type `Array[String]`

is `Array`.

**closure** A function object that captures free variables, and is said to be “closed” over the variables visible at the time it is created.

**companion class** A class that shares the same name with a singleton object defined in the same source file. The class is the singleton object’s companion class.

**companion object** A singleton object that shares the same name with a class defined in the same source file. Companion objects and classes have access to each other’s private members. In addition, any implicit conversions defined in the companion object will be in scope anywhere the class is used.

**contravariant** A contravariant annotation can be applied to a type parameter of a class or trait by putting a minus sign (-) before the type parameter. The class or trait then subtypes contravariantly with—

in the opposite direction as—the type annotated parameter. For example, Function1 is contravariant in its first type parameter, and so Function1[Any, Any] is a subtype of Function1[String, Any].

**covariant** A covariant annotation can be applied to a type parameter of a class or trait by putting a plus sign (+) before the type parameter. The class or trait then subtypes covariantly with—in the same direction as—the type annotated parameter. For example, List is covariant in its type parameter, so List[String] is a subtype of List[Any].

**currying** A way to write functions with multiple parameter lists. For instance def f(x: Int)(y: Int) is a curried function with two parameter lists. A curried function is applied by passing several arguments lists, as in: f(3)(4). However, it is also possible to write a partial application of a curried function, such as f(3).

**declare** You can declare an abstract field, method, or type, which gives an entity a name but not an implementation. The key difference between

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Glossary](#)

712

declarations and definitions is that definitions establish an implementation for the named entity, declarations do not.

**define** To define something in a Scala program is to give it a name and an implementation. You can define classes, traits, singleton objects, fields, methods, local functions, local variables, etc. Because definitions always involve some kind of implementation, abstract members are declared not defined.

**direct subclass** A class is a direct subclass of its direct superclass.

**direct superclass** The class from which a class or trait it is immediately derived, the nearest class above it in its inheritance hierarchy. If a class Parent is mentioned in a class Child's optional extends clause, then Parent is the direct superclass of Child. If a trait is mentioned in Child's extends clause, the trait's direct superclass is the Child's direct superclass. If Child has no extends clause, then AnyRef is the direct superclass of Child. If a class's direct superclass takes type parameters, for example class Child extends Parent[String], the direct superclass of Child is still Parent, not Parent[String]. On the other hand, Parent[String] would be the direct supertype of Child. See supertype for more discussion of the distinction between class and type.

**equality** When used without qualification, equality is the relation between values expressed by '==' . See also reference equality.

**existential type** An existential type includes references to type variables that are unknown. For example, Array[T] forSome { type T } is an existential type. It is an array of T, where T is some completely unknown type. All that is assumed about T is that it exists at all. This assumption is weak, but it means at least that an Array[T] forSome

{ type T } is indeed an array and not a banana.

**expression** Any bit of Scala code that yields a result. You can also say that an expression evaluates to a result or results in a value.

**filter** An if followed by a boolean expression in a for expression. In for(i < 1 to 10; if i % 2 == 0), the filter is "if i % 2 == 0".

The value to the right of the if is the filter expression.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Glossary](#)

**filter expression** A filter expression is the boolean expression following an if in a for expression. In `for(i <- 1 to 10; if i % 2 == 0)`, the filter expression is “`i % 2 == 0`”.

**first-class function** Scala supports first-class functions, which means you can express functions in function literal syntax, i.e., `(x: Int) => x + 1`, and that functions can be represented by objects, which are called function values.

**for comprehension** Another name for for expression.

**free variable** A free variable of an expression is a variable that’s used inside the expression but not defined inside the expression. For instance, in the function literal expression `(x: Int) => (x, y)`, both variables `x` and `y` are used, but only `y` is a free variable, because it is not defined inside the expression.

**function** A function can be invoked with a list of arguments to produce a result. A function has a parameter list, a body, and a result type.

Functions that are members of a class, trait, or singleton object are called methods. Functions defined inside other functions are called local functions. Functions with the result type of `Unit` are called procedures. Anonymous functions in source code are called function literals. At run time, function literals are instantiated into objects called function values.

**function literal** A function with no name in Scala source code, specified with function literal syntax. For example, `(x: Int, y: Int) => x + y`.

**function value** A function object that can be invoked just like any other function. A function value’s class extends one of the `FunctionN` traits (e.g., `Function0`, `Function1`) from package `scala`, and is usually expressed in source code via function literal syntax. A function value is “invoked” when its `apply` method is called. A function value that captures free variables is a closure.

**functional style** The functional style of programming emphasizes functions and evaluation results and deemphasizes the order in which operations

occur. The style is characterized by passing function values into looping methods, immutable data, methods with no side effects. It is the

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Glossary](#)

714

dominant paradigm of languages such as Haskell and Erlang, and contrasts with the imperative style.

**generator** A generator defines a named val and assigns to it a series of values in a for expression. For example, in for(i <- 1 to 10), the generator is “i <- 1 to 10”. The value to the right of the <- is the generator expression.

**generator expression** A generator expression generates a series of values in a for expression. For example, in for(i <- 1 to 10), the generator expression is “1 to 10”.

**generic class** A class that takes type parameters. For example, because `scala.List` takes a type parameter, `scala.List` is a generic class.

**generic trait** A trait that takes type parameters. For example, because trait `scala.collection.Set` takes a type parameter, it is a generic trait.

**helper function** A function whose purpose is to provide a service to one or more other functions nearby. Helper functions are often implemented as local functions.

**helper method** A helper function that's a member of a class. Helper methods are often private.

**immutable** An object is immutable if its value cannot be changed after it is created in any way visible to clients. Objects may or may not be immutable.

**imperative style** The imperative style of programming emphasizes careful sequencing of operations so that their effects happen in the right order.

The style is characterized by iteration with loops, mutating data in place, and methods with side effects. It is the dominant paradigm of languages such as C, C++, C# and Java, and contrasts with the functional style.

initialize When a variable is defined in Scala source code, you must initialize it with an object.

instance An instance, or class instance, is an object, a concept that exists only at run time.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Glossary](#)

715

instantiate To instantiate a class is to make a new object from the class, an action that happens only at run time.

invariant Invariant is used in two ways. It can mean a property that always holds true when a data structure is well-formed. For example, it is an invariant of a sorted binary tree that each node is ordered before its right subnode, if it has a right subnode. Invariant is also sometimes used as a synonym for nonvariant: “class Array is invariant in its type parameter.”

invoke You can invoke a method, function, or closure on arguments, meaning its body will be executed with the specified arguments.

JVM The JVM is the Java Virtual Machine, or runtime, that hosts a running Scala program.

literal 1, "One", and  $(x: \text{Int}) \Rightarrow x + 1$  are examples of literals. A literal is a shorthand way to describe an object, where the shorthand exactly mirrors the structure of the created object.

local function A local function is a def defined inside a block. To contrast, a def defined as a member of a class, trait, or singleton object is called a method.

**local variable** A local variable is a val or var defined inside a block. Although similar to local variables, parameters to functions are not referred to as local variables, but simply as parameters or “variables” without the “local.”

**member** A member is any named element of the template of a class, trait, or singleton object. A member may be accessed with the name of its owner, a dot, and its simple name. For example, top-level fields and methods defined in a class are members of that class. A trait defined inside a class is a member of its enclosing class. A type defined with the type keyword in a class is a member of that class. A class is a member of the package in which it is defined. By contrast, a local variable or local function is not a member of its surrounding block.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Glossary](#)

716

**message** Actors communicate with each other by sending each other messages. Sending a message does not interrupt what the receiver is doing. The receiver can wait until it has finished its current activity and its invariants have been reestablished.

**meta-programming** Meta-programming software is software whose input is itself software. Compilers are meta-programs, as are tools like scaladoc. Meta-programming software is required in order to do anything with an annotation.

**method** A method is a function that is a member of some class, trait, or singleton object.

**mixin** Mixin is what a trait is called when it is being used in a mixin composition. In other words, in “trait Hat,” Hat is just a trait, but in “new Cat extends AnyRef with Hat,” Hat can be called a mixin.

When used as a verb, “mix in” is two words. For example, you can mix traits into classes or other traits.

**mixin composition** The process of mixing traits into classes or other traits.

Mixin composition differs from traditional multiple inheritance in that the type of the super reference is not known at the point the trait is defined, but rather is determined anew each time the trait is mixed into a class or other trait.

**modifier** A keyword that qualifies a class, trait, field, or method definition in some way. For example, the private modifier indicates that a class, trait, field, or method being defined is private.

**multiple definitions** The same expression can be assigned in multiple definitions if you use the syntax `val v1, v2, v3 = exp.`

**nonvariant** A type parameter of a class or trait is by default nonvariant.

The class or trait then does not subtype when that parameter changes.

For example, because class `Array` is nonvariant in its type parameter, `Array[String]` is neither a subtype nor a supertype of `Array[Any]`.

**operation** In Scala, every operation is a method call. Methods may be invoked in operator notation, such as `b + 2`, and when in that notation, `+` is an operator.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Glossary](#)

717

**parameter** Functions may take zero to many parameters. Each parameter has a name and a type. The distinction between parameters and arguments is that arguments refer to the actual objects passed when a function is invoked. Parameters are the variables that refer to those passed arguments.

**parameterless function** A function that takes no parameters, which is defined without any empty parentheses. Invocations of parameterless functions may not supply parentheses. This supports the uniform access principle, which enables the def to be changed into a val without requiring a change to client code.

**parameterless method** A parameterless method is a parameterless function that is a member of a class, trait, or singleton object.

**parametric field** A field defined as a class parameter.

**partially applied function** A function that's used in an expression and that misses some of its arguments. For instance, if function f has type Int => Int => Int, then f and f(1) are partially applied functions.

**path-dependent type** A type like swiss.cow.Food. The swiss.cow part is a path that forms a reference to an object. The meaning of the type is sensitive to the path you use to access it. The types swiss.cow.Food and fish.Food, for example, are different types.

**pattern** In a match expression alternative, a pattern follows each case keyword and precedes either a pattern guard or the => symbol.

**pattern guard** In a match expression alternative, a pattern guard can follow a pattern. For example, in “case x if x % 2 == 0 => x + 1”, the pattern guard is “if x % 2 == 0”. A case with a pattern guard will only be selected if the pattern matches and the pattern guard yields true.

**predicate** A predicate is a function with a Boolean result type.

**primary constructor** The main constructor of a class, which invokes a superclass constructor, if necessary, initializes fields to passed values, and executes any top-level code defined between the curly braces of the class. Fields are initialized only for value parameters not passed to the superclass constructor, except for any that are not used in the body of the class and can therefore be optimized away.

## Glossary

718

**procedure** A procedure is a function with result type of Unit, which is therefore executed solely for its side effects.

**reassignable** A variable may or may not be reassignable. A var is reassignable while a val is not.

**recursive** A function is recursive if it calls itself. If the only place the function calls itself is the last expression of the function, then the function is tail recursive.

**reference** A reference is the Java abstraction of a pointer, which uniquely identifies an object that resides on the JVM's heap. Reference type variables hold references to objects, because reference types (instances of AnyRef) are implemented as Java objects that reside on the JVM's heap. Value type variables, by contrast, may sometimes hold a reference (to a boxed wrapper type) and sometimes not (when the object is being represented as a primitive value). Speaking generally, a Scala variable refers to an object. The term "refers" is more abstract than

"holds a reference." If a variable of type scala.Int is currently represented as a primitive Java int value, then that variable still refers to the Int object, but no reference is involved.

**reference equality** Reference equality means that two references identify the very same Java object. Reference equality can be determined, for reference types only, by calling eq in AnyRef. (In Java programs, reference equality can be determined using == on Java reference types.) **reference type** A reference type is a subclass of AnyRef. Instances of reference types always reside on the JVM's heap at run time.

**referential transparency** A property of functions that are independent of temporal context and have no side effects. For a particular input, an invocation of a referentially transparent function can be replaced by its result without changing the program semantics.

refers A variable in a running Scala program always refers to some object.

Even if that variable is assigned to null, it conceptually refers to the Null object. At runtime, an object may be implemented by a Java object or a value of a primitive type, but Scala allows programmers to

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Glossary](#)

719

think at a higher level of abstraction about their code as they imagine it running. See also reference.

**result** An expression in a Scala program yields a result. The result of every expression in Scala is an object.

**result type** A method's result type is the type of the value that results from calling the method. (In Java, this concept is called the return type.) **return** A function in a Scala program returns a value. You can call this value the result of the function. You can also say the function results in the value. The result of every function in Scala is an object.

**runtime** The Java Virtual Machine, or JVM, that hosts a running Scala program. Runtime encompasses both the virtual machine, as defined by the Java Virtual Machine Specification, and the runtime libraries of the Java API and the standard Scala API. The phrase at run time (with a space between run and time) means when the program is running, and contrasts with compile time.

**runtime type** The type of an object at run time. To contrast, a static type is the type of an expression at compile time. Most runtime types are simply bare classes with no type parameters. For example, the runtime type of "Hi" is String, and the runtime type of  $(x: \text{Int}) \Rightarrow x + 1$  is Function1. Runtime types can be tested with isInstanceOf.

**script** A file containing top level definitions and statements, which can be run directly with scala without explicitly compiling. A script must end in an expression, not a definition.

**selector** The value being matched on in a match expression. For example, in “`s match { case _ => }`”, the selector is `s`.

**self type** A self type of a trait is the assumed type of this, the receiver, to be used within the trait. Any concrete class that mixes in the trait must ensure that its type conforms to the trait’s self type. The most common use of self types is for dividing a large class into several traits as described in [Chapter 27](#).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Glossary](#)

720

**semi-structured data** XML data is semi-structured. It is more structured than a flat binary file or text file, but it does not have the full structure of a programming language’s data structures.

**serialization** You can serialize an object into a byte stream which can then be saved to files or transmitted over the network. You can later deserialize the byte stream, even on different computer, and obtain an object that is the same as the original serialized object.

**shadow** A new declaration of a local variable shadows one of the same name in an enclosing scope.

**signature** Signature is short for type signature.

**singleton object** An object defined with the `object` keyword. Each singleton object has one and only one instance. A singleton object that shares its name with a class, and is defined in the same source file as that class, is that class’s companion object. The class is its companion class. A singleton object that doesn’t have a companion class is a standalone object.

**standalone object** A singleton object that has no companion class.

**statement** An expression, definition, or import, i.e., things that can go into a template or a block in Scala source code.

**static type** See type.

**subclass** A class is a subclass of all of its superclasses and supertraits.

**subtrait** A trait is a subtrait of all of its supertraits.

**subtype** The Scala compiler will allow any of a type's subtypes to be used as a substitute wherever that type is required. For classes and traits that take no type parameters, the subtype relationship mirrors the subclass relationship. For example, if class Cat is a subclass of abstract class Animal, and neither takes type parameters, type Cat is a subtype of type Animal. Likewise, if trait Apple is a subtrait of trait Fruit, and neither takes type parameters, type Apple is a subtype of type Fruit. For classes and traits that take type parameters, however, variance comes into play. For example, because abstract class List

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Glossary](#)

721

is declared to be covariant in its lone type parameter (i.e., List is declared List[+A]), List[Cat] is a subtype of List[Animal], and List[Apple] a subtype of List[Fruit]. These subtype relationships exist even though the class of each of these types is List. By contrast, because Set is not declared to be covariant in its type parameter (i.e., Set is declared Set[A] with no plus sign), Set[Cat] is not a subtype of Set[Animal]. A subtype should correctly implement the contracts of its supertypes, so that the Liskov Substitution Principle applies, but the compiler only verifies this property at the level of type checking.

**superclass** A class's superclasses include its direct superclass, its direct superclass's direct superclass, and so on, all the way up to Any.

**supertrait** A class's or trait's supertraits, if any, include all traits directly mixed into the class or trait or any of its superclasses, plus any supertraits of those traits.

**supertype** A type is a supertype of all of its subtypes.

**synthetic class** A synthetic class is generated automatically by the compiler rather than being written by hand by the programmer.

**tail recursive** A function is tail recursive if the only place the function calls itself is the last operation of the function.

**target typing** Target typing is a form of type inference that takes into account the type that's expected. In `nums.filter((x) => x > 0)`, for example, the Scala compiler infers type of `x` to be the element type of `nums`, because the `filter` method invokes the function on each element of `nums`.

**template** A template is the body of a class, trait, or singleton object definition. It defines the type signature, behavior and initial state of the class, trait, or object.

**trait** A trait, which is defined with the `trait` keyword, is like an abstract class that cannot take any value parameters and can be "mixed into"

classes or other traits via the process known as mixin composition.

When a trait is being mixed into a class or trait, it is called a mixin. A

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Glossary](#)

722

trait may be parameterized with one or more types. When parameterized with types, the trait constructs a type. For example, `Set` is a trait that takes a

single type parameter, whereas `Set[Int]` is a type. Also, `Set` is said to be “the trait of” type `Set[Int]`.

**type** Every variable and expression in a Scala program has a type that is known at compile time. A type restricts the possible values to which a variable can refer, or an expression can produce, at run time. A variable or expression’s type can also be referred to as a static type if necessary to differentiate it from an object’s runtime type. In other words,

“type” by itself means static type. Type is distinct from class because a class that takes type parameters can construct many types. For example, `List` is a class, but not a type. `List[T]` is a type with a free type parameter. `List[Int]` and `List[String]` are also types (called ground types because they have no free type parameters). A type can have a “class” or “trait.” For example, the class of type `List[Int]` is `List`. The trait of type `Set[String]` is `Set`.

**type constraint** Some annotations are type constraints, meaning that they add additional limits, or constraints, on what values the type includes.

For example, `@positive` could be a type constraint on the type `Int`, limiting the type of 32-bit integers down to those that are positive.

Type constraints are not checked by the standard Scala compiler, but must instead be checked by an extra tool or by a compiler plugin.

**type constructor** A class or trait that takes type parameters.

**type parameter** A parameter to a generic class or generic method that must be filled in by a type. For example, class `List` is defined as “`class List[T] { . . . }`”, and method `identity`, a member of object `Predef`, is defined as “`def identity[T](x:T) = x`”. The `T` in both cases is a type parameter.

**type signature** A method’s type signature comprises its name, the number, order, and types of its parameters, if any, and its result type. The type signature of a class, trait, or singleton object comprises its name, the type signatures of all of its members and constructors, and its declared inheritance and mixin relations.

## [Glossary](#)

723

**uniform access principle** The uniform access principle states that variables and parameterless functions should be accessed using the same syntax.

Scala supports this principle by not allowing parentheses to be placed at call sites of parameterless functions. As a result, a parameterless function definition can be changed to a val, or vice versa, without affecting client code.

**unreachable** At the Scala level, objects can become unreachable, at which point the memory they occupy may be reclaimed by the runtime.

Unreachable does not necessarily mean unreferenced. Reference types (instances of AnyRef) are implemented as objects that reside on the JVM's heap. When an instance of a reference type becomes unreachable, it indeed becomes unreferenced, and is available for garbage collection. Value types (instances of AnyVal) are implemented as both primitive type values and as instances of Java wrapper types (such as java.lang.Integer), which reside on the heap. Value type instances can be boxed (converted from a primitive value to a wrapper object) and unboxed (converted from a wrapper object to a primitive value) throughout the lifetime of the variables that refer to them. If a value type instance currently represented as a wrapper object on the JVM's heap becomes unreachable, it indeed becomes unreferenced, and is available for garbage collection. But if a value type currently represented as a primitive value becomes unreachable, then it does not become unreferenced, because it does not exist as an object on the JVM's heap at that point in time. The runtime may reclaim memory occupied by unreachable objects, but if an Int, for example, is implemented at run time by a primitive Java int that occupies some memory in the stack frame of an executing method, then the memory for that object is

“reclaimed” when the stack frame is popped as the method completes.

Memory for reference types, such as Strings, may be reclaimed by the JVM's garbage collector after they become unreachable.

unreferenced See unreachable.

value The result of any computation or expression in Scala is a value, and in Scala, every value is an object. The term value essentially means the image of an object in memory (on the JVM's heap or stack).

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Glossary](#)

724

value type A value type is any subclass of AnyVal, such as Int, Double, or Unit. This term has meaning at the level of Scala source code. At runtime, instances of value types that correspond to Java primitive types may be implemented in terms of primitive type values or instances of wrapper types, such as java.lang.Integer. Over the lifetime of a value type instance, the runtime may transform it back and forth between primitive and wrapper types (i.e., to box and unbox it).

variable A named entity that refers to an object. A variable is either a val or a var. Both vals and vars must be initialized when defined, but only vars can be later reassigned to refer to a different object.

variance A type parameter of a class or trait can be marked with a variance annotation, either covariant (+) or contravariant (-). Such variance annotations indicate how subtyping works for a generic class or trait.

For example, the generic class List is covariant in its type parameter, and thus List[String] is a subtype of List[Any]. By default, i.e., absent a + or - annotation, type parameters are nonvariant.

yield An expression can yield a result. The yield keyword designates the result of a for expression.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## Bibliography

[Abe96] Abelson, Harold and Gerald Jay Sussman. Structure and Interpretation of Computer Programs. The MIT Press, second edition, 1996.

[Aho86] Aho, Alfred V., Ravi Sethi, and Jeffrey D. Ullman. Compilers: Principles, Techniques, and Tools. Addison-Wesley Longman Publishing Co., Inc., Boston, MA, USA, 1986. ISBN 0-201-10088-6.

[Blo08] Bloch, Joshua. Effective Java Second Edition. Addison-Wesley, 2008.

[DeR75] DeRemer, Frank and Hans Kron. “Programming-in-the large versus programming-in-the-small.” In Proceedings of the international conference on Reliable software, pages 114–121. ACM, New York, NY, USA, 1975. doi:<http://doi.acm.org/10.1145/800027.808431>.

[Dij70] Dijkstra, Edsger W. “Notes on Structured Programming.”, April 1970. Circulated privately. Available at <http://www.cs.utexas.edu/users/EWD/ewd02xx/EWD249.PDF> as EWD249 (accessed June 6, 2008).

[Eck98] Eckel, Bruce. Thinking in Java. Prentice Hall, 1998.

[Emi07] Emir, Burak, Martin Odersky, and John Williams. “Matching Objects With Patterns.” In Proc. ECOOP, Springer LNCS, pages 273–295. July 2007.

[Eva03] Evans, Eric. Domain-Driven Design: Tackling Complexity in the Heart of Software. Addison-Wesley Professional, 2003.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Bibliography](#)

[Fow04] Fowler, Martin. “Inversion of Control Containers and the Dependency Injection pattern.” January 2004. Available on the web at <http://martinfowler.com/articles/injection.html> (accesssed August 6, 2008).

[Gam95] Gamma, Erich, Richard Helm, Ralph Johnson, and John Vlissides. Design Patterns : Elements of Reusable Object-Oriented Software. Addison-Wesley, 1995.

[Goe06] Goetz, Brian, Tim Peierls, Joshua Bloch, Joseph Bowbeer, David Homes, and Doug Lea. Java Concurrency in Practice. Addison Wesley, 2006.

[Jav]

The Java Tutorials: Creating a GUI with JFC/Swing. Available on the web at <http://java.sun.com/docs/books/tutorial/uiswing>.

[Kay96] Kay, Alan C. “The Early History of Smalltalk.” In History of programming languages—II, pages 511–598. ACM, New York, NY, USA, 1996. ISBN 0-201-89502-1. doi:<http://doi.acm.org/10.1145/234286.1057828>.

[Kay03] Kay, Alan C. An email to Stefan Ram on the meaning of the term “object-oriented programming”, July 2003. The email is published on the web at [http://www.purl.org/stefan\\_ram/pub/doc\\_kay\\_oop\\_en](http://www.purl.org/stefan_ram/pub/doc_kay_oop_en) (accesssed June 6, 2008).

[Lan66] Landin, Peter J. “The Next 700 Programming Languages.” Communications of the ACM, 9(3):157–166, 1966.

[Mey91] Meyers, Scott. Effective C++. Addison-Wesley, 1991.

[Mey00] Meyer, Bertrand. Object-Oriented Software Construction. Prentice Hall, 2000.

[Ode03] Odersky, Martin, Vincent Cremet, Christine Röckl, and Matthias Zenger. “A Nominal Theory of Objects with Dependent Types.” In Proc. ECOOP’03, Springer LNCS, pages 201–225. July 2003.

[Ode05] Odersky, Martin and Matthias Zenger. “Scalable Component Abstractions.”

In Proceedings of OOPSLA, pages 41–58. October 2005.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Bibliography](#)

727

[Ode08] Odersky,

Martin.

The

Scala

Language

Specification,

Version 2.7.

EPFL, February 2008.

[\[lang.org/docu/manuals.html\]\(http://www.scala-lang.org/docu/manuals.html\).](http://www.scala-</a></p></div><div data-bbox=)

[Ray99] Raymond, Eric. *The Cathedral & the Bazaar: Musings on Linux and Open Source by an Accidental Revolutionary*. O'Reilly, 1999.

[Rum04] Rumbaugh, James, Ivar Jacobson, and Grady Booch. The Unified Modeling Language Reference Manual (2nd Edition). Addison-Wesley, 2004.

[SPJ02] Simon

Peyton

Jones,

et.al.

“Haskell

98

Language

and

Libraries,

Revised

Report.”

Technical

report,

<http://www.haskell.org/onlinereport>, 2002.

[Ste99] Steele, Jr., Guy L. “Growing a Language.” Higher-Order and Symbolic Computation, 12:221–223, 1999. Transcript of a talk given at OOPSLA 1998.

[Vaz07] Vaziri, Mandana, Frank Tip, Stephen Fink, and Julian Dolby.

“Declarative Object Identity Using Relation Types.”

In Proc.

ECOOP 2007, pages 54–78. 2007.

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## About the Authors

Martin Odersky is the creator of the Scala language. As a professor at EPFL in Lausanne, Switzerland, he works on programming languages, more specifically languages for object-oriented and functional programming. His research thesis is that the two paradigms are two sides of the same coin, to be unified as much as possible. To prove this, he has experimented with a number of language designs, from Pizza to GJ to Functional Nets. He has also influenced the development of Java as a co-designer of Java generics and as the original author of the current javac reference compiler. Since 2001 he has concentrated on designing, implementing, and refining the Scala programming language.

Lex Spoon is a software engineer at Google, Inc. He worked on Scala for two years as a post-doc at EPFL. He has a Ph.D. in computer science from Georgia Tech, where he worked on static analysis of dynamic languages.

In addition to Scala, he has worked on a wide variety of programming languages, ranging from the dynamic language Smalltalk to the scientific language X10. He and his wife currently live in Atlanta with two cats, a chi-huahua, and a turtle.

Bill Venners is president of Artima, Inc., publisher of the Artima Developer website ([www.artima.com](http://www.artima.com)). He is author of the book, Inside the Java Virtual Machine, a programmer-oriented survey of the Java platform's architecture and internals. His popular columns in JavaWorld magazine covered Java internals, object-oriented design, and Jini. Active in the Jini Community since its inception, Bill led the Jini Community's ServiceUI project, whose ServiceUI API became the de facto standard way to associate user interfaces to Jini services. Bill is also the lead developer and designer of ScalaTest, an open source testing tool for Scala and Java developers.

## Index

Page numbers followed by an n refer

on numeric types, [118](#)

to footnotes.

`++` (add elements)

on traits `mutable.Map` and

Symbols

`immutable.Map`, [372](#)

`!` (invert)

on traits `mutable.Set` and

on class `Boolean`, [120](#)

`immutable.Set`, [370](#)

`!` (message send)

`++=` (add elements to)

on trait `Actor`, [43, 610–612](#)

on trait `mutable.Map`, [373](#)

`!=` (not equals)

on trait `mutable.Set`, [370](#)

method on `Any`, [123, 237](#)

`+: (prepend)`

" (string delimiter), [113](#)

on class ListBuffer, [363](#)

""" (raw string delimiter), [113](#)

`+= (add element to)`

' (character delimiter), [111](#)

on trait mutable.Map, [373](#)

`() (empty parentheses)`

on trait mutable.Set, [370](#)

on method definitions, [212](#)

`+= (add to)`

`() (unit value)`, [152](#)

on trait mutable.Set, [82](#)

`* (repeat)`

reassignment with immutable

on class String, [91](#)

sets and vars, [83](#)

`* (repeated parameter)`, [188](#)

`+= (append)`

`* (times)`

on class ArrayBuffer, [364](#)

on numeric types, [118](#)

on class ListBuffer, [363](#), [494](#)

\*\* (intersect)

- (contravariant in)

on trait collection.Set, [370](#)

variance annotation, [418](#)

+ (add element)

- (minus)

on traits mutable.Map and

on numeric types, [118](#)

immutable.Map, [372](#)

- (remove element)

on traits mutable.Set and

on traits mutable.Map and

immutable.Set, [82](#), [370](#)

immutable.Map, [372](#)

+ (covariant in)

on traits mutable.Set and

List's type parameter, [488](#)

`immutable.Set`, [370](#)

variance annotation, [418](#)

-- (remove elements)

+ (plus)

729

## [Index](#)

730

on traits `mutable.Map` and

in set membership, [368](#)

`immutable.Map`, [372](#)

`==` (`equals`)

on traits `mutable.Set` and

in Scala versus Java, [124](#)

`immutable.Set`, [370](#)

in-depth treatment, [568–593](#)

`--=` (remove elements from)

method on `Any`, [123, 237, 568](#)

on trait `mutable.Map`, [373](#)

quick introduction, [123–124](#)

on trait `mutable.Set`, [370](#)

`====` (triple equals)

`-=` (remove element from)

in ScalaTest suites, [282](#)

on trait mutable.Map, [373](#)

`=>` (right arrow, or “rocket”)

on trait mutable.Set, [370](#)

in function literals, [68](#)

`->` (map to), [85](#)

in import statements, [270–271](#)

in implicit conversion, [475](#)

in self types, [563](#)

`/` (divided by)

in match alternatives, [164](#)

on numeric types, [118](#)

in this aliasing, [659](#)

`/:` (fold left)

`>` (greater than)

on class List, [348](#)

on numeric types, [119](#)

`:` (colon)

>: (lower bound), [425](#)

in type annotations, [60](#)

>= (greater than or equal to)

:: (cons) class

on numeric types, [119](#)

as pattern constructor, [331](#)

>> (shift right)

subclass of List, [487–490](#)

on integral types, [122](#)

:: (cons) method

>>> (unsigned shift right)

on class List, [76, 328](#)

on integral types, [122](#)

right associativity of, [77, 329](#)

@ (at sign)

::: (concatenation)

in annotations, [533](#)

on class List, [76, 332, 489](#)

to extract XML attributes, [546](#)

:\: (fold right)

# (pound sign)

on class List, [348](#)

in inner class type names, [451](#)

;(semicolon)

\$tag method

inference, [98](#)

on trait ScalaObject, [241](#)

< (less than)

% (remainder)

on numeric types, [119](#)

on numeric types, [118](#)

<- (in)

& (bitwise-and)

in for expressions, [69](#)

on integral types, [121](#)

<: (upper bound), [433](#)

&& (logical-and)

<< (shift left)

on class Boolean, [120](#)

on integral types, [122](#)

`_` (underscore)

`<=` (less than or equal to)

in curried functions, [202](#)

on numeric types, [119](#)

in existential types, [586](#)

`<%` (view bound), [483](#)

in function literals, [180](#), [197](#)

`=` (variable assignment), [60](#)

in identifiers, [142](#)

`==` (equals)

in import statements, [271](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Index](#)

731

in match expressions, [163](#)

in identifiers, [143](#)

used to initialize a field to its

`|` (alternative composition)

default value, [392](#)

parser combinator, 661

`_*` (underscore asterisk)

`|` (alternative composition)

in XML pattern matching, [550](#)

parser combinator, 652

repeated parameter, [189](#)

`|` (bitwise-or)

sequence wildcard pattern, [523](#)

on integral types, 121

`_1, _2, etc.`(tuple accessors), [80](#)

`||` (logical-or)

`_=` (underscore equals)

on class Boolean, 120

in setter method names, [390](#)

`^` (exclusive-or)

A

on integral types, [121](#)

Abelson, Harold, [393](#), [506](#)

`^^` (result conversion, or

abs method

“eyebrows”)

on class Double (via

parser combinator, [651](#)

RichDouble), [128](#)

~ (bitwise complement)

on class Int (via RichInt),

on integral types, [121](#)

[139](#), [240](#)

~ (sequential composition, or

abstract members, [435](#)

“squiggle”)

abstract modifier

parser combinator, [651](#), [660](#)

not needed on abstract methods,

~! (committed sequential

fields, or types, [211](#), [435](#)

composition)

on classes, [210](#)

parser combinator, [668](#)

with override modifier on

~> (sequential composition right)

members of traits, [256](#)

parser combinator, [652](#), [661](#)

abstract types, [447](#)

`<~` (sequential composition left)

access modifiers, [273–278](#)

parser combinator, [652](#), [661](#)

accessor methods, [390](#)

`\(extract)`

Actor trait, [608](#)

on class Elem, [546](#)

methods

`\\ (deep extract)`

`! (message send)`, [43](#), [610](#)

on class Elem, [546](#)

actor, [610](#)

`{}` (curly braces)

act, [608](#)

and variable scope, [167](#)

loop, [615](#)

in class definitions, [130](#)

react, [614](#)

in imports, [270](#)

receiveWithin, [613](#)

in XML literals, [542–543](#)

receive, [611](#)

in XML patterns, [549](#)

start, [609](#)

instead of parentheses in

actors, [43, 377, 607–641, 677](#)

method invocations, [203](#)

addString method

instead of parentheses in for

on class List, [340](#)

expressions, [157](#)

Aho, Alfred, [506, 668n](#)

‘ (back tick)

aliases

AnyRef for Object, [240](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Index](#)

732

int for Int, etc., [108](#)

in Scala class hierarchy

type, [436](#)

diagram, [239](#)

aliasing

AnyRef class, [238](#)

this, [659](#)

as alias of Object, [240](#)

object, see defensive copies

in Scala class hierarchy

alphabetic versus symbolic names,

diagram, [239](#)

[656](#)

AnyVal class, [238](#)

alternatives

in Scala class hierarchy

catch-all, [298](#)

diagram, [239](#)

definition of, [709](#)

application

in match expressions, [163](#), [296](#)

function to arguments, [181](#)

in catch clauses, [161](#)

partial function, [181](#), [343](#)

in partial function literals, [315](#)

Application trait, [105](#), [672](#)

annotations

applications, Scala, [102–105](#)

and reflection, [600](#)

apply method

applied to expressions, [534](#)

called with parentheses, [73](#)

arguments to, [534](#)

in extractors, [518](#)

@BeanProperty, [537](#)

on Array

@deprecated, [533](#)

class, [73](#)

in meta-programming, [533](#)

object, [75](#)

in testing, [285](#)

on List

Java-specific, [597](#)

class, [338](#)

@serializable, [536](#), [598](#)

object, [76](#), [351](#), [525](#)

@SerialVersionUID, [536](#)

on Map

standard, [535](#)

traits, [372](#)

syntax of, [534](#)

on Map

@Test

objects, [85](#)

in JUnit 4, [600](#)

traits, [371](#)

in TestNG, [286](#)

on Set objects, [81](#)

@throws, [598](#)

on trait PartialFunction, [317](#)

@transient, [537](#)

on Function  $N$  traits, [177](#)

type, [40](#), [54](#), [60](#)

args variable

for debugging, [358](#)

in scripts, [65](#)

@unchecked, [312](#), [401](#), [534](#)

arguments

variance, [418](#)

command line, in scripts, [65](#)

@volatile, [536](#)

variable length, [188](#)

anonymous classes, [439](#)

versus parameters, [717](#)

anonymous functions, see function

arithmetic operations (+, -, \*, /, %)

literals

on numeric types, [118–119](#)

ANTLR, [642](#)

Array class, [362](#)

Any class, [238](#)

ArrayBuffer class, [364](#)

arrays, [227](#), [362](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Index](#)

733

accessed with () not [], [73](#)

blank finals (Java)

cloning, [621](#)

not in Scala, [392](#)

converting to lists, [382](#)

Bloch, Joshua, [569n](#), [582n](#), [590n](#)

creating and initializing, [75](#)

blocks, definition of, [710](#)

passing elements as arguments

Boolean class, [108](#), [120](#)

with \_, [189](#)

boolean literals, [115](#)

quick introduction, [72–75](#)

bottom types, [243](#)

asInstanceOf method

bound variables, [157](#), [184](#)

on class Any, [304](#)

boxing, of value types, [241](#)

assert method

Bracha, Gilad, [506](#)

on object Predef, [88](#), [279](#)

break keyword (Java)

AssertionError class, [279](#)

living without, [165](#)

assertions, [279–281](#)

not in match expressions, [164](#)

assignment

ButtonClicked class, [676](#)

result is unit value, [153](#)

by-name parameters, [206](#), [399](#)

associativity, [126–127](#)

by-value parameters, [662](#)

right versus left, [77](#), [126](#)

Byte class, [107](#), [591](#)

asynchronous messages, [619](#)

attributes

C

XML, [541](#), [546](#)

C language, [47](#)

automatic

parser generators, [642](#)

boxing, [241](#)

C++ language, [47](#), [86](#)

conversion, see implicit

C# language, [86](#)

conversion

enumerations, [452](#)

imports, [272](#)

properties, [392](#)

auxiliary constructors, [136–137](#)

static extension methods, [465](#)

Callahan, Harry, [620](#)

B

camel casing, [141](#)

backtracking, [667](#)

capitalization, of identifiers, [141](#)

base classes, see superclasses

capitalize method

BDD, see behavior-driven

on class Int (via RichInt), [128](#)

development

case classes, [294–295](#)

BeanProperty annotation, [537](#),

and actors, [621](#)

[556n](#)

versus extractors, [526–527](#)

Beck, Kent, [284](#)

cases, see alternatives

behavior-driven development, [286](#)

casting, see also toInt, toChar, etc.

Beust, Cédric, [285](#)

with asInstanceOf, [304](#)

BigInt class, [41](#)

with typed patterns (the BigInteger class, [42](#)  
preferred style), [303](#)  
Bison, [642](#)  
catch clauses, [161](#)  
bitwise operations, on integral types  
Cathedral and the Bazaar, The  
logical (&, |, ^, ~), [121](#)  
(Raymond), [41](#)  
shift (<<, >>, >>>), [122](#)

Char class, [107](#), [591](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Index](#)

734

character encoding

class hierarchy diagram, [360](#)

in XML, [548](#)

combinators, [210](#)

character literals, [111](#)

companion classes, [100](#)

escape sequences, [112](#)

companion objects, [75](#), [100](#)

checked exceptions, [161](#), [598](#)

and factory methods, [414](#)

Church, Alonzo, [46](#)

and implicit conversion, [469](#)

Class class, see classOf method

visibility, [277](#)

class hierarchy diagram

compare method

for collections, [360](#)

of trait Ordered, [253](#), [431](#)

for iterators, [361](#)

compatibility, Scala with Java, [39](#),

for lists, [488](#)

[48–49](#)

for maps, [84](#)

compiler errors

for Scala, [239](#)

';' expected but ',' found, [204](#)

for sets, [82](#)

. . . is already defined as . . . , [308](#)

class parameters, [130](#)

. . . is not a legal prefix for a

initialization order compared to

constructor, [452](#)

abstract fields, [441](#)

overloaded method value

not legal on singleton objects,

. . . with alternatives

[102](#)

. . . cannot be applied to

used to implement abstract

. . . , [146](#)

fields, [490](#)

class . . . is abstract; cannot be

classes, [93–95](#)

instantiated, [211](#)

abstract, [210](#)

class . . . needs to be abstract,

annotating, [534](#)

since method . . . in class

anonymous, [439](#)

. . . of type . . . is not

case, [294–295](#)

defined, [447](#)

companion, [100](#)

class type required, [456](#)

generic, [410](#)

constructor . . . cannot be

inner, see inner classes

accessed in . . . , [414](#)

nesting of, [231](#)

covariant type . . . occurs in

private, [415](#)

contravariant position in

sealed, [310–312](#)

type . . . of parameter of

classOf method

setter . . . , [431](#)

on object Predef, [283, 599](#)

covariant type . . . occurs in

clear method

contravariant position in

on mutable Set trait, [370](#)

type . . . of value . . . , [419](#),

closures, [184–188, 197](#)

[422](#)

versus Java's inner classes,

error overriding method . . . in

[186n](#)

class . . . of type . . . method

code duplication

. . . cannot override final

reducing, [52, 194–200](#)

member, [224](#)

collections, [359–386](#)

error overriding method . . . in

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Index](#)

735

class . . . of type . . . method

[584](#)

. . . needs 'override'

there were unchecked warnings;

modifier, [221](#)

re-run with -unchecked for

illegal inheritance from final

details, [305](#)

class, [225](#)

Compilers: Principles, Techniques,

inferred type arguments . . . do

and Tools (Aho, et. al.),

not conform to method

[670n](#)

. . . type parameter bounds

compiling, [104](#)

. . . , [433](#)

complexity, managing, [51](#)

method . . . overrides nothing,

Component class, [673](#)

[220](#), [447](#)

composition, [216](#), [226](#)

missing arguments for method

mixin, see mixin composition

. . . follow this method with

concat method

' \_ ' if you want to treat it as

on object List, [354](#)

a partially applied

conciseness

function, [184](#)

Scala versus Java, [49–51](#)

no implicit argument matching

concurrency

parameter type . . . was

actors model, [43](#), [607–641](#)

found, [381](#), [476](#), [478](#)

and testing, [608](#)

not found: value . . . , [114](#), [184](#)

shared data and locks, [608](#)

overloaded method value

shared-nothing, [608](#)

. . . with alternatives

ConcurrentHashMap class, [619](#)

. . . cannot be applied to

configuring

. . . , [474](#)

to wire modules together, [554](#)

pattern is unchecked since it is

with Scala code, [565](#)

eliminated by erasure, [584](#)

cons (:) method

reassignment to val, [61](#), [378](#)

on class List, [76](#), [328](#), [412](#), [489](#)

trait . . . takes type parameters,

right associativity of, [77](#)

[417](#)

short for construct, [489](#)

type mismatch, [188](#), [381](#), [421](#),

Console object, [89](#)

[449](#), [450](#), [463](#), [471](#), [485](#),

constant patterns, [296](#), [299](#)

[565](#), [566](#)

constants, [142](#)

unreachable code, [310](#)

constructor patterns, [296](#), [301](#)

value . . . is not a member of . . . ,

constructors, [71](#)

[134](#), [442](#)

auxiliary, [136–137](#)

compiler warnings

in Java versus Scala, [131](#)

match is not exhaustive, [316](#),

invoking superclass, [219](#)

[401](#)

primary, [130–132](#)

non variable type-argument

private, [414](#)

. . . in type pattern is

Container trait, [673](#)

unchecked since it is

contains method

eliminated by erasure, [305](#),

on Map traits, [372](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Index](#)

736

contains method

D

on Set traits, [370](#)

data structures

contents property

fully persistent, [411](#)

on trait Container, [673](#)

semi-structured, [539](#)

context-free grammars, [643](#)

deadlock, [43](#), [608](#)

continue keyword (Java)

deafTo method

living without, [165](#)

on Reactor, [676](#)

contravariance, [418](#), [426–429](#)

declarations, versus definitions, [712](#)

control abstraction, [47](#), [194–208](#)

decrementing

conventions, identifier capitalization,

with -= 1, not --, see

[141](#)

incrementing

conversion

def keyword, [62](#), [93](#)

implicit, [49](#), [465](#)

annotating, [534](#)

to target type, [467](#)

default values

copyToArray method

of fields, [392](#)

on class List, [340](#)

defensive copies, [131](#)

count method

definitions, versus declarations, [712](#)

on class List, [78](#)

dependency injection, [554](#)

covariance, [418](#)

deprecated annotation, [533](#), [597](#)

of arrays in Java, [420](#)

dequeue method

of function result type, [427](#)

on class Queue, [365](#)

of lists, [328](#), [492](#)

DeRemer, Frank, [553n](#)

creating and initializing

derived classes, see subclasses

arrays, [75](#)

deserialization

lists, [76](#)

XML, [547](#)

maps, [85](#)

Design Patterns (Gamma, et. al.),

objects with factories, [75](#), [229](#)

[297n](#)

objects with new, [93](#)

Dijkstra, Edsger, [54](#)

sets, [81](#)

Dirty Harry, [620](#)

singleton objects, [102](#)

divide and conquer principle, [333](#)

tuples, [80](#)

do-while loops, [152](#)

curly braces

domain objects, [555](#)

and variable scope, [167](#)

Domain-Driven Design (Evans),

in class definitions, [130](#)

[555n](#)

in imports, [270](#)

domain-specific languages, [707](#)

in XML literals, [542–543](#)

a little language for digital

in XML patterns, [549](#)

circuits, [393](#)

instead of parentheses in

and implicit conversions, [473](#)

method invocations, [203](#)

defining an external DSL with

instead of parentheses in for

parser combinators,

expressions, [157](#)

[642–652](#)

currying, [200–202, 342](#)

embedded in Scala, [xxvii](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Index](#)

737

in Smalltalk and Lisp, [56](#)

of lists, [361](#)

parser combinators as an

of LL(1) versus backtracking

internal DSL, [642](#)

parsers, [669](#)

rich wrappers and internal

of looping versus recursion, [189](#)

versus external DSLs, [475](#)

of maps, [373](#)

Double class, [107](#)

of merge versus insertion sort,

downloading

[341](#)

Scala, [58](#)

of sets, [373](#)

source code for book examples,

of tail versus non-tail recursion,

[xxxvii](#)

[495](#)

drop method

of thread creation and

on class List, [78, 337](#)

switching, [613](#)

dropRight method

of value types, [59](#), [75](#), [238](#), [595](#)

on class List, [78](#)

Eiffel language, [56](#)

dropWhile method

Elem class, [541](#), [546](#)

on class List, [346](#)

Elem type

DSLs, see domain-specific languages

in trait Parsers, [657](#)

dynamic

elements method

binding, [222](#), [248](#)

on class List, [341](#)

typing, [xxvii](#), [53](#), [114](#)

on trait Iterable, [359](#)

elements, XML, [540–541](#)

E

else clauses, [150](#)

Eastwood, Clint, [620](#)

embedded DSLs, see

Eckel, Bruce, [226n](#)

domain-specific languages

Eclipse IDE, [58](#), [671](#)

empty method

EditDone class, [681](#)

on Map objects, [369](#), [373](#)

Effective C++ (Meyers), [226n](#)

on Set objects, [369](#), [370](#)

Effective Java, Second Edition

empty-paren methods, [212](#)

(Bloch), [569n](#), [582n](#), [590n](#)

enclosing instances, see inner classes

efficiency

enqueue method

and hash consing, [242](#)

on class Queue, [365](#)

and trait ScalaObject, [241](#)

ensuring method

of abstract classes versus traits,

on object Predef, [280](#)

[263n, 294n](#)

entities, [556](#)

of arrays, [75, 362](#)

enum keyword (Java), see

of case classes versus

Enumeration class

extractors, [526](#)

Enumeration class, [452](#)

of class ListBuffer, [363, 494](#)

eq method

of fold left and right, [349](#)

on class AnyRef, [124, 243, 568](#)

of functional on the outside,

equality, see also equals method

imperative on the inside

!= (not equals) method

approach, [497](#)

on class Any, [123, 237](#)

of immutable objects, [131](#)

## Index

738

== (equals) method

on class List, [78](#), [199](#), [347](#)

on class Any, [123](#), [237](#), [568](#)

on class RichString, [367](#)

==== (triple equals) method

exists2 method

in ScalaTest suites, [282](#)

on object List, [354](#)

eq method

extends keyword, [214](#)

on class AnyRef, [124](#), [243](#),

external DSLs, see domain-specific

[568](#)

languages

in Scala versus Java, [124](#)

extractors, [516–520](#)

in-depth treatment, [568–593](#)

and injections, [520](#)

ne method

extractor pattern, [331, 520](#)

on class AnyRef, [124, 243](#)

quick introduction, [123–124](#)

F

value versus reference, [124](#)

F# language, [47, 57](#)

equals method, see also equality

factory methods, [75, 456](#)

generated for case classes, [295](#)

factory objects, [229](#)

on class Any, [124, 237, 568–593](#)

Failure class, [658](#)

contract of, [575](#)

false value, [115](#)

recipe for writing, [587–590](#)

fields, [93–95](#)

erasure, [306](#)

abstract, [441](#)

and pattern matching, [584](#)

defining, [139](#)

Erlang language, [43–44, 47, 86](#)

initializing to default values

and actors, [619](#)

with an underscore, [392](#)

errata, viewing and reporting, [xxxvii](#)

overriding, [216–217](#)

errors, see also compiler errors

parametric, [134, 217](#)

handling with exceptions,

pre-initialized, [441](#)

[159–163](#)

private, [95, 138](#)

in parsing, [665–667](#)

FileReader class, [649](#)

preventing, [87](#)

files

escape sequences, for character

ensuring closed with finally,

literals, [112](#)

[162](#)

Evans, Eric, [555n](#)

opening, [89](#)

event handling, [676–679, 702](#)

reading lines from, [89](#)

event listeners, [676](#)

filter method

event sources, [676](#)

on class List, [78, 345](#)

example code, for book

translating for expressions to

downloading, [xxxvii](#)

invocations of, [501](#)

license of, [xxxvii](#)

filters

exception handling, [159–163](#)

in for expressions, [156, 502](#)

and checked exceptions,

final modifier, [224](#)

[598–599](#)

on variables (Java), see vals  
existential types, [586, 602–605](#)

finally clauses, [161](#)  
exists method

find method  
on class List, [346](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)  
[Index](#)

739  
findAllIn method

on class List, [78, 345](#)  
on class Regex, [529](#)

translating for expressions to  
findFirstIn method

invocations of, [501](#)  
on class Regex, [529](#)

formatted method  
findPrefixOf method

on Any (via StringAdd), [459](#)  
on class Regex, [529](#)

formatting strings, [459](#)

first-order methods

forSome keyword, [603](#)

on class List, [332–343](#)

Fortran language, [42](#)

flatMap method

Fowler, Martin, [554n](#)

on class List, [344](#)

free variables, [184](#)

translating for expressions to

fsc (fast Scala compiler), [104](#)

invocations of, [501](#)

fully qualified names, [83](#)

flatten method

function literals

on object List, [349, 353](#)

and closures, [186](#)

Flex, [642](#)

for partial functions, [314](#)

Float class, [107](#)

placeholder syntax, [180](#), [197](#)

floating-point literals, [110](#)

syntax of, [69](#)

floatingPointNumber method

underscores in, [180](#), [197](#)

in trait JavaTokenParsers,

versus function values, [177](#)

[644](#), [650](#)

function values, [177](#), [196](#)

fold

and closures, [186](#)

left, [348](#)

functional programming, [39](#), [46–48](#),

right, [348](#)

[129](#)

foldLeft method

lazy initialization, [446](#)

on class List, [349](#)

main ideas of, [47](#)

foldRight method

functional style, [81](#)

on class List, [349](#)

combining with imperative

for expressions, [69](#), [154](#), [501](#)

style, [497](#)

and extractors, [531](#)

in parsing, [657](#)

and XML patterns, [550–552](#)

methods without side effects, [75](#)

notation, [506](#)

recognizing, [86](#)

translated before type checking,

refactoring functional style to,

[513](#)

[170](#)

types valid after  $\rightarrow$ , [513](#)

functions, see also methods

using patterns in, [317](#), [502](#)

basic form of, [63](#)

for loops, [511](#)

first-class, [47](#), [177](#)

forall method

higher-order, [194](#)

on class List, [78](#), [347](#)

local, [175](#)

forall2 method

partial, [314–317](#)

on object List, [354](#)

partially applied, [181](#), [343](#)

foreach method

predicates, [51](#)

on class Array, [68](#)

procedures, [97](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Index](#)

740

pure, [213](#)

on trait Iterator, [360](#)

recursive, [189](#)

head method

tail recursive, [190](#)

on class List, [79](#), [329](#), [488](#)

Hejlsberg, Anders, [433](#)

G

Hibernate, [556](#)

Gamma, Erich, [284](#), [297n](#)

hiding

generator, in for expressions, [502](#)

names in import clauses, [271](#)

generic types, [410](#), [417](#)

names in nested packages, [266](#)

getLines method

variables in nested blocks, [169](#)

on object Source, [89](#)

higher-kinded types, see [http://](#)

getter methods, [390](#), [423](#), [438](#), [673](#)

[booksites.artima.com/](http://booksites.artima.com/)

Goetz, Brian, [619n](#)

[programming\\_in\\_scala](#)

Gosling, James, [420](#), [506](#)

higher-order functions, [194](#)  
graphical user interfaces, see user  
higher-order methods  
interfaces  
on class List, [343–351](#)  
Groovy language, [xxvii](#)  
“Growing a language” (Steele), [41n](#)

I

GUI programming, see user  
identifiers, [141–143](#)  
interfaces  
alphanumeric, [141](#)  
Guice, [554](#)  
capitalization conventions for,  
[141](#)

H

literal (with back ticks), [143](#)  
Haller, Philipp, [623](#)  
mixed, [143](#)  
handlers, exception, see catch

operator, [142](#)

clauses

identity

hash consing, [242](#)

function, for implicit

hashCode method

conversions, [483](#)

caching, [592](#)

of objects, testing with eq

generated for case classes, [295](#)

method, [568](#)

if overriding equals, [572–573](#)

idioms, see patterns and idioms

on class Any, [237](#)

if expressions, [63, 67, 150–151](#)

contract of, [573](#)

immutability, [47](#)

recipe for writing, [590–592](#)

as functional style, [75](#)

HashMap class

selecting mutable versus  
in class hierarchy diagram, [84](#)  
immutable collections, [377](#)  
HashSet class, [81](#)  
trade-offs, [131](#)  
creating and initializing  
imperative style, [81](#)  
immutable, [83](#)  
combining with functional  
in class hierarchy diagram, [82](#)  
style, [497](#)

Haskell language, [42](#), [47](#), [86](#)  
recognizing, [86](#)  
as a lazy functional language,  
refactoring to functional style,  
[446](#)

[170](#)

hasNext method

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)  
[Index](#)

implements keyword (Java), see

of classes, see constructors

mixin composition

of fields to default values, [392](#)

implicit keyword, [146](#), [466](#)

of instance variables with

implicit conversion, [49](#), [280](#)

constructor parameters, see

a word of caution, [147](#)

class parameters

in-depth treatment, [465–475](#)

of lists, [76](#)

quick introduction, [146](#)

of maps, [85](#)

to rich wrappers, [127](#)

of sets, [81](#), [83](#)

to target type, [467](#)

of traits, [439](#)

implicit parameters, [475–481](#)

initializers, [139](#)

imports, [83](#), [268–273](#)

injections, [520](#)

hiding clauses, [271](#)

inner classes

implicit, [103](#), [272](#)

accessing outer class members

on-demand (i.e., wildcard), [269](#)

with a this alias, [659](#)

renaming clauses, [270](#)

and path-dependent types, [451](#)

selector clauses, [270](#)

and private members, [273](#)

incrementing

example of, [688](#)

with `+= 1`, not `++`, [66](#)

granting access to private

indices method

members of inner classes,

on class List, [338](#)

[276](#)

inference

private, to hide implementation,

semicolon, [98–99](#)

[417](#)

turning off, [654](#)

insertion sort, [329, 331](#)

type, [55, 85n](#)

instance variables, [95](#)

Hindley-Milner style, [358](#)

instanceOf (Java), see type tests

the algorithm, [355](#)

Int class, [107, 591](#)

infix operator notation, [116](#)

int, alias for Int, [108](#)

information hiding, [59, 414](#)

integer literals, [109](#)

with factory methods, [229](#)

IntelliJ IDE, [58](#)

inheritance, [258](#)

interfaces (Java), see traits

and self types, [696](#)

internal DSLs, see domain-specific

extending classes, [214](#)

languages

mixing in traits, [246](#)

interoperability, Scala with Java, [39](#)

versus composition, [226](#)

interpreter, [58–60](#)

inheritance hierarchy diagram, see

invoking a superclass constructor,

class hierarchy diagram

[219](#)

init method

is-a relationships, [226](#)

on class List, [79, 335](#)

isDefinedAt method

initialization

on trait PartialFunction,

lazy, [443](#)

[316](#), [611](#)

of abstract vals, [439](#)

isEmpty method

of arrays, [75](#)

on class List, [79](#), [329](#), [488](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Index](#)

742

on Map traits, [372](#)

keys method

isInstanceOf method

on Map traits, [372](#)

on class Any, [304](#)

keySet method

Iterable trait, [359](#)

on Map traits, [372](#)

in class hierarchy diagram, [360](#)

keywords, using as identifiers, [143](#)

Iterator class, [359](#)

in class hierarchy diagram, [361](#)

L

Label class, [688](#)

J

LALR(1) parsers, [670](#)

Java Concurrency in Practice

lamda calculus, [46](#)

(Goetz), [619n](#)

Landin, Peter, [56](#)

Java language, [47, 86](#)

last method

javac, [600](#)

on class List, [79, 335](#)

ANTLR, [642](#)

layouts, in GUIs, [675](#)

bytecodes, [594](#)

lazy modifier, [444](#)

concurrency utilities, [608, 619](#)

lazy functional languages, [446](#)

covariance of arrays, [420](#)

length method

dependency injection in, [554](#)

on class List, [79](#), [334](#)

enumerations, [452](#)

Lex, [642](#)

exception handling, [598](#)

lexical analysis, [657](#), [665](#)

inner classes, [451](#)

linearization, of traits, [258–262](#)

interfaces and Scala traits, [597](#)

linked lists, [327](#)

interoperability with Scala, [39](#),

linking

[48–49](#), [594–606](#)

of modules at runtime, [564](#)

raw types, [410](#), [602](#)

Liskov Substitution Principle, [426](#)

static methods, [595](#)

and equals method, [582](#)

Swing framework, [671–681](#)

Lisp language, [42](#), [46](#)

threading model, [607](#)

List class, see also lists, [76](#), [361](#)

throws keyword, [598](#)

first-order methods on, [332–343](#)

wildcard types, [602](#)

higher-order methods on,

wildcards, [426](#)

[343–351](#)

Java Persistence Architecture, [556](#)

immutability, [76](#)

JavaBeans, [80](#)

implementation of, [487–498](#)

JavaScript Object Notation, see

methods

JSON

/: (fold left), [348](#)

JavaTokenParsers trait, [644](#)

::: (concatenation), [76](#), [332](#),

JFlex, [642](#)

[489](#)

Joy, Bill, [506](#)

:\: (fold right), [348](#)

JSON, [647–652](#)

:: (cons), [76, 329](#)

JUnit, [284–286, 599–600](#)

addString, [340](#)

apply, [338](#)

## K

copyToArray, [340](#)

Kay, Alan, [45, 433](#)

count, [78, 334, 337](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

## [Index](#)

743

drop, [78, 337](#)

range, [345, 352](#)

dropRight, [78](#)

unzip, [353](#)

dropWhile, [346](#)

ListBuffer class, [77, 363–364, 494](#)

elements, [341](#)

listenTo method

exists, [78](#), [347](#)

on Reactor, [676](#), [704](#)

filter, [78](#), [345](#)

lists, see also List class, [75–77](#), [327](#)

find, [346](#)

appending to, [77](#)

flatMap, [344](#)

class hierarchy diagram, [488](#)

foldLeft, [349](#)

concatenation (::::), [332](#)

foldRight, [349](#)

converting to arrays, [382](#)

forall, [78](#), [347](#)

converting to strings, [339](#)

foreach, [78](#), [345](#)

creating and initializing, [76](#)

head, [79](#), [329](#)

diagram showing linked-list

indices, [338](#)

structure, [492](#)

init, [79](#), [335](#)

in-depth treatment, [327–358](#)

isEmpty, [79](#), [329](#)

passing elements as arguments

last, [79](#), [335](#)

with `_*`, [189](#)

length, [79](#)

table of methods, [78](#)

map, [79](#), [344](#)

ListView class, [685](#)

mkString, [79](#), [339](#)

literal method

partition, [346](#)

on trait RegexParsers, [664](#)

reduceLeft, [91](#)

literals, [108–115](#)

remove, [79](#)

array, [75](#)

reverse, [79](#), [336](#)

boolean, [115](#)

sort, [79](#), [351](#)

character, [111](#)

span, [346](#)

class, see classOf method

splitAt, [337](#)

floating point, [110](#)

tail, [79](#), [329](#)

identifier, [143](#)

take, [337](#)

integer, [109](#)

takeWhile, [346](#)

list, [76](#)

toArray, [340](#)

string, [113](#)

toString, [339](#)

symbol, [114](#)

zip, [338](#)

XML, [541–543](#)

List object

little languages, see domain-specific

methods

languages

apply, [76](#), [351](#), [525](#)

LL(1) grammars, [668](#)

concat, [354](#)

loadFile method

exists2, [354](#)

on XML, [548](#)

flatten, [349](#), [353](#)

loan pattern, [203](#)

forall2, [354](#)

local functions, [175](#)

make, [352](#)

local variables, [169](#)

map2, [354](#)

locks, and shared data, [608](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Index](#)

744

logical operations (`&&`, `||`, `!`)

not thrown in for expressions,

on class Boolean, [120](#)

[502](#), [510](#)

Long class, [107](#)

Matsumoto, Yukihiro, [433](#)

lower bounds, [424](#)

max method

LSP, see Liskov Substitution

on class Int (via RichInt), [91](#),

Principle

[128](#), [240](#)

member functions, see methods

M

member variables, see fields

magic numbers, [142](#)

members

main method

abstract, [435](#)

of GUI applications, [672](#)

field, [93](#)

of Scala applications, [102](#)

initialization order of, [441](#)

MainFrame class, [673](#)

method, [93](#)

attributes

no static, [99](#)

contents, [673](#)

type, [436](#)

title, [673](#)

merge sort, [341](#)

make method

message passing, [43](#), [608](#), [619](#)

on object List, [352](#)

meta-programming, [533](#)

map method

methods, see also functions, [93](#), [173](#)

on class List, [79](#), [344](#)

abstract, [211](#)

translating for expressions to

as operators, [116](#)

invocations of, [501](#)

as procedures, [97](#)

Map objects, [85](#), [369](#)

empty-paren, [212](#)

Map traits, see maps

first-order, [332](#)

map2 method

overloading, [144](#)

on object List, [354](#)

overriding, [216–217](#)

maps, [83–85](#), [367–377](#)

parameterless, [211–214](#)

class hierarchy diagram, [84](#)

overriding with vals, [437](#),

creating and initializing

[490](#)

immutable, [85](#)

parameters of, [96](#)

creating and initializing

private, [138](#)

mutable, [84](#)

return from, [96](#)

in library, not language, [40](#)

when to invoke with empty

mutability modeled in

parentheses, [117, 212](#)

hierarchy, [81](#)

Meyer, Bertrand, [212n](#)

table of methods, [372](#)

Meyers, Scott, [226n](#)

match expressions

min method

in-depth coverage, [295–312](#)

on class Int (via RichInt),

quick introduction, [163–164](#)

[128, 240](#)

MatchError class, [297](#)

mixed identifiers, [143](#)

and “not exhaustive” warning,  
mixin composition, see also traits

[311](#)

and self types, [563](#), [706](#)

and extractors, [519](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Index](#)

745

example of, [699](#)

next method

syntax for, [246](#)

on trait Iterator, [360](#)

mkString method

Nice language, [57](#)

on class List, [79](#), [339](#)

Nil object, [77](#), [328](#), [487–489](#)

on trait Iterable, [87](#)

Nilsson, Rickard, [288](#)

mock objects, [556](#)

Node class, [541](#)

modules, [553–567](#)

NodeSeq class, [542](#)

runtime linking, [564](#)

None object, [312](#)

monads, [514](#)

in extractors, [519](#)

monitors, [607](#)

nonvariance, [418](#)

Multi-Java language, [57](#)

Nothing type, [243](#)

multi-threaded programming, see

as result type of throw

concurrency

expressions, [160](#)

multicore, [43, 614](#)

as type parameter of List, [328](#)

multiple return values, [80, 384](#)

in Scala class hierarchy

multiple variable definitions, [385](#)

diagram, [239](#)

multiple-line statements, [99](#)

Null class, [243](#)

mutability

in Scala class hierarchy

and concurrency, [619–620](#)

diagram, [239](#)

and equals, [574–575](#)

null value, [243](#)

of collections, [378](#)

in equals methods, [575](#)

of object state, [387](#)

using Option instead for

optional values, [313](#)

N

NullPointerException,

namespaces

preventing, [313](#)

in C#, [265](#)

Scala's two instead of Java's

O

four, [217](#)

Object class, see also AnyRef class

naming conventions, [141](#)

in Scala class hierarchy

NaN (not a number), [697, 703](#)

diagram, [239](#)

ne method

object keyword, [99–102](#)

on class AnyRef, [124, 243](#)

object-oriented programming, [39,](#)

nesting

[45–46, 129](#)

of classes and objects, [231](#)

Object-Oriented Software

of functions, [175](#)

Construction (Meyer),

of packages, [265](#)

[212n](#)

.NET, [48, 240, 272](#)

object-private access with

NetBeans IDE, [58](#)

private[this], [276](#)

new keyword, [93](#)

objects

not needed when calling factory

annotating, [534](#)

methods, [75](#)

companion, see companion

not needed with case classes,

objects

[294](#)

domain, [555](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Index](#)

746

entity, [556](#)

overriding

equality of, see equality

equals method, [571](#)

functional (immutable), [129](#)

defs with vals, [437, 490](#)

immutable, [75](#)

methods and fields, [216–217](#)

mock, in testing, [556](#)

mutable, [387](#)

P

safe publication of, [619n](#)

package clauses, [265](#)

serializing, [536](#)

package-private access (Java), [275](#)

singleton, see singleton objects

packages, [264–268](#)

standalone, [102](#)

as modules, [553](#)

stateful (mutable), [387](#)

hiding, [266](#)

OCaml language, [47, 57, 86](#)

implicitly imported, [272](#)

on-demand import, [269](#)

unnamed package, [264](#)

operator

pair, name for Tuple2, [228](#)

associativity, [126–127](#)

Panel class, [675](#)

example: class Rational with

parallel programming, [607–641](#)

operator methods, [145](#)

parameterization

identifiers, [142](#)

with types, [71](#)

when to use, [656](#)

with values, [71](#)

notation, [73–74, 115–118, 141](#)

parameterized types, [71](#)

infix, [116](#)

and object equality, [582–586](#)

postfix, [118](#)

parameterless methods, [211–214](#)

prefix, [117](#)

overriding with vals, [437, 490](#)

“overloading”, [73](#)

parameters

precedence, [124–126, 141](#)

by-name, [206, 399](#)

table of, [126](#)

by-value, [662](#)

opt method

class, see class parameters

on trait Parsers, [663](#)

implicit, [434, 470, 475–481](#)

optimization

repeated, [75, 188–189](#)

of tail recursion, [192](#)

vararg matching, [523](#)

turning off with

type, [71](#)

notailcalls, [192](#)

versus arguments, [717](#)

of value types, [241](#)

parametric fields, [134, 218](#)

Option class, [312–313](#)

parentheses

Ordered trait, [252–254, 375, 431](#)

using curly braces instead of,

outer classes, see inner classes

[203](#)

overloading

when to use on method calls,

constructors, [136–137](#)

[117, 212](#)

methods, [144](#)

Parser class, [644](#)

“operator”, [73](#)

parser combinators, [642–670](#),

override modifier, [132, 220](#)

[691–694, 707](#)

on parametric fields, [218](#)

parser generators, [642](#)

ParseResult class, [657](#)

## Index

747

parsers, [642–670](#)

[497](#)

Parsers trait, [656](#), [663](#)

loan pattern, [203](#)

partial functions, [314–317](#)

reading lines, characters, etc.,

and actors, [611](#)

with do-while, [152](#)

PartialFunction trait, [316](#), [611](#),

rich wrappers pattern, [127–128](#),

[677](#)

[475](#)

partially applied functions, [181](#), [343](#)

using Option not null to

partition method

indicate optional values,

on class List, [346](#)

[313](#)

passing arguments

performance, see also efficiency

to superclass a constructor, [219](#)

and multi-core processors, [43](#)

path-dependent types, [449–452](#)

of Scala compared to Java, [48](#)

and inner classes, [451](#)

Perl language, [40, 527](#)

pattern guards, [308](#)

Pizza language, [xxvii, 57](#)

pattern matching

placeholder syntax

and extractors, [516](#)

in existentials, [603](#)

constant patterns, [296, 299](#)

in function literals, [180, 197](#)

constructor patterns, [296, 301](#)

PLT-Scheme language, [57](#)

examples of, [400, 696](#)

pointers, see references

in event handling, [677](#)

polymorphism, [222](#)

in exception handling, [161](#)

and type inference, [357](#)

in for expressions, [317](#), [502](#)

pop method

in lists, [330](#), [489](#)

on class Stack, [366](#)

in variable definitions, [314](#)

Popescu, Alexandru, [285](#)

in equals method, [572](#), [576](#)

postconditions, see ensuring

in-depth coverage, [295–318](#)

method

on XML, [549–552](#)

postfix operator notation, [118](#)

quick introduction, [163–164](#)

pre-initialized fields, [441](#)

sequence patterns, [302](#)

precedence, operator, [124–126](#), [141](#)

tuple patterns, [303](#)

table of, [126](#)

typed patterns, [303](#)

preconditions, [133](#)

variable patterns, [299](#)

Predef object

variable-binding patterns, [307](#)

methods

wildcard patterns, [298](#)

assert, [88](#), [279](#)

patterns and idioms

classOf, [283](#), [599](#)

conditional initialization, [150](#)

ensuring, [280](#)

divide and conquer principle,

println, [103](#)

[333](#)

predicates, [51](#)

ensuring a resource is closed,

prefix operator notation, [117](#)

[162](#)

primary constructors, [130–132](#)

functional on the outside,

private, [414](#)

imperative on the inside,

primitive types, [75](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Index](#)

748

private modifier

in regular expressions, [528](#)

and inner classes, [273](#)

raw types (Java), [410, 602](#)

augmented with qualifiers, i.e.,

Raymond, Eric, [41](#)

private[meeting], [274](#)

reactions property

granting access to private

on Reactor, [677, 695](#)

members of inner classes,

Reactor trait, [676](#)  
[276](#)

Reader class, [657](#)

in modules, [557](#)

reading

object-private access with

from standard input with

private[this], [276](#)

do-while, [152](#)

on constructors, [414](#)

lines from a file, [89](#)

on fields, [95](#), [138](#)

receive method

on methods, [138](#)

on trait Actor, [43](#), [47](#)

on parametric fields, [218](#)

recommended style, see style

procedures, [97](#)

recommendations

programming in the large, [553](#)

recursion, see recursion

programming in the small, [553](#)

in combinator parsers, [662](#)

programming style

tail, [189–193](#)

functional, [81](#)

optimization, [192](#)

imperative, [81](#)

using ListBuffer to prevent

modular, [553–567](#)

stack overflow, [363](#)

pronunciation of Scala, [39](#)

reduceLeft method

properties, [143, 390–393, 673](#)

on class List, [91](#)

verifiable with static typing, [53](#)

refactoring

protected modifier, [273](#)

and static typing, [54](#)

on parametric fields, [218](#)

and vals, [151](#)

public access, [95](#)

imperative to functional style,

Publisher trait, [702](#)

[170](#)

push method

reducing code duplication with

on class Stack, [366](#)

closures, [197](#)

Python language, [xxvii, 40, 42](#)

reference

classes, [240](#)

Q

definition of, [718](#)

Queue class, [365](#)

equality, [124, 242, 568](#)

referential transparency, [48](#)

R

reflection, [600](#)

r method

Regex class, [528](#)

on class String (via

regex method

RichString), [529](#)

on trait RegexParsers, [664](#)

range method

RegexParsers trait, [647](#), [664](#), [691](#)

on object List, [345](#), [352](#)

regular expressions, [527](#)

ranges, of basic types, [108](#)

as parsers, [646](#), [691–694](#)

raw strings, [113](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Index](#)

749

relational operations ( $>$ ,  $<$ ,  $\geq$ ,  $\leq$ )

class hierarchy diagram, [239](#)

on numeric types, [119](#)

compatibility with Java, [39](#),

on trait Ordered, [252–254](#)

[48–49, 594–606](#)

remove method

compiling, [104](#)

on class List, [79](#)

conciseness versus Java, [49–51](#)

rendererComponent method

downloading, [58](#)

on class Table, [686](#)

IDEs, [58](#)

rep method

influences on, [55–57](#)

on trait Parsers, [663](#)

interpreter shell, [58–60](#)

repeated parameters, [75, 188–189](#)

naming of source files, [103](#)

vararg matching, [523](#)

pronunciation of “Scala”, [39](#)

representation independence, [526](#)

scalability of, [45–48, 555, 706](#)

repsep method

scripts, see scripts, Scala

on trait Parsers, [663](#)

specification, [xxxii](#)

require method

scalability

on object Predef, [133](#)

of configuration, [565](#)

resources, ensuring release of, [162](#),

of Scala language, [45–48, 555](#),

[203](#)

[706](#)

result type, [62](#)

of teams, [554](#)

covariance of, [427](#)

scalac (Scala compiler), [104](#)

return keyword, [96](#)

ScalaCheck, [281, 288–289](#)

return type, [62](#)

Scaladoc, [532](#)

returning multiple values, [80, 384](#)

ScalaObject trait, [241](#)

reverse method

ScalaTest, [281–292](#)

on class List, [79, 336](#)

scanner generators, [642](#)

rich wrappers pattern, [127–128, 475](#)

Scheme language, [47](#)

RichInt class, see Int class

scope

RichString class, see String class

of implicit conversions, [468](#)

rowHeaderView property

of variables, [167–170](#)

on class ScrollPane, [685](#)

scripts, Scala, [64–65, 103](#)

Ruby language, [xxvii, 40, 47, 465](#)

running on Unix, [708](#)

Rumbaugh, James, [260](#)

running on Windows, [708](#)

running a Scala program, see scala

ScrollPane class, [683](#), [685](#)

runtime type, definition of, [719](#)

sealed classes, [310–312](#)

sealed modifier, [310](#), [526](#)

S

selectors

saveFull method

in match expressions, [296](#)

on XML, [548](#)

selectors, in imports, [270](#)

scala (Scala launcher)

self references, [135–136](#)

to launch applications, [104](#)

self types, [563](#), [696](#), [700](#)

to launch scripts, [65](#)

semi-structured data, [539](#)

to launch the interpreter, [59](#)

semicolon inference, [98–99](#)

Scala language

## Index

750

turning off, [654](#)

shown with rounded corners in

Seq trait, [227](#), [361](#)

hierarchy diagrams, [488](#)

sequence patterns, [302](#)

singleton types, [567](#)

serializable annotation, [536](#), [598](#)

size method

serialization

on Set traits, [370](#)

binary, [536](#)

Smalltalk language, [45](#), [465](#)

to and from XML, [543–545](#)

SML language, [47](#)

SerialVersionUID annotation, [536](#)

snoc, [350](#)

Set objects, [81](#), [369](#)

Some class, [312](#)

Set traits, see sets  
in extractors, [519](#)  
sets, [81–83, 367–377](#)

sort  
and generic types, [410](#)  
insertion, [329, 331](#)  
class hierarchy diagram, [82](#)  
merge, [341](#)  
creating and initializing  
sort method  
immutable, [81](#)  
on class List, [79, 351](#)  
creating and initializing  
SortedMap trait, [374](#)  
mutable, [83](#)  
SortedSet trait, [374](#)  
mutability modeled in  
source code, downloading, see  
hierarchy, [81](#)  
example code

table of methods, [370](#)

source files, naming of, [103](#)

setter methods, [390](#), [438](#), [673](#)

Source object, [89](#)

shadowing variables, [169](#)

span method

shared data and locks, [608](#)

on class List, [346](#)

shared-nothing message passing, [608](#)

specifiers, access, see access

shell, Scala interpreter, [58–60](#)

modifiers

shift operations (<<, >>, >>>)

specs, [281](#), [287–288](#)

on integral types, [122](#)

split method

short circuiting, of logical

on class String, [368](#)

operations, [120](#)

splitAt method

Short class, [107](#), [591](#)

on class List, [337](#)

side effects, [48](#), [75](#), [87](#)

spreadsheets, [683–707](#)

minimizing, [88](#)

Spring Framework, [554](#), [565](#)

SimpleGUIApplication class, [672](#),

Stack class, [366](#)

[685](#)

stack, the

Simula language, [45](#)

and tail-recursive functions,

singleton objects, [99–102](#)

[190](#), [494](#)

as modules, [553](#)

and the react method on

as seen from Java, [596–597](#)

actors, [614](#)

in testing, [556](#)

and thrown exceptions, [160](#)

initialization semantics, [102](#)

and variables captured by

nesting of, [231](#)

closures, [188](#)

stackable modifications, [254–258](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Index](#)

751

standalone objects, [102](#)

restraint, [147](#)

standard error stream, [89](#)

subclasses

statements

and equals method, [579](#)

multiple-line, [99](#)

defining, [214](#)

static members, [99](#)

subtyping

static typing, [52–55](#)

and type parameters, [417](#)

Steele, Guy, [41](#), [506](#)

versus subclassing, [720](#)

String class, [108](#)

subtyping polymorphism, [222](#)

methods

Success class, [657](#)

r (via RichString), [529](#)

super references

stripMargin (via

special treatment in traits, [248](#)

RichString), [113](#)

superclasses, [214](#)

StringBuilder class, [340](#)

invoking constructor on, [219](#)

stringLiteral method

supertype, [428](#)

in trait JavaTokenParsers,

Sussman, Gerald J., [393](#), [506](#)

[650](#)

Swing, [671–681](#)

strings

Swing class, [675](#)

formatting, [459](#)

methods

iterating through the characters

EmptyBorder, [675](#)

of, [51](#)

switch statement (Java), [163](#)

literals, [113](#)

symbol literals, [114](#)

long, [113](#)

symbolic versus alphabetic names,

raw, [113, 528](#)

[656](#)

treating as Seq[Char] (via

SynchronizedMap trait, [375](#)

RichString), [367](#)

SynchronizedSet trait, [377](#)

structural subtyping, see <http://>

syntactical analysis, [665](#)

[booksites.artima.com/](http://booksites.artima.com/)

programming\_in\_scala

T

Structure and Interpretation of

Table class, [683](#), [686](#)

Computer Programs

TableUpdated class, [694](#)

(Abelson, et. al.), [393](#)

\$tag method

style recommendations

on trait ScalaObject, [241](#)

prefer alphabetic names unless

tags, XML, [540](#)

symbolic names have

tail method

established meaning, [656](#)

on class List, [79](#), [329](#), [488](#)

prefer classes to tuples when

tail recursion, [189–193](#), [493](#)

data combination has

optimization, [191](#)

meaning, [385](#)

turning off with

prefer vals, immutable objects,

notailcalls, [192](#)

and methods without side

take method

effects, [88](#)

on class List, [337](#)

use implicit conversions with

takeWhile method

on class List, [346](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Index](#)

752

target typing, [179](#)

on class Stack, [366](#)

template, definition of, [721](#)

top method

term, in function literals, [186](#)

on class

Test annotation

SimpleGUIApplication,

in JUnit 4, [600](#)

[672](#)

in TestNG, [286](#)

Torreborre, Eric, [287](#)

test suites, [290](#)

toString method, [132](#), [237](#)

TestCase class, [290](#)

generated for case classes, [295](#)

testing, [88](#), [281–292](#)

on class Any, [237](#)

integration, [554](#)

overriding, [132](#)

unit, [171](#)

traits, see also mixin composition,

with mock objects, [556](#)

[245](#), [561–564](#)

with singletons, [556](#)

and abstract parameters, [439](#)

TestNG, [284–286](#)

and Java interfaces, [597](#)

Text class, [541](#)

annotating, [534](#)

text method

generic, [410, 417](#)

on class Node, [545](#)

initializing, [439](#)

text processing in XML, [540, 545](#)

linearization of, [258–262](#)

TextField class, [687](#)

mixing in, [81](#)

Thinking in Java (Eckel), [226n](#)

transient annotation, [537](#)

this, [135–136](#)

TreeMap class, [375](#)

aliasing, [659](#)

TreeSet class, [375](#)

and self types, [563](#)

true value, [115](#)

Thread class, [613](#)

try expressions, [159–163](#)

thread safety, [40, 375, 619, 620](#)

tuple patterns, [303](#)

threads, and actors, [612–613](#)

tuples, [383–385](#)

throw expressions, [160](#)

creating and using, [80](#)

throws annotation, [598](#)

one-based element access, [81](#)

to method

result of -> operation, [85](#)

on class Int (via RichInt), [73,](#)

when to use a class instead, [385](#)

[128, 240](#)

type aliases, [436](#)

toArray method

type annotations, [40, 54, 60](#)

on class List, [340](#)

for debugging, [358](#)

toChar method

type casts, see casting

on class Int, [690](#)

type constructors, [417](#)

toInt method

type erasure, [306](#)

on class String (via

type inference, [55, 85n](#)

RichString), [49](#)

Hindley-Milner style, [358](#)

toList method

the algorithm, [355](#)

on class Array, [340, 382](#)

type keyword

on class ListBuffer, [363, 494](#)

in singleton types, such as

top method

db.type, [567](#)

## Index

753

in type alias definitions, [368](#),

unapplySeq method

[436](#)

in extractors, [523](#)

type members, [436–437](#)

unary operations, [117](#), [143](#)

type parameterization, see

unchecked annotation, [312](#), [401](#),

parameterized types

[534](#)

type parameters, [333](#), [410](#)

Unicode, [111](#)

in parser results, [657](#)

Unified Modeling Language

lower bounds, [424](#)

Reference Manual, The

upper bounds, [431](#)

(Rumbaugh, et. al.), [260n](#)

type tests

uniform access principle, [212](#)

with `isInstanceOf`, [304](#)

Unit class, [87](#)

with type patterns (preferred

as return type of a method, [97](#)

style), [303](#)

unit testing, [88](#), [171](#), [281–292](#)

type-driven design, [425](#)

unit value, [152](#)

typed patterns, [303](#)

unnamed package, [264](#)

types

until method

abstract, [447](#)

on class Int (via RichInt),

bottom, [243](#)

[228](#), [240](#), [384](#)

erasure, [584](#)

unzip method

existential, [586, 602–605](#)

on object List, [353](#)

generic, [410](#)

update method

ground, [722](#)

on class Array, [74](#)

in for expressions, [513](#)

upper bounds, [431](#)

integral, [107](#)

user interfaces, [671–707](#)

numeric, [107](#)

reactive programming, [683, 707](#)

path-dependent, [449–452](#)

primitive, [75](#)

V

result, [62](#)

vals, see also variables

return, [62](#)

abstract, [437](#)

runtime, [722](#)

annotating, [534](#)

self, [563](#), [696](#), [700](#)

as fields, [93](#)

singleton, [567](#)

conditional initialization of, [150](#)

static, [722](#)

defining, [60–62](#)

target, [467](#)

lazy, [444](#)

typing

preferring over vars, [86](#)

dynamic, [xxvii](#), [53](#), [55](#), [114](#)

referencing mutable objects, [72](#)

static, [52–55](#)

“val” on class parameters, [218](#)

target, [179](#)

Value class, [452](#)

value classes, [238](#)

U

value parameterization, [71](#)

Ullman, Jeffrey, [506](#)

ValueChanged class, [703](#)

unapply method

values method

in extractors, [517](#)

on Map traits, [372](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

[Index](#)

754

van Rossum, Guido, [433](#)

warnings, see compiler warnings

vararg matching, [523](#)

while loops, [65–67, 151–154](#)

variable patterns, [299](#)

as imperative style, [86](#)

variable-binding patterns, [307](#)

wildcard patterns, [298](#)

variable-length arguments, or

wildcard types (Java), [602](#)

“varargs”, see repeated

Wirth, Niklaus, [506](#)

parameters

with keyword, [247](#)

variables

bound, [157](#), [184](#)

X

captured by closures, [188](#)

XML, [539–552](#)

defining, [60–62](#)

attributes, [541](#), [546](#)

using patterns, [314](#), [385](#)

character encoding, [548](#)

fields, [93–95](#)

configuration files, [554](#), [565](#)

final (Java), see vals

deserialization, [547](#)

free, [184](#)

elements, [540–541](#)

instance, [95](#)

literals, [541–543](#)

local, [169](#)

pattern matching, [549–552](#)

multiple definitions of, [385](#)

serialization, [543–545](#)

reassignable, see also vars, [390](#)

tags, [540](#)

scope, [167–170](#)

text, [540](#)

shadowing, [169](#)

using an at sign (@) to extract

variance, [418](#)

attributes , [546](#)

annotations, [417–421](#)

using curly braces ({} ) in

compiler checking of,

pattern matching, [549](#)

[421–424](#), [431](#)

XPath, [545](#)

declaration-site, [426](#)

XML object

use-site, [426](#)

methods

vars, see also variables

loadFile, [548](#)

abstract, [438](#)

saveFull, [548](#)

and mutable objects, [389](#)

XPath, [545](#)

annotating, [534](#)

as fields, [93](#)

Y

defining, [60–62](#)

Yacc, [642](#)

on class parameters, [218](#)

yield keyword

programming without, [86](#)

in for expressions, [158, 501](#)

verifiable properties, [53](#)

Z

view bounds, [434, 482](#)

zip method

viewportView property

on class List, [338](#)

on class ScrollPane, [685](#)

zipWithIndex method

volatile annotation, [536, 597](#)

on class List, [338](#)

W

Wall, Larry, [433](#)

[Cover](#) · [Overview](#) · [Contents](#) · [Discuss](#) · [Suggest](#) · [Glossary](#) · [Index](#)

# Document Outline

- [Contents](#)
- [List of Figures](#)
- [List of Tables](#)
- [List of Listings](#)
- [Foreword](#)
- [Acknowledgments](#)
- [Introduction](#)
- [A Scalable Language](#)
  - [A language that grows on you](#)
  - [What makes Scala scalable?](#)
  - [Why Scala?](#)
  - [Scala's roots](#)
  - [Conclusion](#)
- [First Steps in Scala](#)
  - [Learn to use the Scala interpreter](#)
  - [Define some variables](#)
  - [Define some functions](#)
  - [Write some Scala scripts](#)
  - [Loop with while; decide with if](#)
  - [Iterate with foreach and for](#)
  - [Conclusion](#)
- [Next Steps in Scala](#)
  - [Parameterize arrays with types](#)
  - [Use lists](#)
  - [Use tuples](#)
  - [Use sets and maps](#)
  - [Learn to recognize the functional style](#)
  - [Read lines from a file](#)
  - [Conclusion](#)
- [Classes and Objects](#)
  - [Classes, fields, and methods](#)
  - [Semicolon inference](#)
  - [Singleton objects](#)

- [A Scala application](#)
  - [The Application trait](#)
  - [Conclusion](#)
- [Basic Types and Operations](#)
  - [Some basic types](#)
  - [Literals](#)
  - [Operators are methods](#)
  - [Arithmetic operations](#)
  - [Relational and logical operations](#)
  - [Bitwise operations](#)
  - [Object equality](#)
  - [Operator precedence and associativity](#)
  - [Rich wrappers](#)
  - [Conclusion](#)
- [Functional Objects](#)
  - [A specification for class Rational](#)
  - [Constructing a Rational](#)
  - [Reimplementing the `toString` method](#)
  - [Checking preconditions](#)
  - [Adding fields](#)
  - [Self references](#)
  - [Auxiliary constructors](#)
  - [Private fields and methods](#)
  - [Defining operators](#)
  - [Identifiers in Scala](#)
  - [Method overloading](#)
  - [Implicit conversions](#)
  - [A word of caution](#)
  - [Conclusion](#)
- [Built-in Control Structures](#)
  - [If expressions](#)
  - [While loops](#)
  - [For expressions](#)
  - [Exception handling with try expressions](#)
  - [Match expressions](#)
  - [Living without break and continue](#)
  - [Variable scope](#)

- [Refactoring imperative-style code](#)
  - [Conclusion](#)
- [Functions and Closures](#)
  - [Methods](#)
  - [Local functions](#)
  - [First-class functions](#)
  - [Short forms of function literals](#)
  - [Placeholder syntax](#)
  - [Partially applied functions](#)
  - [Closures](#)
  - [Repeated parameters](#)
  - [Tail recursion](#)
  - [Conclusion](#)
- [Control Abstraction](#)
  - [Reducing code duplication](#)
  - [Simplifying client code](#)
  - [Currying](#)
  - [Writing new control structures](#)
  - [By-name parameters](#)
  - [Conclusion](#)
- [Composition and Inheritance](#)
  - [A two-dimensional layout library](#)
  - [Abstract classes](#)
  - [Defining parameterless methods](#)
  - [Extending classes](#)
  - [Overriding methods and fields](#)
  - [Defining parametric fields](#)
  - [Invoking superclass constructors](#)
  - [Using override modifiers](#)
  - [Polymorphism and dynamic binding](#)
  - [Declaring final members](#)
  - [Using composition and inheritance](#)
  - [Implementing above, beside, and toString](#)
  - [Defining a factory object](#)
  - [Heighten and widen](#)
  - [Putting it all together](#)
  - [Conclusion](#)

- [Scala's Hierarchy](#)
  - [Scala's class hierarchy](#)
  - [How primitives are implemented](#)
  - [Bottom types](#)
  - [Conclusion](#)
- [Traits](#)
  - [How traits work](#)
  - [Thin versus rich interfaces](#)
  - [Example: Rectangular objects](#)
  - [The Ordered trait](#)
  - [Traits as stackable modifications](#)
  - [Why not multiple inheritance?](#)
  - [To trait, or not to trait?](#)
  - [Conclusion](#)
- [Packages and Imports](#)
  - [Packages](#)
  - [Imports](#)
  - [Implicit imports](#)
  - [Access modifiers](#)
  - [Conclusion](#)
- [Assertions and Unit Testing](#)
  - [Assertions](#)
  - [Unit testing in Scala](#)
  - [Informative failure reports](#)
  - [Using JUnit and TestNG](#)
  - [Tests as specifications](#)
  - [Property-based testing](#)
  - [Organizing and running tests](#)
  - [Conclusion](#)
- [Case Classes and Pattern Matching](#)
  - [A simple example](#)
  - [Kinds of patterns](#)
  - [Pattern guards](#)
  - [Pattern overlaps](#)
  - [Sealed classes](#)
  - [The Option type](#)
  - [Patterns everywhere](#)

- [A larger example](#)
  - [Conclusion](#)
- [Working with Lists](#)
  - [List literals](#)
  - [The List type](#)
  - [Constructing lists](#)
  - [Basic operations on lists](#)
  - [List patterns](#)
  - [First-order methods on class List](#)
  - [Higher-order methods on class List](#)
  - [Methods of the List object](#)
  - [Understanding Scala's type inference algorithm](#)
  - [Conclusion](#)
- [Collections](#)
  - [Overview of the library](#)
  - [Sequences](#)
  - [Sets and maps](#)
  - [Selecting mutable versus immutable collections](#)
  - [Initializing collections](#)
  - [Tuples](#)
  - [Conclusion](#)
- [Stateful Objects](#)
  - [What makes an object stateful?](#)
  - [Reassignable variables and properties](#)
  - [Case study: Discrete event simulation](#)
  - [A language for digital circuits](#)
  - [The Simulation API](#)
  - [Circuit Simulation](#)
  - [Conclusion](#)
- [Type Parameterization](#)
  - [Functional queues](#)
  - [Information hiding](#)
  - [Variance annotations](#)
  - [Checking variance annotations](#)
  - [Lower bounds](#)
  - [Contravariance](#)
  - [Object private data](#)

- [Upper bounds](#)
  - [Conclusion](#)
- [Abstract Members](#)
  - [A quick tour of abstract members](#)
  - [Type members](#)
  - [Abstract vals](#)
  - [Abstract vars](#)
  - [Initializing abstract vals](#)
  - [Abstract types](#)
  - [Path-dependent types](#)
  - [Enumerations](#)
  - [Case study: Currencies](#)
  - [Conclusion](#)
- [Implicit Conversions and Parameters](#)
  - [Implicit conversions](#)
  - [Rules for implicits](#)
  - [Implicit conversion to an expected type](#)
  - [Converting the receiver](#)
  - [Implicit parameters](#)
  - [View bounds](#)
  - [Debugging implicits](#)
  - [Conclusion](#)
- [Implementing Lists](#)
  - [The List class in principle](#)
  - [The ListBuffer class](#)
  - [The List class in practice](#)
  - [Functional on the outside](#)
  - [Conclusion](#)
- [For Expressions Revisited](#)
  - [For expressions](#)
  - [The n-queens problem](#)
  - [Querying with for expressions](#)
  - [Translation of for expressions](#)
  - [Going the other way](#)
  - [Generalizing for](#)
  - [Conclusion](#)
- [Extractors](#)

- [An example: Extracting email addresses](#)
  - [Extractors](#)
  - [Patterns with zero or one variables](#)
  - [Variable argument extractors](#)
  - [Extractors and sequence patterns](#)
  - [Extractors versus case classes](#)
  - [Regular expressions](#)
  - [Conclusion](#)
- [Annotations](#)
  - [Why have annotations?](#)
  - [Syntax of annotations](#)
  - [Standard annotations](#)
  - [Conclusion](#)
- [Working with XML](#)
  - [Semi-structured data](#)
  - [XML overview](#)
  - [XML literals](#)
  - [Serialization](#)
  - [Taking XML apart](#)
  - [Deserialization](#)
  - [Loading and saving](#)
  - [Pattern matching on XML](#)
  - [Conclusion](#)
- [Modular Programming Using Objects](#)
  - [The problem](#)
  - [A recipe application](#)
  - [Abstraction](#)
  - [Splitting modules into traits](#)
  - [Runtime linking](#)
  - [Tracking module instances](#)
  - [Conclusion](#)
- [Object Equality](#)
  - [Equality in Scala](#)
  - [Writing an equality method](#)
  - [Defining equality for parameterized types](#)
  - [Recipes for equals and hashCode](#)
  - [Conclusion](#)

- [Combining Scala and Java](#)
  - [Using Scala from Java](#)
  - [Annotations](#)
  - [Existential types](#)
  - [Conclusion](#)
- [Actors and Concurrency](#)
  - [Trouble in paradise](#)
  - [Actors and message passing](#)
  - [Treating native threads as actors](#)
  - [Better performance through thread reuse](#)
  - [Good actors style](#)
  - [A longer example: Parallel discrete event simulation](#)
  - [Conclusion](#)
- [Combinator Parsing](#)
  - [Example: Arithmetic expressions](#)
  - [Running your parser](#)
  - [Basic regular expression parsers](#)
  - [Another example: JSON](#)
  - [Parser output](#)
  - [Implementing combinator parsers](#)
  - [String literals and regular expressions](#)
  - [Lexing and parsing](#)
  - [Error reporting](#)
  - [Backtracking versus LL\(1\)](#)
  - [Conclusion](#)
- [GUI Programming](#)
  - [A first Swing application](#)
  - [Panels and layouts](#)
  - [Handling events](#)
  - [Example: Celsius/Fahrenheit converter](#)
  - [Conclusion](#)
- [The SCells Spreadsheet](#)
  - [The visual framework](#)
  - [Disconnecting data entry and display](#)
  - [Formulas](#)
  - [Parsing formulas](#)
  - [Evaluation](#)

- [Operation libraries](#)
- [Change propagation](#)
- [Conclusion](#)
- [Scala scripts on Unix and Windows](#)
- [Glossary](#)
- [Bibliography](#)
- [About the Authors](#)
- [Index](#)