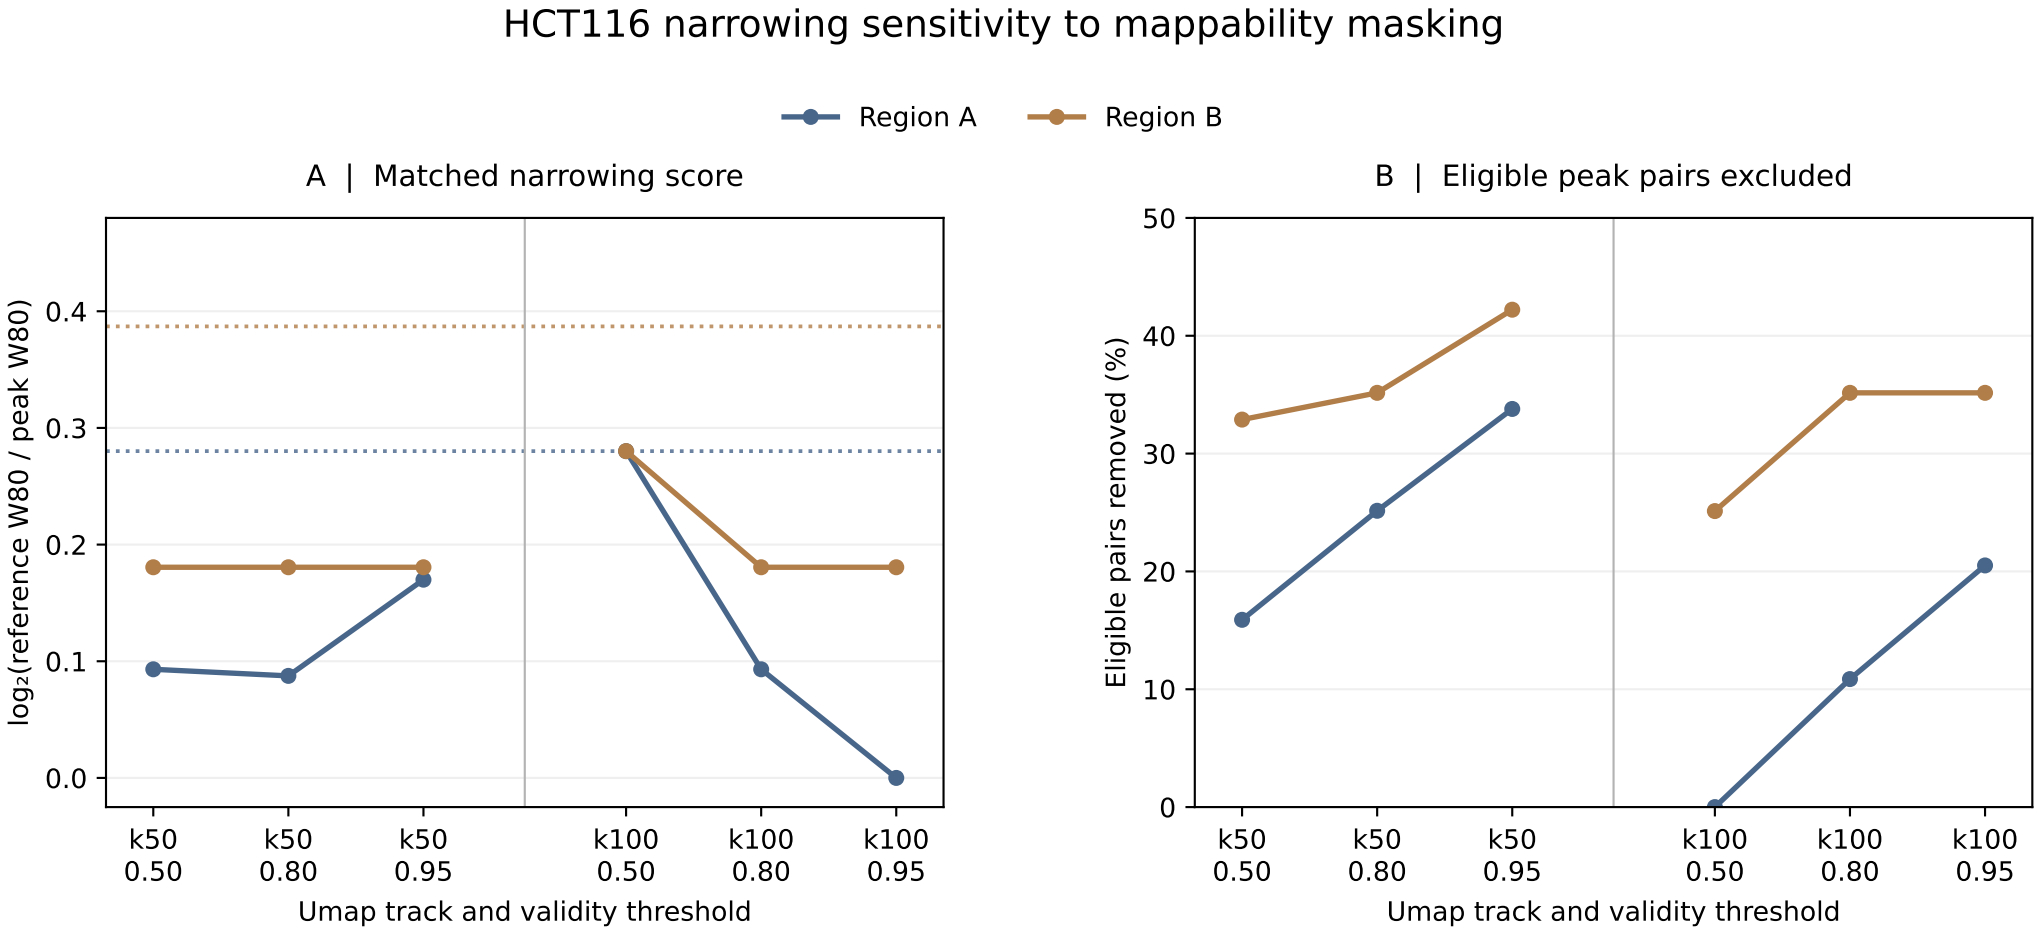
HCT116 narrowing sensitivity to mappability masking
Region A
Region B
A | Matched narrowing score
log₂(reference W80 / peak W80)
0.0
0.1
0.2
0.3
0.4
k50 0.50
k50 0.80
k50 0.95
k100 0.50
k100 0.80
k100 0.95
Umap track and validity threshold
B | Eligible peak pairs excluded
Eligible pairs removed (%)
0
10
20
30
40
50
k50 0.50
k50 0.80
k50 0.95
k100 0.50
k100 0.80
k100 0.95
Umap track and validity threshold
Dotted lines: unmasked scores | Pair loss measures eligible pairs, not sequencing reads
Umap k50/k100 sensitivity settings | Read length unknown | Exploratory; QC unassessed