## Диаграмма вариантов использования

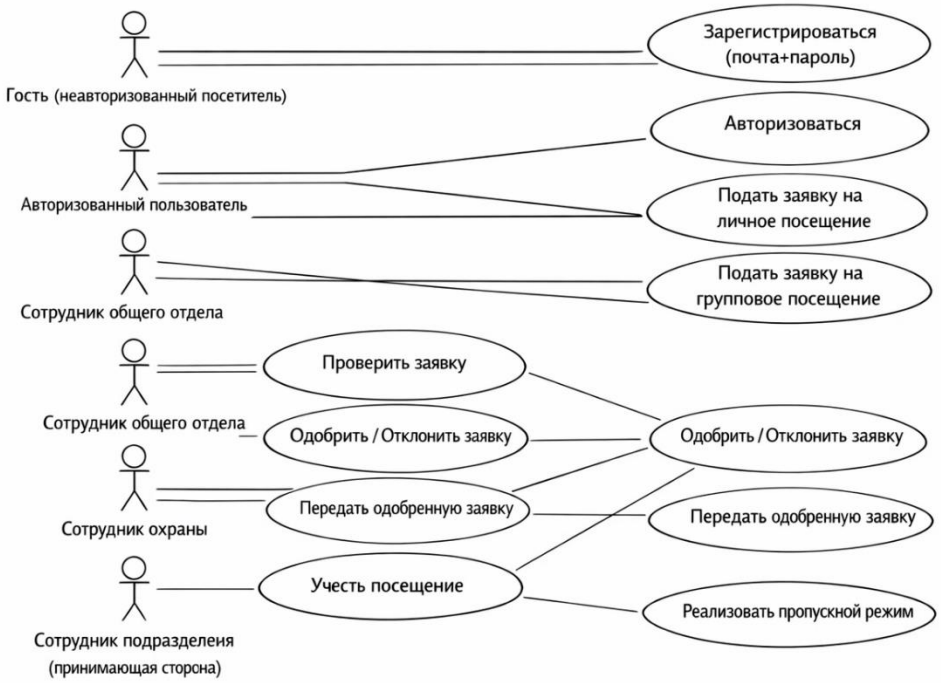


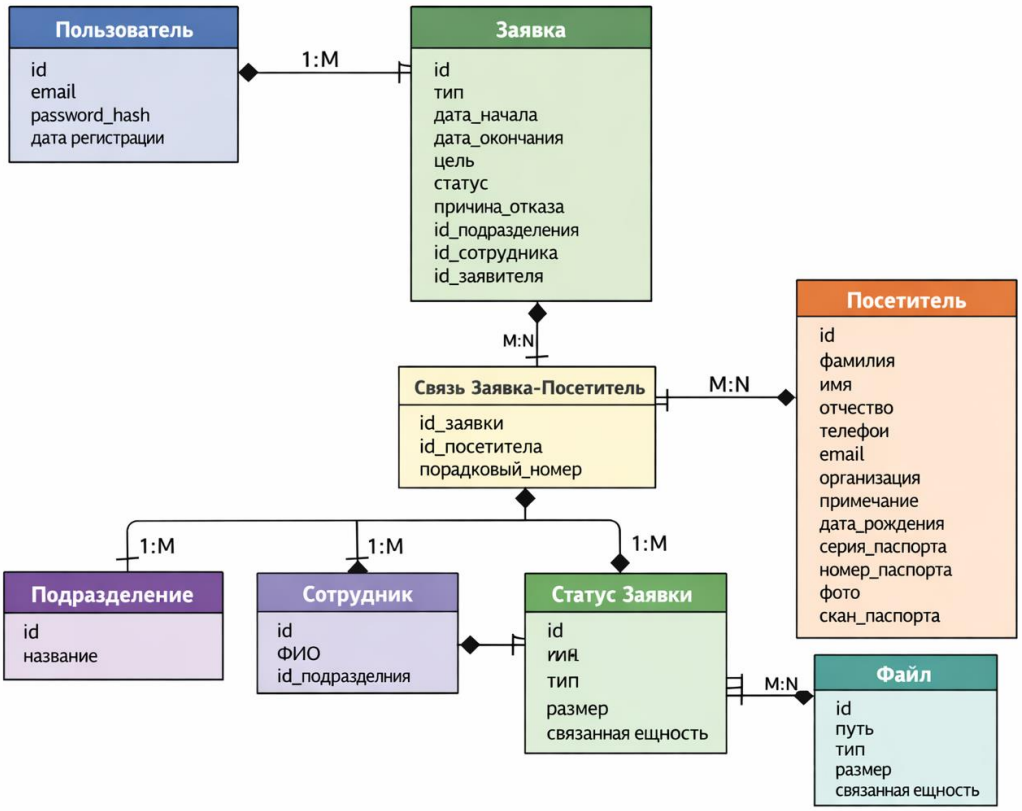

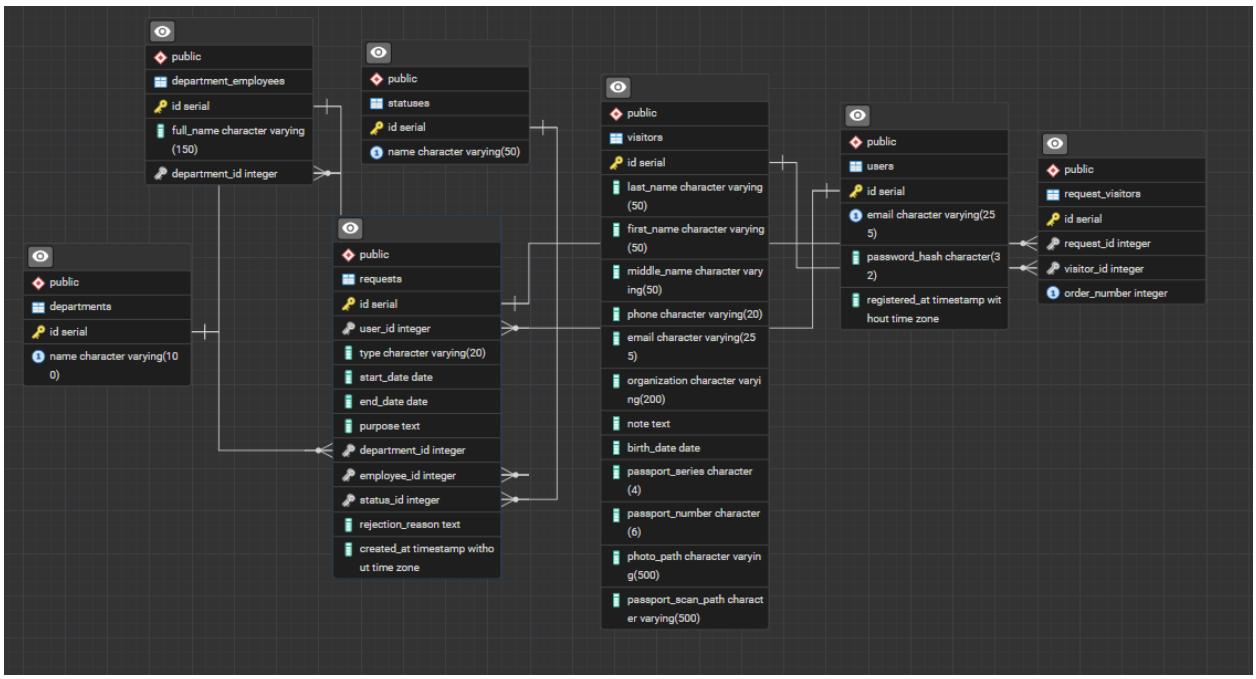
public
department_employees
id serial
full_name character varying (150)
department_id integer
public
statuses
id serial
name character varying(50)
public
departments
id serial
name character varying(100)
public
requests
id serial
user_id integer
type character varying(20)
start_date date
end_date date
purpose text
department_id integer
employee_id integer
status_id integer
rejection_reason text
created_at timestamp without time zone
public
visitors
id serial
last_name character varying (50)
first_name character varying (50)
middle_name character varying(50)
phone character varying(20)
email character varying(255)
organization character varying(200)
note text
birth_date date
passport_series character (4)
passport_number character (6)
photo_path character varying(500)
passport_scan_path character varying(500)
public
users
id serial
email character varying(255)
password_hash character(32)
registered_at timestamp without time zone
public
request_visitors
id serial
request_id integer
visitor_id integer
order_number integer