


# Design

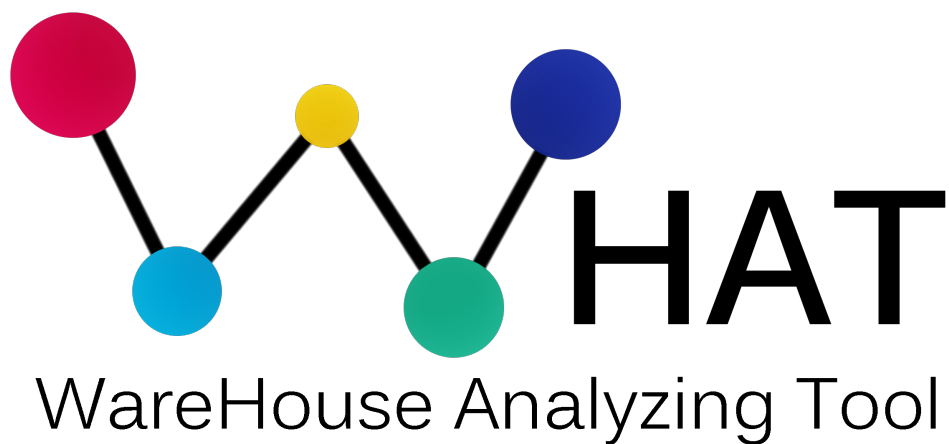

December 13, 2012

Functional Specification	<b>Alexander Noe</b>
Design	<b>Jonathan Klawitter</b>
Implementation	<b>Anas Saber</b>
QA / Testing	<b>Nikolaos Alexandros Kurt Moraitakis</b>
Final	<b>Lukas Ehnle</b>


E-Mail: [pse10-group14-ws12@ira.uni-karlsruhe.de](mailto:pse10-group14-ws12@ira.uni-karlsruhe.de)

## Contents

<b>1</b>	<b>Architecture</b>	<b>3</b>
1.1	Web browser tier . . . . .	4
1.2	Web server tier . . . . .	4
1.3	Application tier . . . . .	4
1.4	Data access tier . . . . .	4
1.5	Data tier . . . . .	4
<b>2</b>	<b>Web page design</b>	<b>5</b>
<b>3</b>	<b>Classes</b>	<b>6</b>
3.1	Server tier class diagram . . . . .	6
3.2	Application & Data access tier class diagram . . . . .	7
3.3	Facade + Configurations . . . . .	10
3.4	Chart request operator . . . . .	10
3.5	Chart parameters . . . . .	12
3.6	. . . . .	12
3.7	Parser . . . . .	12
<b>4</b>	<b>Data warehouse design</b>	<b>15</b>
4.1	Overview . . . . .	15
4.2	Dimension descriptions . . . . .	15
4.3	Measure descriptions . . . . .	15
4.4	Type description . . . . .	15
<b>5</b>	<b>Sequences</b>	<b>16</b>
<b>6</b>	<b>Other data</b>	<b>17</b>
6.1	Static data . . . . .	17
6.2	Dynamic data . . . . .	17
6.3	Extern data . . . . .	17
<b>7</b>	<b>Libraries</b>	<b>18</b>

## 1 Architecture

WHAT follows an intransparent multitier architecture. The GUI, presentation logic, application processing, data accessing and storing data are logically and also partly locally separated. Intransparent means that communication between tiers just happens between adjacent ones. The different tiers are described below.

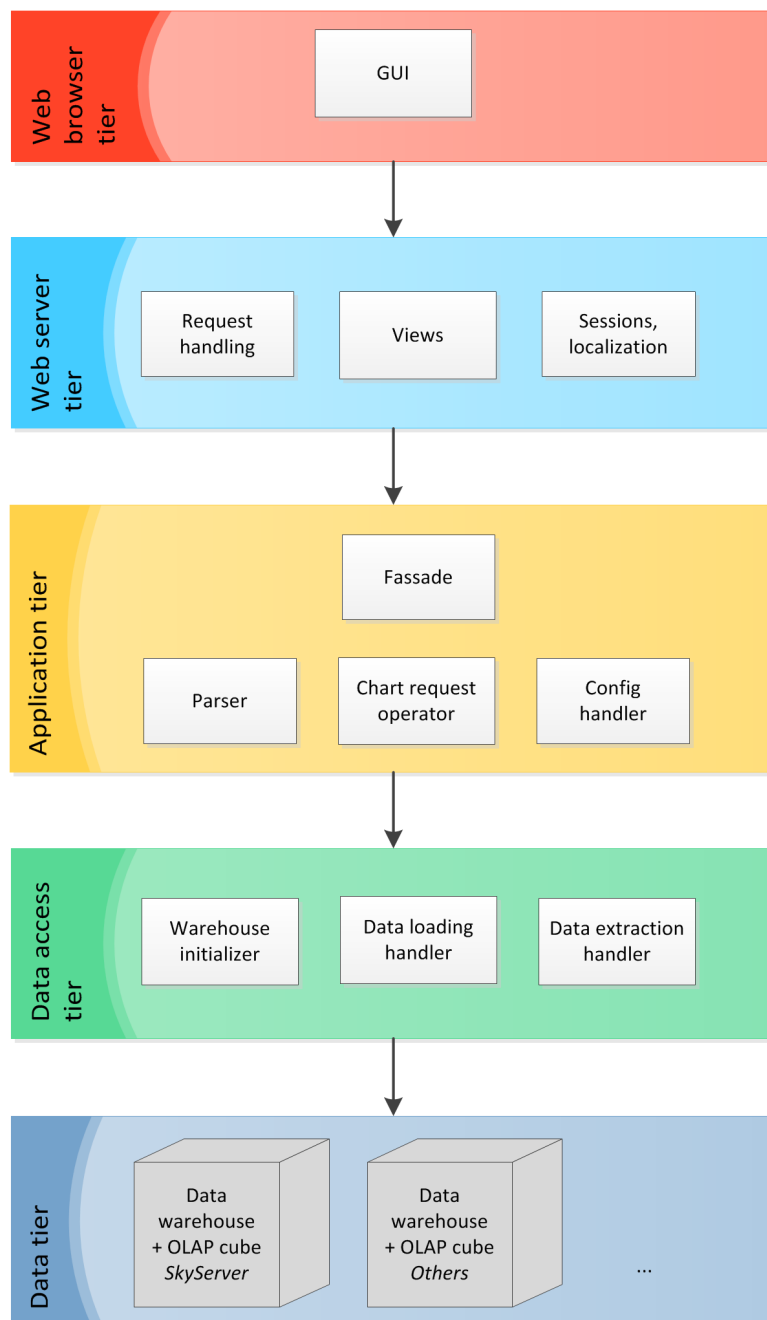

## **1.1 Web browser tier**

The web browser tier represents the GUI of the client, which will be displayed as web page. In the following context GUI and web page will be used interchangeably, as they are the same thing. The webpage utilizes javascript. It handles part of the user interaction with the program.

## **1.2 Web server tier**

The web server provides the presentation logic. This includes both the serving of static files as well as the dynamic integration of content in the html pages. Other tasks are session handling, language localization and most importantly request handling.

It handles the rest of the user interaction with the webpage, while invoking the application tier when needed. This tier uses and is tightly integrated with java Play Framework.

## **1.3 Application tier**

The application tier's function is twofold. On the one hand, it handles the parsing process and the management of configuration files. On the other hand, it acts as a sort of middleman between the web server tier and the data access tier.


## **1.4 Data access tier**

This tier manages all requests of loading and extracting data from the data tier. So its main task is to build a bridge from the application in Java to the SQL language of the Oracle warehouses and OLAP-Cubes. If there is enough time to implement this optional function, it will also handle the automatic initialization of new data warehouses.

## **1.5 Data tier**

In the data tier the data warehouses and their OLAP-Cubes are stored. This will be done with the Oracle software.

## 2 Web page design

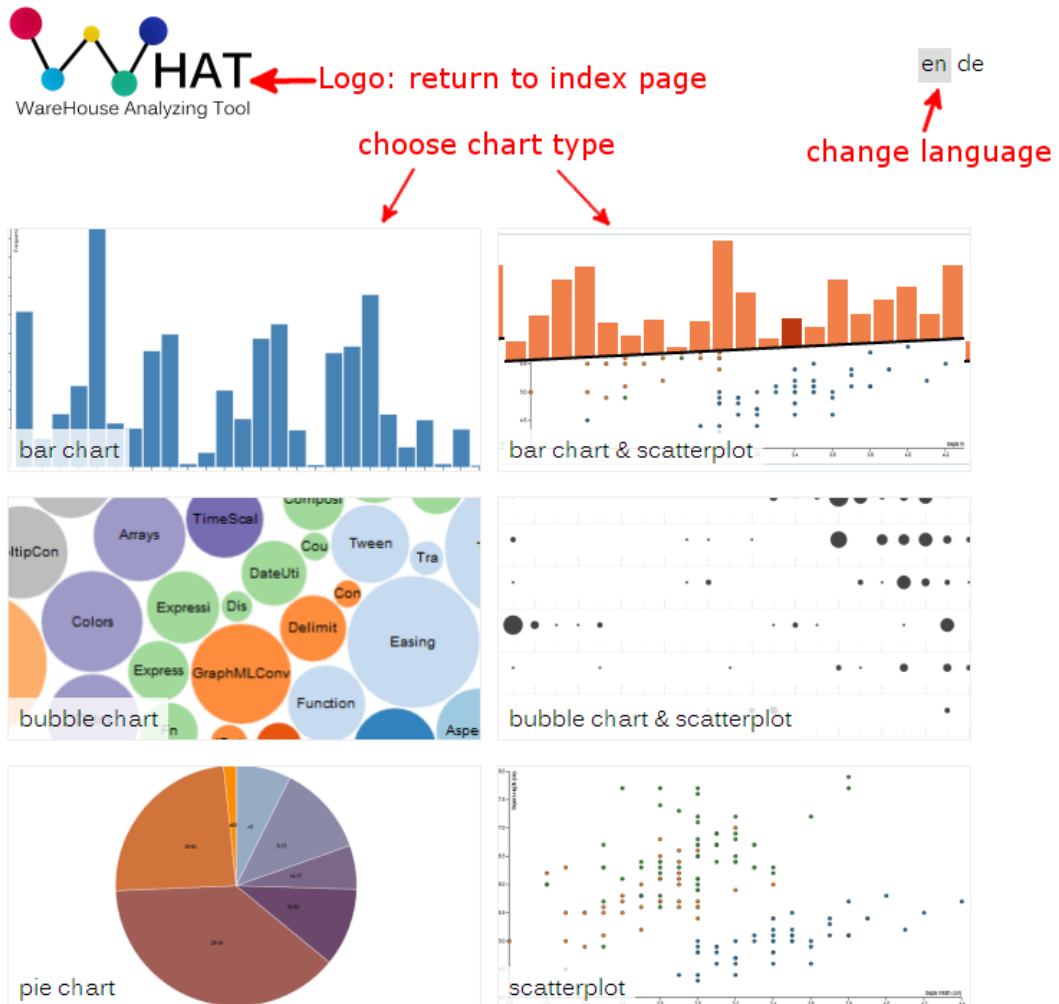


TEXT about admin, blabla, ...

## 3 Classes

### 3.1 Server tier class diagram

TODO sentence about this dia

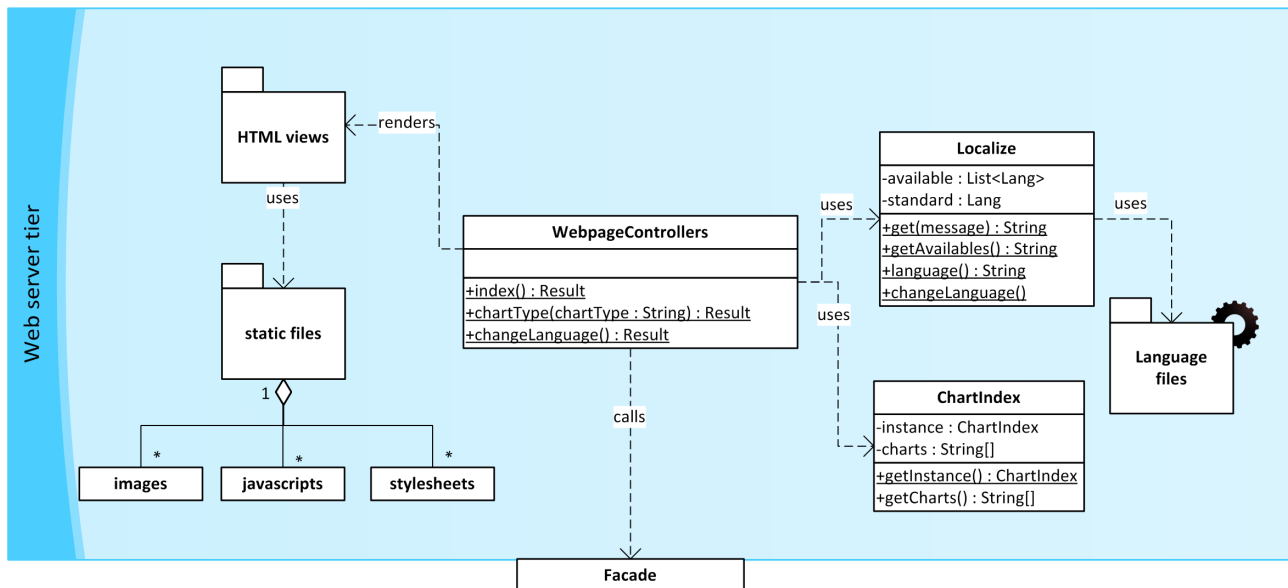

#### WebpageControllers

All valid HTTP requests are mapped to a method from WebpageControllers. WebpageControllers either uses other helper classes to handle requests itself or makes calls to the facade of the application tier. The last step done by WebpageControllers is to create a valid HTTP response.

#### HTML views

The HTML views contain the main template for, and all other HTML content of the webpage. They do not have to be static, but can also dynamically integrate some content, e.g. localized strings.

#### Static files

Static files contains all files of the webpage, which are not changed during runtime. This includes, but is not limited, to images of the webpage, javascript files and stylesheets.

---

## Localize

---

Localize is a static helper class handling all the language related things. It has a method to get localized Strings using the language files, to change the language of the webpage and methods determining all available languages, so they can be integrated in the webpage once they are present.

---


## ChartIndex

---


ChartIndex implements the singleton pattern. On instantiation it scans which chart types are available and saves them internally. This is used by the index page to dynamically display all available chart types, even if one is deleted or added.

## 3.2 Application & Data access tier class diagram


TODO sentence about this dia

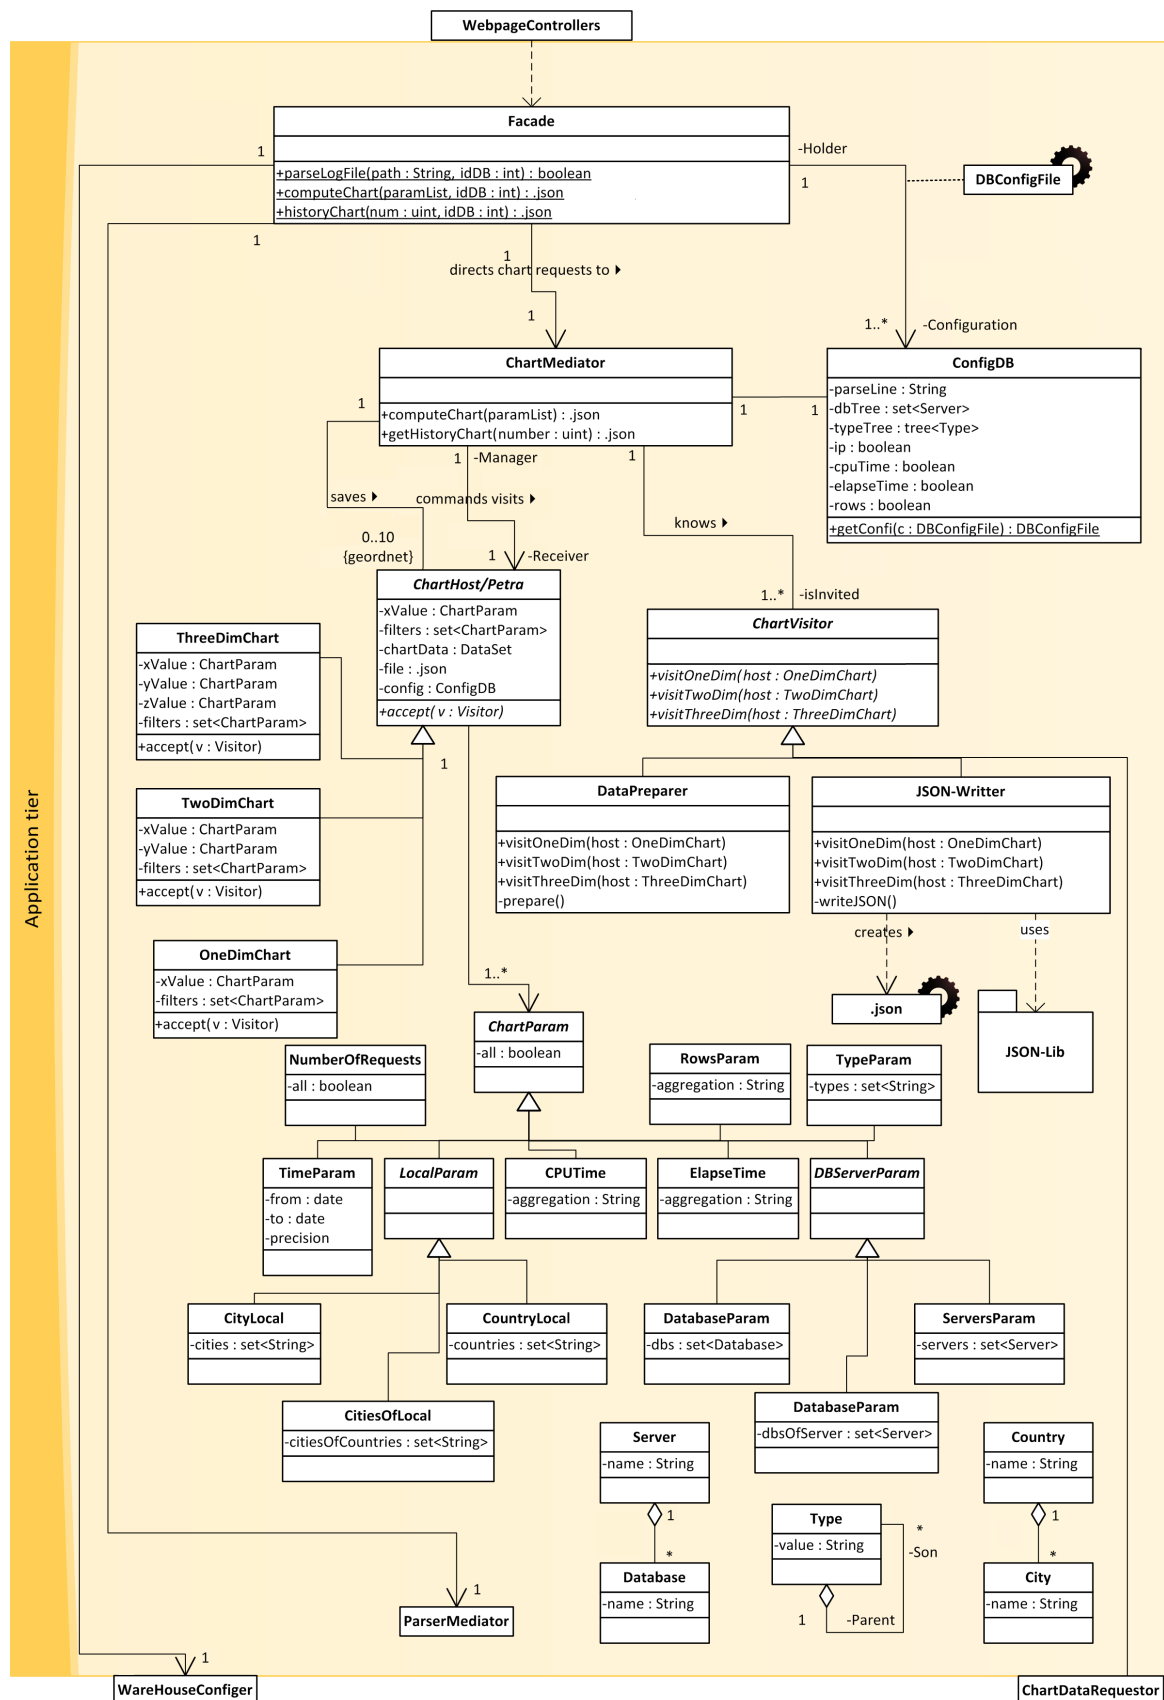



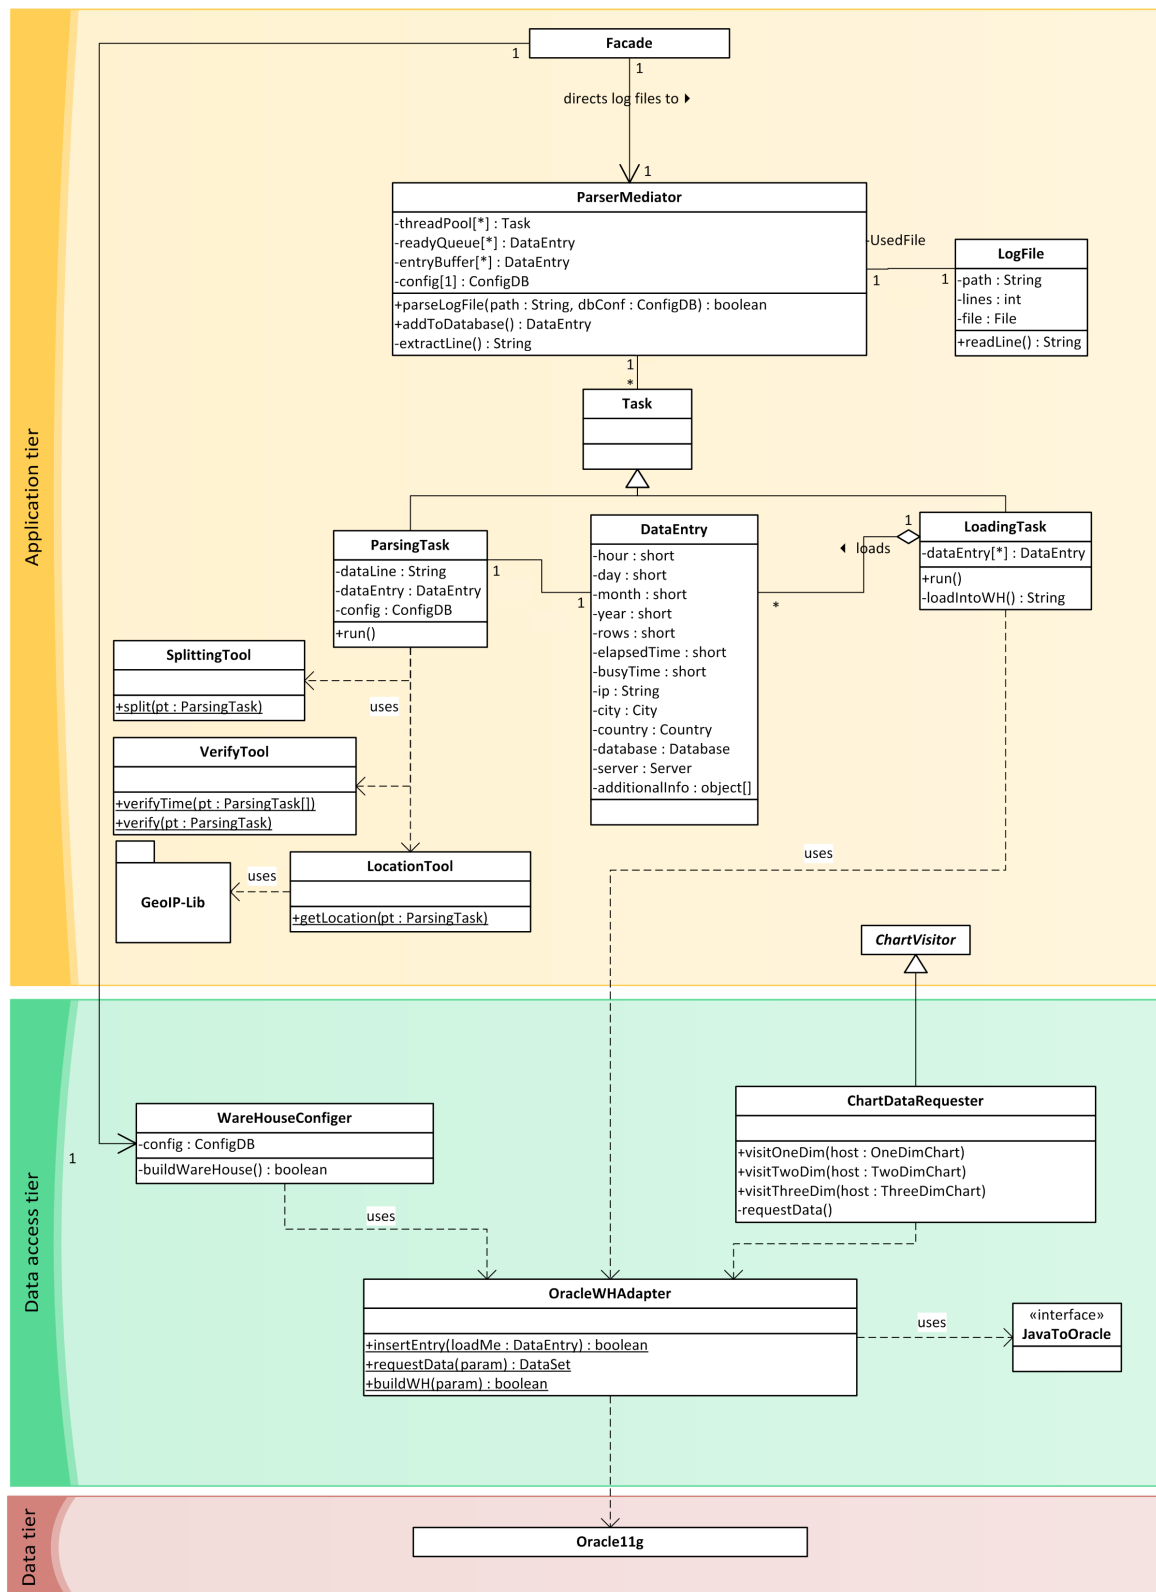


### 3.3 Facade + Configurations

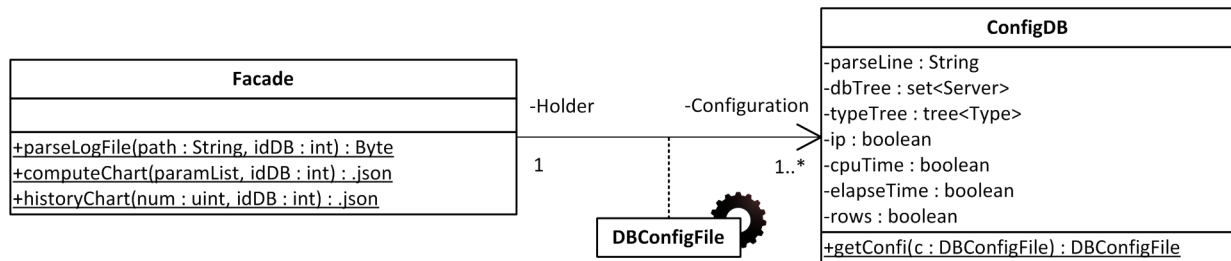

#### Facade

#### ConfigDB

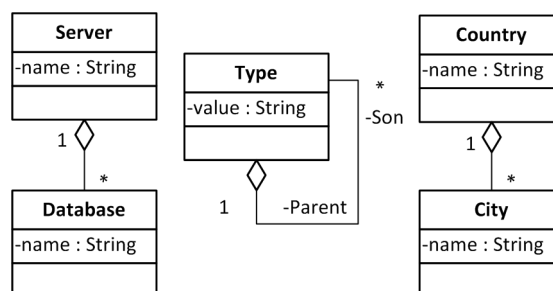


#### Server, Database

#### Type

#### Country, City

### 3.4 Chart request operator

Visitor pattern blabla classes

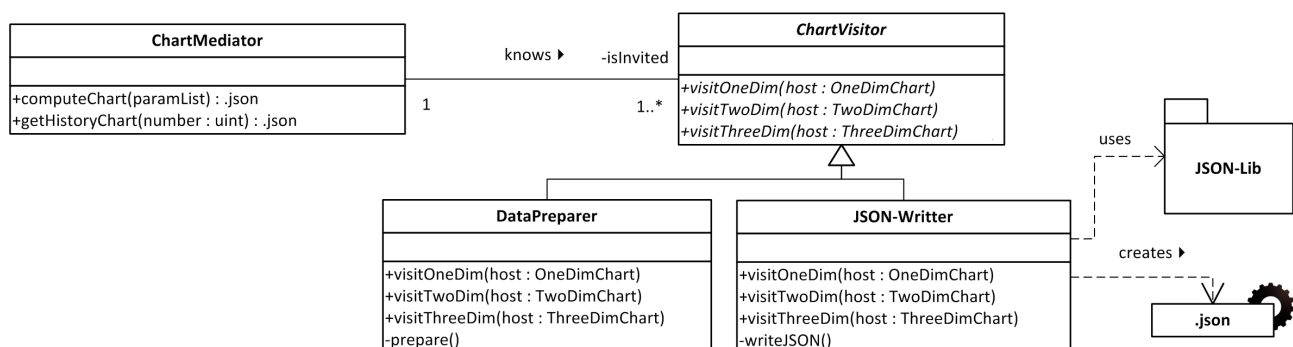

---

## ChartMediator

---



---

## ChartVisitor

---



---

## DataPreparer

---



---

## JSON-Writer

---



---

## .json


---



---

## JSON-Lib

---

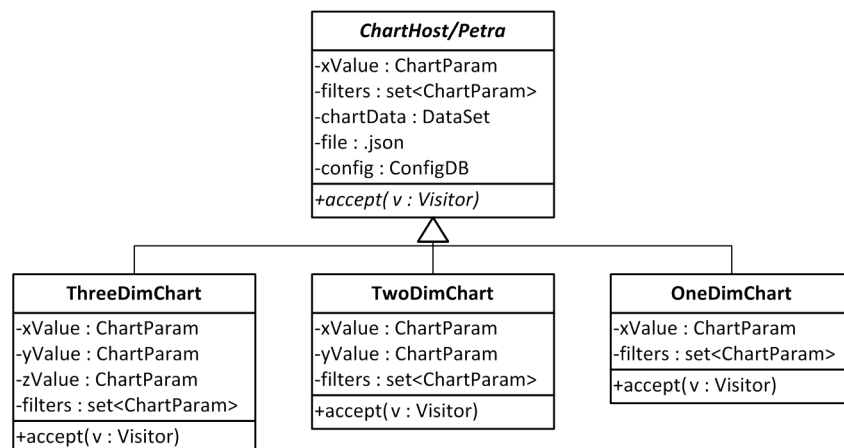


## ChartVisitor

## OneDimeChart

## TwoeDimeChart

## ThreeDimeChart

### 3.5 Chart parameters

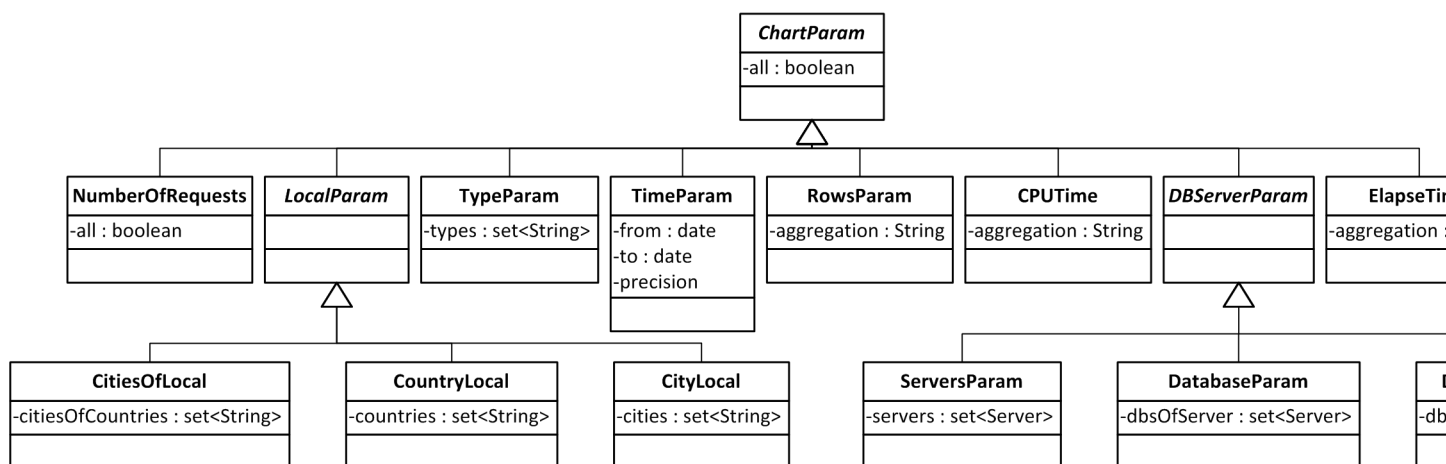

### 3.6

### 3.7 Parser

HIER LOGFILE PARSERMEDIATOR HIN! CAPSLOCK REGELT, UND SO!!!11einselb

## ParserMediator

ParserMediator is the 'main'-Class of the Parser. It creates and administrates a thread-pool, which contains several tasks, contains the entryBuffer for finished DataEntries, the stringBuffer for strings, which were extracted from the logfile and saves which log file and configuration file is used.

## LogFile

The gateway between parser and logfile - it contains the path of the logfile and an integer which saves how many lines have been read from this file. It can read single lines from the logfile and return them to the Parser.

## DATAENTRY

---

## DataEntry

---

The dataEntry which will be written in the warehouse. It contains -hour, day, month, year of the request, -rows which were read from the logfile-the elapsed and busy time on the server -the ip from which the request came -the type of request -the database and server which handled the request. It may contain additional information depending on the actual logfile, as specified in the configuration file.

---

## Java Files

---

The Parser uses java.io.File and a ThreadPool from java.util.

TOOLS + PARSING TASK!

---

## SplittingTool

---

The splitting tool splits the dataLine from its parsingTask and enters the splitted parts into the dataEntry.

---

## VerifyTool

---

The VerifyTool checks if the dataEntry is correct - if it has a mistake (e.g. Month = 13 or Elapsed Time = -1), it will be deleted and the VerifyTool sends an detailed error, which can be displayed elsewhere.

---

## LocationTool

---

The LocationTool takes the IP from the dataEntry and uses GeoIP-libraries[geo] to determine the city and country of the request. Those will be added to the dataEntry.

---

## ParsingTask

---

A ParsingTask is one of the tasks which are created from Parser. It gets a line from the logfile and uses, SplittingTool, VerifyTool and LocationTool to create a dataEntry which contains the same information.

LOADING TASK!

---

## LoadingTask

---

A loading task is another possible task for the threadPool. It takes a finished dataEntry from the buffer and sends it to the warehouse.

---

### **WareHouseGonfiger**

---

This Config sends the order to OracleWHAdapter to build the Data Warehouse.

---

### **ChartDataRequester**

---

A ChartDataRequester is a request which get its information from ChartVistor and sends the data in request form to OracleWHAdapter. The response of this class is to build data for the requester.

---

### **OracleWHAdapter**

---

After accessing the Database and geting the DataEntry from LoadingTask then will build the data warehouse in OLAP - Cube form. With help from Oracle and Java library, which make it easy to access the database and build the warehouse.

---

### **JavaToOracle**

---

Is a Library interface, wich makes a connection with a database.

---

### **Oracle**

---

A database language.

geo link to the maxmind geoip library in the library section

## **4 Data warehouse design**

### **4.1 Overview**

### **4.2 Dimension descriptions**

### **4.3 Measure descriptions**

### **4.4 Type description**

As Type depends which data base is operated, it may get it's own subsection.

## 5 Sequences



## **6 Other data**

### **6.1 Static data**

### **6.2 Dynamic data**

### **6.3 Extern data**

## 7 Libraries

FIXME: Needs links and tex in its life.

The program uses a number of external libraries to achieve its functionality. This section describes which they are, how they interact with the program, as well as licensing information.

-Java Play Java play is primarily a web framework, but it includes a webserver too [play]. We use it to create a modern, dynamic and interactive website, instead of a conventional java Swing GUI. <http://www.playframework.org/assets/images/logos/normal.png> Our web server tier is just a modification of appropriate java play classes[playintegration].

-d3.js D3.js [d3link] is a javascript visualization library for the browser. It allows the creation of beautiful, interactive visualizations. It runs, as one would imagine, in our browser tier.

-Geoip We use the Maxmind geoip Lite[geo] library to map user IPs to locations. This allows queries based on location, as well as preserving anonymity. Our parser uses the geoip library.

-Oracle database and warehouse We host our data in an oracle warehouse. Our data tier consists of them.

-oracle jdbc Oracle jdbc is the oracle database access driver. We use it in the data access tier. //FIXME: be more specific

Licensing information Most of the libraries used are open source, as well as free of charge. The rest are from oracle. We can use them in our product, because our university has bought licenses but I don't know what happens when we release it. FIXME, too

Java play is released under the Apache 2 License [apache2] d3.js is released under the BSD License, BSD 3 Clause [bsd3] The geoip library we use is licensed under the LGPL. [lgpl]

Oracle libraries are released under the oracle license[oracle]

[play]<http://www.playframework.org/> [playintegration] see the class diagram for more details [d3link] [d3js.org](http://d3js.org) [geo] <http://www.maxmind.com/download/geoip/api/java/> [oracle] <http://www.oracle.com/technetwork/licenses/distribution-license-152002.html>. [apache2] <http://www.apache.org/licenses/LICENSE-2.0.html> [bsd3] <http://opensource.org/licenses/BSD-3-Clause> [lgpl] <http://opensource.org/licenses/lgpl-license>