




-part@parent-part@level0-part@text**WHERE**-part-part@plural**WHERE**-part-part@first**WHERE**-
part-part@firstpl**WHERE**-part-part@typemain-part@counterpage-part@useri-part@userii-part@useriii-
part@useriv-part@userv-part@uservi-part@short-part@shortpl-part@long-part@longpl-part@name\texttt
{**WHERE**}-part**WHERE**-part@numberlist-part@descThe \texttt {**WHERE**}-part is a part
of a \gls {query} specific the request with aggregate functions or value ranges.-part@descpluralThe
\texttt {**WHERE**}-part is a part of a \gls {query} specific the request with aggre-
gate functions or value ranges.-part@sort\texttt {**WHERE**}-part-part@symbol\relax -
part@symbolplural\relax -part@flagfalse**WHERE**-part@flag

Functional Specification

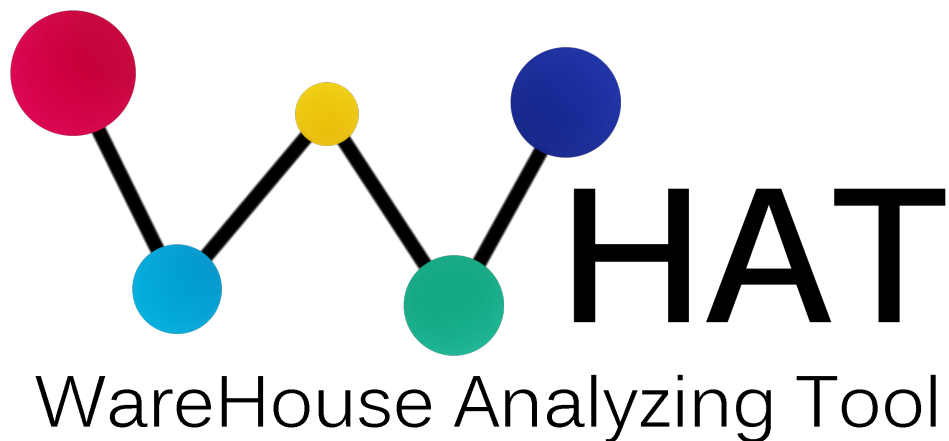

November 21, 2012

Functional Specification	Alexander Noe
Design	Jonathan Klawitter
Implementation	Anas Saber
QA / Testing	Nikolaos Alexandros Kurt Moraitakis
Final	Lukas Ehnle



General Information

[PSE](#) is a mandatory course for students of computer science bachelor at the Karlsruhe Institute of Technology ([KIT](#)). Therefor groups of five to six students are formed to write programs of 'medium size' (about 5000 Lines of Code). The task given in this course consists of analyzing and visualizing the server log of a .

This specification is the one of [PSE](#) Group #10 in the winter semester 2012/13.

What this specification does

The purpose of this document is an outline of the functional specifications and requirements for the WHAT application. It tries to give a complete and exact model of the future system. In the course of this it wants to give the developers answers to all possible question concerning what should be implemented.

What this specification does not

This specification does not give any information on how the system should be implemented. Also it doesn't contain any project planning or deadlines.

A 'Living Document'

Software development is a dynamic process. So with proceeding development the content of this specification will change continuously.

Skyserver

The concept of the system described in this specification should work with any storing it's query-log. The [SkyServer](#) will function as an example and testing reference for this system. [SkyServer](#) is one of the biggest for astronomical data.

About us

Because no one of us speaks English as his first language, we can't guarantee that our documentation doesn't contain simple or incorrectly used language. Our focus lies more on having an easy-to-understand and correct documentation than on perfect English.

If you have any questions or comments regarding this document feel free to send us an [E-Mail](#).

Contents

1 Goals	6
1.1 Web page	6
1.1.1 Core criteria	6
1.1.2 Optional criteria	6
1.1.3 Exclusion criteria	6
1.2 Parser	7
1.2.1 Core criteria	7
1.2.2 Exclusion criteria	7
1.3 Analyzer	7
1.3.1 Core criteria	7
1.3.2 Optional criteria	7
2 Usage	8
2.1 Area of Application	8
2.2 Target groups	8
2.3 Operating conditions	8
3 Operating environment	9
3.1 Software	9
3.2 Hardware	9
3.3 Orgware	9
4 Functional requirements	10
4.1 Main functions	10
4.2 Extending functions	11
5 Data	12
5.1 Static data	12
5.2 Data-Warehouse data	13
6 Nonfunctional requirements	14
6.1 Usability	14
6.2 Swiftiness	14
6.3 Maintainability	14
6.4 Optional	14
7 Test Cases	15
7.1 General	15
7.2 Administrator specific	15
7.3 Parser specific	16
7.4 Analyzer specific	16
8 Models	17
8.1 Overview	17



8.2	Dynamic models	18
8.3	Web interfaces	19
9	Development Environment	20
10	Glossary	21

1 Goals

With this program the user should be put in the position to visualize the prepared data of queries, made into his data base.

To structure the criteria the system has to fulfill, it is divided into three parts for this and other sections.

- Web page
- Parser
- Analyzer

See 8.1 for an overview of these parts and their relationships. In the following section their specific goals and criteria are described.

1.1 Web page

1.1.1 Core criteria

- The web page is the graphical user interface ([GUI](#)) for users and administrators.
- Users can choose the charts they want to see and also choose and filter the dimensions and measures for those. It has to support at least , and .
- The web page provides help for how to use the and variables (and measures). Also the navigation on the page is easy to use and straight forward.
- An admin-login provides administrative rights, which are needed to use the .

1.1.2 Optional criteria

- The language of the web page can be changed (e.g. German).
- The administrator gets the ability to handle the and load new [log files](#).
- A little history of the last requested charts is stored and viewable.

1.1.3 Exclusion criteria

- The web page does not allow normal users to load new data into the .
- The web page does not provide statistical tables.

1.2 Parser

1.2.1 Core criteria

- The is able to perform the -process on [.csv log files](#) (from [SkyServer](#)). This means it extracts the data it needs from the files, transforms them and loads them into the data-warehouse. [dimension](#) and measures are specified in 5.2.
- The will recognize invalid logs and won't add them to the . Every log with a mistake won't be accepted, because an error-message is not as bad as a corrupted .
- The will be fed with [log files](#) from the administrator via web page.

1.2.2 Exclusion criteria

- This is only able to operate on [.csv log files](#) from [SkyServer](#). It can neither read logs in another formats nor logs from another source.
- There is no way to avoid using this when adding data to the . This prevents corrupting the and guarantees correct data in it.
- The doesn't correct mistakes in the [log files](#).

1.3 Analyzer

1.3.1 Core criteria

- The analyzer is the gate to the data warehouse. It extracts the specific data, needed for the diagrams, passing them to the java-script front-end.
- The analyzer can take information filtered by user-selected criteria, to use only certain data for the charts.
- The charts that are supported are at least:
 - scatter plots
 - histograms
 - bubble charts

1.3.2 Optional criteria

- The analyzer will support more chart-types, for example the combination of a histogram and a scatter plot.
- The analyzer does a little bit of data mining, and presents some potentially interesting information.

2 Usage

2.1 Area of Application

The application area of this product is scientific that need to be analysed, understood and visualised. The program has been designed with the Skyserver in mind, so that is the primary application area. However, as the only major requirement is the existence of correct access logs of the . The software may also be used with many other scientific , although minor modifications may be needed.

2.2 Target groups

The target group of this application is people that want to analyse and visualize queries made against a . Specifically, in our case, the [SkyServer](#).

This includes

- the owners of the who want to optimize the access to their data,
- people that are interested in what others use the database for,
- people new to the , who want to understand it or discover interesting information.

To summarize, WHAT will be of interest for many people, whether they want to see how their is used, analyse current trends, or just love statistics and .

We expect a rather technical audience.

2.3 Operating conditions

The program is mainly used as a website, with the primary difference being that the server has to be started, if the capacity for it to run all the time on a dedicated machine doesn't exist. The program needs a server to run.

If a dedicated server exists, the program can be used from anywhere with a decent network connection to it.

If not, the program can still be run on the same computer as the server (on localhost), but the server will have to be started first.

3 Operating environment

Whereas the program and the run on a server, the access to it will be via a web browser on the users computer. This implies that the webpage will need to be hosted on a webserver. However, a dedicated server machine is not required, as the clients computer can host both the client and the webserver, and then access the webpage locally.

3.1 Software

- The server hosting the needs [SQL](#) support.
- The server hosting the web server needs a recent version of the [Java VM](#)

Following software is required on the users computer:

- Latest version of a modern browser
 - Though Chrome and Firefox will be officially supported, other browsers might work as well.
- JavaScript (enabled)

3.2 Hardware

The server has to be fast enough to support all clients. This depends on the expected number of clients. Most computations will be done on the server.

The client needs to be fast enough to visualize the data received from the server, as that's almost all it does. The required hardware thus depends greatly on the amount of data that needs to be visualized. That said, any recent computer, with for example, an Intel® Core™2 Duo CPU E8400 @ 3.00GHz × 2 processor, 4GB(2x2GB) of 667Mhz DDR2 SDRAM, running Ubuntu Linux 12.10 Quantal Quetzal, as a point of reference, should be able to visualize about 50.000 data points on a with ease.

3.3 Orgware

The server needs to be able to connect to the client with a reasonable latency. Also it has to be set up before the client is able to connect to it.

To fulfill optional requirements, the program must be able to run queries against the origin .

4 Functional requirements

4.1 Main functions

This functions are required to fulfill the core criteria.

General

/F010/ Provide access via web page
/F020/ Provide option for types
/F030/ Show
/F040/ Show
/F050/ Provide option to select and filter variables for
/F060/ Show
/F070/ Provide option to select and filter variables for
/F080/ Show
/F090/ Provide option to select and filter variables for
/F100/ Show information about types
/F110/ Show information about selectable variables

Administrator specific

This functions are required for the administrative business.

/F120/ Provide access via web page with administrator rights
/F130/ Provide the opportunity to pass to the

Parser specific

The functions required from the are mainly to execute the [ETL-process](#).

/F140/ Extract specific data from the
/F150/ Extract access , access time and user information ()
/F160/ Extract number of , , ()
/F170/ Extract type of data requested from the
/F180/ Transform the data to fit into the schema
/F190/ Load the data into the

Analyzer specific

/F200/ Run specific queries against

/F210/ Transform received data serving the web page

4.2 Extending functions

To fulfill the optional goals the following functions are required.

General

/F220/ Select language on web page

/F230/ Show bubble map

/F240/ Show combination of and

/F250/ Show other

/F260/ Show history of the 5 last requested

/F270/ Show interesting attribute combinations

/F280/ Show clusters in the data

/F290/ Add background clustering

Administrator specific

/F300/ Provide the opportunity to initialize the

/F310/ Provide the opportunity to request new for specific time intervals from the

/F320/ Provide the opportunity to clean the

5 Data

5.1 Static data

/D10/ Language files

/D20/ Manual

/D30/ Source Code

/D40/ Documentation

/D50/ Graphics for GUI

/D60/ HTML backbone


/D70/ Javascript files

/D80/ Stylesheet files

5.2 Data-Warehouse data

The stores all the data, coming from from the ([SkyServer](#)) server logs. They were subject of the [ETL-process](#) in the parser. If optional criteria are fulfilled they can be replaced by clearing the and loading new data via web page as administrator.

The may use a star schema.

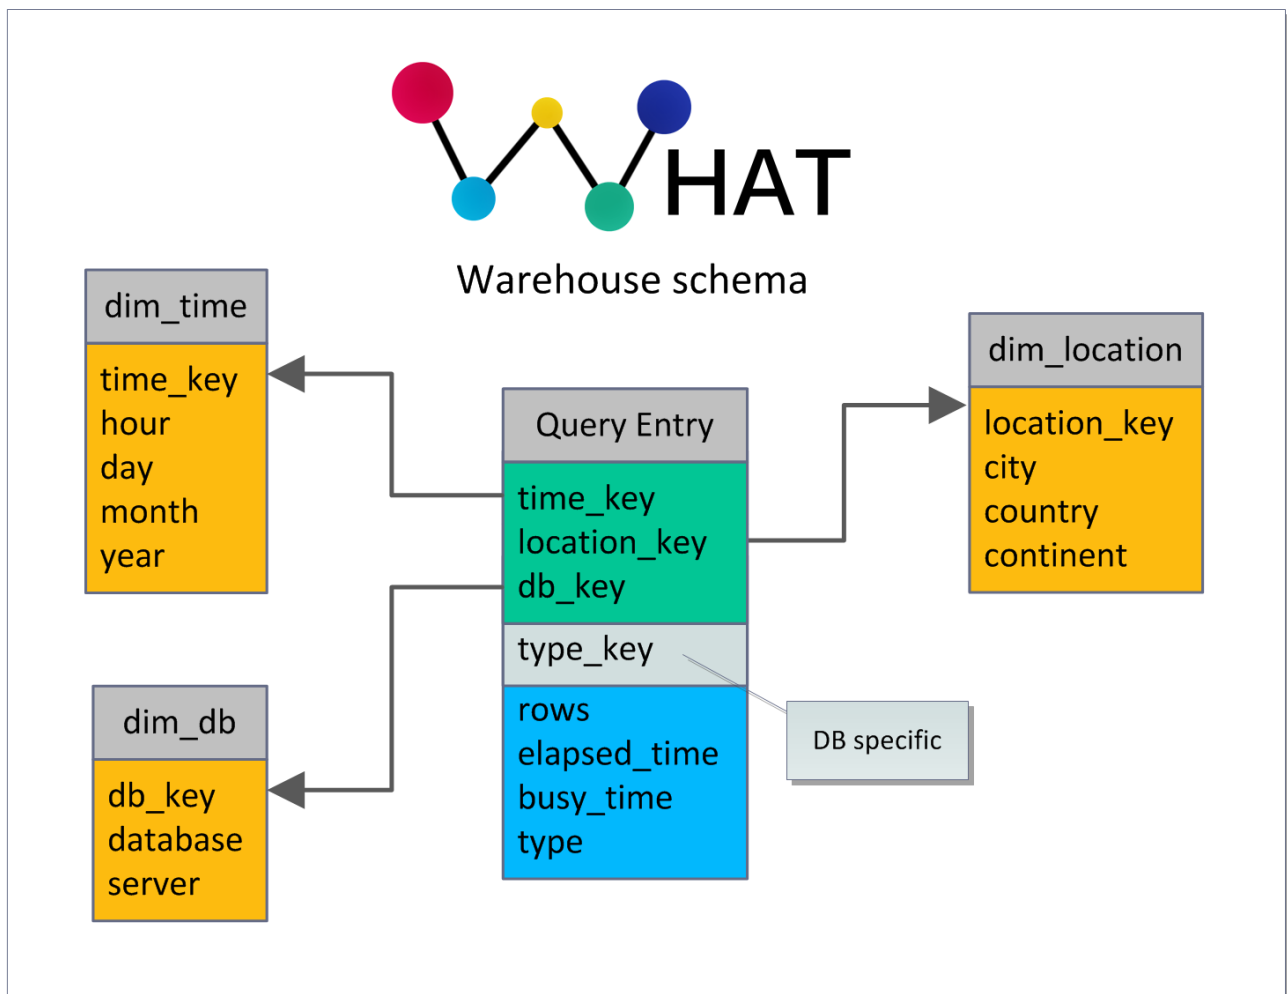

The column 'type_key' can either be just a measure or refer to a new . This depends on the on which is operated.

See rows, and in the glossary (10) for descriptions.

6 Nonfunctional requirements

6.1 Usability

- /N10/ Minimalistic GUI design
- /N20/ Responsive GUI
- /N30/ GUI that is easy to get used to
- /N40/ The can store more than 1000000 entries

6.2 Swiftiness

- /N50/ Parse 1000 log in 10 seconds
- /N60/ Visualize of 50000 points in 10 seconds

6.3 Maintainability

- /N70/ Easy translating in other languages
- /N80/ Reasonably commented, clean code

6.4 Optional

- /N90/ Show a nice loading screen while visualizing a .

7 Test Cases

7.1 General

These test-cases are necessary for the web page to work properly and succeed in serving basic requests.

/T010/ Access web page (/F010/)

 /T012/ via Google Chrome,

 /T014/ via Mozilla Firefox.

/T020/ Navigate swiftly through the web page. (/N30/)

/T030/ Open page for -creation and create an example with x-Axis date and y-Axis number of rows per request. (/F020/, /F030/, /F060/, /F070/)

/T040/ Open page for -creation and create an example with x-Axis year and y-Axis number of requests. (/F020/, /F030/, /F040/, /F050/)

/T050/ Open page for -creation and create an example with x-Axis year, y-Axis Country and size number of requests. (/F020/, /F030/, /F080/, /F090/)

/T060/ Call the information about types. (/F100/)

/T070/ Request information about selectable variables. (/F110/)

7.2 Administrator specific

These test cases check the correct admin-login.

/T080/ Enter loginname and password for admin-login. (/F120/)

/T090/ Log-in and get administrative rights. (/F120/)

/T100/ Try to log in with wrong loginname. (/F120/)

/T110/ Try to log in with wrong password. (/F120/)

/T120/ Pass example [log file](#) to the . (/F130/)

7.3 Parser specific

The following test cases ensure the correct work of our .

/T130/ Parse example [log file](#) and extract valuable information correctly. (/F140/)

More specifically:

/T132/ Extract correct , time, user information and type, (/F150/)

/T134/ Extract correct number of , , from the [log file](#), (/F160/)

/T136/ Extract the type requested. (/F170/)

/T140/ Load the extracted information into the correctly. (/F180/, /F190/)


7.4 Analyzer specific

The functions /F200/ and /F210/ of the analyzer are already tested in the general test-cases /T030/ to /T050/.


8 Models

8.1 Overview

This picture describes the general concept of WHAT.

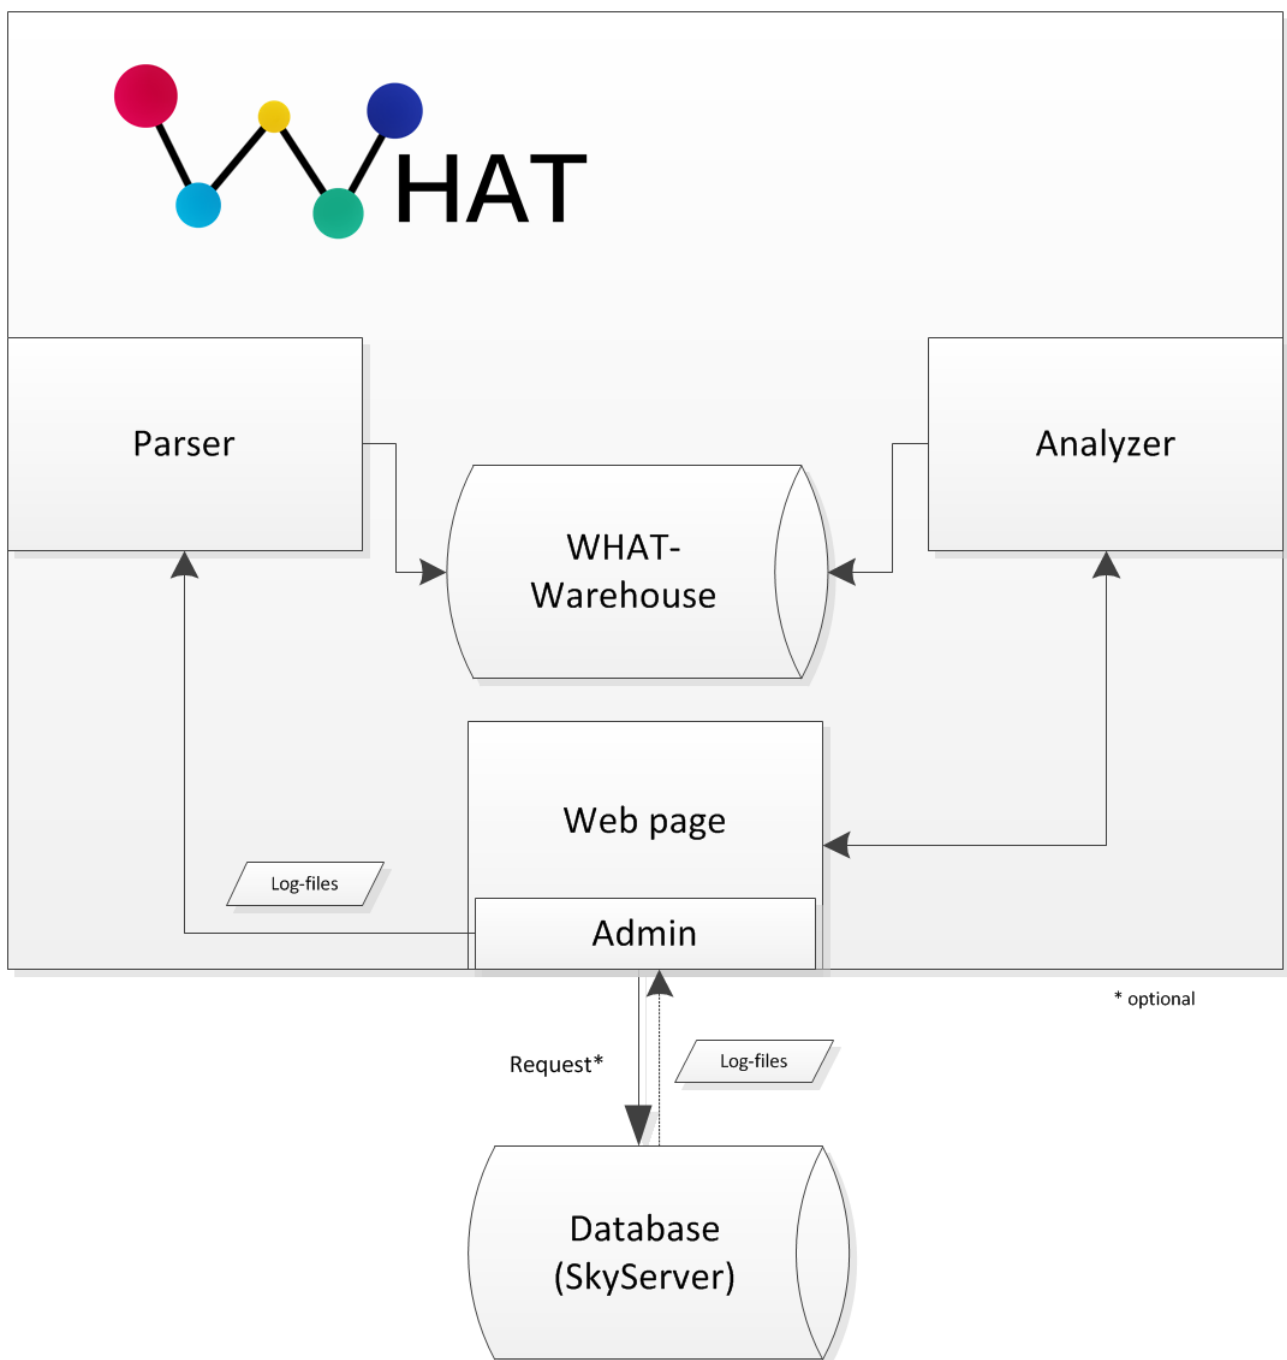

8.2 Dynamic models

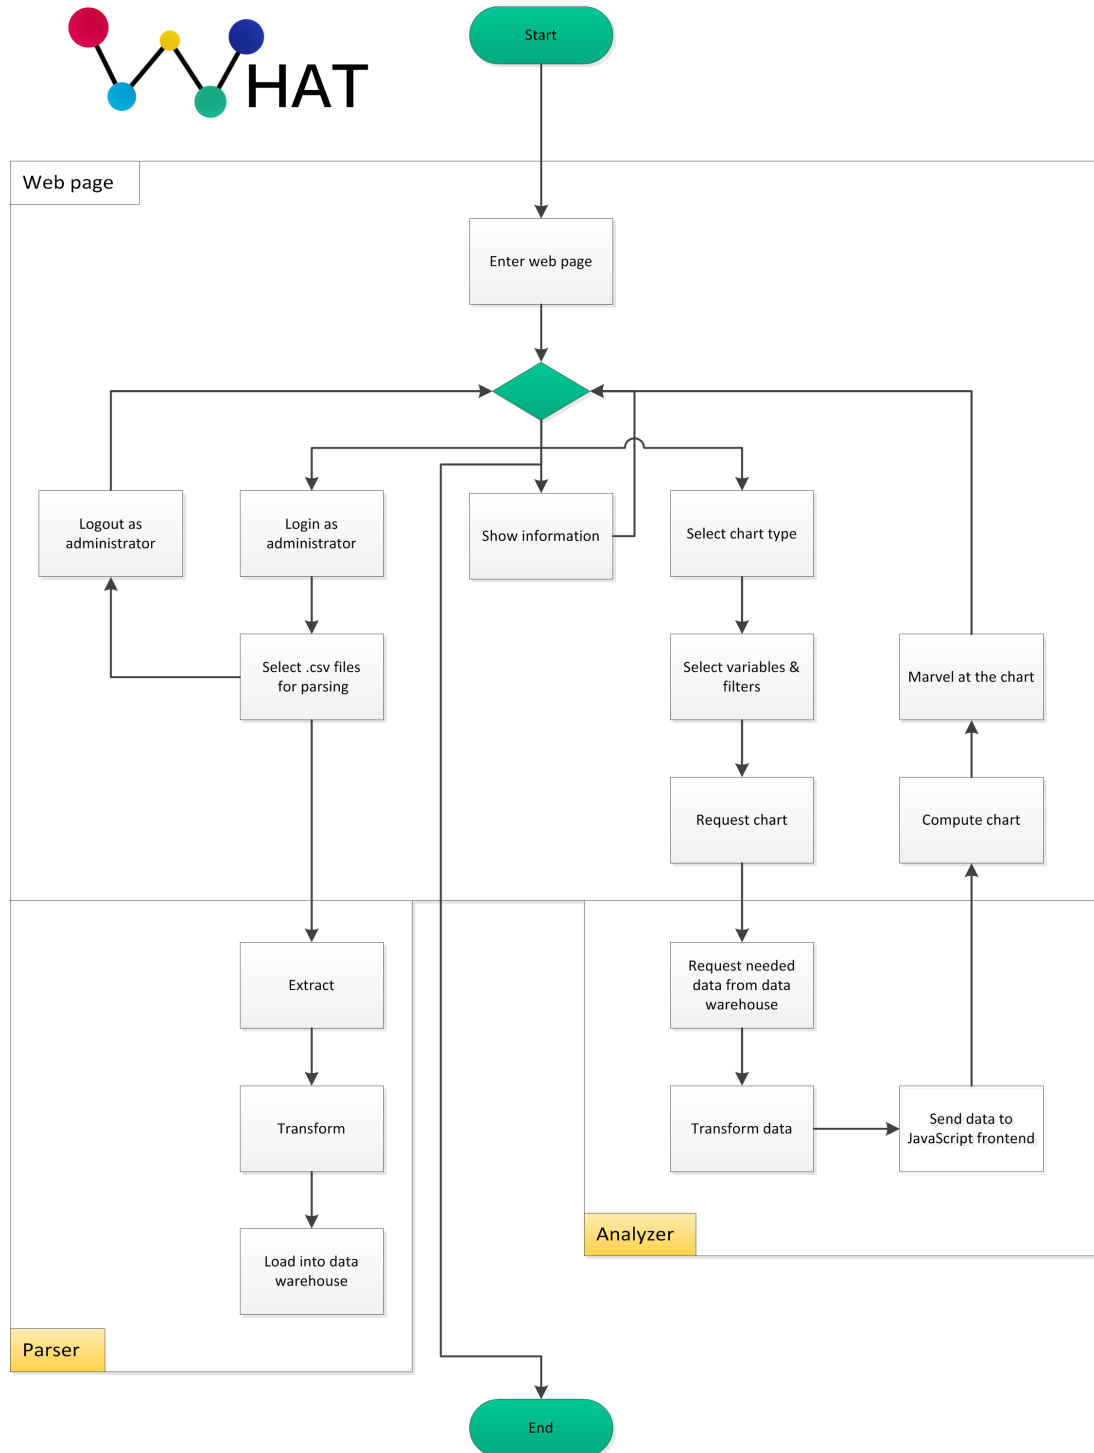

8.3 Web interfaces

9 Development Environment

Operating System

- Windows 7
- Fedora 17
- Ubuntu 12.10

Object Models

- Microsoft Visio

Version Control

- Git

Miscellaneous

- Github (Hosting of Repository, Issue Tracking)
- Travis (Integration)
- \LaTeX (Documents)
- Gradle (Building)



10 Glossary

KIT is a technological university in Karlsruhe, Baden-Württemberg, Germany (Karlsruhe Institute of Technology) [2]

SkyServer is a big database for astronomical data. It contains pictures and other information concerning astronomy and tries to 'form a map of the universe' [2]