

Zimbra™ Collaboration Suite Single Server Installation

The Zimbra Collaboration Suite includes the Zimbra MTA, the Zimbra LDAP server, and the Zimbra mailbox server. In a single-server installation, all components are installed on one server and require no additional manual configuration.

This installation guide is a quick start guide that describes the basic steps needed to install and configure the Zimbra Collaboration Suite in a direct network connect environment. In this environment, the Zimbra server is assigned a domain for which it receives mail, and a direct network connection to the Internet. When the Zimbra Collaboration Suite is installed, you will be able to log on to the Zimbra administration console to manage the domain and provision accounts. The accounts you create will be able to send and receive external email.

This guide includes the following sections:

- Installation Prerequisites
- Overview of Installation Process
- Zimbra Requirements for Network Edition Licenses
- Basic Configuration
- · Installing Zimbra Software
- Provisioning Accounts
- Support and Contact Information

Important Notice About Single Server Installations

The Zimbra Collaboration Suite is designed to be the only application suite installed on the server. The Zimbra Collaboration Suite bundles and installs, as part of the installation process various other third party and open source software, including Apache Tomcat, Postfix, OpenLDAP®, and MySQL®. The versions installed have been tested and configured to work with the Zimbra software. See the Administration Guide for a complete list of software.

Note: A Zimbra license is required in order to create accounts on the Network Edition Zimbra Collaboration Suite server. You can install ZCS without a license but only one account, the administrator account, can be

created. See "Zimbra License Requirements for ZCS Network Edition" on page 11.

The following ports are set as defaults when the Zimbra Collaboration Suite is installed.

Table 1 **Zimbra Port Mapping**

	Port
Postfix	25
HTTP	80
POP3	110
IMAP	143
LDAP	389
HTTPS	443
Tomcat IMAP SSL	993
Tomcat POP SSL	995
Tomcat LMTP	7025

Important. You cannot have any other web server, database, LDAP, or MTA server running, when you install the Zimbra software. If you have installed any of the applications, before you install Zimbra software, disable these applications.

Installation Prerequisites

In order to successfully install and run the Zimbra Collaboration Suite, ensure your system meets the requirements described in this section. System administrators should be familiar with installing and managing email systems.

System Requirements

For the ZCS system requirements see System Requirements for Zimbra Collaboration Suite 4.5

Note: To find SSH client software, go to http://www.download.com/ and search for SSH. The list displays software that can be purchased or downloaded for free. An example of a free SSH client software is PuTTY, a software implementation of SSH for Win32 and Unix platforms. To download a copy go to http://putty.nl/.

Modifying Operating System Configurations


Configuration modifications for two of the most frequently used operating systems, Red Hat Enterprise Linux and Fedora, are described in this guide. The SUSE configuration would be similar to those described for the Red Hat Enterprise Linux. The MAC OS X requires no additional modifications.

Other operating systems may require similar modifications, use this information as a reference to gauge whether your operating system may need to be modified. Also, search the Zimbra forums.


Installation Modifications for Red Hat Enterprise Linux

The Zimbra Collaboration Suite runs on the Red Hat Enterprise Linux, version 4 operating system. When you install the Red Hat software for the Zimbra Collaboration Suite, accept the default setup answers, except for the following steps. Refer to the Red Hat Enterprise Linux installation guide for detailed documentation about installing their software.

- **Disk Partitioning Setup**. Check **Manually partition with DiskDruid**. The disk partition should be set up as follows:
 - The Mount Point/RAID Volume size for the /boot partition should be 100 MB.
 - The Swap partition should be set to twice the size of the RAM on your machine.
 - The Root partition (/) should be set with the remaining disk space size.

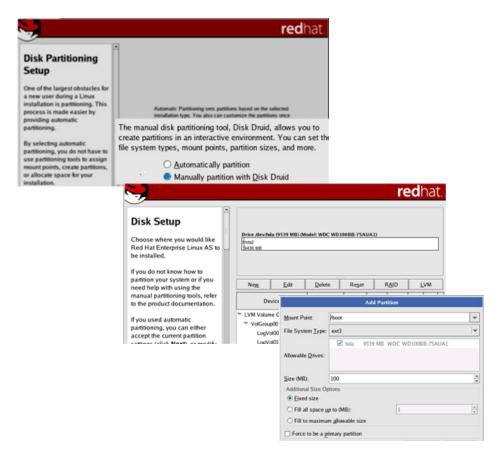


 Network Configuration>Network Devices>Hostname should be configured manually with the fully qualified hostname [mailhost.example.com] of the Zimbra server.

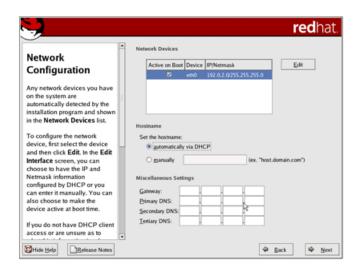

Enter the Gateway and Primary DNS addresses.

In the Edit Interface pop-up screen, check Activate on Boot. Enter the IP Address and Netmask of the device. This allows the interface to start when you boot.



Firewall Configuration should be set to No firewall, and the Security **Enhanced Linux** (SELinux) should be disabled.

Important: You will need to disable Sendmail in order to run the Zimbra Collaboration Suite. You can disable the Sendmail service with these command, chkconfig sendmail off, service sendmail stop.

Important: Make sure that FQDN entry in /etc/hosts appears before the hostnames. If this is missing, the creation of the Zimbra certificate fails. The FQDN entry should look like this example. See zmcreatecert in the Administrator's Guide, CLI Commands appendix.


```
127.0.0.1
                                localhost.localdomain localhost
your.ip.address
                                FQDN yourhostname
```

Installation Modifications for Fedora


The Zimbra Collaboration Suite runs on the Fedora, Core 4 operating system. When you install the Fedora software for the Zimbra Collaboration Suite, accept the default setup answers, except for the following steps. Refer to the Fedora installation guide for detailed documentation about installing their software.

- Disk Partitioning Setup. Check Manually partition with DiskDruid. The disk partition should be set up as follows:
 - The Mount Point/RAID Volume size for the /boot partition should be
 - The Swap partition should be set to twice the size of the RAM on your machine.
 - The **Root** partition (/) should be set with the remaining disk space size.

Open Source Edition 4.5

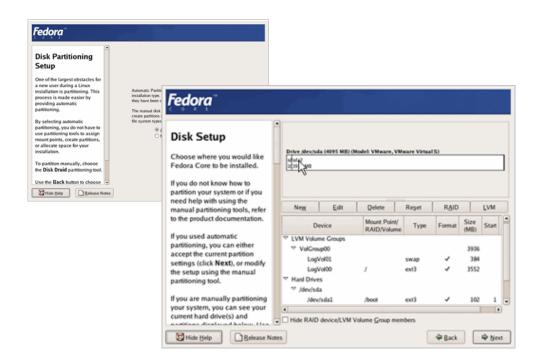

 Network Configuration>Network Devices>Hostname should be configured manually with the fully qualified hostname name [mailhost.example.com] of the Zimbra server.

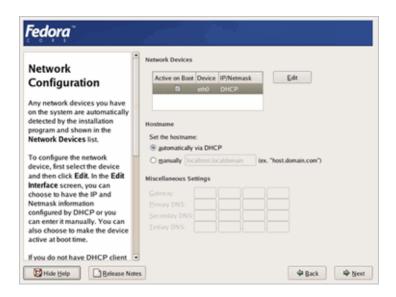

Enter the Gateway and Primary DNS addresses.

 In the Edit Interface pop-up screen, check Activate on Boot. Enter the IP Address and Netmask of the device. This allows the interface to start when you boot.

Important: You will need to disable Sendmail in order to run the Zimbra Collaboration Suite. You can disable the Sendmail service with these command, chkconfig sendmail off, service sendmail stop.


Important: Make sure that FQDN entry in *letc/hosts* appears before the hostnames. If this is missing, the creation of the Zimbra certificate fails. The FQDN entry should look like this example. See **zmcreatecert** in the Administrator's Guide, CLI Commands appendix.

127.0.0.1 localhost.localdomain localhost your.ip.address FQDN yourhostname


Installation Modifications for Fedora

The Zimbra Collaboration Suite runs on the Fedora, Core 4 operating system. When you install the Fedora software for the Zimbra Collaboration Suite, accept the default setup answers, except for the following steps. Refer to the Fedora installation guide for detailed documentation about installing their software.

- **Disk Partitioning Setup**. Check **Manually partition with DiskDruid**. The disk partition should be set up as follows:
 - The Mount Point/RAID Volume size for the /boot partition should be 100 MB.
 - The Swap partition should be set to twice the size of the RAM on your machine.
 - The **Root** partition (/) should be set with the remaining disk space size.

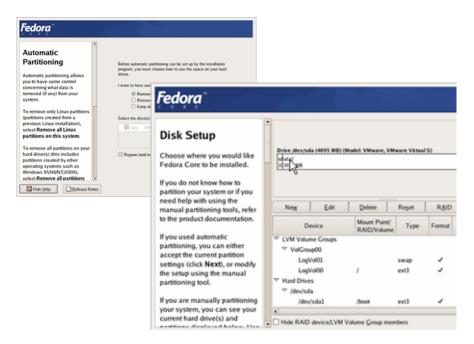

 Network Configuration>Network Devices>Hostname should be configured manually with the hostname name [mailhost.example.com] of the Zimbra server.

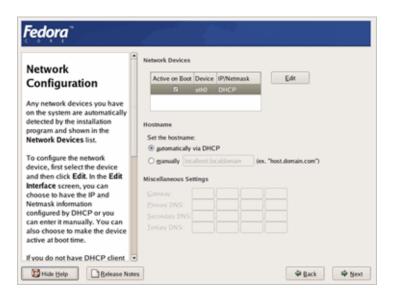

- Enter the Gateway and Primary DNS addresses.
- In the Edit Interface pop-up screen, check Activate on Boot. Enter the IP Address and Netmask of the device. This allows the interface to start when you boot.
- Firewall Configuration should be set to No firewall, and the Security Enhanced Linux (SELinux) should be disabled.



Important: The following should also be considered before you install the Zimbra Collaboration Suite.

- You must disable Sendmail in order to run the Zimbra Collaboration Suite application. The Sendmail command to stop the service is /etc/ init.d/sendmail stop, to disable, is chkconfig sendmail off. The Postfix command to stop the service is /etc/init.d/postfix stop, to disable, is chkconfig postfix stop.
- Make sure that FQDN entry in /etc/hosts appear before the hostnames. If this is missing, the creation of the Zimbra certificate fails. The FQDN entry should look like this example.

```
127.0.0.1 localhost.localdomain localhost your.ip.address FQDN yourhostname
```

Installation Modification for Mac Servers

No modifications are required to the MAC server operating system, but Java 1.5 must be set as the default Java.

To set Java 1.5 as the default:

- su root
- cd /System/Library/Frameworks/JavaVM.Framework/Versions
- rm CurrentJDK
- ln -s 1.5.0 CurrentJDK

Configure DNS

In order to send and receive email, the Zimbra MTA must be configured in DNS with both A and MX records. For sending mail, the MTA uses DNS to

resolve hostnames and email-routing information. To receive mail the MX record must be configured correctly to route the message to the mail server.

During the installation process ZCS checks to see if you have an MX record correctly configured. If it is not, an error is displayed suggesting that the domain name have an MX record configured in DNS.

You must configure a relay host if you do not enable DNS. After ZCS is installed, go to the **Global Settings>MTA** tab on the administration console and uncheck **Enable DNS lookups**. Enter the relay MTA address to use for external delivery.

Note: Even if a relay host is configured, an MX record is still required if the ZCS server is going to receive email from the internet.

Overview of Installation Process

When you run the install script, the Zimbra install verifies that the correct prerequisite packages are installed.

- Zimbra Core installs the libraries, utilities, and monitoring tools.
- Zimbra LDAP installs the OpenLDAP software, an open source LDAP directory services.
- Zimbra MTA installs the Postfix open source MTA, the Clam AntiVirus antivirus engine, the SpamAssassin junk mail filter, and the Amavisd-New content filter.
- **Zimbra Store** installs the mailbox server, including Apache Tomcat, the servlet container for the Zimbra server.
- **Zimbra Spell** installs the Aspell open source spelling checker. When Zimbra spell is installed, Zimbra-Apache is also installed.
- Zimbra SNMP installs the SNMP package for monitoring. This package is optional.
- Zimbra Logger installs tools for syslog aggregation, reporting, and message tracing.

The Zimbra server configuration is menu driven. The installation menu shows you the default configuration values. The menu displays the logical host name and email domain name [mailhost.example.com] as configured on the computer. You can change any of the values. For single server installs, the only value you must define is the administrator's password. The password is used to log on to the Zimbra administration console.

Downloading the Zimbra Software

For the latest Zimbra software download, go to www.Zimbra.com. Save the Zimbra Collaboration Suite archive file to the computer from which you will install the software.

Zimbra License Requirements for ZCS Network Edition

A Zimbra license is required in order to create accounts in the Network Edition Zimbra Collaboration Suite servers.

A trial license and a regular license are available:

- **Trial**. You can obtain the trial license from the Zimbra license portal for free. The trial license allows you to create up to 50 users. It expires in 60 days.
- Regular. You must purchase the Zimbra Regular license. This license is
 valid for a specific Zimbra Collaboration Suite system and is encrypted with
 the number of Zimbra accounts (seats) you have purchased, the effective
 date, and expiration date of the regular license.

Go to Zimbra's website to obtain a trial license from the Network Downloads area. Contact Zimbra sales to purchase a regular license, email sales@zimbra.com or call 1-650-212-7767, extension 100.

The regular license can only be installed on the ZCS system for which it is purchased. Only one Zimbra license is required for your Zimbra Collaboration Suite environment.

You can add the license file during the ZCS installation or you can install the license from the ZCS administration console after you install ZCS.

Current license information, including the number of accounts purchased, the number of accounts used, and the expiration date, can be viewed from Global Settings, License tab on the administration console.

Basic Configuration

The default configuration installs the Zimbra-LDAP, the Zimbra-MTA with antivirus and anti-spam protection, the Zimbra mailbox server, the SNMP monitoring tools (optional), Zimbra-spell (optional), and the logger tool (optional), on one server.

The menu driven installation displays the components and their existing default values. During the installation process you can modify the information.

The table below describes the menu options

Table 2 Main Menu Options

Main Menu	Description
1) Hostname	The host name configured in the Red Hat operating system installation.
2) LDAP master host	The LDAP host name. On a single server installation this name is the same as the hostname.
3) LDAP port	The default port is 389.

Main Menu Options Table 2

Main Menu	Description
4) LDAP password	The root LDAP password for the host. This password is automatically generated.
5) zimbra-ldap	 Create Domain - Yes. You can create one domain during installation and additional domains can be created from the administration console. Domain to create - The default domain is the fully qualified hostname of the server. If you created a valid mail domain on your DNS server, enter it now. In most cases, you will accept the default.
6) zimbra-store	 Create Admin User - The administrator account is created during installation. This account is the first account provisioned on the Zimbra server and allows you to log on to the administration console. Admin user to create - The default is admin@[mailhost.example.com]. Admin Password - You must set the admin account password. The password is case sensitive and must be a minimum of six characters. The administrator name, mail address, and password are required to log in to the administration console. Enable automated spam training - By default, the automated spam training filter is enabled and two mail accounts are created. Spam Training User to receive mail notification about mail that was not marked as junk, but should be. Non-spam (HAM) training user to receive mail notification about mail that was marked as junk, but should not have been. These addresses are automatically configured to work with the spam training filter. The accounts created have a randomly selected name. To recognize what the account is used for you may want to change this name. Global Documents Account - The Global Documents account holds the templates and the default Documents Notebook. The Documents feature is enabled from the COS or for individual accounts.

Table 2 Main Menu Options

Main Menu	Description
Main Menu	 Description These default port configurations are shown. SMTP host Web server HTTP port:- 80 Web server HTTPS port: - 443 Web server mode - Can be http, https, mixed. Mixed mode uses HTTPS for logging in and HTTP for normal session traffic. All modes use SSL encryption for back-end administrative traffic. Note: selecting both will set it to mixed. Enable POP/IMAP proxy, default No. For single server installations, this setting should be No. IMAP server port: 143 IMAP server SSL port: 993 POP server SSL port: 995 Use spell checker server: yes (if installed) Spell server URL: http://<example.com>:7780/aspell.php</example.com> License file name is Unset (Network Edition). The license file must be saved to the server in order to add the license file to ZCS during the install process. Enter the name and location for the Zimbra license file and the license is installed as part of the installation. If you do not have the license, you can proceed with the installation but you cannot create accounts until the license is installed. See the "Installing the Zimbra License" on page 22.

Table 2 **Main Menu Options**

Main Menu	Description
7) zimbra-mta	 The following options can be modified. MTA Auth host. This is configured automatically if the MTA authentication server host is on the same server, but must be configured if the authentication server is not on the MTA. Enable Spamassassin. Default is enabled. Enable ClamAV. Default is enabled. Notification address for AV alerts. Sets the notification address for AV alerts. You can either accept the default or create a new address. If you create a new address, remember to provision this address from the admin console. Note: If the virus notification address does not exist and your host name is the same as the domain name on the Zimbra server, the virus notifications queue in the Zimbra MTA server and cannot be delivered.
8) zimbra-snmp (optional)	 You can modify the following options Enable SNMP notifications. The default is No. If you enter yes, you must enter the SNMP Trap hostname. SNMP Trap hostname Enable SMTP notification - The default is No. SMTP Source email address - If you enter yes for SMTP notification, you must enter the SMTP source email address and SMTP Destination email address - destination email address.
9) zimbra-logger	When installed, it is automatically enabled. This information is used to generate the statistics graphs and is used for message tracing.
10) zimbra-spell (optional)	When installed, it is automatically enabled.
11) Enable default backup schedule	For the Network Edition only, sets the schedule for Backup session to run as a full backup every Sunday at 1 a.m. and as incremental on the other days at 1 a.m.
r) Start servers after configuration	When the installation and configuration is complete, if this is set to Yes, the Zimbra server is automatically started.

Table 2 Main Menu Options

Main Menu	Description
s) Save config to file	At any time during the installation, you can save the configuration to file.
q) Quit	Quit can be used at any time to quit the installation.

Installing Zimbra Software

For servers other than Mac servers, open an SSH session to the Zimbra server and follow the steps below.

For Macs, see "Installing Zimbra Software on a Mac Server" on page 18.

- Log in as root to the Zimbra server and cd to the directory where the Zimbra Collaboration Suite archive tar file is saved (cd /var/<tmp>). Type the following commands.
 - tar xzvf [zcs.tgz], to unpack the file
 - cd zcs, to change to the correct directory
 - ./install.sh, to begin the installation

The install.sh script reviews the installation software to verify that the Zimbra packages are available.

The screen shots are examples of the Zimbra installation script

```
[root@mailhost. tmp]# tar xzvf zcs.tgz
zcs/
zcs/util/
zcs/packages/
zcs/packages/zimbra-apache-3.0.0 M2 595.RHEL4-20051104060309.i386.rpm
zcs/packages/zimbra-core-3.0.0 M2 595.RHEL4-20051104060309.i386.rpm
zcs/packages/zimbra-mta-3.0.0 M2 595.RHEL4-20051104060309.i386.rpm
zcs/packages/zimbra-spell-3.0.0 M2 595.RHEL4-20051104060309.i386.rpm
zcs/packages/zimbra-store-3.0.0 M2 595.RHEL4-20051104060309.i386.rpm
zcs/packages/zimbra-logger-3.0.0 M2 595.RHEL4-20051104060309.i386.rpm
zcs/packages/zimbra-ldap-3.0.0_M2_595.RHEL4-20051104060309.i386.rpm
zcs/packages/zimbra-snmp-3.0.0 M2 595.RHEL4-20051104060309.i386.rpm
zcs/README.txt
zcs/readme binary.txt
zcs/docs/
[root@mailhost tmp]# cd zcs
[root@mailhost zcs]# ./install.sh
Operations logged to /tmp/install.log.23354
Checking for existing installation...
    zimbra-ldap...NOT FOUND
   zimbra-logger...NOT FOUND
   zimbra-mta...NOT FOUND
   zimbra-snmp...NOT FOUND
   zimbra-store...NOT FOUND
   zimbra-apache...NOT FOUND
    zimbra-spell...NOT FOUND
    zimbra-core...NOT FOUND 1
```

- 2. The installation process checks to see if Sendmail, Postfix, and MySQL software are running. If any of these applications is running, you are asked to disable them. Disabling MySQL is optional but highly recommended. Sendmail and Postfix must be disabled for the Zimbra collaboration Suite to start correctly.
- 3. The Zimbra software agreement is displayed and includes the link to the license terms for the Zimbra Collaboration Suite. Please read the agreement and, to continue, press Enter.

```
PLEASE READ THIS AGREEMENT CAREFULLY BEFORE USING THE SOFTWARE.
ZIMBRA, INC. ("ZIMBRA") WILL ONLY LICENSE THIS SOFTWARE TO YOU IF YOU
FIRST ACCEPT THE TERMS OF THIS AGREEMENT. BY DOWNLOADING OR
INSTALLING THE SOFTWARE, OR USING THE PRODUCT, YOU ARE CONSENTING TO
BE BOUND BY THIS AGREEMENT. IF YOU DO NOT AGREE TO ALL OF THE TERMS
OF THIS AGREEMENT, THEN DO NOT DOWNLOAD, INSTALL OR USE THE PRODUCT.
License Terms for the Zimbra Collaboration Suite:
       http://www.zimbra.com/license/index.html
Press Return to continue
Checking for prerequisites...
   NPTL...found
   sudo -1.6.7p5-30.1.3...found
   libidn...FOUND libidn-0.5.6-1
   curl...FOUND curl-7.12.1-5.rhel4
   fetchmail...FOUND fetchmail-6.2.5-6.el4.2
   gmp...FOUND gmp-4.1.4-3
   /user/lib/libstdc++- FOUND compat-libstdc++-33-3.2.3-47.3
Checking for installable packages
```

- 4. Next, the installer checks to see that the prerequisite software is installed. If NPTL, sudo, libidn, cURL, fetchmail, GMP or compat-libstdc++- are not installed, the install process quits. You must fix the problem and start the installation over.
- 5. Select the services to be installed on this server. To install Zimbra Collaboration Suite on a single server, enter **Y** for each package.
- 6. Type Y and press Enter to modify the system. The selected packages are installed on the server.

```
Select the packages to install
Install zimbra-ldap [Y]
Install zimbra-logger [Y]
Install zimbra-mta [Y]
Install zimbra-snmp [Y]
Install zimbra-store [Y]
Install zimbra-spell [Y]
Installing:
   zimbra-core
   zimbra-ldap
   zimbra-mta
   zimbra-snmp
   zimbra-store
   zimbra-apache
   zimbra-spell
   zimbra-logger
This system will be modified. Continue [N]\mathbf{Y}
Configuration section
```

Note: Before the configuration starts, the installer checks to see if the hostname is resolvable via DNS. If there is an error, the installer asks if you would like to change the hostname. We recommend that the domain name have a MX record configured in DNS.

7. At this point the Main menu displays the default entries for the Zimbra component you are installing. To expand the menu to see the configuration values type X and press Enter. The main menu expands to display configuration details for the package being installed. Values that require further configuration are marked with asterisks (*)

```
Main menu
   1) Hostname:
                                                 mailhost.example.com
   2) Ldap master host
                                                 mailhost.example.com
   3) Ldap port:
                                                 389
   4) Ldap password:
                                                 set
   5) zimbra-ldap:
                                                 Enabled
       +Create Domain:
                                                yes
        +Domain to create:
                                                mailhost.example.com
   6) zimbra-store:
                                                Enabled
       +Create Admin User:
        +Admin user to create:
                                                admin@mailhost.example.com
***** +Admin Password
                                                UNSET
       +Enable automated spam training:
+Spam training user:
+Non-spam(Ham) training user:
+Global Documents Account
+SMTP host:

ges
fdi0j@mailhost.example.com
wiki@mailhost.example.com
mailhost.example.com
        +SMTP host:
                                               mailhost.example.com
        +Web server HTTP port:
                                                 80
        +Web server HTTPS port:
                                                 443
        +Web server mode:
                                                http
        +Enable POP/IMAP proxy:
        +IMAP server port:
                                                143
        +IMAP server SSL port:
                                                993
                                                110
        +POP server port:
        +POP server SSL port:
                                                995
        +FOF Server SSL port:
+Use spell check server:
                                                 yes
        +Spell server URL:
                                                 http://
mailhost.example.com:7780/aspell.php
   ****+License file name:
                                                 UNSET
   7) zimbra-mta:
                                                 Enabled
   8) zimbra-snmp:
                                                Enabled
  9) zimbra-logger:
                                                Enabled
 10) zimbra-spell:
                                                Enabled
 11) Enable default backup schedule:
                                                yes
  r) Start servers after configuration
                                                yes
  s) Save config to file
  x) Expand menu
   q) Quit
Address unconfigured (**) items (? - help) 6
```

To navigate the Main menu, select the menu item to change. You can modify any of the defaults. See Table 2, Main Menu Options, for a description of the Main menu.

For a quick installation, accepting all the defaults. You only need to do the following:

8. Enter 6 to select Main menu 6, zimbra-store.

```
Store configuration
  Status:
2) Create Admin User:
3) Admin user to create:
                                 Enabled
1) Status:
                                   yes
                                     admin@mailhost.example.com
                                    UNSET
** 4) Admin Password
  4) Admin Password
5) Enable automated spam training: yes
  9) SMTP host:
                                    mailhost.example.com
 10) Web server HTTP port:
                                    80
 11) Web server HTTPS port:
                                     443
                                    http
 12) Web server mode:
 13) Enable POP/IMAP proxy:
                                    no
 14) IMAP server port:
                                    143
 15) IMAP server SSL port:
                                    993
                                     110
 16) POP server port:
 17) POP server SSL port:
                                     995
 18) Use spell check server:
                                     yes
 19) Spell server URL:
                                     http://
mailhost.example.com:7780/aspell.php
**20) License filename:
                                     UNSET
Select, or 'r' for previous menu [r] 6
```

- 9. Select the following from the store configuration menu:
 - a. 4 and type the admin password. The password must be six or more characters. Press Enter.
 - b. 20 and type the directory and file name for the Zimbra license. For example, if you saved to the tmp directory, you would type /tmp/ZCSLicense.xml. If you do not have the license, you can proceed but will not be able to create new accounts until the license is installed. See "Configure the Zimbra License for ZCS Network Edition" on page 19.
- 3. Type **r** to return to the Main menu.
- 4. If no other defaults need to be changed, type **a** to apply the configuration changes. Press **Enter**.
- 5. When Save Configuration data to file appears, press Enter.

- 6. The next request is where to save the files. To accept the default, press Enter. To save the files to another directory, enter the directory and then press Enter.
- 7. When The system will be modified continue? appears, type v and press

The server is modified. Installing all the components and configuring the server can take a few minutes.

8. When Configuration complete - press return to exit displays, press Enter.

The installation is complete and the servers are started.

Installing Zimbra Software on a Mac Server

- 1. Click on the dmg file to open the file and then click **ZCS.mpkg** to open the Zimbra install package. The Apple installer opens and verifies that the server is ready to install the Zimbra Collaboration Suite. Click Continue.
- 2. Welcome screen appears, click Continue.
- 3. The Zimbra Software License Agreement is displayed. Read the agreement and click Continue. A popup screen appears asking that to continue the install you must accept the terms of the license agreement. Click Agree.
- 4. Select the destination volume to install the software. Click Continue.
- 5. The **Easy Install** ... dialog displays. Now you select which services to be installed on this server. To install all service packages on a single server, click Install.

To select which services to install, click Customize. Deselect those packages you do not want installed. See "Overview of Installation Process" on page 8 for information about the packages. Click Install to proceed.

A progress bar shows the Zimbra packages being installed. When **The** software was successfully installed dialog displays, click Close.

- 6. Open the Apple Terminal and log on as root. Type sudo /bin/bash. Enter your root password, if asked.
- 7. To install the Zimbra license file during the ZCS install, copy the ZCSLicense.xml file to /opt/zimbra/conf. (Network Edition only)
- 8. Type cd /opt/zimbra/libexec
- 9. Type Is to see the packages in the directory.
- 10.Type ./zmsetup.pl. This starts the ZCS configuration. A temporary log file is created and the server port configurations are checked for conflicts. The installation process checks to see if Sendmail, Postfix, and MySQL software are running. If any of these applications are running, you are

asked to disable them. Disabling MySQL is optional but highly recommended. Sendmail and Postfix must be disabled for the Zimbra collaboration Suite to start correctly.

11.If no conflicts are found, the Main menu displays the default entries for the Zimbra component you are installing. To expand the menu to see the configuration values type X and press Enter. The main menu expands to display configuration details for the package being installed. Values that require further configuration are marked with asterisks (*).

12.Go to Step 6 on page -15 to continue the installation steps.

Verify Zimbra Server Operation

When Configuration complete! appears, the installation is finished and the server has been started.

To verify that the server is running:

- 1. Type su zimbra.
- 2. Type zmcontrol status. The services status information is displayed. All services should be running.

Note: If services are not started, type zmcontrol start.

See the CLI Command appendix in the Administration Guide for more zmcontrol commands.

Installing the Zimbra License

Use the **Update License Wizard** from the administration console's Global Settings to upload and install a new license and to update an existing license, or you can install the license using the **zmlicense** CLI commands. See the Administrator's Guide Appendix A, CLI Commands, zmlicense to use the CLI command.

If you did not install the license file when you installed ZCS, to complete the ZCS installation and create accounts, install the license now.

- 1. Save the ZCSLicense.xml license file on the computer you use to access the administration console.
- Log on to the administration console, go to Global Settings>License tab and on the toolbar, click Update License. The License Installation Wizard opens.
- 3. Use **Browse** to select the ZCS license file you saved. Click **Next**. The license file is uploaded to Zimbra LDAP server.
- 4. Click Install to install the license file.

After the license file is installed, the current license information on the License page is updated to reflect the new information. You can now add new accounts.

Provisioning Accounts

Once the mailbox server is running, open your browser, enter the administration console URL and log on to the console to provision email accounts. The administration console URL is entered as https:[mailhost.example.com]:7071/zimbraAdmin

Note: To go to the administration console, you must type https, even if you configured the web server mode as http.

The first time you log on, a certificate authority (CA) alert may be displayed. Click Accept this certificate permanently to accept the certificate and be able connect to the Zimbra administration console. Then click **OK**.

Enter the admin user name and password configured during the installation process. Enter the name as admin@mailhost.example.

To provision accounts:

1. From the admin console navigation pane, click **Accounts**.

Note: Four accounts are listed: admin account, two spam training accounts, and a global Documents account. These accounts do not need any additional configuration.

- 2. Click New, page 1 of the New Account Wizard opens.
- 3. Enter the Account name to be used as the email address and the Last name. This the only required information to create an account.
- 4. You can click **Finish** at this point, and the account will be configured with the default COS and global features.

If you want to configure aliases, forwarding addresses, and specific features for this account, proceed through the dialog before you click Finish.

When the accounts are provisioned, you can send and receive emails.

Importing Content from User Mailboxes

Zimbra developed different applications to facilitate moving user's email messages, calendars, and contacts from their old email servers to their accounts on the Zimbra server. When the user's files are imported, the folder hierarchy is maintained. The following applications can be accessed from the administration console Download page, and instruction guides are available from the Help Desk page or from the Zimbra website, Documents page.

- ZCS Migration Wizard for Exchange. Format is an .exe file. You can migrate users from Microsoft® Exchange server email accounts to Zimbra server accounts.
- ZCS Migration Wizard for Lotus Domino. Format is an .exe file. You can migrate users from Lotus® Domino® server email accounts to Zimbra server accounts.
- Zimbra Collaboration Suite Import Wizard for Outlook. Format is an .exe file. Users download the Import Wizard to their computers and run the executable to import their Outlook .pst files to the Zimbra server.

Administrator's Account

Initial administrative tasks when you log on for the first time may include setting up the admin mailbox to include features, aliases, and forwarding addresses needed for the administrator's working environment.

Two aliases for the admin account are created during install:

- Postmaster. The postmaster address is displayed in emails that are automatically generated from Postfix when messages cannot be sent. If users reply to that address, the message is forwarded to the admin mailbox.
- Root. This address is where notification messages from the operating system are sent.

If you didn't change the default during installation, the anti-virus notification is sent directly to the admin account.

Uninstalling Zimbra Collaboration Suite

To uninstall servers you run the install script -u and then delete the zcs directory and remove the ZCS tgz file on the servers.

- 1. cd to the original install directory for the zcs files.
- 2. Type ./install.sh -u.
- 3. When **Completely remove existing installation?** is displayed, type **Yes.**The Zimbra servers are stopped, the existing packages, the webapp directories, and the /opt/zimbra directory are removed.
- 4. Delete the zcs directory, type rm -rf zcs.
- 5. Delete the zcs.tgz file.

Additional Information

To learn more about the Zimbra Collaboration Suite, read the Administrator Reference Guide and Help. The Zimbra guides and release notes in pdf

format can be found in the opt/zimbra/docs directory and is also available from the administration console Help button and from the Zimbra website.

- Administrator's Guide. This guide describes product architecture, server functionality, administration tasks, configuration options, and backup and restore procedures. The guide is available in pdf format from the administrator's console.
- Administrator Help. The administrator Help provides detailed instructions about how to add and maintain your servers, domains, and user accounts from the admin console.

Support and Contact Information

Visit www.zimbra.com to join the community and to be a part of building the best open source messaging solution. We appreciate your feedback and suggestions.

- Contact sales@zimbra.com to purchase Zimbra Collaboration Suite.
- Network Edition customers can contact support at support@zimbra.com.
- Explore the Zimbra Forums for answers to installation or configurations problems.
- Join the Zimbra Community Forum, to participate and learn more about the Zimbra Collaboration Suite.
- Send an email to feedback@zimbra.com to let us know what you like about the product and what you would like to see in the product. Or, if you prefer, post your ideas to the Zimbra Forum.

If you encounter problems with this software, visit Zimbra.com and submit a bug report. Make sure you provide enough detail so that the bug can be easily duplicated.

Zimbra Inc. Copyright Zimbra, Inc. 2005-2007. All rights reserved. The Zimbra logo and logo type are trademarks of Zimbra, Inc.

All other marks are the property of their respective owners.



System Requirements for Zimbra Collaboration Suite 4.5

Zimbra Collaboration Suite system requirements for both the Network Edition and the Open Source Edition.

	Requirements
Servers	Evaluation and Testing
	Intel/AMD 32-bit CPU 1.5 GHz
	• 1 GB RAM
	 5 GB free disk space for software and logs
	Additional disk space for mail storage
	Production environments
	 Intel/AMD CPU 32-bit 2.0 GHZ+
	Minimum - 2 GB RAM
	Recommend - 4 GB
	 10 GB free disk space for software and logs (SATA or SCSI for performance, and RAID/Mirroring for redundancy)
	Additional disk space for mail storage
	Note: RAID-5 is not recommended for installations with more than 100 accounts.
Mac Server	Evaluation and Testing
	PPC Mac (G4 or better), Intel Core Solo, or Intel Core Duo*
	• 1 GB RAM
	5 GB free disk space for software and logs
	Additional disk space for mail storage

Mac Server (continued)	 Production environments PPC Mac (G5 or better), Intel Core Solo, or Intel Core Duo* Minimum - 2 GB RAM Recommend - 4 GB 10 GB free disk space for software and logs Additional disk space for mail storage *There are known issues using ZCS on Macs with the Intel Core Duo. See the Release Note.
Operating System Network Edition	 Red Hat® Enterprise Linux®, AS/ES version 4. (32-bit, 64-bit) For clustering, version 4, update 3 is required. The operating system must be configured as described in this guide. Mac OS® X 10.4.7 Note: Max OS X server installs, the following features are not included: attachment indexing/search, view attachments as HTML, clustering. SUSE ES 9 (32-bit) Note: SUSE server installs, the following features are not included: clustering
Operating System Open Source Edition	In addition to supporting the operating systems listed above for the Network Edition, other OS versions are available for the Open Source Edition. Check the Zimbra Open Source Downloads page on www.zimbra.com.

2 January 2007 Open Source Edition 4.5

Other Dependencies	 For Red Hat Enterprise, Fedora Core and SuSE operating systems, the server must also have the following installed: NPTL. Native POSIX Thread Library Sudo. Superuser, required to delegate admins. Ilbidn. For internationalizing domain names in applications (IDNA) cURL. A command line tool for transferring files with URL syntax fetchmail. A remote-mail retrieval and forwarding utility used for on-demand TCIP/IP links. GMP. GNU Multiple-Precision Library. compat-libstdcc++-33. Compatibility Standard C++ libraries. NOTE: The 32-bit version of the compat-libstdc rpm package is required for both 32-bit or 64-bit servers. For Red Hat Enterprise only: compat-libstdcc++-296
	For Mac servers, Java 1.5 must be installed as the default Java.
Miscellaneous	 SSH client software to transfer and install the Zimbra Collaboration Suite software. Valid DNS configured with an A record and MX record Servers should be configured to run Network Time Protocol (NTP) on a scheduled basis
Administrator Computers *These OS configurations have been tested and are known to work. Other configurations may work.	 Windows XP with either Internet Explorer 7.0 and 6.0 SP2 or Firefox 1.5.x and 2.0 Macintosh OS X 10.4 with Firefox 1.5 and 2.0

End User Computers using Zimbra Web Client *These OS configurations have been tested and are known to work. Other configurations may work.	 Minimum Intel/AMD/Power PC CPU 750MHz 256MB RAM Recommended Intel/AMD/Power PC CPU 1.5GHz 512MB RAM Operating system/ browser combinations Windows XP with either Internet Explorer 7 and 6.0 SP 2 or Firefox 1.5.x and 2.0 Fedora Core 4 with Firefox 1.5 and 2.0 Mac OS X 10.4 with Firefox 1.5 and 2.0 or Safari 2.0.4 (Pots)
End User Computers	Safari 2.0.4 (Beta) Minimum
End User Computers Using Other Clients *These OS configurations have been tested and are known to work. Other configurations may work.	 Intel/AMD/Power PC CPU 750MHz 256MB RAM Recommended Intel/AMD/Power PC CPU 1.5GHz 512MB RAM Operating system POP/IMAP combinations Windows XP with either Outlook Express 6, Outlook 2003 (MAPI), or Thunderbird 1.0.7 Fedora Core 4 with Thunderbird 1.0.7 Mac OS X 10.4 with Apple Mail
Monitor	Display minimum resolution 1024 x 768
Internet Connection Speed	128 kbps or higher

Migration Wizard Requirements

Accounts from Microsoft Exchange 2000, 2003 and 5.5 can be migrated to Zimbra Collaboration Suite

Import Wizard Requirements

Contents of a .pst file from accounts using Microsoft® Outlook® 2003 can be imported to accounts on the Zimbra server.

4 January 2007 Open Source Edition 4.5

Rev 1/4/07

6 January 2007 Open Source Edition 4.5