



Zimbra Collaboration Suite Administrator's Guide

Release 7.0

**Open Source Edition
February 2011**

Legal Notices

Copyright ©2005-2011 VMware, Inc. All rights reserved. This product is protected by U.S. and international copyright and intellectual property laws. VMware products are covered by one or more patents listed at <http://www.vmware.com/go/patents>.

VMware and Zimbra are registered trademarks or trademarks of VMware, Inc. in the United states and/or other jurisdiction. All other marks and names mentioned herein may be trademarks of their respective companies.

Zimbra, a division of VMware, Inc.

3401 Hillview Avenue
Palo Alto, California 94304 USA

www.Zimbra.com

ZCS 7.0

2/2011

Table of Contents

Chapter 1	Introduction	9
	Intended Audience	9
	Zimbra Collaboration Suite License	9
	Obtaining a License	10
	Available Documentation	10
	Support for Recommended Third-Party Components	11
	Support and Contact Information	11
Chapter 2	Product Overview	13
	Core Functionality	14
	Zimbra Components	15
	System Architecture	16
	Zimbra Packages	17
	Backup Process Overview	20
	Zimbra System Directory Tree	20
	Example of a Typical Multi-Server Configuration	22
Chapter 3	Zimbra Mailbox Server	25
	Zimbra Licenses	25
	Incoming Mail Routing	26
	Disk Layout	26
	Message Store	26
	Data Store	27
	Index Store	27
	Backup	28
	Redo Log	29
	Log	29
Chapter 4	Zimbra Directory Service	31
	Directory Services Overview	31
	LDAP Hierarchy	32
	Zimbra Schema	33
	Account Authentication	34
	Internal Authentication Mechanism	34
	External LDAP and External Active Directory Authentication Mechanism	34
	Custom Authentication - zimbraCustomAuth	35
	Kerberos5 Authentication Mechanism	37
	Zimbra Objects	38
	Company Directory/GAL	41
	Flushing LDAP Cache	43
	Themes and Locales	43
	Accounts, COS, Domains, and Servers	43
	Global Configuration	44

Chapter 5	Zimbra MTA	45
	Zimbra MTA Deployment	45
	Postfix Configuration Files	46
	MTA Functionality	47
	SMTP Authentication	47
	SMTP Restrictions	47
	Relay Host Settings	47
	MTA-LDAP Integration	48
	Account Quota and the MTA	48
	MTA and Amavisd-New Integration	48
	Anti-Virus Protection	48
	Anti-Spam Protection	49
	Receiving and Sending Mail through Zimbra MTA	52
	Zimbra MTA Message Queues	52
Chapter 6	Using the Administration Console	55
	Logging In	55
	Changing Administrator Passwords	56
	About the Administration Console	56
	Managing Tasks from the Administration Console	59
	Tasks Not Available from Administration UI	59
	Creating Message of the Day for Administrators	60
	Checking for ZCS Software Updates	61
	Searching from the Administration Console	62
Chapter 7	Managing ZCS Configuration	65
	Managing Global Configurations	65
	General Global Settings	66
	Global Settings to Block Mail Attachments	67
	Global MTA Settings	67
	Global IMAP and POP Settings	69
	Anti-spam Settings	69
	Anti-virus Settings	70
	Zimbra Free/Busy Interoperability	70
	Customizing Themes	72
	Global HSM	72
	License Information	73
	Backup/Restore	74
	Managing Domains	74
	General Information	75
	Global Address List (GAL) Mode	76
	Authentication Modes	78
	Virtual Hosts	78
	Free/Busy Interoperability	79
	Zimlets on the Domain	79
	Customizing Themes for Domains	79
	Setting Account Limits	79
	Renaming a Domain	80
	Managing Servers	81
	General Server Settings	81
	Services Settings	82
	MTA Server Settings	82

IMAP and POP Server Settings	82
Volume Settings	83
Backup and Restore - selecting the backup mode	84
Managing Other Functions	84
Zimlets	84
Admin Extensions	84
Adding Words to ZCS Spell Dictionary	85
Setting System-wide Signatures	85
Customizing External Share Prompt for Zimbra Web Client	85
 Chapter 8 Managing User Accounts	87
Setting up Accounts	88
Configuring One Account	88
Configuring Many Accounts at Once	89
Managing Aliases	89
Managing Class of Services	89
COS Calendar Preference to Set Default Time Zones	90
Distributing Accounts Across Servers	90
Changing Passwords	91
Directing Users to Your Change Password Page	91
Setting Polling Intervals	91
View an Account's Mailbox	91
Reindexing a Mailbox	92
Changing an Account's Status	92
Deleting an Account	93
Moving a Mailbox	93
Moving a Mailbox using the CLI command	94
Managing Distribution Lists	94
Using Distribution Lists for Group Sharing	95
Managing Resources	95
 Chapter 9 Customizing Accounts, Setting General Preferences and Password Rules	99
Zimbra Web Client Versions	99
Zimbra Messaging and Collaboration Applications	100
Email messaging	100
Address Book	108
Calendar	109
Tasks	112
Briefcase	113
Other Configuration Settings for Accounts	113
Enabling Sharing	114
Disabling Preferences	115
Setting Account Quotas	115
Setting Password Policy	115
Setting Failed Login Policy	116
Setting Session Timeout Policy	118
Setting Email Retention Policy	118
Setting Attachment Viewing Options	119
Zimbra Web Client UI Themes	120
Zimbra Mobile	121
Configuring Zimlets for Accounts	121
Other Account Configuration Preferences	122

Chapter 10	Managing Zimlets	123
Overview of Zimlets		123
Accessing Zimlets		124
Default Zimlets included in ZCS		124
Zimlets from the Library or Gallery		125
Developing Customized Zimlets		125
Deploying Zimlets		125
Enabling, Disabling, or Making Zimlets Mandatory		128
Default Zimlets		128
Toggling a Zimlet between Enabling and Disabling		129
Disabling a Zimlet using the CLI		130
Undeploying Zimlets		131
Configuring Zimlets		132
Viewing Zimlet Status		132
Upgrading a Zimlet		133
Chapter 11	Monitoring Zimbra Servers	135
Zimbra Logger		136
Reviewing Server Status		137
Server Performance Statistics		137
Generating Daily Mail Reports		138
Monitoring Disk Space		139
Monitoring Servers		139
Monitoring Mail Queues		140
Flushing the Queues		141
Monitoring Mailbox Quotas		141
Monitoring Authentication Failures		142
Log Files		142
Syslog		143
Using log4j to Configure Logging		144
Logging Levels		144
Reviewing mailbox.log Records		146
Reading a Message Header		151
SNMP		152
SNMP Monitoring Tools		152
SNMP Configuration		152
Errors Generating SNMP Traps		152
Checking MySQL		152
Checking for Latest ZCS Software Version		152
Appendix A	Command-Line Utilities	155
General Tool Information		155
Zimbra CLI Commands		156
Using non-ASCII Characters in CLIs		160
zmprov (Provisioning)		160
zmaccts		174
zmarchiveconfig		174
zmarchivectl		175
zmarchivesearch		175
zmbackup		176
zmblobchk		179
zmcalthk		180

zmschedulebackup	181
zmbackupabort	183
zmbackupquery	184
zmrestore	186
zmrestoreoffline (Offline Restore)	188
zmrestoreldap	190
zmcontrol (Start/Stop Service)	191
zmmailboxmove (Move Mailbox)	192
zmmboxsearch (Cross Mailbox Search)	194
zmcertmgr	195
zmgsautil	195
zmldappasswd	196
zmlocalconfig	197
zmmailbox	198
zmtlsctl	201
zmhsm	202
zmlicense	202
zmmetadump	203
zmmypasswd	203
zmplayredo	203
zmproxyconfgen	204
zmproxypurge	205
zmredodump	206
zmskindeploy	207
zmsoap	207
zmstat-chart	208
zmstat-chart-config	210
zmstatctl	210
zmthrdump	211
zmtrainsa	211
zmtzupdate	212
zmvolume	212
zmzimletctl	213
zmproxyconfig	214
Appendix B ZCS Crontab Jobs	219
How to read the crontab	219
ZCS Cron Jobs	219
Jobs for crontab.store	220
Jobs for crontab.logger	221
Jobs for crontab.mta	221
Single Server Crontab -I Example	222
Appendix D Glossary	225
Index	231

Chapter 1 Introduction

Zimbra™ Collaboration Suite (ZCS) is a full-featured messaging and collaboration solution that includes email, address book, calendaring, tasks, and Web document authoring.

Topics in this chapter include:

- ◆ [Intended Audience](#)
- ◆ [Available Documentation](#)
- ◆ [Support for Recommended Third-Party Components](#)
- ◆ [Support and Contact Information](#)

Intended Audience

This guide is intended for system administrators responsible for installing, maintaining, and supporting the server deployment of Zimbra.

Readers of this guide should possess the following recommended knowledge and skill sets:

- Familiarity with the associated technologies and standards, including Red Hat® Enterprise Linux® operating system, SUSE operating systems, and open source concepts
- Industry practices for mail system management

Available Documentation

The following ZCS documentation is available:

- **Installation Guides.** Installation guides for single server and multi-server installation, include system requirements and server configuration instructions.
- **Administrator Guide.** This guide provides a comprehensive product overview, including architecture, server functionality, administration tasks, configuration options, and monitoring tools.
- **ZCS Migration Wizard Guides.** The guides provide instructions for running the Migration Wizard to migrate accounts from either Microsoft Exchange servers or Lotus Domino servers.

- **Zimbra administration console Help.** The Help topics describes how to perform tasks required to centrally manage ZCS servers and mailbox accounts from the administration console.
- **Zimbra Web Client Help.** The Help topics describes how to use the features of the ZCS Web Client.
- **Release Notes.** Late-breaking news for product releases and upgrade instructions are contained in the release notes. The latest notes can be found on the Zimbra Website, www.zimbra.com.

Support for Recommended Third-Party Components

Where possible, Zimbra adheres to existing industry standards and open source implementations for backup management, user authentications, operating platform, and database management. However, Zimbra only supports the specific implementations described in the Zimbra Collaboration Suite architecture overview in the [Product Overview](#) chapter as officially tested and certified for the Zimbra Collaboration Suite. This document may occasionally note when other tools are available in the marketplace, but such mention does not constitute an endorsement or certification.

Support and Contact Information

Visit www.zimbra.com to join the community and to be a part of building the best open source messaging solution. We appreciate your feedback and suggestions.

- Contact sales@zimbra.com to purchase Zimbra Collaboration Suite
- Explore the Zimbra Forums for answers to installation or configurations problems
- Join the [Zimbra Forums](#), to participate and learn more about the Zimbra Collaboration Suite.

Let us know what you like about the product and what you would like to see in the product. Post your ideas to the Zimbra Forum.

If you encounter problems with this software, go to <http://bugzilla.Zimbra.com> to submit a bug report. Make sure to provide enough detail so that the bug can be easily duplicated.

Chapter 2 Product Overview

This chapter describes the Zimbra application architecture, integration points, and information flow.

Topics in this chapter include:

- ◆ [Core Functionality](#)
- ◆ [Zimbra Components](#)
- ◆ [System Architecture](#)
- ◆ [Example of a Typical Multi-Server Configuration](#)

The Zimbra Collaboration Suite is designed to provide an end-to-end mail solution that is scalable and highly reliable. The messaging architecture is built with well-known open-system technology and standards and is composed of a mail server application and a client interface.

The architecture includes the following core advantages:

- **Open source integrations.** Linux[®], Jetty, Postfix, MySQL[®], OpenLDAP[®].
- **Uses industry standard open protocols.** SMTP, LMTP, SOAP, XML, IMAP, POP.
- **Modern technology design.** Java, JavaScript thin client, DHTML.
- **Horizontal scalability.** Because each mailbox server includes its own data store, message store, and set mailbox accounts, you don't change anything on existing servers in order to scale the system. To scale for additional mail accounts, add more servers.
- Red Hat[®] Enterprise Linux[®] Cluster Suite version 4, Update 5 or later or with Veritas[™] Cluster Server by Symantec (VCS) version 5.0 with maintenance pack 1 or later. **Browser based client interface.** Zimbra Web Client gives users easy access to all the ZCS features.
- Administration console to manage accounts and servers.

Core Functionality

The Zimbra Collaboration Suite is an innovative messaging and collaboration application that offers the following state-of-the-art messaging and collaboration solutions:

- Email
- Group Calendars
- Address Books
- Task Management
- Web document management and authoring

The core functionality within ZCS is as follows:

- Mail delivery and storage
- Indexing of mail messages upon delivery
- Mailbox server logging
- IMAP and POP support
- Directory services
- Anti-spam protection
- Anti-virus protection

Administrators can easily manage domains, servers, and accounts from the browser based administration console.

- Manage classes of service
- Add accounts and domains
- Set account restrictions either for an individual account or by COS
- Create and edit distribution lists
- Import Microsoft Exchange user accounts
- Set up virtual hosts on a domain
- Manage servers
- View and manage system status
- Monitor usage

Zimbra offers two browser based web clients, Advanced Zimbra Web Client that offers a state-of-the-art Ajax web client; and Standard Zimbra Web Client as an HTML client. Some of the features that can be found in the web client include:

- Compose, read, reply, forward, and use other standard mail features
- View mail by conversation threads
- Tag mail to easily group messages for quick reference
- Perform advanced searches
- Save searches
- Use Calendar to schedule appointments

- Share calendars, email folders, address books, and Briefcase folders with others
- Set mailbox usage preferences, including defining mail filtering options
- Use ZCS Documents to create, organize and share web documents
- Use the Tasks feature to create to-do lists and manage tasks through completion.

Zimbra Components


Zimbra architecture includes open-source integrations using industry standard protocols. The third-party software listed below is bundled with Zimbra software and installed as part of the installation process. These components have been tested and configured to work with the software.

- Jetty, the web application server that Zimbra software runs in.
- Postfix, an open source mail transfer agent (MTA) that routes mail messages to the appropriate Zimbra server
- OpenLDAP software, an open source implementation of the Lightweight Directory Access Protocol (LDAP) that provides user authentication
- MySQL database software
- Lucene, an open source full-featured text and search engine
- Anti-virus and anti-spam open source components including:
 - ClamAV, an anti-virus scanner that protects against malicious files
 - SpamAssassin, a mail filter that attempts to identify spam
 - Amavisd-new interfaces between the MTA and one or more content checkers
- James/Sieve filtering, used to create filters for email

System Architecture

Figure 1 shows ZCS architectural design, including the open-source software bundled with the Suite and other recommended third-party applications.

ZCS Collaboration Suite System Architecture

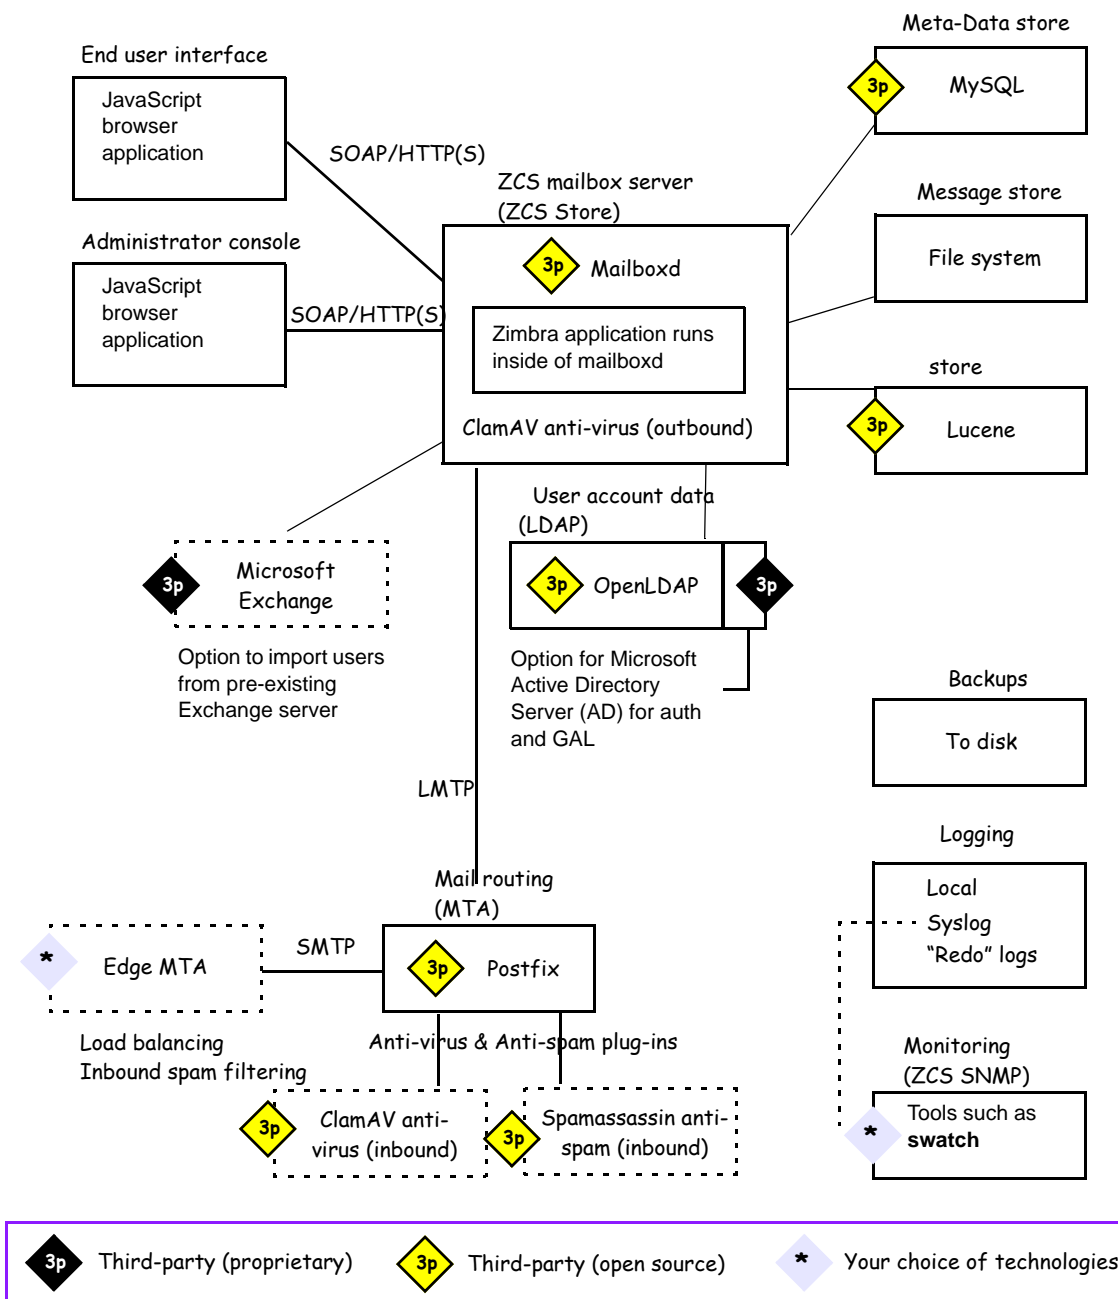

Zimbra Packages

The Zimbra Collaboration Suite includes the following application packages.

Zimbra Core

The Zimbra Core package includes the libraries, utilities, monitoring tools, and basic configuration files.

Zimbra LDAP

ZCS uses the OpenLDAP software, an open source LDAP directory server. User authentication is provided through OpenLDAP. Each account on the Zimbra server has a unique mailbox ID that is the primary point of reference to identify the account.

The OpenLDAP schema has been customized for ZCS.

Zimbra MTA

Postfix is the open source mail transfer agent (MTA) that receives email via SMTP and routes each message to the appropriate Zimbra mailbox server using Local Mail Transfer Protocol (LMTP). The Zimbra MTA also includes the anti-virus and anti-spam components.

Zimbra Store (Zimbra server)

The Zimbra store package installs the components for the mailbox server, including Jetty, which is the servlet container the Zimbra software runs within. Within ZCS, this servlet container is called **mailboxd**.

Each account is configured on one mailbox server, and this account is associated with a mailbox that contains all the mail messages and file attachments for that mail account.

The mailbox server includes the following components:

- Data store
- Message store
- Index store

Each Zimbra server has its own standalone data store, message store, and store for the mailboxes on that server.

As each email arrives, the Zimbra server schedules a thread to have the message indexed (Index store).

Data store. The **data store** is a MySQL database where internal mailbox IDs are linked with user accounts. The data store maps the mailbox IDs to users' OpenLDAP accounts. This database contains each user's set of tag definitions, folders, calendar schedules, and contacts, as well as the status of each mail message - read, unread, tags associated to message, and folder the message resides in.

Message store. The **message store** is where all email messages and file attachments reside. Messages are stored in MIME format. A message that is sent to multiple recipients who have accounts on one mailbox server are stored only once in the file system.

Index store. Index and search technology is provided through Lucene. Index files are maintained for each mailbox.

Zimbra-SNMP

Installing the Zimbra-SNMP package is optional. If you choose to install Zimbra-SNMP for monitoring, the package should be run on every server (Zimbra server, Zimbra LDAP, Zimbra MTA) that is part of the Zimbra configuration. Zimbra uses swatch to watch the syslog output to generate SNMP traps.

Zimbra Logger

Installing the Zimbra Logger package is optional and is installed on one mailbox server. The Zimbra logger installs tools for syslog aggregation, reporting. If you do not install Logger, the server statistics section of the administration console will not display.

Zimbra Spell

Installing the Zimbra Spell package is optional. Aspell is the open source spell checker used on the Zimbra Web Client. When zimbra-spell is installed, the Zimbra-Apache package is also installed.

Zimbra Proxy

Installing the Zimbra Proxy is optional. Use of an IMAP/POP proxy server allows mail retrieval for a domain to be split across multiple Zimbra servers on a per user basis.

Note: *The Zimbra Proxy package can be installed with the Zimbra LDAP, the Zimbra MTA, the Zimbra mailbox server, or on its own server.*

Zimbra Memcached

Memcached is a separate package from zimbra-proxy and is automatically selected when the zimbra-proxy package is installed. One server must run zimbra-memcached when the proxy is in use. All installed zimbra-proxies can use a single memcached server.

Zimbra System Directory Tree

Table Table lists the main directories created by the Zimbra installation packages.

The directories not listed in this table are libraries used for building the core Zimbra software

Note: *The directory organization is the same for any server in the Zimbra Collaboration Suite, installing under **/opt/Zimbra**.*

Table Directory Structure for Zimbra Components

Parent	Directory	Description
/opt/ Zimbra/		Created by all Zimbra installation packages
	bin/	Zimbra application files, including the utilities described in Appendix A, Command -Line Utilities
	clamav	Clam AV application files for virus and spam controls
	conf/	Configuration information
	contrib	Third-party scripts for conveyance
	convertd	Convert service
	cyrus-sasl	SASL AUTH daemon
	data/ldap/ hdb	OpenLDAP data directory
	db/	Data Store
	doc/	SOAP txt files
	dspam	DSPAM antivirus
	httpd	Spell server
	/	Store
	java/	Contains Java application files
	jetty/	mailboxd application server instance. In this directory, the webapps/Zimbra/skins directory includes the Zimbra UI theme files.
	lib/	Libraries
	libexec/	Internally used executables
	log/	Local logs for Zimbra server application
	logger/	RRD and SQLite data files for logger services
	mysql/	MySQL database files
	openldap/	OpenLDAP server installation, pre-configured to work with Zimbra
	postfix/	Postfix server installation, pre-configured to work with Zimbra


Parent	Directory	Description
	redolog/	Contains current transaction logs for the Zimbra server
	sleepycat/	Berkeley DB
	snmp/	SNMP monitoring files
	ssl/	Certificates
	store/	Message store
	wiki	Contains the Zimbra Documents global template file
	zimbramon/	Contains the control scripts and Perl modules
	zimlets	Contains Zimlet zip files that are installed with Zimbra
	zimlets-extra	Contains Zimlet zip files that can be installed
	zmstat	mailboxd statistics are saved as .csv files

Example of a Typical Multi-Server Configuration

The exact configuration for each deployment is highly dependent on variables including the number of mailboxes, mailbox quotas, performance requirements, existing network infrastructure, IT policies, security methodologies, spam filtering requirements, and so forth.

Figure shows a typical configuration with incoming traffic and user connection. Alternate ways of configuring at many points within the network are possible.

Typical Configuration with Incoming Traffic and User Connections

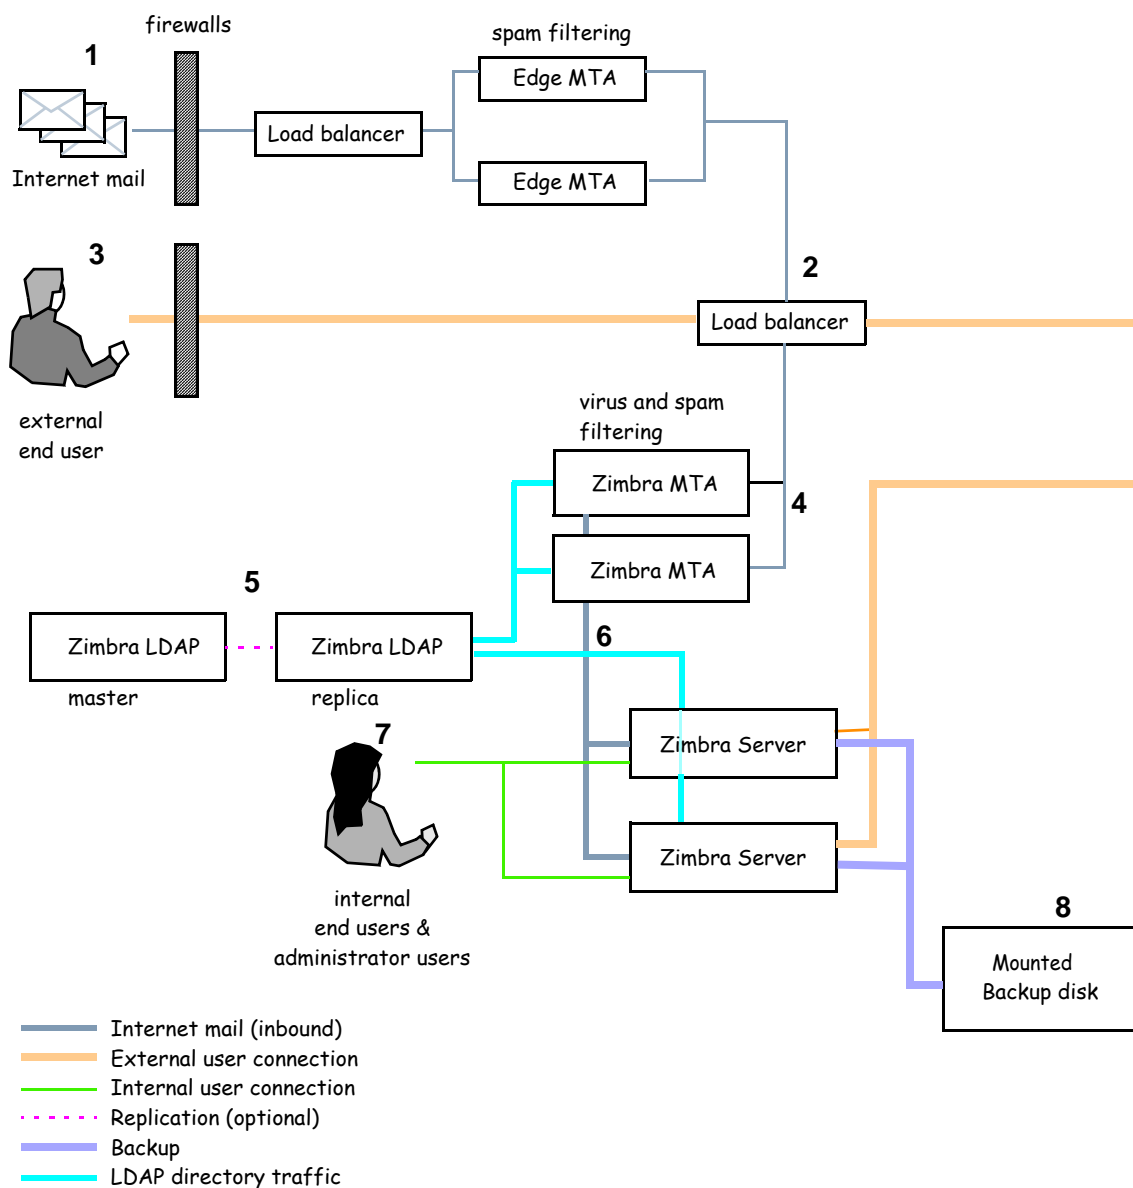

Explanation of Figure follows:

- 1 Inbound Internet mail goes through a firewall and load balancing to the edge MTA for spam filtering.
- 2 The filtered mail then goes through a second load balancer.
- 3 An external user connecting to the messaging server also goes through a firewall to the second load balancer.
- 4 The inbound Internet mail goes to any of the Zimbra MTA servers and goes through spam and virus filtering.
- 5 The designated Zimbra MTA server looks up the addressee's directory information from the Zimbra LDAP replica server.
- 6 After obtaining the user's information from the Zimbra LDAP server, the MTA server sends the mail to the appropriate Zimbra server.
- 7 Internal end-user connections are made directly to any Zimbra server which then obtains the user's directory information from Zimbra LDAP and redirects the user as needed.
- 8 Zimbra servers' backups can be processed to a mounted disk.

Chapter 3 Zimbra Mailbox Server

The Zimbra mailbox server is a dedicated server that manages all of the mailbox contents, including messages, contacts, calendar, Briefcase files and attachments.

Topics in this chapter include:

◆ Incoming Mail Routing

Messages are received from the Zimbra MTA server and then passed through any filters that have been created. Messages are then indexed and deposited into the correct mailbox.

Each Zimbra mailbox server in the system can see only its own storage volumes. Zimbra mailbox servers cannot see, read, or write to another Zimbra server.

In a ZCS single-server environment, all services are on one server, and during installation the computer is configured to partition the disk to accommodate each of the services.

In a ZCS multi-server environment, the LDAP and MTA services can be installed on separate servers. See the Multi-Server Installation Guide.

Incoming Mail Routing

The MTA server receives mail via SMTP and routes each mail message to the appropriate Zimbra mailbox server using LMTP. As each mail message arrives, the Zimbra server schedules a thread to have Lucene index it.

Disk Layout

The mailbox server includes the following volumes:

- **Message Store.** Mail message files are in `opt/zimbra/store`
- **Data Store.** The MySQL database files are in `opt/zimbra/db`
- **Index Store.** Index files are in `opt/zimbra/index`
- **Log files.** Each component in ZCS has log files. Local logs are in `/opt/zimbra/log`

Message Store

The Zimbra Message Store is where all email messages reside, including the message body and any file attachments. Messages are stored in MIME format.

The Message Store is located on each Zimbra server under `/opt/zimbra/store`. Each mailbox has a dedicated directory named after its internal Zimbra mailbox ID.

Note: Mailbox IDs are unique per server, not system-wide.

Single Copy Message Storage

Single copy storage allows messages with multiple recipients to be stored only once in the file system. On UNIX systems, the mailbox directory for each user contains a hard link to the actual file.

Data Store

The Zimbra Data Store is a MySQL database that contains all the metadata regarding the messages including tags, conversations, and pointers to where the messages are stored in the file system.

Each account (mailbox) resides only on one server. Each Zimbra server has its own stand alone data store containing data for the mailboxes on that server.

The Data Store contains:


- Mailbox-account mapping. The primary identifier within the Zimbra database is the mailbox ID, rather than a user name or account name. The mailbox ID is only unique within a single mailbox server. The Data Store maps the Zimbra mailbox IDs to the users' OpenLDAP accounts.
- Each user's set of tag definitions, folders, contacts, calendar appointments, tasks, Briefcase folders, and filter rules.
- Information about each mail message, including whether it is read or unread, and which tags are associated.

Index Store

The index and search technology is provided through Apache Lucene. Each message is automatically indexed as it enters the system. Each mailbox has an index file associated with it.

The tokenizing and indexing process is not configurable by administrators or users.

Message tokenization

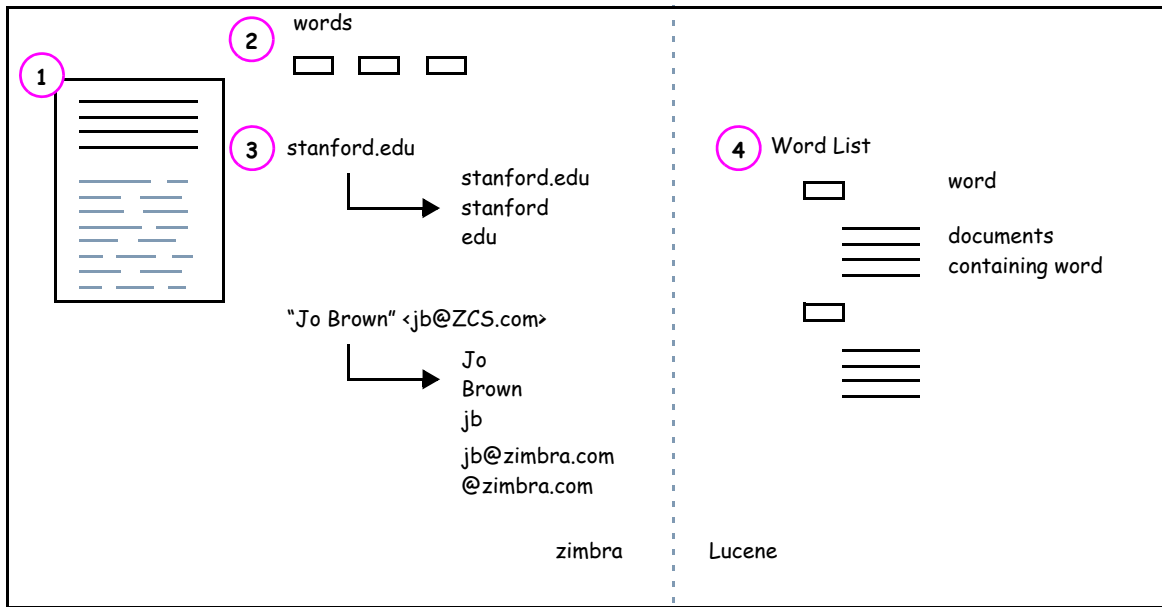

The process is as follows:

1. The Zimbra MTA routes the incoming email to the Zimbra mailbox server that contains the account's mailbox.
2. The mailbox server parses the message, including the header, the body, and all readable file attachments such as PDF files or Microsoft Word documents, in order to tokenize the words.
3. The mailbox server passes the tokenized information to Lucene to create the index files.

Note: Tokenization is the method for indexing by each word. Certain common patterns, such as phone numbers, email addresses, and domain names are tokenized as shown in Figure .

Log

A Zimbra deployment consists of various third-party components with one or more Zimbra mailbox servers. Each of the components may generate its own logging output.

Selected Zimbra log messages generate SNMP traps, which you can capture using any SNMP monitoring software. See [Chapter 11, Monitoring Zimbra Servers](#).

Chapter 4 Zimbra Directory Service

The Zimbra LDAP service is a directory service running a version of the OpenLDAP software that has the Zimbra schema already installed. This chapter describes how the directory service is used for user authentication and account configuration and management.

Topics in this chapter include:

- ◆ [Directory Services Overview](#)
- ◆ [Zimbra Schema](#)
- ◆ [Account Authentication](#)
- ◆ [Zimbra Objects](#)
- ◆ [Company Directory/GAL](#)
- ◆ [Flushing LDAP Cache](#)

Note: *Zimbra also supports integration with Microsoft's Active Directory Server. Contact Zimbra support for more detailed information on specific directory implementation scenarios.*

The LDAP server is identified when ZCS is installed. Each server has its own LDAP entry that includes attributes specifying operating parameters. In addition, there is a global configuration object that sets defaults for any server whose entry does not specify every attribute.

A selected subset of these attributes can be modified through the Zimbra administration console; others can be changed through the CLI utility.

Directory Services Overview


LDAP directory services provide a centralized repository for information about users and devices that are authorized to use your network. The central repository used for Zimbra's LDAP data is the OpenLDAP directory server.

Figure shows traffic between the Zimbra-LDAP directory server and the other servers in the Zimbra system. The Zimbra MTA and the Zimbra mailbox server read from, or write to, the LDAP database on the directory server. The edge

MTA does not connect to the LDAP database; instead, it uses the DNS server's MX entry to determine where to direct mail.

The Zimbra clients connect through the Zimbra server, which in turn connects to LDAP.

LDAP Directory Traffic

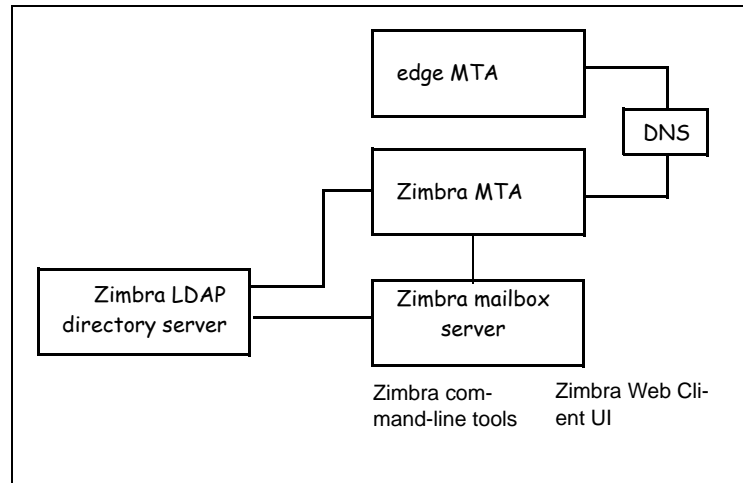

At the core of every LDAP implementation is a database organized using a *schema*. The schema specifies the types of objects that are stored in the database, and what types of attributes they have.

An LDAP directory entry consists of a collection of attributes and has a globally unique distinguished name (DN). The attributes allowed for an entry are determined by the *object classes* associated with that entry. The values of the object class attributes determine the schema rules the entry must follow.

The object classes determine what type of object the entry refers to and what type of data can be stored for that entry. An entry's object class that determines what kind of entry it is, is called a structural object class and cannot be changed. Other object classes are called auxiliary and may be added to or deleted from the entry.

Use of auxiliary object classes in LDAP allows for an object class to be combined with an existing object class. For example, an entry with structural object class **inetOrgPerson**, and auxiliary object class **zimbraAccount**, would be an account, either administrator or end-user. An entry with the object class **zimbraServer** would be a server in the Zimbra system that has one or more Zimbra packages installed.


LDAP Hierarchy

LDAP directories are arranged in an hierarchal tree-like structure. In the Zimbra system, the structure is arranged based on Internet domain names.

LDAP entries typically include items such as user accounts, organizations, or servers.

Figure shows the Zimbra LDAP hierarchy. Each type of entry (object) has certain associated object classes.

Zimbra LDAP Hierarchy

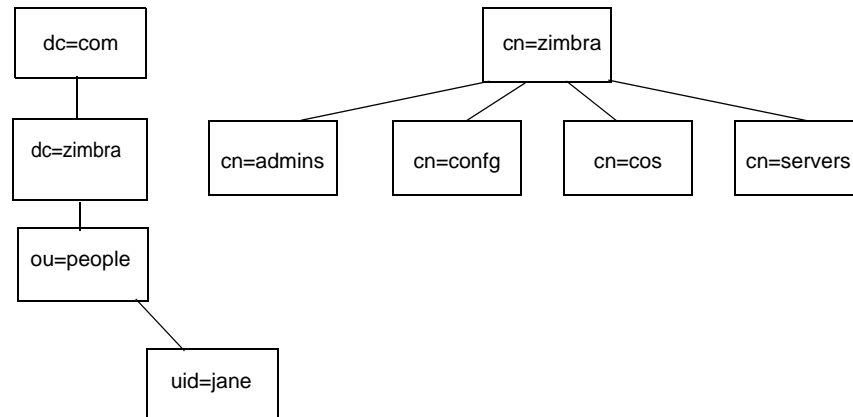

For a complete listing of the Zimbra auxiliary object classes, see the Zimbra LDAP Schema.

Zimbra Schema

Every LDAP implementation has a schema that defines its domain structure, account attributes, and other data structures in use by the organization. Zimbra includes a custom LDAP schema that extends the generic schema included with OpenLDAP software and is designed to potentially coexist with existing directory installations. The Zimbra server, the administration console, the command-line account provisioning, and the management utilities require the Zimbra schema.

All attributes and object classes specifically created for Zimbra are prefaced by “zimbra,” as in **zimbraMailRecipient** object class or the **zimbraAttachmentsBlocked** attribute.

The Zimbra schema assumes a baseline schema. In the OpenLDAP installer package included with Zimbra, the following schema files are included in the OpenLDAP implementation:

- core.schema
- cosine.schema
- inetorgperson.schema
- zimbra.schema

Note: *You cannot modify the Zimbra schema.*

Account Authentication

This section describes the following account authentication mechanisms and formatting directives that are supported:

- Internal
- External LDAP
- External Active Directory

The **Internal** authentication method assumes the Zimbra schema running on the OpenLDAP directory server.

The **External LDAP** and **External Active Directory** authentication methods attempt to bind to the specified LDAP server, using the supplied user name and password. These methods can be used if the email environment uses Microsoft Active Directory directory services for authentication and the Zimbra-LDAP directory services for all other Zimbra-related transactions. This requires that users exist in both OpenLDAP and in the Active Directory servers.

The authentication method type is set on a per-domain basis, using the **zimbraAuthMech** attribute, with other information also coming from the domain. If this attribute is not set, the default is to use the internal method as the authentication.

Internal Authentication Mechanism

For accounts stored in the OpenLDAP server, the **userPassword** attribute stores a salted-SHA1 (SSHA) digest of the user's password. This information is not used to connect to the directory server; it is only used to compare with the information on the OpenLDAP server, using a pool of re-usable administrator LDAP connections.

External LDAP and External Active Directory Authentication Mechanism

Unlike the internal authentication mechanism, the external authentication mechanism attempts to bind to the directory server using the supplied user name and password. If this bind succeeds, the connection is closed and the password is considered valid.

Two additional domain attributes are required for the external mechanism: **zimbraAuthLdapURL** and **zimbraAuthLdapBindDn**.

zimbraAuthLdapURL Attribute and SSL

The **zimbraAuthLdapURL** attribute contains the URL of the Active Directory server to bind to. This should be in the form:

ldap://ldapservice:port/

where **ldapservice** is the IP address or host name of the Active Directory server, and **port** is the port number. You can also use the fully qualified host name instead of the port number.

Examples include:

ldap://server1:389

ldap://exch1.acme.com

For SSL connection, use **ldaps:** instead of **ldap:**. If the SSL version is used, the SSL certificate used by the server must be configured as a trusted certificate.

zimbraAuthLdapBindDn Attribute

The **zimbraAuthLdapBindDn** attribute is a format string used to determine which user name to use when binding to the Active Directory server.

During the authentication process, the user name starts out in the format:

user@domain.com

The user name may need to be transformed into a valid LDAP bind dn (distinguished name). In the case of Active Directory, that bind dn might be in a different domain.

zimbraAuthFallbackToLocal Attribute

The **zimbraAuthFallbackToLocal** attribute can be enabled so that the system falls back to the ZCS local authentication if external authentication fails. The default is FALSE.

Custom Authentication - zimbraCustomAuth

You can implement a custom authentication on your domain. Custom authentication allows external authentication to your proprietary identity database. When an AuthRequest comes in, Zimbra checks the designated auth mechanism for the domain. If the auth mechanism is set to custom auth, Zimbra invokes the registered custom auth handler to authenticate the user.

To set up custom authentication, prepare the domain for the custom auth and register the custom authentication handler.

Preparing a domain for custom auth

To enable a domain for custom auth, set the domain attribute, **zimbraAuthMet to custom:{registered-custom-auth-handler-name}**.

For example:

zmprov modifydomain {domain|id} zimbraAuthMech custom:sample.

In the above example, “sample” is the name under which a custom auth mechanism is registered.

Registering a custom authentication handler

To register a custom authentication handler, invoke **ZimbraCustomAuth.register [handlerName, handler]** in the init method of the extension.

- Class: **com.zimbra.cs.account.Idap.zimbraCustomAuth**
- Method: public synchronized static void register [**String handlerName**, **zimbraCustomAuth handler**]

Note: *Definitions*

- **handlername** is the name under which this custom auth handler is registered to Zimbra's authentication infrastructure. This is the name that is set in the domain's zimbraAuthMech attribute. For example, if the registered name is "sample", then zimbraAuthMech must be set to custom:sample.
- **handler** is the object on which the authenticate method is invoked for this custom auth handler. The object has to be an instance of zimbraCustomAuth (or subclasses of it).

Example

```

public class SampleExtensionCustomAuth implements ZimbraExtension {

    public void init() throws ServiceException {

        /*
         * Register to Zimbra's authentication infrastructure
         *
         * custom:sample should be set for domain attribute zimbraAuthMech
         */

        ZimbraCustomAuth.register("sample", new SampleCustomAuth());

    }

    ...

}

```

How Custom Authentication Works

When an AuthRequest comes in, if the domain is specified to use custom auth, the authenticating framework invokes the authenticate method on the **ZimbraCustomAuth** instance passed as the handler parameter to **ZimbraCustomAuth.register ()**.

The account object for the principal to be authenticated and the clear-text password entered by the user are passed to the **ZimbraCustomAuth.authenticate ()** method. All attributes of the account can be retrieved from the account object.

Kerberos5 Authentication Mechanism

Kerberos5 Authentication Mechanism authenticates users against an external Kerberos server. To set up Kerberos5 auth set the domain attribute zimbraAuthMech to kerberos5. Then set the domain attribute zimbraAuthKerberos5Realm to the Kerberos5 realm in which users in this domain are created in the Kerberos database.

When users log in with an email password and the domain, **zimbraAuthMech** is set to **kerberos5**, the server constructs the Kerberos5 principal by **{localpart-of-the-email}@{value-of-zimbraAuthKerberos5Realm}** and uses that to authenticate to the kerberos5 server.

Kerberos5 can be supported for individual accounts. This is done by setting the account's zimbraForeignPrincipal as kerberos5. Set the account's zimbraForeignPrincipal as **kerberos5:{kerberos5-principal}**. For example:

kerberos5:user1@MYREALM.COM. If **zimbraForeignPrincipal** starts with "kerberos5:", the server uses {kerberos5-principal} as the Kerberos5 principal instead of the algorithm of grabbing the realm from the zimbraAuthKerberos5Realm as mentioned in the previous paragraph.

Zimbra Objects

Zimbra uses auxiliary object classes to add Zimbra-specific attributes to existing objects such as an account. The LDAP objects used in Zimbra include the following:

- Accounts
- Class of Service (COS)
- Domains
- Distribution Lists
- Recipients
- Servers
- Global Configurations
- Aliases
- Zimlet
- CalendarResource
- Identity
- Data Source
- Signature

Accounts Object

An Accounts object represents an account on the Zimbra mailbox server that can be logged into. Account entrees are either administrators or user accounts that can be logged into. The object class name is **zimbraAccount**. This object class extends the **zimbraMailRecipient** object class.

The object class **zimbraMailRecipient** is a directory entry that represents an entity that can receive mail. This is a visible external mail address that is expanded through aliases or forwarding into one or more internal/external addresses.

All accounts have the following properties:

- A name in the format of user@example.domain
- A unique ID that never changes and is never reused
- A set of attributes, some of which are user-modifiable (preferences) and others that are only configurable by the system administrator

All user accounts are associated with a domain, so a domain must be created before creating any accounts.

For more about account provisioning, see the [Chapter 8, Managing User Accounts](#).

Class of Service (COS) Object

Class of Service is a Zimbra-specific object that defines the default attributes an email account has and what features are added or denied. The COS controls features, default preference settings, mailbox quotas, message lifetime, password restrictions, attachment blocking, and server pools for creation of new accounts. The object class name is **zimbraCOS**.

Domains Object

A Domains object represents an email domain such as **example.com** or **example.org**. A domain must exist before email addressed to users in that domain can be delivered. The object class name is **zimbraDomain**.

Distribution Lists Object

Distribution lists object, also known as mailing lists, are used to send mail to all members of a list by sending a single email to the list address. The object class name is **zimbraDistributionList**.

Recipient Object

The **Recipient** object represents an entity that can receive mail. An external email address exists, and the recipient can be expanded through aliases or forwarding into one or more internal/external addresses. The object class name is **zimbraMailRecipient**. This object class name is only used in conjunction with **zimbraAccount** and **zimbraDistributionlist** classes.

Servers Object

The Servers object represents a particular server in the Zimbra system that has one or more of the Zimbra software packages installed. During the installation, the software is automatically registered on the OpenLDAP server. The object class name is **zimbraServer**. Attributes describe server configuration information, such as which services are running on the server.

The server name is used by the Zimbra to make a request for the server object in the directory. The server requested gets its configuration information and picks up any changes that might have been made by the administrator through the administrator console.

Global Configuration Object

The Global Configuration object specifies default values for the following objects: server, account, COS, and domain. If the attributes are not set for other objects, the values are inherited from the global settings. The object class name is **zimbraGlobalConfig**.

Global configuration values are required and are set during installation as part of the Zimbra core package. These become the default values for the system.

Alias Object

Alias object is a placeholders in the directory to reserve a name. The object class name is **zimbraAlias**. The attribute points to another entry.

Zimlet Object

Zimlet object defines Zimlets that are installed and configured in Zimbra. The object class name is **zimbraZimletEntry**. See the [Managing Zimlets](#) chapter for more information about Zimlets.

CalendarResource Object

CalendarResource object defines a calendar resource such as conference rooms or equipment that can be selected for a meeting. The object class name is **zimbraCalendarResource**.

Identity Object

Identity object represents a persona of a user. A persona contains the user's identity such as display name and a link to the signature entry used for outgoing emails. A user can create multiple personas. Identity entries are created under the user's LDAP entry in the DIT. The object class name is **zimbralidentity**.

Data Source Object

Data Source object represents an external mail source of a user. The two types of data source are POP3 and IMAP. A data source contains the POP3/IMAP server name, port, and password for the user's external email account. The data source also contains persona information, including the display name and a link to the signature entry for outgoing email messages sent on behalf of the external account. Data Source entries are created under the user's LDAP entry in the DIT. The object class name is **zimbraDataSource**.

Signature Object

Signature object represents a user's signature. A user can create multiple signatures. Signature entries are created under the user's LDAP entry in the DIT. The object class name is **zimbraSignature**.

Company Directory/GAL

A company directory is a company-wide listing of users, usually within the organization itself, that is available to all users of the email system. Sometimes called “white pages” or global address list (GAL), Zimbra uses the company directory to look up user addresses from within the company.

For each domain used in Zimbra, you can choose from the following GAL search options:

- Use an external LDAP server for the GAL
- Use the Zimbra implementation in OpenLDAP
- Include both external LDAP server and OpenLDAP in GAL searches

GAL Searches in Zimbra Client

The Zimbra client can search the GAL. The GAL search returns a list of directory entries that match the user’s search.

When the user supplies a name to search for, that name is turned into an LDAP search filter similar to the following example:

```
(|(cn = %s*)(sn=%s*)(gn=%s*)(mail=%s*))
(zimbraMailDeliveryAddress = %s*)
(zimbraMailAlias=%s*)
(zimbraMailAddress = %s*)
```

The string “%s” is replaced with the name the user is searching for.

GAL Attributes in Zimbra

Two possible sources for GAL information are the Zimbra server and the Active Directory server. The relevant LDAP/Active Directory fields are referenced in the Zimbra schema under the same names as listed in the Active Directory schema.

Table Table maps generic GAL search attributes to their Zimbra contact fields.

Table Attributes Mapped to Zimbra contact

Standard LDAP Attribute	Zimbra Contact Field
co	workCountry
company	Company
givenName/gn	firstName
sn	lastName
cn	fullName
initials	initials
l	workCity
street, streetaddress	workStreet
postalCode	workPostalCode
telephoneNumber	workPhone
st	workState
title	jobTitle
mail	email
objectClass	Not currently mapped

Zimbra GAL Search Parameters

Like authentication, GAL is configured on a per-domain basis. From the administration console, you can run the GAL Configuration Wizard to configure the domain's attributes.

Modifying Attributes

The OpenLDAP directory should not be modified directly. Any additions, changes and deletions are made through the Zimbra administration console or from the CLI utility for provisioning, **zmprov**.

Users modify attributes for their entry (accounts) in the OpenLDAP directory when they change their options from the Zimbra Web Client.

Administrators can also modify LDAP attributes using the command-line tools described in [Appendix A Command-Line Utilities on page 155](#).

Important: Do not use any LDAP browsers to change the Zimbra LDAP content.

Flushing LDAP Cache

The Zimbra LDAP server caches the following types of entries

- Themes (skins)
- Locales
- Account
- COS
- Domains
- Global configuration
- Server
- Zimlet configuration

Themes and Locales

When you add or change skin (themes) properties files and local resource files for ZCS on a server, you flush the cache to reload the new content. Until you do this, the new skins and locales are not available in the COS or Account.

- To flush skins, type **zmprov flushCache skin**
- To flush locales, type: **zmprov flushCache locale**

Note: *Flushing the skin/locale cache only makes the server aware of the resource changes. It does not automatically modify any COS or account's LDAP **zimbraAvailableSkin** and **zimbraAvailableLocal** settings. The LDAP attributes must be modified separately either from the administration console or with the **zmprov ma** command.*

Accounts, COS, Domains, and Servers

When you modify Account, COS, Domain, and Server attributes, the change is effective immediately on the server to which the modification is done. On the other servers, the LDAP entries are automatically updated after a period of time if the attributes are cached. Use **zmprov flushCache** to make the changes available immediately on a server.

Note: *The default ZCS setting for updating the server is 15 minutes.*

- To flush accounts, COS, domain, and server caches, type **zmprov flushCache [account|cos|domain|server] [name|id]**

If you do not specify a name or ID along with the type, all entries in cache for that type are flushed and the cache is reloaded.

Note: Some server attributes are not effective until after a server restart, even after the cache is flushed. For example, settings like `bind port` or `number of processing threads`.

Global Configuration

When you modify global config attributes, the changes are effective immediately on the server to which the modification is done. On other mailbox servers, you must flush the cache to make the changes available or restart the server. LDAP entries for global config attributes do not expire.

Note: Some global config attributes are computed into internal representations only once per server restart. For efficiency reasons, changes to those attributes are not effective until after a server restart, even after the cache is flushed. Also, some global configuration settings and server settings that are inherited from global config are only read once at server startup, for example `port` or `number of processing threads`. Modifying these types of attributes requires a server restart.

To make a global config change effective on all servers do the following:

1. Modify the setting using `zmprov mcf`. For example, type `zmprov mcf zimbralmapClearTextLoginEnabled`.

Note: The change is only effective on the server `zimbra_zmprov_default_soap_server`, port `zimbra_admin-service_port`.

2. Flush the global config cache on all other servers, `zmprov flushCache` must be issued on all servers, one at a time. For example:

```
zmprov -s server-1 flushCache config
```

```
zmprov -s server-2 flushcache config
```

```
zmprov -s server-3 flushcache config
```

Chapter 5 Zimbra MTA

The Zimbra MTA (Mail Transfer Agent) receives mail via SMTP and routes each message, using Local Mail Transfer Protocol (LMTP), to the appropriate Zimbra mailbox server.

Topics in this chapter include:

- ◆ [Zimbra MTA Deployment](#)
- ◆ [MTA Functionality](#)
- ◆ [Receiving and Sending Mail through Zimbra MTA](#)

The Zimbra MTA server includes the following programs:

- Postfix MTA, for mail routing, mail relay, and attachment blocking.
- Clam AntiVirus, an antivirus engine used for scanning email messages and attachments in email messages for viruses.
- SpamAssassin, a mail filter that attempts to identify unsolicited commercial email (spam) with learned data stored in the default Berkeley DB database or an alternative MySQL database.
- Amavisd-New, a Postfix content filter used as an interface between Postfix and ClamAV / SpamAssassin.
- Milter servers filter applications that can be configured to filter email ReciptTo content for alias domains and to filter restricted sender addresses for distribution lists.

In the Zimbra Collaboration Suite configuration, mail transfer and delivery are distinct functions. Postfix primarily acts as a MTA and the Zimbra mail server acts as a Mail Delivery Agent (MDA).

MTA configuration is stored in LDAP and a configuration script automatically polls the LDAP directory every two minutes for modifications, and updates the Postfix configuration files with the changes.


Zimbra MTA Deployment

ZCS includes a precompiled version of Postfix. This version does not have any changes to the source code, but it does include configuration file modifications, additional scripts, and tools.

Postfix performs the Zimbra mail transfer and relay. It receives inbound messages via SMTP, and hands off the mail messages to the Zimbra server via LMTP, as shown in Figure . The Zimbra MTA can also perform anti-virus and anti-spam filtering.

Postfix also plays a role in transfer of outbound messages. Messages composed from the Zimbra web client are sent by the Zimbra server through Postfix, including messages sent to other users on the same Zimbra server.

Postfix in a Zimbra Environment

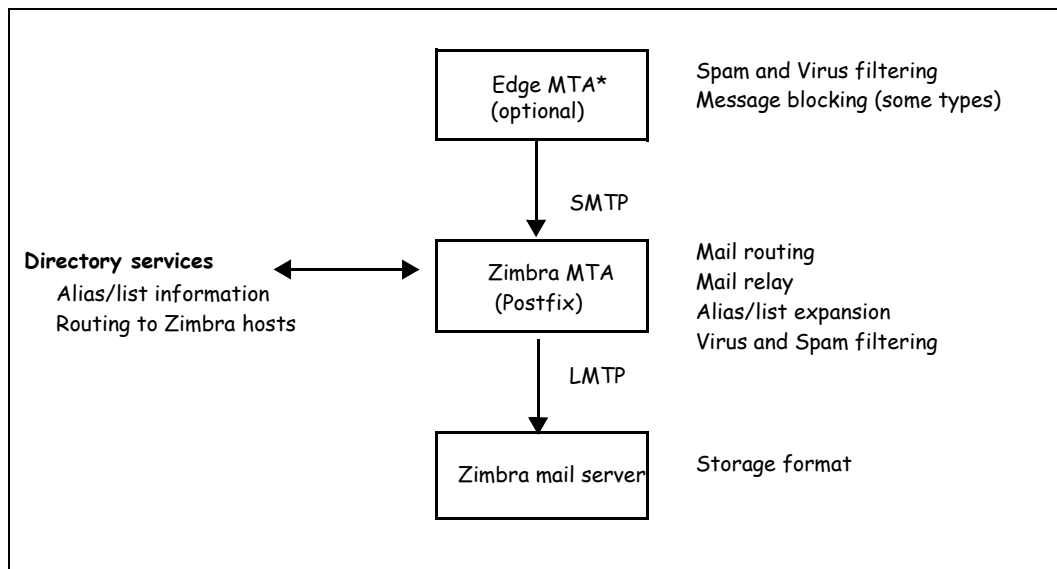

***Edge MTA** The term edge MTA is a generic term referring to any sort of edge security solution for mail. You may already deploy such solutions for functions such as filtering. The edge MTA is optional. Some filtering may be duplicated between an edge MTA and the Zimbra MTA.

Postfix Configuration Files

Zimbra modified the following Postfix files specifically to work with ZCS:

- **main.cf** Modified to include the LDAP tables. The configuration script in the Zimbra MTA pulls data from the Zimbra LDAP and modifies the Postfix configuration files.
- **master.cf** Modified to use Amavisd-New.

Important: Do not modify the Postfix configuration files directly! Some of the Postfix files are rewritten when changes are made in the administration console. Any changes you make will be overwritten.

MTA Functionality

Zimbra MTA Postfix functionality includes:

- SMTP authentication
- Attachment blocking
- Relay host configuration
- Postfix-LDAP integration
- Integration with Amavisd-New, ClamAV, and Spam Assassin

SMTP Authentication

SMTP authentication allows authorized mail clients from external networks to relay messages through the Zimbra MTA. The user ID and password is sent to the MTA when the SMTP client sends mail so the MTA can verify if the user is allowed to relay mail.

Note: *User authentication is provided through the Zimbra LDAP directory server, or if implemented, through the Microsoft Active Directory Server.*

SMTP Restrictions

In the administration console, you can enable restrictions so that messages are not accepted by Postfix when non-standard or other disapproved behavior is exhibited by an incoming SMTP client. These restrictions provide some protection against ill-behaved spam senders. By default, SMTP protocol violators (that is, clients that do not greet with a fully qualified domain name) are restricted. DNS based restrictions are also available.

Important: *Understand the implications of these restrictions before you implement them. You may want to receive mail from people outside of your mail system, but those mail systems may be poorly implemented. You may have to compromise on these checks to accommodate them.*

Relay Host Settings

Postfix can be configured to send all non-local mail to a different SMTP server. Such a destination SMTP server is commonly referred to as a relay or smart host. You can set this relay host from the administration console.

A common use case for a relay host is when an ISP requires that all your email be relayed through a designated host, or if you have some filtering SMTP proxy server.

In the administration console, the relay host setting must not be confused with Web mail MTA setting. Relay host is the MTA to which Postfix relays non-local email. Webmail MTA is used by the Zimbra server for composed messages and must be the location of the Postfix server in the Zimbra MTA package.

Important: Use caution when setting the relay host to prevent mail loops.

MTA-LDAP Integration

The Zimbra LDAP directory service is used to look up email delivery addresses. The version of Postfix included with Zimbra is configured during the installation of ZCS to use the Zimbra LDAP directory.

Account Quota and the MTA

Account quota is the storage limit allowed for an account. Email messages, address books, calendars, tasks, and Briefcase files contribute to the quota. Account quotas can be set by COS or per account.

The MTA attempts to deliver a message, and if a Zimbra user's mailbox exceeds the set quota, the Zimbra mailbox server temporarily sends the message to the deferred queue to be delivered when the mailbox has space. The MTA server's bounce queue lifetime is set for five days. The deferred queue tries to deliver a message until this bounce queue lifetime is reached before bouncing the message back to the sender. You can change the default through the CLI `zmlocalconfig`, `bounce_queue_lifetime` parameter.

Note: To permanently have messages bounced back to the sender, instead of being sent to the deferred queue first, set the server global config attribute `zimbraLmtpPermanentFailureWhenOverQuota` to `TRUE`.

You can view individual account quotas from the Administration Console Monitoring Server Statistics section.

MTA and Amavisd-New Integration

The Amavisd-New utility is the interface between the Zimbra MTA and Clam AV and SpamAssassin scanners.

Anti-Virus Protection

Clam AntiVirus software is bundled with ZCS as the virus protection engine. The anti-virus protection is enabled for each server and a global virus quarantine mailbox is created during installation.

The Clam anti-virus software is configured to quarantine messages that have been identified as having a virus to the virus quarantine mailbox. An email notification is sent to recipients letting them know that a message has been quarantined. The message lifetime for this mailbox is set to 7 days.

By default, the Zimbra MTA checks every two hours for any new anti-virus updates from ClamAV.

Note: Updates are obtained via HTTP from the ClamAV website.

Anti-Spam Protection

SpamAssassin, a mail filter that attempts to identify unsolicited commercial email (spam) with learned data stored in either the Berkeley DB database or a MySQL database.

SpamAssassin uses predefined rules as well as a Bayes database to score messages with a numerical range. Zimbra uses a percentage value to determine "spaminess" based on a SpamAssassin score of 20 as 100%. Any message tagged between 33%-75% is considered spam and delivered to the user's junk folder. Messages tagged above 75% are always considered spam and discarded.

The ZCS default is to use data in the Berkeley DB database. SpamAssassin can alternatively be configured to use a MySQL-backed database for spam training. To use this method, set **zmlocalconfig antispm_mysql_enabled** to TRUE on the MTA servers. When this is enabled, Berkeley DB database is not enabled.

Note: *The DSPAM spam filter is also included with ZCS but the default is to not enable DSPAM. You can enable DSPAM by setting the localconfig attribute **amavis_dspam_enabled** to TRUE on the MTA servers.*

```
zmlocalconfig -e amavis_dspam_enabled=true
```

Anti-Spam Training Filters

When ZCS is installed, the automated spam training filter is enabled and two feedback system mailboxes are created to receive mail notification.

- **Spam Training User** to receive mail notification about mail that was not marked as spam, but should be.
- **Non-spam (referred to as ham) training user** to receive mail notification about mail that was marked as spam, but should not have been.

For these training accounts, the mailbox quota is disabled (i.e. set to 0) and attachment indexing is disabled. Disabling quotas prevents bouncing messages when the mailbox is full.

How well the anti-spam filter works depends on recognizing what is considered spam or not considered spam (ham). The SpamAssassin filter can learn what is spam and what is not spam from messages that users specifically mark as spam or not spam by sending them to their junk folder in the web client or via Outlook for ZCO and IMAP. A copy of these marked messages is sent to the appropriate spam training mailbox. The ZCS spam training tool, **zmtrainsa**, is configured to automatically retrieve these messages and train the spam filter.

In order to correctly train the spam/ham filters, when ZCS is installed, spam/ham cleanup is configured on only the first MTA. The **zmtrainsa script** is enabled through a crontab job to feed mail that has been classified as spam or

as non-spam to the SpamAssassin application, allowing SpamAssassin to 'learn' what signs are likely to mean spam or ham. The `zmtrainsa` script empties these mailboxes each day.

Note: *New installs of ZCS limit spam/ham training to the first MTA installed. If you uninstall or move this MTA, you will need to enable spam/ham training on another MTA, as one host should have this enabled to run `zmtrainsa --cleanup`. To do this, set `zmlocalconfig -e zmtrainsa_cleanup_host=TRUE`.*

The ZCS default is that all users can give feedback in this way. If you do not want users to train the spam filter, you can modify the global configuration attributes, **ZimbraSpamIsSpamAccount** and **ZimbraSpamIsNotSpamAccount**, and remove the account addresses from the attributes. To remove, type as:

```
zmprov mcf <attribute> ""
```

When these attributes are modified, messages marked as spam or not spam are not copied to the spam training mailboxes.

Initially, you may want to train the spam filter manually to quickly build a database of spam and non-spam tokens, words, or short character sequences that are commonly found in spam or ham. To do this, you can manually forward messages as `message/rfc822` attachments to the spam and non-spam mailboxes. When `zmtrainsa` runs, these messages are used to teach the spam filter. Make sure you add a large enough sampling of messages to these mailboxes. In order to get accurate scores to determine whether to mark messages as spam at least 200 known spams and 200 known hams must be identified.

The `zmtrainsa` command can be run manually to forward any folder from any mailbox to the spam training mailboxes. If you do not enter a folder name when you manually run `zmtrainsa` for an account, for spam, the default folder is Spam. For ham, the default folder is Inbox.

Protecting Alias Domains From Backscatter Spam

A filter that runs a Postfix SMTP Access Policy Daemon that validates **RCPT To:** content specifically for alias domains can be enabled to reduce the risk of backscatter spam.

Note: *See the Zimbra wiki article about creating Domain Alias, Managing Domains at <http://wiki.zimbra.com/index.php?title=ManagingDomains>. To learn about the Postfix Policy Daemon, go to http://www.postfix.org/SMTPD_POLICY_README.html.*

This functionality is enabled using the CLI, `zmlocalconfig`.

1. To set the Postfix LC key, type

```
zmlocalconfig -e postfix_enable_smtpd_policyd=yes
```

2. Stop postfix, type **postfix stop**

3. Type

```
zmprov mcf +zimbraMtaRestriction "check_policy_service unix:private/policy"
```

4. Restart, type **postfix start**

The policy daemon runs after you set the bits in steps 1 and 3 above and then restart Postfix. The **postfix_policy_time_limit** key is because the Postfix spawn (8) daemon by default kills its child process after 1000 seconds. This is too short for a policy daemon that may run as long as an SMTP client is connected to an SMTP process.

Disable Postfix Policy Daemon

To disable the Postfix Policy Daemon, type the following:

1. **zmlocalconfig -e postfix_enable_smtpd_policyd=no**

2. **zmprov mcf -zimbraMtaRestriction "check_policy_service unix:private/policy"**

3. Stop postfix, type **postfix stop**

4. Restart, type **postfix start**

Email Recipient Restrictions

RBL (Real-time black-hole lists) can be turned on or off in the Zimbra MTA from the administration console or using the Zimbra CLI. From the administration account go to the Global Settings>MTA tab.

For protocol checks, the following three RBLs can be enabled:

- Hostname in greeting violates RFC - **reject_invalid_hostname**
- Client must greet with a fully qualified hostname - **reject_non_fqdn_hostname**
- Sender address must be fully qualified - **reject_non_fqdn_sender**

You can set the following, in addition to the three above:

- **reject_rbl_client** dnsbl.njabl.org
- **reject_rbl_client** cbl.abuseat.org
- **reject_rbl_client** bl.spamcop.net
- **reject_rbl_client** dnsbl.sorbs.net
- **reject_rbl_client** sbl.spamhaus.org
- **reject_rbl_client** relays.mail-abuse.org

As part of recipient restrictions, you can also use the **reject_rbl_client <rbl hostname>** option. In the **Global Settings>MTA>DNS checks** section on the administration console specify the list of RBLs. For a list of current RBL's, see

the *Comparison of DNS blacklists* article at http://en.wikipedia.org/wiki/Comparison_of_DNS_blacklists

Adding RBLs using the CLI

1. Log on to the server and go to the Zimbra directory, `su - zimbra`.
2. Enter `zmprov gacf | grep zimbraMtaRestriction`, to see what RBLs are set.
3. To add any new RBL types, you must list the existing RBLs and the new RBLs all in one command as:

```
zmprov mcf zimbraMtaRestriction [RBL type]
```

To add all the possible restrictions, the command would be

```
zmprov mcf zimbraMtaRestriction reject_invalid_hostname zimbraMtaRestriction  
reject_non_fqdn_hostname zimbraMtaRestriction reject_non_fqdn_sender  
zimbraMtaRestriction "reject_rbl_client dnsbl.njabl.org" zimbraMtaRestriction  
"reject_rbl_client cbl.abuseat.org" zimbraMtaRestriction "reject_rbl_client  
bl.spamcop.net" zimbraMtaRestriction "reject_rbl_client dnsbl.sorbs.net"  
zimbraMtaRestriction "reject_rbl_client sbl.spamhaus.org" zimbraMtaRestriction  
"reject_rbl_client relays.mail-abuse.org"
```

Note: Quotes must be added to RBL types that are two words.

Receiving and Sending Mail through Zimbra MTA


The Zimbra MTA delivers both the incoming and the outgoing mail messages. For outgoing mail, the Zimbra MTA determines the destination of the recipient address. If the destination host is local, the message is passed to the Zimbra server for delivery. If the destination host is a remote mail server, the Zimbra MTA must establish a communication method to transfer the message to the remote host. For incoming messages, the MTA must be able to accept connection requests from remote mail servers and receive messages for the local users.

In order to send and receive email, the Zimbra MTA must be configured in DNS with both an [A record](#) and a [MX Record](#). For sending mail, the MTA use DNS to resolve hostnames and email-routing information. To receive mail, the MX record must be configured correctly to route messages to the mail server.

You must configure a relay host if you do not enable DNS. Even if a relay host is configured, an MX record is still required if the server is going to receive email from the internet.

Zimbra MTA Message Queues

When the Zimbra MTA receives mail, it routes the mail through a series of queues to manage delivery. The Zimbra MTA maintains four queues where mail is temporarily placed while being processed: incoming, active, deferred and hold.

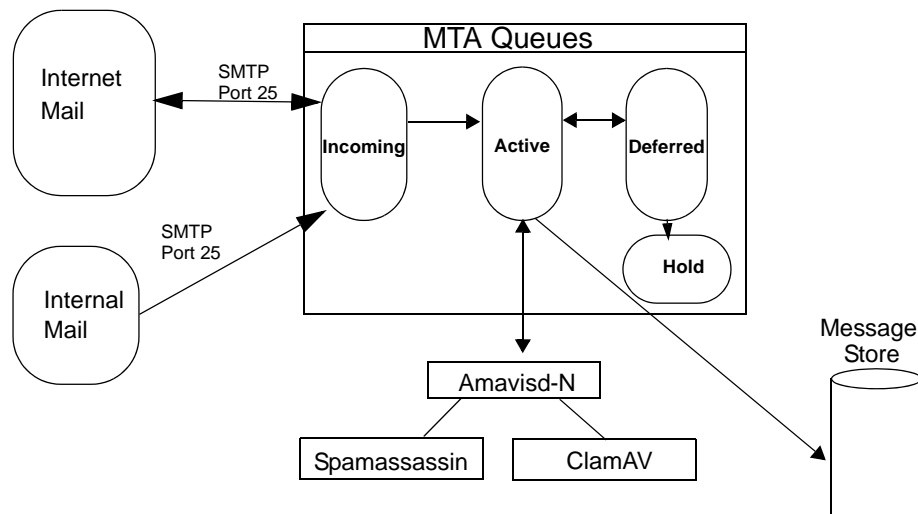

Incoming. The incoming message queue holds the new mail that has been received. Each message is identified with a unique file name. Messages in the incoming queue are moved to the active queue when there is room in the active queue. If there are no problems, messages move through this queue very quickly.

Active. The active message queue holds messages that are ready to be sent. The MTA sets a limit to the number of messages that can be in the active queue at any one time. From here, messages are moved to and from the anti-virus and anti-spam filters before being delivered or moved to another queue.

Deferred. Messages that cannot be delivered for some reason are placed in the deferred queue. The reasons for the delivery failures are documented in a file in the deferred queue. This queue is scanned frequently to resend the message. If the message cannot be sent after the set number of delivery attempts, the message fails. The message is bounced back to the original sender. The default for the bounce queue lifetime is five days. You can change the default MTA value for **bounce_queue_lifetime** from the **zmlocalconfig** CLI.

Before the bounce queue lifetime sends the message back to the sender, senders can be notified that the message they sent is in the Deferred queue and has not been delivered. This is set up from the **zmlocalconfig** CLI. The following attributes are configured to send a warning message to the sender:

- **postfix_delay_warning_time=0h.** The time after which the sender receives the message headers of email that is still queued.
- **postfix_bounce_notice_recipient=postmaster.** The recipient of postmaster notifications with the message headers of mail that the MTA did not deliver.
- **postfix_notify_classes=resource,software.** The list of error classes that are reported to the postmaster.

Note: *See Postfix documentation for details on the impact of changes to these Postfix attributes.*

Hold. The hold message queue keeps mail that could not be processed. Messages stay in this queue until the administrator moves them. No periodic delivery attempts are made for messages in the hold queue.

Corrupt. The corrupt queue stores damaged unreadable messages.

You can monitor the mail queues for delivery problems from the administration console. See [Monitoring Mail Queues](#) on page 140.

Chapter 6 Using the Administration Console

The Zimbra administration console is the browser-based user interface ZCS administrators use to centrally manage Zimbra servers and user accounts.

Topics in this chapter include:

- ◆ [Logging In](#)
- ◆ [Changing Administrator Passwords](#)
- ◆ [About the Administration Console](#)
- ◆ [Creating Message of the Day for Administrators](#)
- ◆ [Checking for ZCS Software Updates](#)
- ◆ [Searching from the Administration Console](#)

When you installed ZCS, one global administrator account is created. Global administrator can log into the administration console to manage accounts and server configurations. Additional administrator accounts can be created. All administrator accounts have equal privileges.

To give administrator privileges to an account, check the Global Administrator box on the General tab in the user's account.

Logging In

To start the console in a typical installation, use the following URL pattern.

`https://server.domain.com:7071/`

Where **server.domain.com** is the current running Zimbra server name or IP address and **default** HTTP listen port is 7071.

Enter the complete administrator address, as **admin@domain.com** and then enter the password. The initial password is configured when ZCS is installed.

Note: *A different login and logout page can be configured either as a global setting or as a domain setting. The attributes to modify are **zimbraAdminConsoleLoginURL** to specify a URL to redirect administrators if their log in is not authenticated or authentication has expired, and*

`zimbraAdminConsoleLogoutURL` to specify a URL to redirect administrators when they log out.

Changing Administrator Passwords

The first global administrator password is created when the ZCS software is configured during installation. The password can be changed at any time from the **Accounts** toolbar. Select the account and change the password.

The administration password can also be changed using the command line utility (CLI) **zmpov setpassword**. Enter as
`zmpov sp adminname@domain.com password`

About the Administration Console


When global administrators log on to the administration console, the right Content pane displays the Server Status and the left Navigation pane displays all the functions exposed through the console.

The area above the Content pane includes the Search function, the Help Desk and the Downloads links.

- **Search and Advanced Search** allow you to quickly find accounts, aliases, distribution lists and resources for editing.
- **Search Zimbra** searches Zimbra's wiki, forums, and documentation. This is a powerful unified search to quickly find answers to common questions.
- **Help Desk** includes the Help, and links to ZCS documentation
- **Downloads** includes a link to download migration wizards, import wizard, and other useful downloads.

Administration Console - Managing Accounts Page

The Navigation pane includes the following sections and folders:

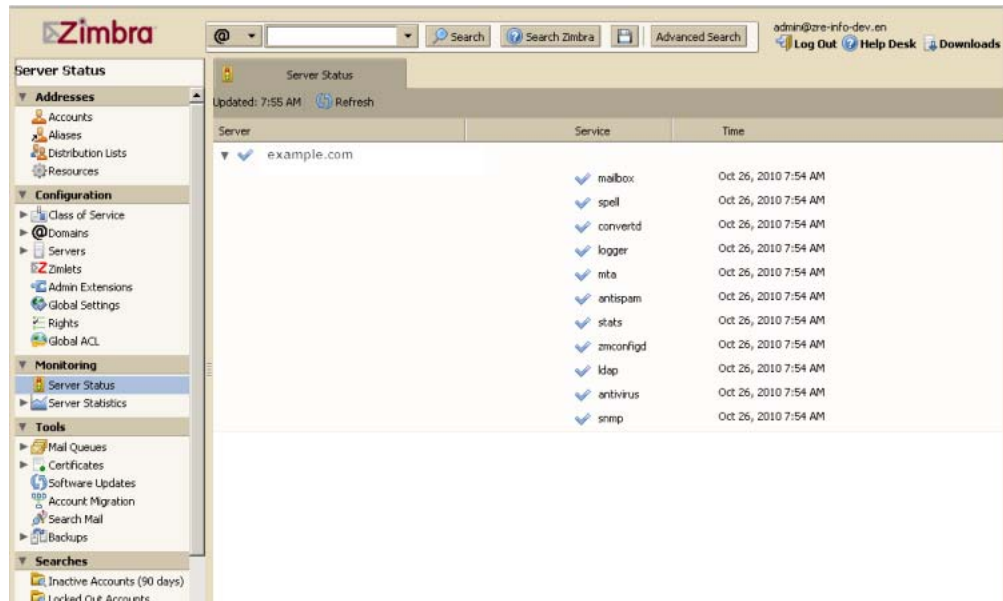

Addresses

- **Accounts.** Lists all accounts. In the **Accounts** folder, you create and manage end-user accounts, setting options, class of service, passwords and aliases for an account.
- **Aliases.** Lists all aliases that have been created in Accounts. You can use the Move Alias feature from the toolbar to move an alias from one account to another.
- **Distribution Lists.** Lists all distribution lists. You can create new distribution lists and add or delete members of a distribution list.
- **Resources.** Lists location or equipment that can be scheduled for a meeting. You can create new resources and set the scheduling policy for the resource.

Configuration

- **Class of Service.** Lists classes of service (COS) that have been created. As a minimum, the default COS is displayed. You can create, edit, or delete COS definitions.
- **Domains.** Lists the domain in the ZCS environment. You can create and manage domains, configure GAL, and configure the authentication mechanism to be used for that domain.
- **Servers.** Lists the servers, the host name and description. You can configure services, MTA, SMTP, IMAP, and POP features for servers.
- **Zimlets.** You can add new Zimlets, set access privileges by COS and by individual accounts and disable and uninstall Zimlets from ZCS.

- **Admin Extensions.** You can create custom modules to add to the Zimbra administration console user interface. You can use the administration console to easily upload and install your modules
- **Global Settings.** From the Global Settings folder, you set the global defaults rules for GAL search results, acceptance of incoming attachments, for MTA, POP, IMAP, anti-spam and anti-virus configuration. These default settings are used when personal options and COS settings are not set.

■

Monitoring

- **Server Status.** Shows the current status, either **On** or **Off**, for all servers that are running Zimbra MTA, Zimbra LDAP, Zimbra Store, SNMP, and the anti-virus service.
- **Server Statistics.** Shows both system-wide and server specific data about the inbound message volume, inbound message count, anti-spam/anti-virus activity and disk usage for messages processed in the last 48 hours, 30 days, 60 days, and the last year. Server specific data includes a Session tab that shows active session information for the Web Client, Administrators, and IMAP, and a Mailbox Quota tab that shows quotas for individual accounts.

Tools

- **Mail Queues.** Shows the number of messages on the Zimbra MTA that are in the Deferred, Incoming, Active, and Hold queues.
 - **Account Migration.** Zimbra migration tool used to import users mailboxes, including messages, calendars, and contacts to ZCS.
 - **Certificates.** You can easily install, manage, and view self-signed and commercial certificate details for Zimbra servers from the administration console.
-
- **Software Updates.** The Software Updates feature can be set up to notify administrators when newer ZCS updates are available. Software Updates is configured with how often to check for updates and the email address that receives the notification.

Searches

- In the **Searches** section of the Navigation pane, several popular search queries, including search for inactive accounts, search for locked out accounts, and search for closed accounts, are available.

Managing Tasks from the Administration Console

From the administration console, the global administrator can do the following:

- Create and manage end-user accounts
- Use the account migration wizard to import many accounts at once

- Monitor server status and performance statistics
- Add or remove domains
- Create Classes of Service (COS), which are used to define group policies for accounts
- Create password policies
- Create distribution lists
- Enable or disable optional user-interface features such as conversations and address book in the email client
- Configure various global settings for security, address book, and MTAs
- Check to see if new ZCS updates are available
- Easily access other Zimbra migration tools from the administration console's downloads page.

See the [Chapter 7, Managing ZCS Configuration](#), for information about how to configure these functions.

Tasks Not Available from Administration UI

The Zimbra command-line interface (CLI) is another method of configuring and maintaining the Zimbra system. The CLI tool set contains utilities that are not available through the administration console. The CLI options are executed on each server individually.

Use CLI command utilities for the following. See [Appendix A Command-Line Utilities on page 155](#) for details about the commands.

- Start, stop, and restart services, CLI **zmcontrol**
- Manage local server configuration, CLI **zmlocalconfig**
- Create a message of the day to display on the administration console, CLI **zmprov**. See **Setting up a Message of the Day**.

Creating Message of the Day for Administrators

Global administrators can create messages of the day (MOTD) that can be viewed when global administrators log into the administration console.

A global or domain multi-value attribute, **zimbraAdminConsoleLoginMessage**, is used to create a MOTD. The message is created from the CLI **zmprov**.

Every time an admin logs in the message displays at the top left on the administration console. They can close the message. The message displays until it is replaced or removed.

Example of a Message of the Day



To create a message of the day

You can create a message globally or for a specific domain.

1. To create by domain type:

```
zmprov md domainexample.com zimbraAdminConsoleLoginMessage "message to display"
```

The quotes must be used.

You can create more than one message to display. Run the command again to create additional messages, but add a plus sign (+) before the attribute, as in this example

```
zmprov md domainexample.com +zimbraAdminConsoleLoginMessage "second message to display"
```

To remove a message of the day

To remove a specific message, type the attribute, adding a minus sign (-) before the attribute and type the message as it is shown.


```
zmprov md domainexample.com -zimbraAdminConsoleLoginMessage "message to display"
```

To remove all messages, type the attribute and add a single quote at the end.

```
zmprov md domainexample.com zimbraAdminConsoleLoginMessage ''
```

Checking for ZCS Software Updates

When ZCS is installed, the ZCS software update utility is automatically configured to check for the latest ZCS version once a day and if there is an update to send notification to the address that is configured in the administration console's Server Updates tab.

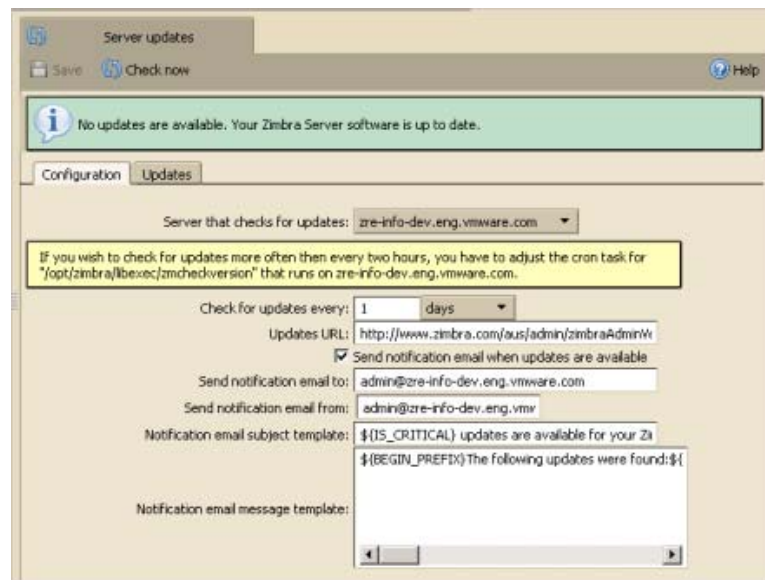

From this tab, you can configure the following:

- **Server that checks for updates.** The pull-down tab lists all available servers. Only one server is configured. The selected server checks for updates and the result of the update response from www.zimbra.com is stored in LDAP.
- **Check for updates every x.** The default is to check once a day. You can change the frequency interval to check every x hours, minutes, or seconds. A cron job is configured to check for new updates. If the frequency interval is less than 2 hours, the crontab file must be modified.
- **Updates URL.** This address is the URL that the server connects to when checking for updates. When a ZCS server checks for updates, it transmits its version, platform, and build number to Zimbra. Normally, this URL is not changed.
- To be notified of updates, check the **Send notification email when updates are available** and enter the send to and send from addresses. The default address is the administrator's address.
- A generic email is created. The subject and content of the email can be changed.

When a server polls the URL specified, the response is displayed in the Updates tab.

Searching from the Administration Console

The Search bar offers three search options:

- Search
- Zimbra Search
- Advanced Search



The Search field can be used to quickly find specific accounts, aliases, distribution lists, resources and domains.

Zimbra Search is a powerful unified search to find answers to common questions. When you click Help Search, the Zimbra wiki, forums, and documents are searched. The results are displayed in a new window with links to the information.

The Advanced search feature lets you create a complex query to search for addresses by domain or server. Individual mini-search panes let you select the criteria for the search. The Advanced Attributes pane can be configured to search for the last login time in a date range or for account that have never logged in.

If you do not know the complete name, you can enter a partial name. Partial names can result in a list that has the partial name string anywhere in the information. You can also use the Zimbra mailbox ID number to search for an account. To return a search from a mailbox ID, the complete ID string must be entered in the search.

The results of a search display in the Content pane and the total number of items found are displayed on the right side of the toolbar.

In the Navigation pane, the Searches section includes predefined search queries. Click on the search and the results are immediately displayed in the Content pane. You can search for inactive accounts, locked out accounts, and accounts by status.

You can save the results of your search and download it as a .csv file. The information in the .csv file includes the account name, the user ID number, the type of address, the display name and the status of the account. The COS is listed if it is not the default.

When you create a query in either Search or Advanced Search, you can save the search. Click the small disk icon after Help Search. You give the search a name and it is saved to our Search section in the Navigation pane.

Chapter 7 Managing ZCS Configuration

This chapter describes the Zimbra Collaboration Suite components that you manage.

Topics in this chapter include:


- ◆ [Managing Global Configurations](#)
- ◆ [Managing Domains](#)
- ◆ [Managing Servers](#)
- ◆ [Managing Other Functions](#)

The ZCS components are configured during the initial installation of the software. After the installation, you can manage the following components from either the administration console or using the CLI utility.

Help is available from the administration console about how to perform tasks from the administration console. If the task is only available from the CLI, see Appendix A for a description of how to use the CLI utility.

Managing Global Configurations

Global Settings controls global rules that apply to accounts in the Zimbra servers. The global settings are set during installation, and the settings can be modified from the administration console. A series of tabs make it easy to manage these settings.

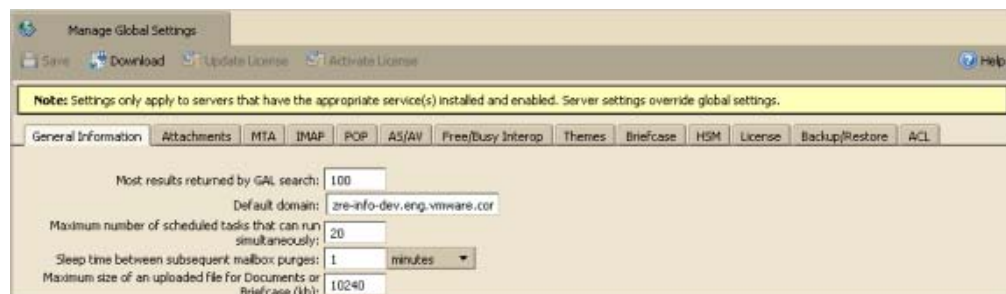

Global settings that can be configured include:

- Defining the default domain

- Setting the number of results returned for GAL searches
- Setting how users view email attachments and what type of attachments are not allowed
- Configuring authentication process, setting the Relay MTA for external delivery, enabling DNS lookup and protocol checks
- Enabling Pop and IMAP and the port numbers

Note: *If IMAP/POP proxy is set up, making sure that the port numbers are configured correctly.*

- Set the spam check controls and anti-virus options for messages received that may have a virus
- Set up free/busy scheduling across a mix of ZCS servers and third party email servers.
- Customize themes color scheme and add your logo to the themes
- Configure the company name that displays when external guests log on to see a shared Briefcase folder.

Note: *Configurations set in Global Settings define inherited default values for the following objects: server, account, COS, and domain. If these attributes are set in the server, they override the global settings.*

General Global Settings

In the General tab configure the following:

- **Most results returned by GAL search** field. This sets a global ceiling for the number of GAL results returned from a user search. The default is 100 results per search.
- **Default domain.** The default domain displays. This is the domain that user logins are authenticated against.
- **Number of scheduled tasks that can run simultaneously.** This controls how many threads are used to process fetching content from remote data sources. The default is 20. If this is set too low, users do not get their mail from external sources pulled down often enough. If the thread is set too high, the server may be consumed with downloading this mail and not servicing "main" user requests.
- **Sleep time between subsequent mailbox purges.** The duration of time that the server should "rest" between purging mailboxes. By default, message purge is scheduled to run every 1 minute. See the Customizing Accounts chapter, section Setting Email Retention Policy on page 118.

Note: *If the message purge schedule is set to 0, messages are not purged even if the mail, trash and spam message life time is set.*

- **Maximum size of an uploaded file for Briefcase files (kb).** This is the maximum size of a file that can be uploaded into Briefcase. **Note:** the maximum message size for an email message and attachments that can be sent is configured in the Global Settings MTA tab.

Global Settings to Block Mail Attachments

The **Attachments** tab can be configured with global rules for handling attachments to an email message. You can also set rules by COS and for individual accounts. When attachment settings are configured in Global Settings, the global rule takes precedence over COS and Account settings.

The attachment settings are as follows:

- **Attachments cannot be viewed regardless of COS.** Users cannot view any attachments. This global setting can be set to prevent a virus outbreak from attachments, as no mail attachments can be opened.
- **Attachments are viewed according to COS.** This global settings states the COS sets the rules for how email attachments are viewed.

You can also reject messages with certain types of files attached. You select which file types are unauthorized from the **Common extensions** list. You can also add other extension types to the list. Messages with those type of files attached are rejected. By default the recipient and the sender are notified that the message was blocked. If you do not want to send a notification to the recipient when messages are blocked, you can disable this option from the Global Settings>Attachments tab.

Global MTA Settings

The MTA tab is used to enable or disable authentication and configure a relay hostname, the maximum message size, enable DNS lookup, protocol checks, and DNS checks. For a information about the Zimbra MTA, see [Chapter 5, Zimbra MTA](#).

- | | |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Authentication | <ul style="list-style-type: none"> ■ Authentication should be enabled, to support mobile SMTP authentication users so that their email client can talk to the Zimbra MTA. ■ TLS authentication only forces all SMTP auth to use Transaction Level Security to avoid passing passwords in the clear. |
| Network | <ul style="list-style-type: none"> ■ Web mail MTA Host name and Web mail MTA Port. The MTA that the web server connects to for sending mail. The default port number is 25. ■ The Relay MTA for external delivery is the relay host name. This is the Zimbra MTA to which Postfix relays non-local email. ■ If your MX records point to a spam-relay or any other external non-Zimbra server, enter the name of that server in the Inbound SMTP host name field. This check compares the domain MX setting against the zimbrainboundSmtphostname setting, if set. If this attribute is not set, the domain MX setting is checked against zimbrasmtphostname. ■ If Enable DNS lookups is checked, the Zimbra MTA makes an explicit DNS query for the MX record of the recipient domain. If this option is disabled, set a relay host in the Relay MTA for external delivery. ■ If Allow domain administrators to check MX records from Admin Console is checked, domain administrators can check the MX records for their domain. |
| Milter Server | <ul style="list-style-type: none"> ■ If Enable Milter Server is checked, the milter enforces rules for who can send email to a distribution list. |
| Messages | <ul style="list-style-type: none"> ■ Set the Maximum messages size for a message and its attachments that can be sent. Note: To set the maximum size of an uploaded file to Briefcase, go to the General Information tab. ■ You can enable the X-Originating-IP header to messages checkbox. The X-Originating-IP header information specifies the original sending IP of the email message the server is forwarding. |

- Protocol checks ■ The **Protocol** fields are checked to reject unsolicited commercial email (UCE), for spam control.
- DNS checks ■ The **DNS** fields are checked to reject mail if the client's IP address is unknown, the hostname in the greeting is unknown, or if the sender's domain is unknown.
- Add other email recipient restrictions to the **List of RBLs** field.

Note: *RBL (Real time black-hole lists) can be turned on or off from the Zimbra CLI. See the section [Adding RBLs using the CLI on page 52](#).*

Global IMAP and POP Settings

IMAP and POP access can be enabled as a global setting or server setting.

With POP3 users can retrieve their mail stored on the Zimbra server and download new mail to their computer. The user's POP configuration determines if messages are deleted from the Zimbra server.

With IMAP, users can access their mail from any computer as the mail is stored on the Zimbra server.

When you make changes to these settings, you must restart ZCS before the changes take effect.

Anti-spam Settings

ZCS utilizes SpamAssassin to control spam. SpamAssassin uses predefined rules as well as a Bayes database to score messages with a numerical range. ZCS uses a percentage value to determine spaminess based on a SpamAssassin score of 20 as 100%. Any message tagged between 33%-75% is considered spam and delivered to the user's junk folder. Messages tagged above 75% are always considered spam and discarded.

When a message is tagged as spam, the message is delivered to the recipient's junk folder. Users can view the number of unread messages that are in their junk folder and can open the junk folder to review the messages marked as spam. If you have the anti-spam training filters enabled, when they add or remove messages in the junk folder, their action helps train the spam filter. See [Anti-Spam Protection on page 49](#).

RBL (Real time black-hole lists) can be turned on or off in SpamAssassin from the Zimbra CLI. See the section [Adding RBLs using the CLI on page 52](#).

SpamAssassin's sa-update tool is included with SpamAssassin. This tool updates SpamAssassin rules from the SA organization. The tool is installed into /opt/zimbra/zimbramon/bin.

Anti-virus Settings

Anti-virus protection is enabled for each server when the Zimbra software is installed. The global settings for the anti-virus protection is configured with these options enabled:

- **Block encrypted archives**, such as password protected zipped files.
- **Send notification to recipient** to alert that a mail message had a virus and was not delivered.

During ZCS installation, the administrator notification address for anti-virus alerts is configured. The default is to set up the admin account to receive the notification. When a virus has been found, a notification is automatically sent to that address.

By default, the Zimbra MTA checks every two hours for any new anti-virus updates from ClamAV. The frequency can be set between 1 and 24 hours.

Note: Updates are obtained via HTTP from the ClamAV website.

Zimbra Free/Busy Interoperability

When ZCS is deployed in a mix of ZCS servers and Microsoft Exchange servers and Calendar is an important feature with your users, you can set up free/busy scheduling across the mix so that users can efficiently schedule meetings.

ZCS can query the free/busy schedules of users on Microsoft Exchange 2003/2007 servers and also can propagate the free/busy schedules of ZCS users to the Exchange servers.

To set free/busy interoperability, the Exchange systems must be set up as described in the Exchange Setup Requirements section, and the ZCS Global Config, Domain, COS and Account settings must be configured. The easiest way to configure ZCS is from the administration console.

Note: You can use the *zmprov* CLI. For more information about using *zmprov* to set this up, see the wiki article, [Free Busy Interop for Exchange](#).

Exchange 2003/2007 Setup Requirements.

For Exchange 2003, the following is required:

- Either a single Active Directory (AD) must be in the system or the global catalog must be available.
- The ZCS server must be able to access the HTTP(S) port of IIS on at least one of the Exchange servers.
- Web interface to Exchange public folders needs to be available via IIS. (<http://server/public/>)

- ZCS users must be provisioned as a contact on the AD using the same administrative group for each mail domain. This is required only for ZCS to Exchange free/busy replication.
- The Exchange user name must be provisioned in the account attribute **zimbraForeignPrincipal** for all ZCS users. This is required only for ZCS to Exchange free/busy replication.

Configuring Free/Busy on ZCS

To set Free/Busy Interoperability up from the administration console, configure the following:

- Either globally or by domain configure the Exchange server settings as described in Global Config Setup below.
- Add the **o** and **ou** values that are configured in the **legacyExchangeDN** attribute for Exchange in either the Global Config or Domain Interop tab or in the Class of Service (COS) Advanced tab. The **o** and **ou** values correspond to the ZCS domain attribute **zimbraFreebusyExchangeUserOrg**.
- In the Accounts Free/Busy Interop tab, configure the foreign principal for the account. The **cn** setting in the **legacyExchangeDn** attribute corresponds to the **zimbraForeignPrincipal** attribute. This sets up a mapping from the ZCS account to the corresponding object in the AD.

Note: To find these settings on the Exchange server, you can run the Exchange ADSI Edit tool and search the **legacyExchangeDN** attribute for the **o=** , **ou=** , and **cn=** settings.

Global Config Setup The ZCS Global Config Settings are configured from the Interop tab on the administration console. Here you configure the Exchange server settings as follows:

- Exchange Server URL. This is the Web interface to the Exchange.
- Exchange Authentication Scheme, either Basic or Form.
 - Basic is authentication to Exchange via HTTP basic authentication.
 - Form is authentication to Exchange as HTML form based authentication.
- Exchange user name and password. This is the name of the account in Active Directory and password that has access to the public folders. These are used to authenticate against the Exchange server on REST and WebDAV interfaces.
- The **O** and **OU** used in the **legacyExchangeDN** attribute. Set at the global level this applies to all accounts talking to Exchange.

2.

■

Managing Domains

One domain is identified during the installation process and additional domains can be easily added to the Zimbra system from the administration console.

For domains, you configure the following. These settings can be set from the admin console:

- Global Address List mode
- Authentication mode
- Virtual hosts for the domain to establish a default domain for a user login
- Public service host name that is used for REST URLs, commonly used in sharing.
- The maximum number of accounts that can be created on the domain
- Free/Busy Interop settings for use with Microsoft Exchange.

A domain can be renamed and all account, distribution list, alias and resource addresses are changed to the new domain name. The CLI utility is used to changing the domain name. See Renaming a Domain on page 80.

Note: *Domain settings override Global settings.*

General Information

In this tab you configure the following:

- The default time zone for the domain. If a time zone is configured in a COS or for an account, the domain time zone setting is ignored.
- Public service host name. Enter the host name of the REST URL. This is commonly used for sharing. See Setting up a Public Service Host Name on page 76.
- Inbound SMTP host name. If your MX records point to a spam-relay or any other external non-zimbra server, enter the name of the server here.

- Default Class of Service (COS) for the domain. This COS is automatically assigned to accounts created on the domain if another COS is not set.
- Domain status. The domain status is active in the normal state. Users can log in and mail is delivered. Changing the status can affect the status for accounts on the domain also. The domain status is displayed on the Domain General tab. Domain status can be set as follows :
 - **Active.** Active is the normal status for domains. Accounts can be created and mail can be delivered. Note: If an account has a different status setting than the domain setting, the account status overrides the domain status.
 - **Closed.** When a domain status is marked as closed, Login for accounts on the domain is disabled and messages are bounced. The closed status overrides an individual account's status setting.
 - **Locked.** When a domain status is marked as locked, users cannot log in to check their email, but email is still delivered to the accounts. If an account's status setting is marked as maintenance or closed, the account's status overrides the domain status setting.
 - **Maintenance.** When the domain status is marked as maintenance, users cannot log in and their email is queued at the MTA. If an account's status setting is marked as closed, the account's status overrides the domain status setting.
 - **Suspended.** When the domain status is marked as suspended, users cannot log in, their email is queued at the MTA, and accounts and distribution lists cannot be created, deleted, or modified. If an account's status setting is marked as closed, the account's status overrides the domain status setting.

Setting up a Public Service Host Name

You can configure each domain with the public service host name to be used for REST URLs. This is the URL that is used when sharing email folders and Briefcase folders, as well as sharing task lists, address books, and calendars.

When users share a ZCS folder, the default is to create the URL with the Zimbra server hostname and the Zimbra service host name. This is displayed as **http://server.domain.com/service/home/username/sharedfolder**. The attributes are generated as follows:

- Hostname is server.zimbraServiceHostname
- Protocol is determined from server.zimbraMailMode
- Port is computed from the protocol

When you configure a public service host name, this name is used instead of the server/service name, as **http://publicservicename.domain.com/home/username/sharedfolder**. The attributes to be used are:

- **zimbraPublicServiceHostname**

- `zimbraPublicServiceProtocol`
- `zimbraPublicServicePort`

You can use another FQDN as long as the name has a proper DNS entry to point at 'server' both internally and externally.

Global Address List (GAL) Mode

The Global Address List (GAL) is your company-wide listing of users that is available to all users of the email system. See [Chapter 4, Zimbra Directory Service](#).

GAL is configured on a per-domain basis. The GAL mode setting for each domain determines where the GAL lookup is performed.

Select one of the following GAL configurations:

- **Internal.** The Zimbra LDAP server is used for directory lookups.
- **External.** External directory servers are used for GAL lookups. You can configure multiple external LDAP hosts for GAL. All other directory services use the Zimbra LDAP service (configuration, mail routing, etc.). When you configure the external GAL mode, you can configure GAL search and GAL sync separately.
- **Both.** Internal and external directory servers are used for GAL lookups.

Creating GAL sync accounts

To give users faster access to GAL, when you configure an internal or external GAL, you can set up an account in ZCS that is configured to sync to the GAL data. You define the GAL datasource and the contact data is synced to address book. The gal sync account is a system account and does not use a Zimbra license.

If the mode **Both** is selected, an address book is created for each LDAP data source.

When a datasource is configured in this account, the GAL configuration on the domain is overridden.

The internal GAL polling interval for the GAL sync determines how often the GALsync account syncs with the LDAP server. The sync intervals can be in x days, hours, minutes, or seconds.

When the GAL sync account syncs to the LDAP, all GAL contacts from the LDAP are added to the address book for that GAL. During the sync, the address book is updated with new contact, modified contact and deleted contact information. You should not modify the address book directly. When the LDAP syncs the GAL to the address book, changes you made directly to the address book are deleted.

If the GALsync account is not available for some reason, the traditional LDAP based search is run.

See Appendix A Command-Line Utilities, the CLI **zmgsautil** for information about the GALsync CLI command,

Changing GAL sync account name. The default name for the GAL sync account is **galsync**. When you configure the GAL mode, you can specify another name. After the GAL sync account is created, you cannot rename the account as the data sync will not work.

To change the account name you delete the existing GAL sync account and configure a new GAL for the domain.

1. Select the domain where you want to change the GAL sync account name.
2. Select **Configure GAL** to open the configuration wizard and change the GAL mode to internal. Do not configure any other fields. Click **Finish**.
3. In the domain's account Content pane, delete the domain's galsync account.
4. Select the domain again and select Configure GAL to reconfigure the GAL. In the GAL sync account name field, enter the name for the account. Complete the GAL configuration and click **Finish**. The new account is displayed in the Accounts Content pane.

Configuring GAL Search for External GALs

When you configure an external GAL, you can configure different search settings and sync settings. You may want to configure different search settings if your LDAP environment is set up to optimize LDAP searching by setting up an LDAP cache server, but users also will need to be able to sync to the GAL.

Authentication Modes

Authentication is the process of identifying a user or a server to the directory server and granting access to legitimate users based on user name and password information provided when users log in. Zimbra Collaboration Suite offers the following three authentication mechanisms:

- **Internal.** The Internal authentication uses the Zimbra directory server for authentication on the domain. When you select Internal, no other configuration is required.
- **External LDAP.** The user name and password is the authentication information supplied in the bind operation to the directory server. You must configure the LDAP URL, LDAP filter, and to use DN password to bind to the external server.
- **External Active Directory.** The user name and password is the authentication information supplied to the Active Directory server. You identify the Active Directory domain name and URL.

On the administration console, you use an authentication wizard to configure the authentication settings on your domain.

Virtual Hosts

Virtual hosting allows you to host more than one domain name on a server. The general domain configuration does not change. When you create a virtual host, this becomes the default domain for a user login. Zimbra Web Client users can log in without having to specify the domain name as part of their user name.

Virtual hosts are entered on the **Domains>Virtual Hosts** tab on the administrator's console. The virtual host requires a valid DNS configuration with an A record. Not required for Virtual Hosts.

To open the Zimbra Web Client log in page, users enter the virtual host name as the URL address. For example, **https://mail.company.com**.

When the Zimbra login screen displays, users enter only their user name and password. The authentication request searches for a domain with that virtual host name. When the virtual host is found, the authentication is completed against that domain.

Free/Busy Interoperability

The Zimbra Free/Busy Module to connect with Microsoft Exchange pulls the free/busy schedule of users on Exchange and also pushes the free/busy schedule of ZCS users to the Exchange server. You complete the Interop tab for the domain to enable this feature for the domain. For more information see [Zimbra Free/Busy Interoperability on page 70](#).

You configure the following on the domain Interop tab:

- Exchange server URL. This is the Web interface to the Exchange public folders.
- Exchange authorization schema, either Basic or Form.
 - Basic is authentication to Exchange via HTTP basic authentication.
 - Form is authentication to Exchange as HTML form based authentication.
- Exchange user name and password. This is the name of the account and password that has access to the public folders.

Zimlets on the Domain

Zimbra Collaboration Suite includes pre configured Zimlets, see Chapter 10, Managing Zimlets. These Zimlets are enabled in the default COS. Additional Zimlets can be added and enabled by COS or by account. All Zimlets that are deployed are displayed in the **Domain>Zimlets** tab. If you do not want all the deployed Zimlets made available for users on the domain, select from the list the Zimlets that are available for the domain. This overrides the Zimlet settings in the COS or for an account.

Renaming a Domain

When you rename a domain you are actually creating a new domain, moving all accounts to the new domain and deleting the old domain. All account, alias, distribution list, and resource addresses are changed to the new domain name. The LDAP is updated to reflect the changes.

How to Rename a Domain

Before you rename a domain

- Make sure MX records in DNS are created for the new domain name
- Make sure you have a functioning and current full backup of the domain

After the domain has been renamed

- Update external references that you have set up for the old domain name to the new domain name. This may include automatically generated emails that were sent to the administrator's mailbox such as backup session notifications
- Immediately run a full backup of the new domain

You rename the domain using the CLI utility **zmprov**. To rename a domain, type

```
zmprov -l rd [olddomain.com] [newdomain.com]
```

Domain Rename Process

When you run this **zmprov** command, the domain renaming process goes through the following steps:

1. The status of the old domain is changed to an internal status of shutdown, and mail status of the domain is changed to suspended. Users cannot login, their email is bounced by the MTA, and accounts, calendar resources and distribution lists cannot be created, deleted or modified.
2. The new domain is created with the status of shutdown and the mail status suspended.
3. Accounts, calendar resources, distribution lists, aliases, and resources are all copied to the new domain.
4. The LDAP is updated to reflect the new domain address.
5. The old domain is deleted.
6. The status for the new domain is changed to active. The new domain can start accepting email messages.

Managing Servers

A server is a machine that has one or more of the Zimbra service packages installed. During the installation, the Zimbra server is automatically registered on the LDAP server.

You can view the current status of all the servers that are configured with Zimbra software, and you can edit or delete existing server records. You cannot add servers directly to LDAP. The ZCS Installation program must be used to add new servers because the installer packages are designed to register the new host at the time of installation.

The server settings include:

- General information about the service host name, and LMTP advertised name and bind address, and the number of threads that can simultaneously process data source imports
- A list of enabled services
- Authentication types enabled for the server, setting a Web mail MTA hostname different from global. Setting relay MTA for external delivery, and enabling DNS lookup if required.
- Enabling POP and IMAP and setting the port numbers for a server. If IMAP/POP proxy is set up, making sure that the port numbers are configured correctly.
- Index and message volumes configuration.

Servers inherit global settings if those values are not set in the server configuration. Settings that can be inherited from the Global configuration include MTA, SMTP, IMAP, POP, anti-virus, and anti-spam configurations.

General Server Settings

The General Information tab includes the following configuration information:

- Server display name and a description field
- Server hostname
- LMTP information including advertised name, bind address, and number of threads that can simultaneously process data source imports. The default is 20 threads.
- Purge setting. The server manages the message purge schedule. You configure the duration of time that the server should “rest” between purging mailboxes from the administration console, Global settings or Server settings, General tabs. By default, message purge is scheduled to run every 1 minute.
- When installing a reverse proxy the communication between the proxy server and the backend mailbox server must be in plain text. Checking **This server is a reverse proxy lookup target** automatically sets the following:
 - zimbralmapCleartextLoginEnabled=TRUE

- zimbraReverseProxyLookupTarget=TRUE
- zimbraPop3CleartextLoginEnabled=TRUE

The Notes text box can be used to record details you want to save.

Services Settings

The Services tab shows the Zimbra services. A check mark identifies the services that are enabled for the selected server, including LDAP, Mailbox, IMAP and POP proxy, MTA, SNMP, Anti-virus, Anti-spam, Spell Checker, and Logger.

MTA Server Settings

The MTA tab shows the following settings:

- Authentication enabled. Enables SMTP client authentication, so users can authenticate. Only authenticated users or users from trusted networks are allowed to relay mail. TLS authentication when enabled, forces all SMTP auth to use Transaction Level Security (similar to SSL) to avoid passing passwords in the clear.
- Network settings, including Web mail MTA hostname, Web mail MTA timeout, the relay MTA for external delivery, MTA trusted networks ID, and the ability to enable DNS lookup for the server.

IMAP and POP Server Settings

From these tabs, you can configure IMAP and POP availability on a per server basis.

Volume Settings

In the Volume tab you manage storage volumes on the Zimbra Mailbox server. When Zimbra Collaboration Suite is installed, one index volume and one message volume are configured on each mailbox server. You can add new volumes, set the volume type, and set the compression threshold.

Note: *If Compress Blobs is enabled (YES), the disk space used is decreased, but memory requirements for the server increases.*

Index Volume

Each Zimbra mailbox server is configured with one current index volume. Each mailbox is assigned to a permanent directory on the current index volume. You cannot change which volume the account is assigned.

As volumes become full, you can create a new current index volume for new accounts. When a new current volume is added, the older index volume is no longer assigned new accounts.

Index volumes not marked current are still actively in use as the index volumes for accounts assigned to them. Any index volume that is referenced by a mailbox as its index volume cannot be deleted.

Message Volume

When a new message is delivered or created, the message is saved in the current message volume. Additional message volumes can be created, but only one is configured as the current volume where new messages are stored. When the volume is full, you can configure a new current message volume. The current message volume receives all new messages. New messages are never stored in the previous volume.

A current volume cannot be deleted, and message volumes that have messages referencing the volume cannot be deleted.

Managing Other Functions

Zimlets

Zimlets are applications that enhance the user experience from the Zimbra Web Client. Some Zimlets are automatically deployed when ZCS is installed and you can add new Zimlets and manage existing Zimlets from the Zimlets Configuration page on the administration console.

To see a list of Zimlets that are deployed, click **Zimlets** in the Configuration Overview pane. The Content pane lists all the Zimlets and their status - enabled or disabled. You can upload and deploy new Zimlets. Zimlets are delivered as a zip file that includes all the files necessary to run the Zimlet.

You can manage the Zimlets by domain, and you can configure COSs and individual accounts to allow access to Zimlets.

See the [Managing Zimlets](#) chapter for information about Zimlets.

Admin Extensions

You can create custom modules to add to the Zimbra administration console user interface. The admin extension framework allows developers to add new views to the administration console, manage new data objects in the administration console, extend existing objects with new properties, and customize existing views.

You upload and install your modules from the administration console

Go to the Zimbra Wiki, [Extending Admin UI](#) for documentation about how to create an extended admin UI module.

Adding Words to ZCS Spell Dictionary

If ZWC users frequently use words, abbreviations or acronyms that are marked as spelled incorrectly with the ZWC spell check, you can update the COS or domain attribute **zimbraPrefSpellIgnoreWord** with the words that should be ignored when spell check is run.

For example, to configure words to ignore for a domain, run

Setting System-wide Signatures

```
zmprov md domainexample.com +zimbraPrefSpellIgnoreWord ZXY
+zimbraPrefSpellIgnoreWord DDE
```

You can create system-wide mandatory signatures. The signatures are added to every message sent out. These types of signatures can be used to set up company signatures, legal notices, and company disclaimers. The following attributes are used to enable this feature:

- **zimbraDomainMandatoryMailSignatureEnabled (TRUE/FALSE)** TRUE enables this feature.
- **zimbraDomainMandatoryMailSignatureText.** This creates the plain text version.
- **zimbraDomainMandatoryMailSignatureHTML.** This creates the HTML version.

1. To create a system wide mandatory signature, enter the following

```
zmprov mcf zimbraDomainMandatoryMailSignatureEnabled TRUE
zmprov mcf zimbraDomainMandatoryMailSignatureText <"some text">
zmprov mcf zimbraDomainMandatoryMailSignatureHTML
"<html><body>some html text</body></html>"
```


2. Restart Amavis to apply the configuration and global signature files. Type:

```
/opt/zimbra/bin/zmamavisctl restart
```

The global signature is not visible when an email is composed, but displays in the recipient's email message.

Customizing External Share Prompt for Zimbra Web Client

In Global Settings and Domains, the Share Configuration option in the Briefcase folder can be customized with a name that is displayed in the prompt on the Authentication Required dialog. This dialog appears when external guests log in to a shared Briefcase folder.

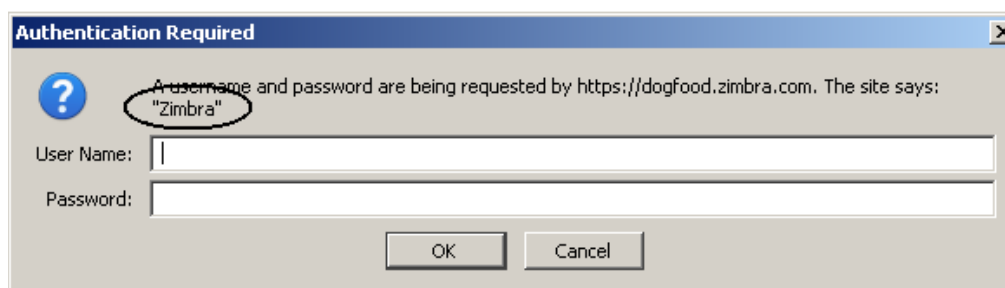

Backing Up the System

Backing up the mailbox server on a regular basis can help you quickly restore your email service if there is an unexpected crash. You should include backing up the ZCS server in your system-wide backup process. Only full backups of the ZCS data can be created.

Before backing up the ZCS data, all servers must be stopped. To stop the servers, use the CLI command, **zmcontrol stop**. After the backup is complete, to restart the servers, use **zmcontrol start**. See Appendix A, for more information about these command.

To restore the ZCS data, you must delete the existing data and then restore the backup files. The servers must be stopped before restoring the data.

Chapter 8 Managing User Accounts

You create accounts and configure features and access privileges from either the administration console or using CLI commands.

Topics in this chapter include:

- ◆ [Setting up Accounts](#)
- ◆ [Managing Class of Services](#)
- ◆ [Managing Distribution Lists](#)
- ◆ [Managing Resources](#)

The following are some of the account tasks you perform from the administration console:

- Quickly create new accounts with the **New Account Wizard**
- Create many new accounts at once with the **Bulk Provisioning Wizard**
- View the date when an account was created
- Find a specific account using the **Search** feature
- Change account information
- Add or delete an account to multiple distribution lists at one time, and view which lists the account is on
- Create, change, and move alias addresses
- Change password for a selected account
- Set the time zone for an account
- View an account's mailbox
- Change an account's status and delete accounts
- Reindex a mailbox

See the Zimbra administration console **Help** for information about how to perform these tasks from the administration console.

The following CLI commands are also available to help facilitate account management.

- The CLI **zmprov** command can be used to add, modify, and view accounts, aliases, distribution lists, and Calendar resources. Most of the zmprov functions are available from the administration console.
- The CLI **zmmailbox** command can be used for mailbox management. This command can help you provision new mailboxes, debug issues with a mailbox, and help with migrations. You can invoke zmmailbox from within zmprov.
- The CLI **zmaccts** command runs a report that lists all the accounts, their status, when they were created and the last time anyone logged on. The domain summary shows the total number of accounts and their status.

See [Zimbra CLI Commands on page 156](#) for information about how to use these commands.

Setting up Accounts

You can configure one account at a time with the New Account Wizard or you can create many accounts at once using the Bulk Provisioning Wizard.

Configuring One Account

The administration console New Account Wizard steps you through the account information to be completed. Before you add user accounts, you should determine what features and access privileges should be assigned. You can configure the following type of information:

- General information, including account name, Class of Service (COS) to be assigned, and password
- Contact information, including phone number, company name, and address
- Language preference to display Zimbra Web Client
- Default time zone
- Aliases to be used
- Forwarding directions
- Features and preferences available for this specific account. Changes made at the account level override the rules in the COS assigned to the account
- Themes and Zimlets that the user can access
- Advanced settings including attachment settings, quotas, quota warning flag, and password log in policies

For a description of the features see [Chapter 9, Customizing Accounts, Setting General Preferences and Password Rules](#).

If the COS you assign is configured with the correct functionality for the account, you do not need to configure features, preferences, themes, zimlets, or advanced settings.

Creating an account sets up the appropriate entries on the Zimbra LDAP directory server. When the end-user logs in for the first time or when an email is delivered to the user's account, the mailbox is created on the mailbox server.

Configuring Many Accounts at Once

<<Migration and importing description to be added here for 7.0>>

Managing Aliases

An email alias is an email address that redirects all mail to a specified mail account. An alias is not an email account. Each account can have unlimited numbers of aliases.

When you select Aliases from the Manage Addresses Overview pane, all aliases that are configured are displayed in the Content pane. From Aliases you can quickly view the account information for a specific alias, move the alias from one account to another, and delete the alias.

You can view and edit an account's alias names from the account view.

Managing Class of Services

Class of Service (COS) determines what default attributes an account has and which features are enabled or denied. The following can be configured in a COS:

- ZCS features for accounts assigned the COS
- Default settings for user preferences
- Themes that users can use in the Zimbra Web Client
- Zimlets that users can use in the Zimbra Web Client
- Servers that are added to the server pool to distribute accounts across
- Advanced functions including setting rules for attachment blocking, account quotas, data source polling intervals, for proxy-allowed domains, and policies for passwords, login, timeout, email retention, and free/busy interop
- Zimbra Mobile sync rules

For more information about features, preferences, advanced functions, see [Chapter Chapter 9](#), Customizing Accounts, Setting General Preferences and Password Rules.

A default COS is automatically created during the installation of Zimbra Collaboration Suite. A COS is global and does not need to be restricted to a particular domain or set of domains. You can modify the default COS to set the attributes to your email restrictions, and you can create multiple COSs.

Each account is assigned one COS. You can create a domain COS and have all accounts created on that domain automatically be assigned this COS. You can create numerous COSs and specify which COS(s) are available for a domain. If the domain does not have a COS defined, the original default COS is automatically assigned when an account is created.

Note: *If you delete a COS that accounts are currently assigned, the accounts are automatically assigned the default COS.*

Assigning a COS to an account quickly configures account features and restrictions. Some of the COS settings can be overridden either by global settings or by user settings. For example:

- Whether outgoing messages are saved to **Sent** can be changed from the Zimbra Web Client in the user's Preferences.
- Attachment blocking set as a global setting can override the COS setting.

Note: *Some COS settings assigned to an account are not enforced for IMAP clients.*

COS Calendar Preference to Set Default Time Zones.

The default time zone setting that is displayed in the account's Preferences folder is used to localize the time for received messages and calendar activities in the standard Web client. When using the standard Web client, the time zone on the computer is not used to set the time a message is received or for calendar activities. The time zone setting in the Preferences>General tab is. When using the advanced Web client, the time zone setting on the computer is used as the time stamp for received messages and for calendar activities, not the time zone setting on the General tab.

Because the advanced Web client and the standard Web client do not use the same time zone source to render messages, you may notice that the same message has a different time when displayed in one or the other client. You can avoid this by having the computer time zone and the Web client time zone set to the same time.

Distributing Accounts Across Servers

In an environment with multiple mailbox servers, the class of service is used to assign a new account to a mailbox server. The COS Server Pool tab lists the mailbox servers in your Zimbra environment. When you configure the COS, you select which servers to add to the server pool. Within each pool of servers, a random algorithm assigns new mailboxes to any available server.

Note: *You can assign an account to a particular mailbox server when you create an account in the New Account Wizard, Mail Server field. Uncheck **auto** and enter the mailbox server in the Mail Server field.*

Changing Passwords

If you use internal authentication, you can quickly change an account's password from the Account's toolbar. The user must be told the new password to log on.

If you want to make sure users change a password that you create, you can enable **Must Change Password** for the account. The user must change the password the next time he logs on.

Password restrictions can be set either at the COS level or at the account level. You can configure settings to require users to create strong passwords and change their passwords regularly, and you can set the parameters to lock out accounts when incorrect passwords are entered. See [Setting Password Policy](#) and [Setting Failed Login Policy](#) in the Managing End-User Mailbox Features chapter.

Directing Users to Your Change Password Page

If your ZWC authentication is configured as external auth, you can configure ZCS to direct users to your password change page when users change their passwords. You can either set this URL as a global setting or a per domain setting.

Set the **zimbraChangePasswordURL** attribute to the URL of your password change page. The **Change Password** link in the Preferences>General tab goes to this URL and when passwords expire, users are sent to this page.

This is changed from the zmprov CLI.

```
zmprov md exampledomain.com zimbraChangePasswordURL http://  
www.mysite.com
```

Setting Polling Intervals

Polling intervals determine how often accounts poll the server for new data. Polling intervals can be set in the COS/account tab for POP, IMAP, Calendar updates, RSS feeds, and CalDAV invites.

If the polling interval is not set, data is not automatically polled.

View an Account's Mailbox

View Mail in Accounts lets you view the selected account's mailbox content, including all folders, calendar entries, and tags. When you are in an account, you can mouse over or right click on a folder to see the number of messages in the folder and the size of the folder. This feature can be used to assist users who are having trouble with their mail account as you and the account user can be logged on to the account.

Any View Mail action to access an account is logged to the *audit.log* file.

Reindexing a Mailbox

Mail messages and attachments are automatically indexed before messages are deposited in a mailbox. Each mailbox has an index file associated with it. This index file is required to retrieve search results from the mailbox.

If a mailbox's index file becomes corrupt or is accidentally deleted, you can re-index the messages in the mailbox from the administration console.

Text searches on an account might or might not fail with errors when the index is corrupt. You cannot count on a user reporting a failed text search to identify that the index is corrupt. You must monitor the index log for messages about corrupt indexes. If the server detects a corrupt index, a message is logged to the Zimbra mailbox.log at the WARN logging level. The message starts with **Possibly corrupt index**. When this message is displayed, the administrator must correct the problem. In many cases correcting the problem may mean reindexing the mailbox.

Reindexing a mailbox's content can take some time, depending on the number of messages in the mailbox. Users can still access their mailbox while reindexing is running, but because searches cannot return results for messages that are not indexed, searches may not find all results.

Changing an Account's Status

Account status determines whether a user can log in and receive mail. The account status is displayed when account names are listed on the Accounts Content pane.

An account's status can be one of the following:

- **Active.** Active is the normal status for a mailbox account. Mail is delivered and users can log into the client interface.
- **Maintenance.** When a mailbox status is set to maintenance, login is disabled, and mail addressed to the account is queued at the MTA.

Note: *Maintenance status is automatically set on an account when a backup is being run, or when importing/exporting or restoring an account.*

- **Pending.** Pending is a status that can be assigned when a new account is created and not yet ready to become active. The login is disabled and messages are bounced.
- **Locked.** When a mailbox status is locked, the user cannot log in, but mail is still delivered to the account. The locked status can be set, if you suspect that a mail account has been hacked or is being used in an unauthorized manner.

- **Closed.** When a mailbox status is closed, the login is disabled, and messages are bounced. This status is used to soft-delete an account before deleting the account from the server. A closed account does not change the account license.
- **LockOut.** This is set automatically when users who try to log in do not enter their correct password and are then locked out of their account. You cannot set this status manually. You set up a login policy with a specified number of consecutive failed login attempts that are allowed before they are locked out. How long the account is locked out is set by COS or Account configuration, but you can change the lockout status at any time.

Deleting an Account

You can delete accounts from the administration console. This removes the account from the server, deletes the message store, and changes the number of accounts used against your license.

Note: Before you delete an account, you can run a full backup of that account to save the account information. See the [Backup and Restore](#) chapter.

Managing Distribution Lists

A distribution list is a group of email addresses contained in a list with a common email address. When users send to a distribution list, they are sending the message to everyone whose address is included in the list. The address line displays the distribution list address; the individual recipient addresses cannot be viewed. Only administrators can create, change, or delete distribution lists.

The maximum number of members in a distribution list is 1000 recipients. The 1000 recipients include addresses in distribution lists that are nested within a distribution list. Senders do not receive an error when they send a message to a distribution list with more than 1000 members, but the message is not sent to more than 1000 recipients.

When a Zimbra user's email address is added to a distribution list, the user's account **Member Of** tab is updated with the list name. When a distribution list is deleted or the removed, the distribution list is automatically removed from the **Member Of** tab.

The **Hide in GAL** check box can be enabled to create distribution lists that do not display in the Global Address List (GAL). You can use this feature to limit the exposure of the distribution list to only those that know the address.

Using Distribution Lists for Group Sharing

Instead of creating individual share requests, distribution lists can be created to share items with a group. Users notify the administrator that they have shared an item with the distribution list and the administrator publishes the shared item to the list. This is done in the Shares tab. When a new shared item is published, existing members of the list are automatically notified of the new share.

Everyone in the DL has the same share privileges that the grantee defines for the shared item.

When new members are added to the group distribution list, they are automatically granted the same shared privileges as other members of the group. You can set up the Share tab so that new members are automatically notified about items that are shared with them through the list.

When members are removed from the group distribution list, their share privileges are revoked.

If you create a distribution list for sharing and do not want the distribution list to receive mail, you can disable the **Can receive mail** checkbox.

Create Distribution List Aliases

A distribution list can have an alias. This is set up from the administration console, Distribution List Alias tab.

Managing Resources

A resource is a location or equipment that can be scheduled for a meeting. Each meeting room location and other non-location specific resources such as AV equipment is set up as a resource account. The Addresses> Resources section in the administration console shows all resources that are configured for ZCS.

User accounts with the Calendar feature can select these resources for their meetings. The resource accounts automatically accept or reject invitations based on availability.

Administrators do not need to monitor these mailboxes on a regular basis. The contents of the resource mailboxes are purged according to the mail purge policies.

A Resource Wizard on the administration console guides you through the resource configuration. You can configure the account with the following details about the resource:

- Type of resource, either location or equipment
- Scheduling policy
- Forwarding address to receive a copy of the invite
- Description of the resource

- **Contact information.** This can be a person to contact if there are issues.
- **Location information,** including room name, specific building location including building and address, and room capacity

When you create a resource account, a directory account is created in the LDAP server.

To schedule a resource, users invite the equipment resource and/or location to a meeting. When they select the resource, they can view the description of the resource, contact information and free/busy status for the resource, if these are set up.

When the meeting invite is sent, an email is sent to the resource account, and, based on the scheduling policy, if the resource is free the meeting is automatically entered in the resource's calendar and the resource is shown as Busy.

Setting up the Scheduling Policy

The scheduling policy establishes how the resource's calendar is maintained. The following resource scheduling values can be set up:

- **Auto decline all recurring appointments.** This value is enabled when the resource can be scheduled for only one meeting at a time. No recurring appointments can be scheduled for this resource.
- **Auto accept if available, auto-decline on conflict.** When this option is selected, the resource account automatically accepts appointments unless the resource is already scheduled. The free/busy times can be viewed. You can modify the auto-decline rule to accept some meetings that conflict
- **Manual accept, auto decline on conflict.** When this option is selected, the resource account automatically declines all appointments that conflict. Appointment requests that do not conflict are marked as tentative in the resource calendar and must be manually accepted. If you set this up, configure the forwarding address so a copy of the invite is sent to the account that can manually accept the invitation. You can modify the auto-decline rule to accept some meetings that conflict.
- **Auto accept always.** The resource account automatically accepts all appointments that are scheduled. In this case, free/busy information is not maintained, thus more than one meeting could schedule the resource at the same time. Because the resource always accepts the invitation, the suggested use for this policy would be for a frequently used location off premises that you want the location address to be included in the invite to attendees.
- **No auto accept or decline.** The resource account is manually managed. A delegated user must log into the resource account and accept or decline all requests.

Conflict Rules. For accounts that include the auto decline on conflict value, you can set up a threshold, either as a number of conflicts or as a percentage

of all the recurring appointments to partially accept recurring appointments. **Maximum allowed number of conflicts** and/or **Maximum allowed percent of conflicts** are configured to allow a recurring resource to be scheduled even if it is not available for all the requested recurring appointment dates. The resource accepts appointments even if there are conflicts until either the number of conflicts reaches the maximum allowed or the maximum percentage of conflicts allowed. If you set both fields, the resource declines appointments whenever either of the conditions is met.

Managing Resource Accounts

The Resource Accounts Preference>Calendar tab can be configured to let users manage the Resource's Calendar. You can configure the following options to manage the resource.

- An address to forward invites. If the forwarding address was set up when the account was provisioned, you can change the address
- Who can use this resource. In the Permissions section, Invites, select **Allow only the following internal users to invite me to meetings** and add the appropriate users' email addresses to the list.

To fully manage a resource account's calendar, you can share the resource calendar with a user who is given the Manager rights. Users delegated as Manager have full administrative rights for that calendar. They can view, edit, add, remove, accept or decline the invites.

Chapter 9 Customizing Accounts, Setting General Preferences and Password Rules

When an account is provisioned, you create the mailbox, assign the primary account email address, and enable ZCS applications and features. You also set general preferences, the policy for password usage, and select a theme as the initial appearance of Zimbra Web Client.

This chapter describes the features and user preferences that can be configured for an account either from the assigned COS or in individual accounts.

Topics in this chapter include:

- ◆ [Zimbra Web Client Versions](#)
- ◆ [Zimbra Messaging and Collaboration Applications](#)
- ◆ [Other Configuration Settings for Accounts](#)

Note: Mailbox features are enabled for the Zimbra Web Client users. When IMAP or POP clients are used, users may not have these features available.

Zimbra Web Client Versions

Zimbra offers a standard and an advanced Zimbra Web Client that users can log into. Both Web Clients include mail, calendar, address book and task functionality. Users can select the client to use when they log in.

- Advanced Web Client includes Ajax capability and offers a full set of Web collaboration features, including Briefcase and the ability to export your account information. This Web client works best with newer browsers and fast internet connections.
- Standard Web Client is a good option when Internet connections are slow or users prefer HTML-based messaging for navigating within their mailbox.

The default ZWC for login is the advanced Zimbra Web Client. When users log in, they view the advanced Zimbra Web Client, unless they use the menu on the login screen to change to the standard version. However, if ZWC detects the screen resolution to be 800 x 600, users are automatically redirected to the standard Web Client. Users can still choose the advanced ZWC but get a

warning message suggesting the use of the standard ZWC for better screen view. The default version can be changed in the COS Preferences tab and users can change their preferences.

Zimbra Messaging and Collaboration Applications

The Zimbra Collaboration Suite provides the following messaging and collaboration solutions:

- Email messaging
- Calendar and scheduling
- Address books
- Tasks
- Briefcase for sharing files and document management
- Advanced search capability

You can enable and disable these applications by either Class of Service (COS) or by individual accounts.

Configuring the COS and assigning a COS to accounts lets you configure the default settings for account features and restrictions for groups of accounts. Individual accounts can be configured differently and any changes you make override the COS setting. When you update the COS, the changes are not reflected in accounts that have COS overrides.

Email messaging

ZCS email messaging is a full-featured email application that includes advanced message search capabilities, mail sorted by conversations, tags, user-defined folders, user-defined filters, and more. You configure which email messaging features are enabled.

Messaging features that can be enabled are listed in the following table. Note that the third column is the tab name where the feature can be enabled. Many of these features can then be managed from the users' account Preferences tab when they log on to the Zimbra Web Client.

The default is to let users manage their preferences. If you do not want users to be able to change their account preferences, in the Features tab, remove the check for Preferences.

Feature Name	Description	COS/ Account Tabs
Mail	Enables the email application. This is enabled by default.	Features
Conversations	Messages can be displayed grouped into conversations or as a message list. Conversations group messages by subject. If this feature is enabled, conversation view is the default. You can change the default on the COS Preferences tab. Users can change the default from the Mail toolbar, View link.	Features
HTML compose	Users can compose email messages with an HTML editor. They can specify their default font settings for HTML compose in their account Preferences tab.	Features
Draft auto save interval	Configure how frequently draft messages are automatically saved. The default is to save messages being composed every 30 seconds. Users cannot change the time, but they can turn off the feature to automatically save drafts while composing.	Preferences
Mail send later	When this is enabled, users can select the Send option Send Later to send a message at a later time. They configure a date and time to send an email message and it is saved in the Draft folder.	Features
Message priority	When this is enabled, users can set the priority of the message - High, Normal, or Low. The recipient in ZWC sees the priority flag if it is high or low.	Features

Allow the user to specify a forwarding address	<p>Users can create a forwarding address for their mail. When this feature is enabled in the COS, in the account configuration, you can specify a default forwarding address that the user can use and enable the function so that a copy of the forwarded message is not saved in the user's mailbox. Users can change the information from their account Preferences tab.</p> <p>In the account configuration, you can also specify forwarding addresses that are hidden from the user. A copy of each message sent to the account is immediately forwarded to the designated forwarding address.</p>	Features tab in COS Forwarding tab in Accounts
Out of office reply	<p>Users can create an email message that automatically replies to incoming messages. This is commonly used as a vacation message. By default message is sent to each recipient only once every seven days, regardless of how many messages that person sends to the address during that week. This can be changed in the COS Preferences tab, Out of office cache lifetime field.</p> <p>Users can also set the start and stop dates for the message. You can change this setting in the COS or Account setup.</p>	Features Preferences

New mail notification	<p>Allows users the option to specify an address where to be notified of new mail to their ZWC account. They can turn this feature on or off and designate an address from their account Preferences tab.</p> <p>An email with information about the email's subject, sender address and recipient address is sent to the address.</p> <p>Note: See zmprov (Provisioning) on page 160 in Appendix A CLI commands, for information about how to change the email template.</p>	Features tab in COS Preferences tab in Accounts
Persona	<p>The name and address configured for the account creates the primary account persona. This is the information that user use as the From address.</p> <p>When Persona is enabled, users can create additional account names to manage different roles. Account aliases can be selected for the From name of messages sent from that persona account and a specific signature can be set for the persona account.</p> <p>The number of personas that can be created is set to 20. You can change this from the CLI zmprov mc zimbraIdentityMaxNumEntries</p>	Features
Maximum length of mail signature	<p>You can set the maximum number of characters that can be in a signature. The default is 1024 characters.</p> <p>Users can create signatures for different roles. The number of signatures users can create is configured in zimbraSignatureMaxNumEntries</p>	Preferences
Advanced Search	Allows users to build a complex search by date, domain, status, tags, size, attachment, Zimlets, and folders.	Features
Saved searches	Users can save a search that they have previously executed or built.	Features

Search for people	A People Search bar is added to the users ZWC page and users can search the GAL for people within their organization. They see detailed information from the GAL, including phone numbers, office location, and a contact's photo.	Features
Initial search preference	When this feature is enabled, the default search mailbox can be changed. The Inbox folder is the default. The default folder can be changed in the Preferences tab and users can change this from their Preferences>Mail page. The default mail search folder is the folder that is searched when the Get Mail link in ZWC is clicked.	Preferences
External POP access	Users can set up to retrieve their POP accounts' email messages directly from their ZWC account. They can add the external account address to their account settings. Users can set these up from their Preferences tab.	Features
External IMAP Access	Users can set up to retrieve their IMAP accounts' email messages directly from their ZWC account. They can add the external account address to their account settings. Users can set these up from their Preferences tab.	Feature
Aliases for this account	You can create an aliases for the account. Users cannot change this.	Alias tab in Accounts

Mail filters	<p>Users can define a set of rules and corresponding actions to apply to incoming and outgoing mail and calendar appointments. When an incoming email message matches the conditions of a filter rule, the corresponding actions associated with that rule are applied. Users set up these rules from their account Preferences tab.</p> <hr/> <p>Note: <i>Spam check on a received message is completed before users' mail filters are run. Messages identified as spam are moved to the junk folder. To avoid having mail incorrectly marked as spam, users can create a spam white list from the Preferences Mail folder to identify email addresses that should not be marked as spam.</i></p>	Features
Tagging and Flagging	Users can create tags and flags and assign them to messages, contacts, and files in Briefcase folders.	Feature
Enable keyboard shortcuts	<p>Users can use keyboard shortcuts within their mailbox.</p> <p>The shortcut list can be printed from the Preferences Shortcuts folder.</p>	Preferences
Dumpster folder	Users can recover email messages that they have deleted from their Trash folders. When this is enabled, users can right-click on the Trash folder and select Recover Deleted Items to display messages deleted up to 30 days before.	Feature
GAL access	Users can access the company directory to find names for their email messages.	Features

Autocomplete from GAL	When this is enabled, users enter a few letters in their compose header and names listed in the GAL are displayed ranked by usage. Users can turn this feature on or off from their Preferences tab. See How Autocomplete Ranks Names .	Features
IMAP access	Users can use third party mail applications, such as Thunderbird or Outlook, to access their mailbox using the IMAP protocol. You can set the polling interval from the COS/Account Advanced tab, Data Source>IMAP polling interval section. The polling interval is not set.	Features
POP3 access	Users can use third party mail applications, such as Thunderbird or Outlook, to access their mailbox using the POP protocol. When they retrieve their POP email messages, the messages and attachments are saved on the Zimbra server. Users can configure how mail from the POP server is downloaded to ZCS from their Preference>Mail page. The options are <ul style="list-style-type: none"> • Allow all mail, including old mail, to be downloaded. Default • Allow only mail from now to be downloaded You can set the polling interval from the COS/Account Advanced tab, Data Source>POP3 polling interval section. The polling interval is not set.	Features

How Autocomplete Ranks Names

When users use the autocomplete feature, names appear ranked by mailed-to contacts first and then non mailed-to contacts. When users view an autocomplete list, the most frequently recalled contact is listed at the top. If the contact name that appears first should not be listed at the top, the user can click **Forget** and the contact names are re-ranked.

Email Preferences Users Manage

The default behavior for many of these preferences can be set from either the COS or the Accounts Preferences tab. Users can modify the following mail preferences from their account Preferences Mail tab.

- How often, in minutes, that the Web Client checks for new messages, **Check for new mail every...**
- Set or change email message alerts. Alerts can be set up to play a sound, highlight the Mail tab when a message arrives, and flash the browser.
- Set the display language for ZWC. If more than one language locale is installed on ZCS, users can select the locale that is different from the browser language settings.
- Whether to save copies of outbound messages to the Sent folder
- Whether to save a local copy of a message that is forwarded or to have it deleted from their mailbox
- Whether to compose messages in a separate window
- Whether to view mail as HTML for messages that include HTML or to view messages as plain text
- Whether to send a read receipt when it is requested.
- Adjust the default font size for printed messages. The default is 12 points.
- Users can set up their own Spam mail options of white list and blacklist email addresses that is used to filter incoming message from their Preferences Mail folder. The default maximum number of white list and black list addresses is 100 on each list. This value can be changed using CLI `zmprov` for accounts and COS. The attributes are **zimbraMailWhitelistMaxNumEntries** and **zimbraMailBlacklistMaxNumEntries**.
- Users can modify the following mail preferences from their Preferences Signatures tab.
 - Whether to automatically append a signature to outgoing messages.
 - Preferences for how messages that are replied to or forwarded are composed.

Using Import/Export Page

In the advanced Web Client, the Preference, Import/Export page can be used to export a user's account data, including email messages and attachments, contacts, calendar, tasks, etc. This data can be saved to their computer or other location as a backup. The account data is saved as a tar-gzipped (tgz) archive file so that it can be imported to restore the user's account. When they run the export command, the data are copied, not removed from the user's account.

You can turn the Import/Export feature off from the COS or Account Features tab, General Features section.

Setting Up Trusted Addresses Preferences

Users have a Trusted Addresses page in their Mail Preferences folder. When users receive email with external images that are not displayed, in the message they can select to always display images sent from that address or domain. This address or domain name is added to the users Trusted Address folder. They can also add or remove addresses directly in this folder.

Subscribing to RSS Feeds

Users can create an folder and subscribe to Websites that provide RSS (Really Simple Syndication) and podcast feeds to send updated information directly to their mailbox. RSS feeds count against users' account quota.

The default is to automatically update the RSS data every 12 hours. You can change the polling interval from the COS/Account Advanced tab, Data Source>RSS polling interval section.

Address Book

Zimbra Address Book allows users to create multiple contact lists and add contact names automatically when mail is received or sent. By default, a Contacts list and an Emailed Contacts list are created in Address Book. Users can import contacts into their Address Book.

Important: To allow users to share their address books, calendars, and Briefcase files, enable Sharing on the Features tab.

Feature Name	Description	COS/ Account Tabs
Address Book	Users can create their own personal contacts lists. By default, two contact lists folders are in the Address Book.	Features
Address book size limit	Maximum number of contacts a user can have in all address books. 0 means unlimited.	Advanced

Users can modify the following Address Book preferences from their account Preferences Address Book page. The default behavior can be set from the COS or Accounts>Preferences tab.

- Enable auto adding of contacts to automatically add contacts to their Emailed Contact list when they send an email to a new address.
- Enable the ability to use the Global Access List when using the contact picker to look up names.
- Enable the options to include the GAL addresses and names in shared address books when using autocomplete to address a message.

Users can import other contact lists into their Address Book and can export their address books as well. The files must be .csv files. This is done from the Preferences Import/Export page.

Calendar

Zimbra Calendar lets users schedule appointments and meetings, establish recurring activities, create multiple calendars, share calendars with others, and delegate manager access to their calendars. They can subscribe to external calendars and view their calendar information from Zimbra Web Client. They can also use search for appointments in their calendars.

Important: To allow users to share their calendars, address books, and Briefcase files, enable Sharing in the Features tab.

Feature Name	Description	COS/ Account Tabs
Calendar	A calendar and scheduling tool to let users maintain their calendar, schedule meetings, delegate access to their calendar, create multiple personal calendars, and more.	Features
Group Calendar	When Group Calendar is not checked, the only Calendar feature is the ability to create personal appointments and accept invitations to meetings. The Find Attendees, Schedule and Find Resources tabs are not displayed.	Features
Nested Calendars	Calendars can be nested within ZCS folders like Mail, Contact, and Calendar folders. The administrator creates a nested list of calendars using CLI. A nested calendar grouping can be imported through migration as well. The CLI command to define the grouping is zmmailbox -z -m user1 cf -V appointment /<Calendar Name>/ <sub-calendar name>. This creates a calendar nested under the Calendar Name folder.	

Timezone	Sets the timezone that is used for scheduling in the Calendar application. A drop down displays the timezone list.	Preferences
Forward calendar invitation to specific addresses	<p>You can specify email addresses to forward a user's calendar invitations. Users can also specify forwarding address from the Preferences Calendar folder.</p> <p>The account the invitation is forwarded to must have been granted admin privileges on the shared calendar to be able to reply to the invitation.</p>	Accounts Forwarding

Troubleshooting Calendar Appointment Issues The CLI **zmcalthk** command is used to check for discrepancy between different users' calendars for the same meeting and send an email notification regarding the discrepancies.

You can also use this command to notify the organizer and/or all attendees when an appointment is out of sync. See Appendix A, **zmcalthk** on page 180.

Setting Remote Calendar Automatic Update Interval

Remote calendars are automatically updated every 12 hours by default. You can change the frequency of these updates in the COS/Account Advanced>Data Source section, Calendar polling interval.

Filtering Calendar Messages

Users can set up mail filter rules that act on Calendar-related messages. The filter subject is **Calendar Invite**. When they select this subject, messages that are marked as invites are run through the filter.

Disable Attendee Edits to Appointments

Attendees can edit appointments in their calendars. Unless they are the originator of the appointment, any changes are made only to their appointments. The originator and other attendees are not notified of the changes. If the organizer makes changes to the appointment, these changes overwrite the attendees edits. The option for attendees to edit their appointments can be disabled from the COS attribute, **zimbraPrefCalendarApptAllowAttendeeEdit**. To disable the ability for invitees to edit appointments they received, run the following:

```
zmprov mc <cosname> zimbraPrefCalendarApptAllowAttendeeEdit FALSE
```

Other User Calendar Preferences

Users can modify the following Calendar preferences from their account Preferences Calendar folder. The default behavior can be set from the COS or Accounts Preferences tab.

- **Time zone.** This sets the default time zone that is displayed in the user's Preferences. See [Managing User Accounts chapter, COS Calendar Preference to Set Default Time Zones](#). If the time zone is configured in the COS, the time zone configured in the domain is ignored.
- **Number of minutes before an appointment to show reminder.** This sets the time before the meeting a reminder notice should be sent.
- **Initial calendar view.** This sets the default view. Options are Day, Work Week, 7-Day Week, Month, List, or Schedule.
- **First day of the week.** This set the default first day of a user's work week.
- **Default appointment visibility.** Options are Public or Private. This sets the default visibility options on the new appointment page. The default is Public, appointments details can be viewed by others. In addition to setting the default appointment option, when the default is Private, all incoming calendar invites are marked as private on the user's calendar and details are hidden.
- **Use iCal delegation model for shared calendars for CalDAV interface.** Apple iCal can be configured to access users' calendars using the CalDAV protocol. When this is enabled, shared calendars are displayed in users' iCal account's Delegation tab and they can delegate access to their calendars. For automatic polling, the polling interval can be set up in the COS/Account Advanced tab, Data Source>CalDAV polling interval field.
- **Enable past due reminders.** When this is enabled, when users log into the ZWC and have old meeting reminders they did not dismiss, the reminder notifications for the last two weeks pop up. When this is disabled, ZCS silently dismisses the old reminders.
- **Enable toaster notification for new calendar events.** When this is enabled, a popup displays in ZWC when new calendar events are received.
- **Allow sending cancellation email to organizer.** When this is enabled, when users receive an invitation they cannot attend at the scheduled time, they have the option to click **Propose New Time** and select another time. The meeting organizer receives an email with the proposed time.

- **Automatically add invites with PUBLISH method.** A calendar invitation email should have method=REQUEST in the calendar object but some third-party email clients incorrectly set method=PUBLISH. These emails are not processed as invitations by default. You can relax the rules by enabling this option.
- **Automatically add forwarded invites to calendar.** When this is enabled, invites that have been forward to users are automatically added to the forwarded recipient's calendar.
- **Flash browser title on appointment reminder.** When this is enabled, when appointment reminders pop up, the browser flashes until the user closes the pop-up.
- **Enable audible appointment notification.** When this is enabled, when an appointment reminder pops up, users can be notified by a beep on their computer. Users must have either QuickTime or Windows Media installed.
- **Auto-decline invites from users who are denied from inviting this user.** When this is enabled, users can set
- **Automatically add appointments when invited.** When this is enabled, appointments are automatically added to user's default calendar and declined appointments display on the ZWC calendar in a faded view. **Note:** Mobile devices do not see the deleted invite information in a faded view and may not know that the invite was deleted.
- **Notify of changes made via delegated access.** Users that delegated their calendar are notified of changes made to an appointment by a delegated access grantee.
- **Always show the mini-calendar.** The mini-calendar automatically displays in the Calendar view.
- **Use the QuickAdd dialog when creating new appointments.** When this option is enabled, the QuickAdd dialog displays when users double-click or drag on the calendar.
- **Show time zone list in appointment view.** A time zones list displays in their appointment dialog, giving them the opportunity to change time zones while making appointments.

Tasks

Zimbra Tasks lets users create to-do lists and manage tasks through to completion. They can add tasks to the default Tasks list and they can create additional task lists to organize to-do lists by more specific activities.

Important: To allow users to share their Task lists, enable *Sharing* in the *Features* tab. Task lists can be shared with individuals, groups, and the public.

The Tasks feature is enabled from either the COS or the Accounts Preferences tab.

Feature Name	Description	COS/ Account Tabs
Tasks	Users can create and organize tasks from the Zimbra Web Client.	Features

Briefcase

Briefcase can be used to share and manage documents that users create in Briefcase or documents and images that users upload to their Briefcase. Users can access these files whenever they log into their account from any computer.

The Briefcase feature is enabled from either the COS or the Accounts Preferences tab.

Feature Name	Description	COS/ Account Tabs
Briefcase	<p>Users can upload files to their Zimbra Web Client account. They can open the file if the application is available on the computer, send the file in an email, organize files into different briefcase folders.</p> <p>The New Document feature is enabled by default. Users can create new documents using the Zimbra tool. You can disable this features in COS or Accounts Feature tabs, Briefcase Features section.</p>	Features

Other Configuration Settings for Accounts

Other configuration options include:

- Enabling the Sharing feature that allows users to share items with other users
- Disabling Preferences for user accounts
- Setting the quota for accounts
- Setting the password policy and failed logon policy
- Setting account session length
- Enabling View Attachments settings
- Selecting ZWC UI theme to display

- Enabling Zimlets for accounts
- Disabling the user preferences for Import/Export.
- Specifying default behavior the appearance of a warning message when navigating from ZWC and the appearance of check boxes for items listed on the Content page for email and contacts

Enabling Sharing

When the Sharing feature is enabled, users can share any of their folders, including their mail folders, calendars, address books, task lists, and Briefcase folders.

Users specify the type of access permissions to give the grantee. They can share with internal users who can be given complete manager access to the folder, external guests that must use a password to view the folder content, and the public access so that anyone who has the URL can view the content of the folder.

When internal users share a mail folder, a copy of the shared folder is put in the grantee's folder list on the Overview pane. Users can manage their shared folders from their ZWC Preferences Sharing page. In this folder users see a list of folders that have been shared with them and folders that they have shared with others.

Managing Shared Items using Distribution Lists

When distribution lists are used to manage shared items, members of the distribution list are automatically granted rights to the shared item. Administrators manage the shares from the DL's Shares tab. All members of the list have the same share privileges that the grantee defined for the shared folder. When a member is removed from the distribution list, the share privileges associated with the DL are revoked.

Users must notify the administrator that they have shared a folder with the distribution list. When the administrator is notified, the administrator publishes the shared item in the Shares tab to make the shared item available to members of the DL. When a new shared is published, existing members of the DL are automatically notified of the new shared item.

New members added to the distribution list can be automatically notified about items that are shared with them. They can accept the shared item from their ZWC Preferences>Sharing page.

Disabling Preferences

Preferences is enabled by default. Users can modify the default preferences that are configured for their account. You can disable preferences and the Preferences tab does not display in users' mailboxes. They cannot change the default configuration for features that are set up for their accounts.

Setting Account Quotas

You can specify mailbox quotas and the number of contacts allowed for each account through the Zimbra administration console.

Account quota is the amount of space in megabytes that an account can use. The quota includes email messages, Calendar meeting information, task lists, files in Briefcase and RSS feed folders. When the quota is reached, all email messages are rejected and users cannot add files to their account. If you set the quota to 0, accounts do not have a quota. See Account Quota and the MTA on page 48

You can view mailbox quotas from the administration console, Monitoring, Server Statistics.

Users can be notified that their mailboxes are nearing their quota. The percentage threshold for quota notification can be configured. When this threshold is reached, a quota warning message is sent to the user. The quota percentage can be set and the warning message text can be modified in the Advanced tab settings for COS and Accounts.

The Address Book size limit field sets the maximum number of contacts a user can have across all of their address books. When the number is reached, users cannot add new contacts.

Setting Password Policy

If internal authentication is configured for the domain, you can configure ZCS to require users to create strong passwords.

Important: *If Microsoft Active Directory (AD) is used for user authentication, you must disable the Change Password feature in their COS. The AD password policy is not managed by Zimbra.*

The password settings that can be configured are listed below.

Feature Name	Description	COS/ Account Tabs
Minimum/Maximum password length	This specifies the required length of a password. The default minimum length is 6 characters. The default maximum length is 64 characters.	Advanced
Minimum / Maximum password age	Configuring a minimum and maximum password age sets the password expiration date. Users can change their passwords at any time between the minimum and maximum set. They must change it when the maximum password age is reached.	Advanced
Configuring the next settings will require users to create more complex passwords.		
Minimum upper case characters	Upper case A - Z	Advanced
Minimum lower case characters	Lower case a - z	Advanced
Minimum punctuation symbols	Non-alphanumeric, for example !, \$, #, &, %	Advanced
Minimum numeric characters	Base 10 digits 0 - 9	Advanced
Minimum number of unique passwords history	Number of unique new passwords that a user must create before he can reuse an old password.	Advanced
Password locked	Users cannot change their passwords. This should be set if authentication is external.	Advanced
Must change password	When a user logs in, he is required to change his password.	General Information
Change password	When this is enabled, users can change their password at any time within the password age settings from their account Preferences tab.	Features

Setting Failed Login Policy

You can specify a policy that sets the maximum number of failed login

attempts before the account is locked out for the specified lockout time. This type of policy is used to prevent password attacks.

Feature Name	Description	COS/ Account Tabs
Enable failed login lockout	When this box is checked, the “failed login lockout” feature is enabled and you can configure the following settings.	Advanced
Number of consecutive failed logins allowed	The number of failed login attempts before the account is locked out. The default is 10 attempts. If this is set to 0, an unlimited number of failed log in attempts is allowed. This means the account is never locked out.	Advanced
Time to lockout the account	The amount of time in seconds, minutes, hours, or days the account is locked out. If this is set to 0, the account is locked out until the correct password is entered, or the administrator manually changes the account status and creates a new password. The default is 1 hour.	Advanced
Time window in which the failed logins must occur within to lock the account	The duration of time in seconds, minutes, hours, or days after which the number of consecutive failed login attempts is cleared from the log. The default is 0, the user can continue attempts to authenticate, no matter how many consecutive failed login attempts have occurred.	Advanced

Setting Session Timeout Policy

You can set how long a user session should remain open and when to close a session because the session is inactive,

Feature Name	Description	COS/ Account Tabs
Admin console autho token lifetime	Auth token lifetime sets a browser cookie that contains the auth token. Administrators can open the administration console without having to log on again until the auth token expires. The default is 12 hours.	Advanced
Auth token lifetime	Auth token lifetime sets a browser cookie that contains the auth token. User can open ZWC without having to log on again until the auth token expires. The default is 2 days. When it expires, the log in page is displayed and the user must log in to continue.	Advanced
Session idle lifetime	Session idle lifetime sets how long a user session remains active, if no activity occurs. Activity includes any clickable mouse action, such as viewing contents of a folder or clicking a button. The default is 2 days.	Advanced

You can manually expire a user's web client session from the administration console Expire Sessions link. This forces the current session of the account to expire immediately.

Setting Email Retention Policy

The email retention policy for email, trashed and spam messages is set by COS. When the message purge function runs is set by the message purge command.

Feature Name	Description	COS/ Account Tabs
Email message lifetime	Number of days a message can remain in any folder before it is automatically purged. This includes data in RSS folders. The default is 0; email messages are not deleted. The minimum configuration for email message lifetime is 30 days.	Advanced
Trashed message lifetime	Number of days a message remains in the Trash folder before it is automatically purged. The default is 30 days.	Advanced
Spam message lifetime	Number of days a message can remain in the Junk folder before it is automatically purged. The default is 30 days.	Advanced

The server manages the message purge schedule. You configure the duration of time that the server should “rest” between purging mailboxes from the administration console, Global settings or Server settings, General tabs. By default, message purge is scheduled to run every 1 minute.

For example, when the purge interval is set to 1 minute, after mailbox1 is purged of messages that meet the message lifetime setting, the server waits 1 minute before beginning to purge mailbox2.

If the message purge schedule is set to 0, messages are not purged even if the mail, trash and spam message life time is set.

Note: *Because users cannot see these message lifetime settings, if you set a purge limit, make the purge policy known to your users.*

Zimbra Web Client UI Themes

The appearance of the Zimbra Web Client user interface can be changed. A number of Zimbra themes are included with ZCS, and you can create others. You can select a theme to be the default and the themes that users can select from to customize their user experience.

Note: *To learn more about themes, go to the [Rebranding and Themes section](#) of the Zimbra Wiki.*

Change UI themes	When this is enabled, users can select different UI themes to display ZWC. Select the theme types that are available from the Themes tab.	Features
------------------	-------------------------------------------------------------------------------------------------------------------------------------------	----------

The following theme usage options can be configured either from COS or by individual accounts:

- **Limit users to one theme.** On the Features tab, remove the check mark from **Change UI Themes**. The ZWC theme is the theme listed in **Current UI theme** field on the Themes tab.
- **Let users access any of the installed Zimbra themes.** If the **Change UI Themes** is checked, users can access any of the themes that are listed in the **Available UI themes** list.

Configuring Zimlets for Accounts

Zimlets™ is a mechanism for integrating and extending the functionality of the Zimbra Collaboration Suite with third party information systems and content.

Zimlets that are deployed on the ZCS servers are listed in the administration console Configuration>Zimlets section. Zimlets can be deployed and undeployed from here. See [Chapter 10, Managing Zimlets](#) for how to install and deploy Zimlets.

When a Zimlet is deployed, it is immediately available to everyone in the default COS. If a Zimlet is not deployed to another COS directly, the COS displays the Zimlets but they are not enabled.

You can set access privileges to Zimlets by COS, by account, and by domain.

The Zimlet tab displays all Zimlets that are deployed and shows the status of the Zimlet:

- **Enabled.** All Zimlets that are deployed are enabled. Users can disable a Zimlet from their account's Preferences>Zimlet page.
- **Mandatory.** If you want a Zimlet to always be enabled in users' accounts, select **mandatory**. Users do not see these Zimlets on their Zimlet page.
- **Disabled.** If you do not want a Zimlet immediately available to users in this COS, you can disable the Zimlet. Users can enable a Zimlet from their account's Preferences>Zimlet page.

ZCS includes pre configured Zimlets that enhance the user experience while working in the Zimbra Web Client. These Zimlets are already deployed and enabled in the default COS. See [Chapter 10, Managing Zimlets](#).

Other Account Configuration Preferences

The following preferences can be set up:

- **Display a warning when users try to navigate away from Zimbra.** It is easy for users to click the Back and Forward arrows in the browser or close their browser without logging out of their account. If this preference is not checked, users are asked if confirm that they want to navigate away from there account. If this preference is checked, the question is not asked.
- **Show selection checkbox for selecting email and contact items in a list view for batch operation.** If this is enabled, when users view email messages or contacts in the Content pane, a check box displays for each item. Users can select items from the Content pane and then perform an action such as mark as read/unread, move to a specific folder, drag and drop to a folder, delete, and tag for all those selected items. A checkbox in the toolbar lets users select all items in the Content pane at once.

Preferences Import/Export. The Preferences Import/Export tab lets users export all of their account data, including mail, contacts, calendar, tasks, and Briefcase folders. They can export specific items in their account and save the data to their computer or other location. The account data is saved as a tar-gzipped (tgz) archive file so that it can be easily imported to restore their account. Individual contacts are saved as .csv files, and individual calendar files are saved as .ics files. The data are not removed from their accounts. The exported account data file can be viewed with an archive program such as WinRAR archiver. Any of these files can be imported into their account from the same tab.

If you do not want users to the Import/Export capability, you can disable the feature from the COS or Admin Features tab.

Chapter 10 Managing Zimlets

This chapter describes how to deploy, configure, and manage Zimlets™ on the Zimbra server.

Topics in this chapter include:

- ◆ [Overview of Zimlets](#)
- ◆ [Accessing Zimlets](#)
- ◆ [Deploying Zimlets](#)
- ◆ [Enabling, Disabling, or Making Zimlets Mandatory](#)
- ◆ [Undeploying Zimlets](#)
- ◆ [Configuring Zimlets](#)
- ◆ [Viewing Zimlet Status](#)
- ◆ [Upgrading a Zimlet](#)

Overview of Zimlets

Zimlets were created as a mechanism to integrate ZCS with different third-party applications to enhance the user experience from the Zimbra Web Client. When Zimlets are added to the ZCS, users can look at information and interact with the third-party applications from within their email messages.

With Zimlets, arbitrary message content can be made live by linking it with Web content and services on intranets or the Internet. Mousing over actionable content gives the user a real-time preview (subject to security constraints) that can be factored in decision making. For example, various Zimlets can be enabled to let users preview the following:

- Mouse over a date or time and see what is in calendar.
- Mouse over a name or email address and see details from the address book for this name.
- Right-click on a phone number to make a call with your soft-phone.
- Right-click on a date to schedule a meeting.
- Right-click on a name, address, or phone number to update address book information.

Several pre-defined Zimlets are included with ZCS and you can create other Zimlets so that users can interact with your company resources or other defined applications from the Zimbra Web Client.

For more detailed information about creating Zimlets, see the Zimlet Development section on the Zimbra Wiki.

Accessing Zimlets

Zimlets are available from the following sources:

- [Default Zimlets included in ZCS](#)
- [Zimlets from the Library or Gallery](#)
- [Developing Customized Zimlets](#)

Default Zimlets included in ZCS

ZCS includes preconfigured Zimlets when installed. You select which default Zimlets to enable, disable or make mandatory, as described in [Enabling, Disabling, or Making Zimlets Mandatory on page 128](#).

The following is a list of default Zimlets included in your ZCS installation.

Zimlet	Description
Attach Contacts	Allows attaching contacts when composing a new message.
Email Attacher	Attach email messages when composing a new message.
Date	Highlights dates, previews associated appointments and creates a link to the calendar.
Drag-n-Drop Attachments	Provides ability to drag-n-drop file attachments when composing an email message.
Email Contact Details	Highlights and previews associated contact details for an email address.
LinkedIn	Hooks on to email Zimlet; shows LinkedIn search result for a given email.
Phone Reverse Lookup	Hooks on to email Zimlet; does a Reverse-lookup of a Voicemail email address.
Social	Access social services like Twitter, Facebook, Digg and TweetMeme from Zimbra.
Search Highlighter	After a mail search, this Zimlet highlights Search terms with yellow color.

URL Links	Highlights Web URLs for linking in email messages.
WebEx	Easily schedule, start or join WebEx meetings.

Some of these Zimlets do not appear in the navigation pane list but come into play by enhancing the user experience when users use certain ZWC features, such as the Email Attacher and URL Links. Other Zimlets, such as LinkedIn and WebEx Zimlets display in the navigation pane.

Zimlets from the Library or Gallery

In addition to the default Zimlets included in your ZCS installation, you can also download and deploy Zimlets from the Zimlet Gallery, which is located on the Zimbra web site.

See [Deploying Zimlets on page 125](#) for more information on how to deploy Zimlets.

Developing Customized Zimlets


For information about how to develop your own custom Zimlets, see the [Zimlet Developers Guide](#) on the [Zimbra Wiki](#). This is an extensive guide which shows you how to set up your development environment, create a basic Zimlet and learn the principles of building, debugging and deploying a Zimlet.

Deploying Zimlets

When a Zimlet is deployed, it is immediately available to everyone in the default COS. If a Zimlet is not deployed to another COS directly, the COS displays the Zimlets but they are not enabled. You can deploy Zimlets from the Admin console or the CLI, as described in this section.

Deploying a Zimlet from the Admin console

1. From the **Configuration>Zimlets** view, click **Deploy**. The **Deploying a zimlet or an extension** view displays.
2. Browse to the Zimlet zip file you want to upload and deploy. Click **Deploy**. In the example below, we are deploying `com_zimbra_apptsummary.zip`.
3. The Zimlet deploys to the server. A dialog displays indicating the server name where the Zimlet is deployed and the status of the deployment.
4. Verify the Zimlet is enabled by viewing the Zimlets page in the Admin console.

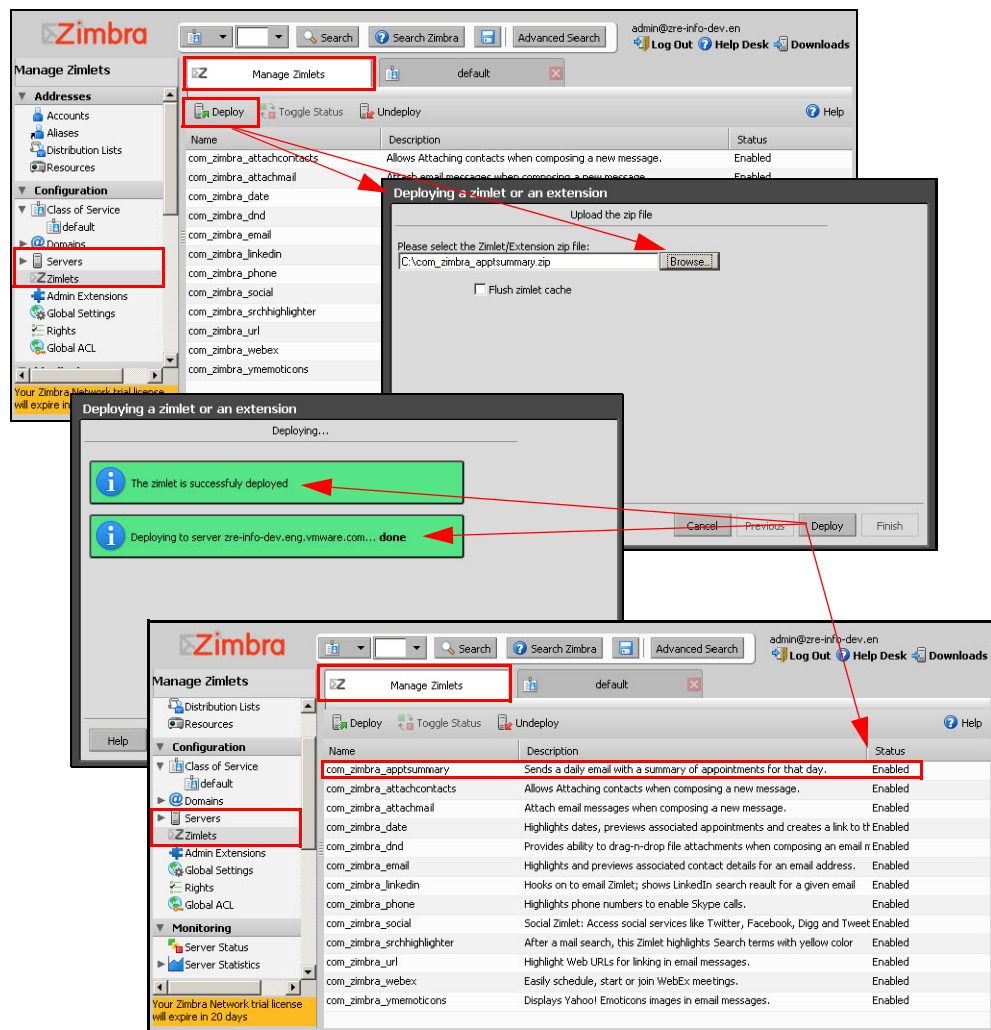

Deploying a Zimlet from the CLI


You can deploy Zimlets from the CLI, including first modifying the COS before deploying to the default COS, or granting access to a COS other than the default COS.

1. Copy the Zimlet zip file to your Zimbra server.
2. Login as zimbra user:
`su - zimbra`
3. Run the following command to deploy your zimlet:
`zmzimletctl deploy /tmp/<zimlet>.zip`

Adding Proxy Allowed Domains to a Zimlet

1. From the **Configuration>default** view, click the **Advanced** tab.

2. Scroll down to the **Proxy Allowed Domains** section.
3. Add or remove domain names.

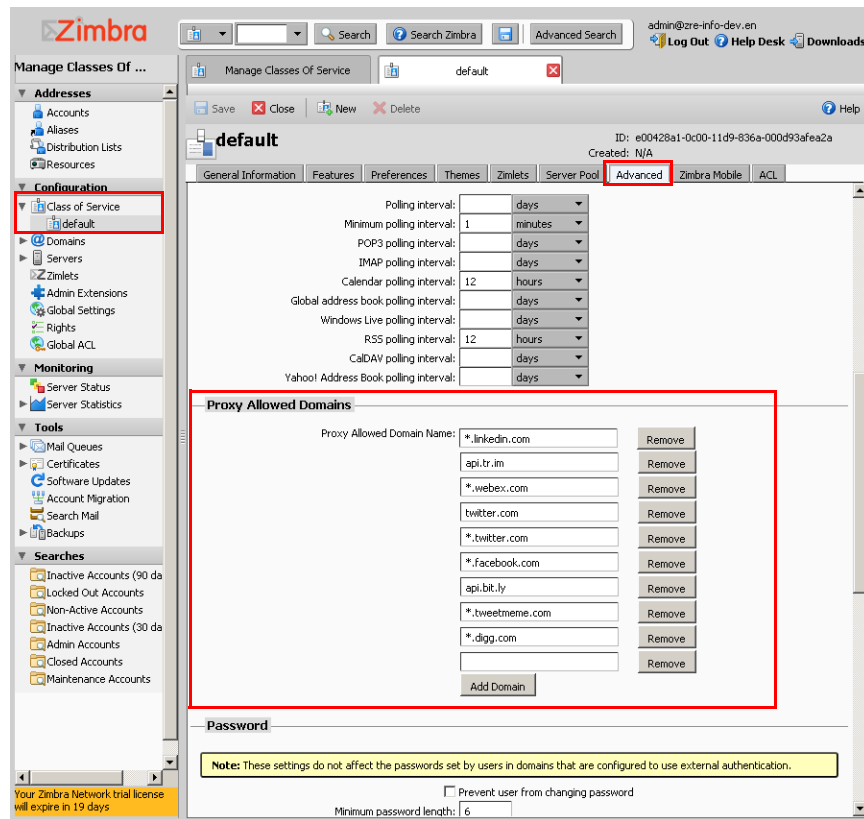

Modifying COS before Deploying Zimlets

When deploying a Zimlet, the COS attribute, **zimbraProxyAllowedDomains** must be set for the domain address that the Zimlet might call to get information.

1. To set this attribute, type:

```
zmprov mc <COSname> +zimbraProxyAllowedDomains <*. domain.com>
```

The * must be added before the domain.com.

This must be applied to all COSs that have your Zimlet enabled.

2. To deploy, type the following command

```
zmzimletctl deploy <zimlet.zip file name>
```

The Zimlet is copied to the **/opt/zimbra/zimlets-deployed** directory. If your Zimlet included a .jsp file, the .jsp file is copied to the **/opt/zimbra/jetty/webapps/zimlet/<zimletnamefolder>**.

This deployment creates the Zimlet entry in the LDAP server, installs the Zimlet files on the server, grants access to the members of the default COS, and enables the Zimlet.

To deploy a Zimlet and grant access to a COS other than the default COS

To deploy a Zimlet to one or more COSs other than default, first install the Zimlet, then adjust the ACL on the COSs.

1. Copy the Zimlet zip file to the `/opt/zimbra/zimlets-extra` directory.
2. To add the Zimlet to other COSs and grant access, type

```
zmzimletctl acl <zimletname> <cosname1> grant
```

You can grant access to more than one COS on the same command line. Enter as `zmzimletctl acl <zimletname> <cosname1> grant <cosname2> grant`

Note: To turn off access to Zimlets in the default COS, type
`zmzimletctl acl <zimletname> default deny`

Enabling, Disabling, or Making Zimlets Mandatory

You can enable or disable Zimlets, or make them mandatory. You can also use the toggle feature to enable or disable an installed Zimlet. This feature can be managed using the Admin console or the CLI.


Default Zimlets

From the **Class of Service>default** view, select which default Zimlets you want to enable, disable, or make mandatory as described below. Default Zimlets do not require any configuration to work.

- **Mandatory.** If you want a Zimlet to be mandatory and always enabled in users' accounts, select mandatory. Users do not see these Zimlets on their Zimlet page.
- **Disabled.** If you do not want a Zimlet immediately available to users in this COS, you can disable the Zimlet. Users can enable a Zimlet from their account's Preferences>Zimlet page.
- **Enabled.** All Zimlets that are deployed are enabled. Users can disable a Zimlet from their account's Preferences>Zimlet page.

Note: Users can only enable or disable Zimlets which are optional. If you select a Zimlet to be mandatory, it cannot be disabled by the user.

Note: Default Zimlets cannot be removed from ZCS.

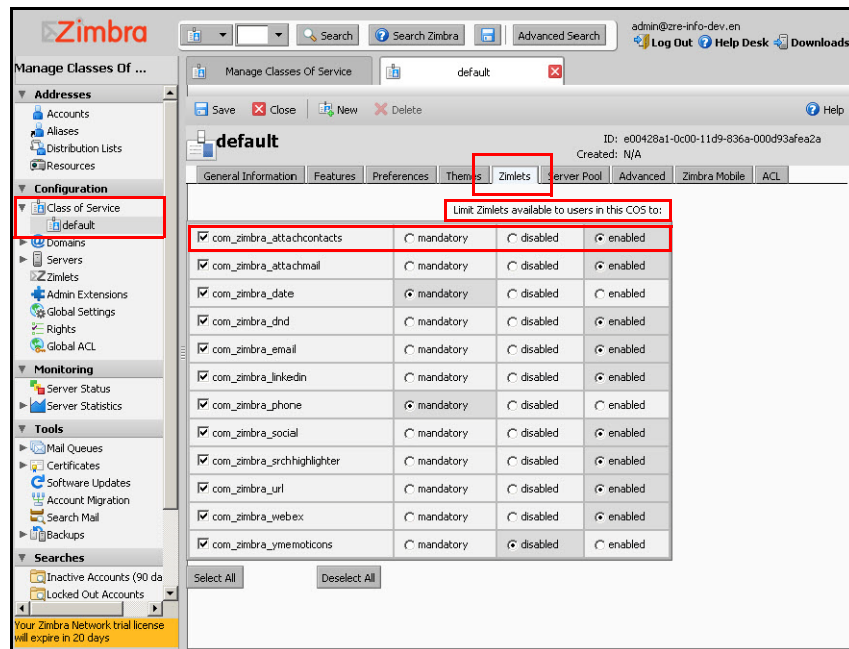


Toggle a Zimlet between Enabling and Disabling

You can easily switch a Zimlet status from Enabled to Disabled by using the **Toggle Status** button located on the Manage Zimlets toolbar.

To toggle a Zimlet status:

1. On the Admin console navigation pane, select **Zimlets**.
2. On the Managing Zimlets view, select the Zimlet you want to change from Enabled to Disabled, or vice versa.
3. Click the **Toggle Status** button. The status is now changed for the Zimlet.

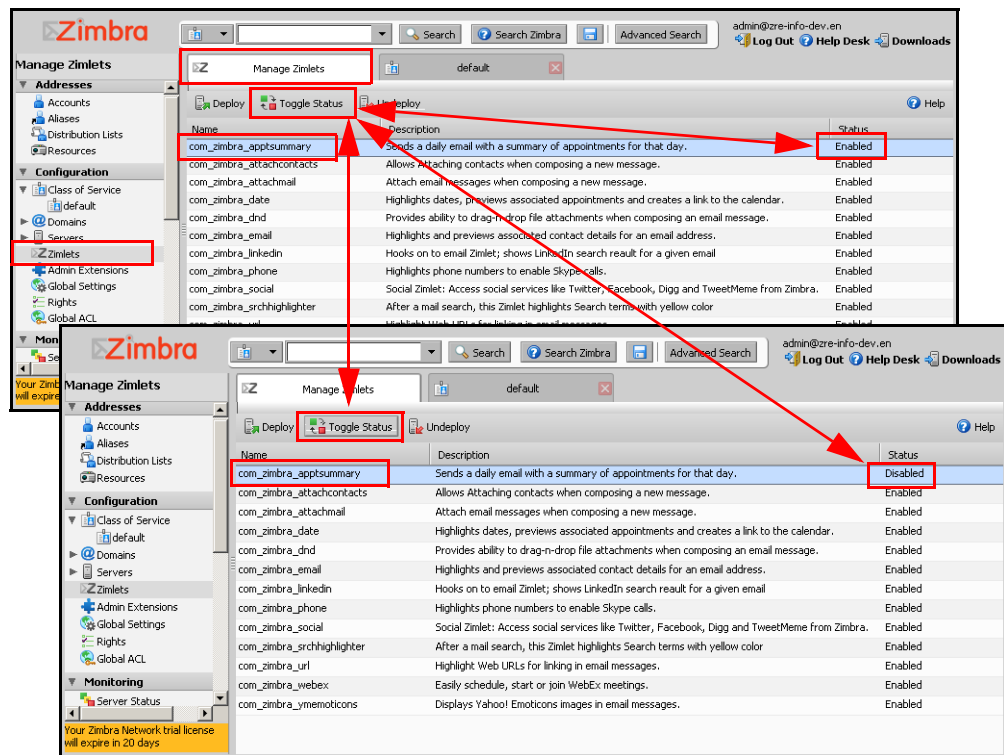

Disabling a Zimlet using the CLI

You can turn off access to a Zimlet from a COS or disable the Zimlet from the server using the CLI.

To turn off access from a COS

Type `zmzimletctl acl <zimletname> <cosname> deny`

To disable a Zimlet on the Zimbra server

Type `zmzimletctl disable <zimletname>`

Note: To enable a disabled Zimlet, type `zmzimletctl enable <zimletname>`


Undeploying Zimlets

When a Zimlet is undeployed from the server, it is removed from all COSs and then removed from the LDAP. You can undeploy a Zimlet using the Admin console or the CLI.

Important: Only remove your custom Zimlets. You should not remove Zimlets that are included in the Zimbra Collaboration Suite. If you do not want to have the Zimbra Zimlets available, disable them.

To undeploy a Zimlet using the Admin console

1. On the Admin console navigation pane, select **Zimlets**.
2. On the Managing Zimlets view, select the Zimlet you want to undeploy and click the Undeploy button.
3. A confirmation dialog displays. Click **Yes** to confirm you want to undeploy the selected Zimlet.
4. The Zimlet is removed. You can confirm by viewing the Zimlet list on the Manage Zimlets view.

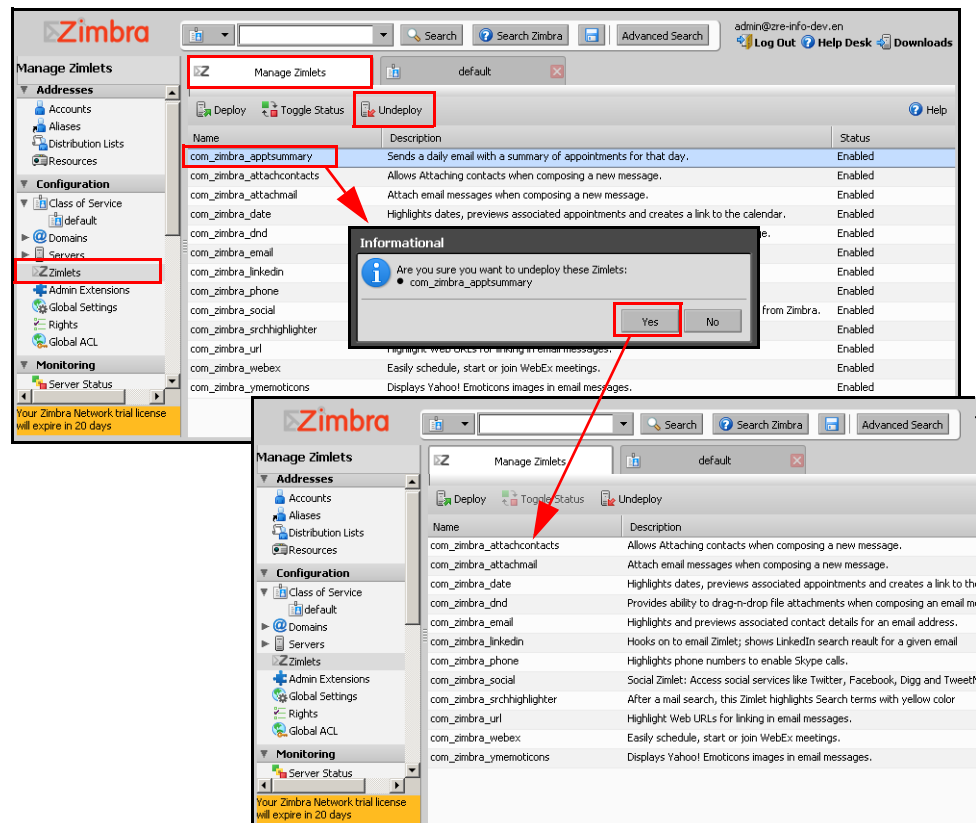

To undeploy a Zimlet using the CLI

Type `zmzimletctl undeploy <zimletname>`

The Zimlet and all associated files are uninstalled.

Remove the Zimlet file from `/opt/zimbra/zimlets`

Configuring Zimlets

Some Zimlets may require additional configuration after they are deployed to configure additional information. Your developer will let you know if this is necessary.

The Zimlet configuration template allows you to make changes on the configuration template and then install the new configuration file on the Zimbra server.

See the [Zimlet Development section on the Zimbra Wiki](#), including the [Zimlet Developers Guide](#) for details about developing and deploying Zimlets.

To change Zimlet configurations

1. To extract the configuration template, type

`zmzimletctl getConfigTemplate <zimlet.zip>`

The `config_template.xml` is extracted from the Zimlet. zip file.

2. Make the required changes in the template. Be careful to only change the required areas. Save the file.

Note: *If you have more than one custom Zimlet, you should rename the `config_template.xml` file before updating the configuration in LDAP so that files are not overwritten.*

3. Type the following command to update the configuration in the LDAP. If you changed the name of the configuration template, replace `config_template.xml` with the new name.


`zmzimletctl configure config_template.xml`

Viewing Zimlet Status

You can view a list of Zimlets that are installed on the Zimbra server, and which are enabled or disabled on the LDAP server, from the Admin console or from the CLI.

To view Zimlet status using the Admin console

From the Admin console, the Zimlet tab displays all Zimlets that are deployed and shows the status of the Zimlet:

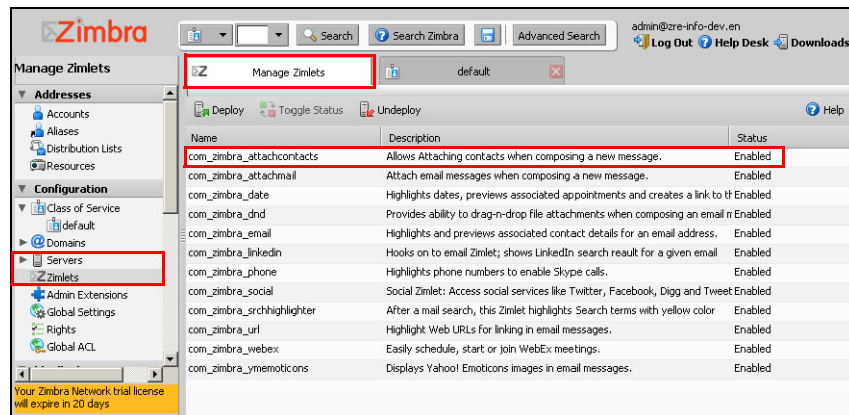

To view Zimlet status using the CLI

At the CLI command prompt, enter

- **zmzimletctl listZimlets** to view the status of installed Zimlet files. This displays Zimlets installed on the server, Zimlets installed in LDAP and Zimlets available by COS, or
- **zmzimletctl listZimlets all** to view a list of all Zimlets that are on the server and their status.

Upgrading a Zimlet

Upgrading a customized Zimlet is performed by using the same steps as deploying a new Zimlet.

To upgrade a Zimlet

1. The Zimlet zip files should have the same name. Copy the Zimlet zip file to the **/opt/zimbra/zimlets-extra** directory, replacing the older version.
2. To deploy, type the following command

```
zmzimletctl deploy <zimlet.zip file name>
```

The Zimlet is copied to the **/opt/zimbra/zimlets-deployed** directory. If your Zimlet included a .jsp file, the .jsp file is copied to the **/opt/zimbra/jetty/webapps/zimlet/<zimletnamefolder>**.

3. In order for the newer version to be available, flush the cache. From the Admin console, select the server and click **Flush cache**. On the Flush server cache dialog, make sure that there is a check next to **Flush zimlet cache**.

To flush the cache from with command line, **zmprov flushCache zimlet**.

You do not enter the Zimlet name.

Chapter 11 Monitoring Zimbra Servers

The Zimbra Collaboration Suite includes the following to help you monitor the Zimbra servers, usage, and mail flow:

- Zimbra Logger package to capture and display server statistics and server status, and to create nightly reports
- Mailbox quota monitoring
- MTA mail queue monitoring
- Log files

Also, selected error messages generate SNMP traps, which can be monitored using an SNMP tool.

Topics in this chapter include:

- ◆ [Zimbra Logger](#)
- ◆ [Monitoring Disk Space](#)
- ◆ [Monitoring Servers](#)
- ◆ [Monitoring Mail Queues](#)
- ◆ [Monitoring Mailbox Quotas](#)
- ◆ [Monitoring Authentication Failures](#)
- ◆ [Log Files](#)
- ◆ [Reading a Message Header](#)
- ◆ [SNMP](#)
- ◆ [Checking MySQL](#)
- ◆ [Checking for Latest ZCS Software Version](#)

Note: *Checking the overall health of the system as a whole is beyond the scope of this document.*

Zimbra Logger

Zimbra-Logger includes tools for syslog aggregation and reporting. Installing the Logger package is optional, but if you do not install Logger, Server Statistics and Server Status information is not captured.

In environments with more than one Zimbra server, Logger is enabled on only one mailbox server. This server is designated as the monitor host. The Zimbra monitor host is responsible for checking the status of all the other Zimbra servers and presenting this information on the Zimbra administration console. Real-time service status, MTA, spam, virus traffic and performance statistics can be displayed.

Note: *In a multi-server installation, you must set up the syslog configuration files on each server to enable logger to display the server statistics on the administration console, and you must enable the logger host. If you did not configure this when you installed ZCS, do so now.*

To enable Server Statistics:

1. On each server, as root, type `/opt/zimbra/bin/zmsyslogsetup`. This enables the server to display statistics.
2. On the logger monitor host, you must enable **syslog** to log statistics from remote machines.
 - a. Edit the `/etc/sysconfig/syslog` file, add `-r` to the `SYSLOGD_OPTIONS` setting, `SYSLOGD_options="-r -m 0"`
 - b. Stop the syslog daemon. Type `/etc/init.d/syslogd stop`.
 - c. Start the syslog daemon. Type `/etc/init.d/syslogd start`.

Note: *These steps are not necessary for a single-node installation.*

Enabling Remote Syslogging on Mac OS X

To enable remote syslogging on Mac OS X

1. Back up the daemon file to the desktop. Type

```
sudo cp /System/Library/LaunchDaemons/com.apple.syslogd.plist ~/Desktop/
```
2. Edit the list using the nano Unix editor. Type

```
sudo nano /system/Library/LaunchDaemons/com.apple.syslogd.plist
```
3. Scroll down to this line

```
<string>/usr/sbin/syslogd</string>
```

Add the following directly below this line

```
<string>-u</string>
```


4. Save and exit.
5. Stop and start the daemon. Type


```
sudo launchctl unload /System/Library/LaunchDaemons/com.apple.syslogd.plist
sudo launchctl load /System/Library/LaunchDaemons/com.apple.syslogd.plist
```

Reviewing Server Status

The **Server Status** page lists all servers and services, their status, and when the server status was last checked. The servers include the MTA, LDAP, and mailbox server. The services include MTA, LDAP, Mailbox, SNMP, Anti-Spam, Anti-Virus, Spell checker, and Logger.

To start a server if it is not running, use the **zmcontrol** CLI command. You can stop and start services from the administration console, **Servers>Services** tab.

Server Performance Statistics

If the Zimbra-logger package is installed on a Zimbra mailbox server. Server Statistics shows bar graphs of the message count, message volume, anti-spam, and anti-virus activity. The information is displayed for the last 48 hours, and 30, 60, and 365 days.

When Server Statistics is selected in the Navigation pane, consolidated statistics for all mailbox servers is displayed. Selecting a specific server in the expanded view shows statistics for that server only. Server specific information also includes disk usage, session information, and mailbox quota details.

The following tabs display system-wide information:

- **Message Count** counts message transactions. A transaction is defined as either the SMTP receipt of a message per person (by Postfix) or a LMTP delivery of it (by mailboxd) per person. For example, if a message is sent to three people, six transactions are displayed. Three for SMTP to Postfix and three for LMTP to mailboxd. The message count is increased by six.
- **Message Volume** displays the aggregate size in bytes of transactions sent and received per hour and per day. Graphs show the total inbound data by volume in bytes.
- **Anti-Spam/Anti-Virus Activity** displays the number of messages that were checked for spam or viruses and the number of messages that were tagged as spam or deemed to contain a virus. The AS/AV count is increased by one per message scanned. One message sent to three people counts as only one message processed by AS/AV.

The Message Count and the Anti-spam/Anti-virus Activity graphs display a different message count because:

- Outbound messages may not go through the Amavisd filter, as the system architecture might not require outbound messages to be checked.

- Message are received and checked by Amavisd for spam and viruses before being delivered to all recipients in the message. The message count shows the number of recipients who received messages.
- The Advanced Statistics tab is used to generate

Server-specific statistics also include the following tabs:

- **Disk** for a selected server displays the disk used and the disk space available. The information is displayed for the last hour, day, month, and year.
- **Session** displays information about the active Web client, administrator and IMAP sessions. You can see how many active sessions are opened, who is logged on, when the session was created and the last time the session was accessed.
- **Mailbox Quota** displays information about each account sorted by mailbox size in descending order. See [Monitoring Mailbox Quotas on page 141](#).

Generating Daily Mail Reports

When the Logger package is installed, a daily mail report is automatically scheduled in the crontab. The Zimbra daily mail report includes the following information:

- Errors generated from the Zimbra MTA Postfix logs
- Total number of messages that moved through the Zimbra MTA
- Message size information (totals and average bytes per message)
- Average delay in seconds for message delivery
- Total number of bounced deliveries
- Most active sender accounts and number of messages
- Most active recipient accounts and number of messages

The report runs every morning at 11:30 p.m. and is sent to the administrator's email address.

You can configure the number of accounts to include in the report. The default is 25 sender and 25 recipient accounts.

To change the number of recipients to add to the report, type:

```
zmlocalconfig -e zimbra_mtareport_max_recipients=<number>
```

To change the number of senders to add to the report, type:

```
zmlocalconfig -e zimbra_mtareport_max_senders=<number>
```

Monitoring Disk Space

You should regularly review your disks capacity and when disks are getting full you should take preventative measures to maintain service. To alert administrators of low disk space, an email notification is sent to the admin account. The default is to send out warning alerts when the threshold reaches 85% and a critical alert when the threshold reaches 95%.

You can change these values. Use `zmlocalconfig` to configure the disk warning thresholds.

- Warning alerts: **zmdisklog_warn_threshold**
- Critical alert: **zmdisklog_critical_threshold**

When starting services with `zmcontrol`, if the threshold is exceeded, a warning is displayed before the services are started. You should clean up your disk to free up space.

Monitoring Servers

The ZCS server collects many performance-related statistics that can help you diagnose problems and load issues.

The **Server Statistics Advanced Statistics** tab includes advanced graphing options that lets you generate various charts based on statistical information for the CPU, IO, mailboxd, MTA queue, MySQL and other components.

To chart the graphics in the Server Statistics Advanced Statistics tab, select one of these groups and then select from the list of specific counters for the type of information to display.

The information covers a wide array of data:

- **cpu.csv**: CPU utilization. This group contains counters to keep track of CPU usage (iowait, idle, system, user, time etc.). CPU information can be tracked both at the server level and the process level.
- **df.csv**: Captures disk usage. Disk utilization is tracked for each disk partition.
- **fd.csv**: file descriptor count. Keeps track of system file descriptor usage over time. This is primarily used to track down “out-of-file descriptor” errors.
- **mailboxd.csv**: ZCS server and JVM statistics. Mailboxd stores almost all of its statistics here. Interesting numbers to keep track of are `heap_used`, `heap_free`, `imap_conn`, `soap_sessions`, `pop_conn`, `db_conn_count`.
- **mtaqueue.csv**: Postfix queue. This measures the mail queue size in number of messages and the size in bytes.
- **proc.csv**: Process statistics for Zimbra processes. For example mailboxd/ java, MySQL, OpenLDAP, etc.)
- **soap.csv**: SOAP request processing time.


- **threads.csv**: JVM thread counts. Counts the number of threads with a common name prefix.
- **vm.csv**: Linux VM statistics (from the `vmstat` command).
- **io-x.csv** and **io.csv** store data from the `iostat(1)` command (`io-x.csv` with `iostat -x`).

You can also use **zmstats** CLI to view performance metrics and statistics. The CLI, `zmstat-chart`, can be used to generate charts from the `.csv` data. The data is read from the `.csv` files in `/opt/zimbra/zmstat/<date>`. Files created with `zmstats-chart` are in a standard CSV format that can be loaded into Excel for viewing and charting. See the Zimbra wiki article, [Zmstats](#).

Monitoring Mail Queues

If you are having problems with mail delivery, you can view the mail queues from the administration console Monitoring Mail Queues page to see if you can fix the mail delivery problem. When you open mail queues, the content of the Deferred, Incoming, Active, Hold, and Corrupt queues at that point in time can be viewed. You can view the number of messages and where they are coming from and going to. For description of these queues, see [Zimbra MTA Message Queues on page 52](#).

Mail Queue Page

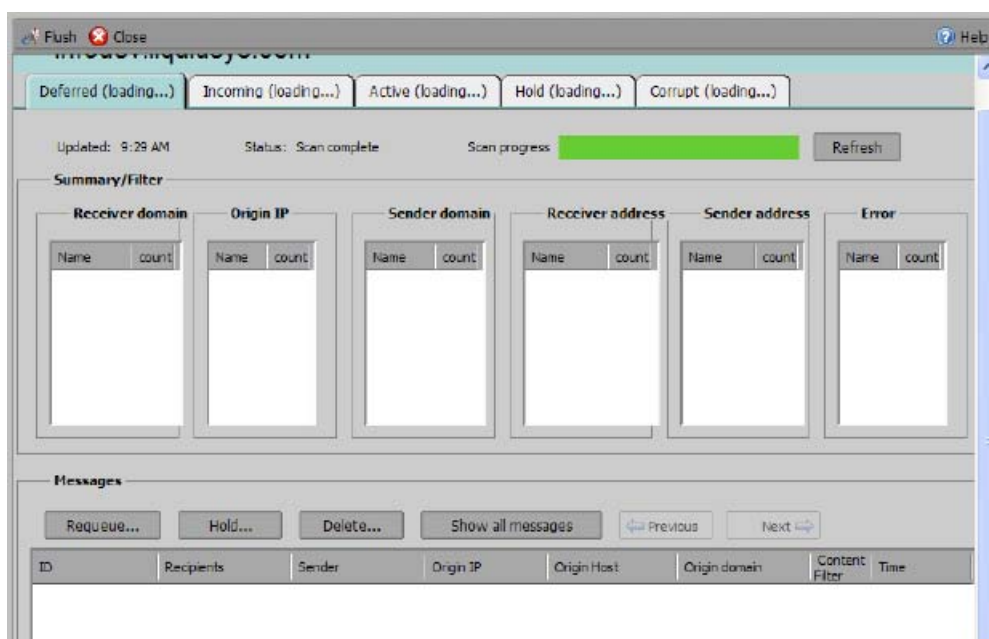

For each queue, the Summary pane shows a summary of messages by receiver domain, origin IP, sender domain, receiver address, sender address, and for the Deferred queue, by error type. You can select any of the summaries to see detailed envelope information by message in the Messages pane.

The Messages pane displays individual message envelope information for search filters selected from the Summary pane.

The following Mailbox Queue functions can be performed for all the messages in a queue:

- **Hold**, to move all messages in the queue being viewed to the Hold queue. Messages stay in this queue until the administrator moves them.
- **Release**, to remove all message from the Hold queue. Messages are moved to the Deferred queue.
- **Requeue** all messages in the queue being viewed. Requeuing messages can be used to send messages that were deferred because of a configuration problem that has been fixed. Messages are re-evaluated and earlier penalties are forgotten.
- **Delete** all messages in the queue being viewed.

The Zimbra MTA, Postfix queue file IDs are reused. If you requeue or delete a message, note the message envelope information, not the queue ID. It is possible that when you refresh the mail queues, the queue ID could be used on a different message.

Flushing the Queues

In addition to moving individual messages in a specific queue, you can flush the server. When you click Flush on the Mail Queue toolbar, delivery is immediately attempted for all messages in the Deferred, Incoming and Active queues.

Monitoring Mailbox Quotas

Mailbox quotas apply to email messages, attachments, calendar appointments, tasks, and briefcase files in a user's account. When an account quota is reached all mail messages are rejected. Users must delete mail from their account to get below their quota limit, or you can increase their quota. This includes emptying their Trash.

You can check mailbox quotas for individual accounts from Server Statistics on the administration console. The Mailbox Quota tab gives you an instant view of the following information for each account:

- Quota column shows the mailbox quota allocated to the account. Quotas are configured either in the COS or by account.
- Mailbox Size column shows the disk space used
- Quota Used column shows what percentage of quota is used

From a COS or Account, you can configure a quota threshold that, when reached, triggers sending a warning message alerting users that they are about to reach their mailbox quota.

Monitoring Authentication Failures

To guard against simple password harvest attacks, a ZCS account authentication password policy can be configured to insure strong passwords and a failed login policy can be set to lockout accounts that fail to log in after the maximum number of attempts. These policies protect against targeted account attacks, but do not provide visibility into dictionary and distributed based attacks.

The `zmauditwatch` script attempts to detect these more advanced attacks by looking at where the authentication failures are coming from and how frequently they are happening for all accounts on a Zimbra mailbox server and sends an email alert to the administrator's mailbox.

The types of authentication failures checked include:

- **IP/Account hash check.** The default is to send an email alert if 10 authenticating failures from an IP/account combination occur within a 60 second window.
- **Account check.** The default is to send an email alert if 15 authentication failures from any IP address occur within a 60 second window. This check attempts to detect a distributed hijack based attack on a single account.
- **IP check.** The default is to send an email alert if 20 authentication failures to any account occur within a 60 second window. This check attempts to detect a single host based attack across multiple accounts.
- **Total authentication failure check.** The default is to send an email alert if 1000 auth failures from any IP address to any account occurs within 60 seconds. The default should be modified to be 1% of the active accounts on the mailbox server.

The default values that trigger an email alert are changed in the following `zmlocalconfig` parameters:

- IP/Account value, change `zimbra_swatch_ipacct_threshold`
- Account check, change `zimbra_swatch_acct_threshold`
- IP check, change `zimbra_swatch_ip_threshold`
- Total authentication failure check, change `zimbra_swatch_total_threshold`

Configure `zimbra_swatch_notice_user` with the email address that should receive the alerts.

Log Files

The Zimbra Collaboration Suite logs its activities and errors to a combination of system logs through the `syslog` daemon as well as Zimbra specific logs on the local file system. The logs described below are the primary logs that are used for analysis and troubleshooting.

Local logs containing Zimbra activity are in the `/opt/zimbra/log` directory.

- **audit.log.** This log contains authentication activity of users and administrators and login failures. In addition, it logs admin activity to be able to track configuration changes.
- **clamd.log.** This log contains activity from the antivirus application clamd.
- **freshclam.log.** This log contains log information related to the updating of the clamd virus definitions.
- **logger_myslow.log.** This slow query log consists of all SQL statements that took more than `long_query_time` seconds to execute. Note: `long_query_time` is defined in `/opt/zimbra/my.logger.cnf`.
- **mailbox.log.** This log is a mailboxd log4j server log containing the logs from the mailbox server. This includes the mailbox store, LMTP server, IMAP and POP servers, and Index server.
- **myslow.log.** This slow query log consists of all SQL statements from the mailbox server that took more than `long_query_time` seconds to execute. Note: `long_query_time` is defined in `/opt/zimbra/my.cnf`.
- **spamtrain.log.** This log contains output from `zmtrainasa` during regularly scheduled executions from the cron.
- **sync.log.** This log contains information about ZCS mobile sync operations.

Other logs include:

- **/opt/zimbra/jetty/logs/.** This is where Jetty-specific activity is logged.
- **/opt/zimbra/db/data.** `<hostname>.err`. This is the message store database error log.
- **/opt/zimbra/logger/db/data.** `<hostname>.err`. This is the Logger database error log.

ZCS activity logged to System syslog

- **/var/log/zimbra.log.** The Zimbra syslog details the activities of the Zimbra MTA (Postfix, amavisd, antispam, antivirus), Logger, Authentication (cyrus-sasl), and Directory (OpenLDAP). By default LDAP activity is logged to `Zimbra.log`.

Syslog

Zimbra modifies the systems syslog daemon to capture data from the mail and local syslog facility to **/var/log/zimbra.log**. This allows syslogd to capture data from several ZCS components including Postfix, Amavis, ClamAV, mailboxd, `zmmtaconfig`, and `logger`. The SNMP module uses the data from the log file to generate traps for critical errors. The `zmlogger` daemon also collects a subset of the data in this file to provide statistics on the utilization of ZCS via the administration console.

By default, mailboxd is configured to log its output to **/opt/ZCS/log/mailboxd.log**. You can enable mailboxd to take advantage of a centralized syslogd infrastructure by enabling the following either globally or by server


```
zmprov mcf zimbraLogToSysLog True
```

Using log4j to Configure Logging

The Zimbra server uses **log4j**, a Java logging package as the log manager. By default, the Zimbra server has **log4j** configured to log to the local file system. You can configure **log4j** to direct output to another location. Go to the Log4j website for information about using log4j.

Logging Levels

The logging level is set by default to include logs that are generated for INFO, WARNING, ERROR and FATAL. When problems start to occur, you can turn on the DEBUG or TRACE log levels.

To change the logging levels, edit the log4j properties, **log4j.properties**, **log4j.logger.zimbra**.

When enabling DEBUG, you can specify a specific category to debug. For example, to see debug details for POP activity, you would type **logger.zimbra.pop=DEBUG**.

To find the pre-defined cat

The following categories are pre-defined in log4j:

zimbra.account	Account operations
zimbra.acl	ACL operations
zimbra.backup	Backup and restore
zimbra.cache	In-memory cache operations
zimbra.calendar	Calendar operations
zimbra.dav	DAV operations
zimbra.dbconn	Database connection tracing
zimbra.extensions	Server extension loading
zimbra.filter	Mail filtering
zimbra.gal	GAL operations
zimbra.imap	IMAP protocol operations
zimbra.index	Index operations
zimbra.io	File system operations
zimbra.ldap	LDAP operations
zimbra.lmtp	LMTP operations (incoming mail)
zimbra.mailbox	General mailbox operations
zimbra.misc	Miscellaneous
zimbra.op	Changes to the mailbox state
zimbra.pop	POP protocol operations

zimbra.redolog	Redo log operations
zimbra.security	Security events
zimbra.session	User session tracking
zimbra.smtp	SMTP operations (outgoing mail)
zimbra.soap	SOAP protocol
zimbra.sqltrace	SQL tracing
zimbra.store	Mail store disk operations
zimbra.sync	Sync client operations
zimbra.system	Start-up/shutdown and other system messages
zimbra.wiki	Wiki operations
zimbra.zimlet	Zimlet operations
zimbra.mailop	Changes to mailbox state
zimbra.purge	Mailbox purge operations

Changes to the log level take affect immediately.

Table zimbra Logging Levels

Level	Local?	Syslog ?	SNMP Trap?	When Used
FATAL	Y	Y	Y	The FATAL level designates very severe error events that will lead the application to abort or impact a large number of users. For example, being unable to contact the MySQL database.
ERROR	Y	Y	N	The ERROR level designates error events that might still allow the application to continue running or impact a single user. For example, a single mailbox having a corrupt index or being unable to delete a message from a mailbox.
WARN	Y	N	N	The WARN level designates potentially harmful situations but are usually recoverable or can be ignored. For example, user log in failed.

* A few non-critical messages such, as service startup messages, will generate traps.

Level	Local?	Syslog ?	SNMP Trap?	When Used
INFO*	Y	N	N *	The INFO level designates information messages that highlights the progress of the application, basic transaction-level logging. For example, server start-ups, mailbox creation/deletion, account creation.
DEBUG	Y	N	N	Events that would generally be useful to help a customer debug problems.

* A few non-critical messages such, as service startup messages, will generate traps.


Reviewing mailbox.log Records

The mailbox.log file logs every action taken on the mailbox server, including authentication sessions, LMTP, POP3, and IMAP servers, and Index server. Review the mailbox.log to find information about the health of your server and to help identify problems.

Mailbox.log records valid and invalid login attempts, account activity such as opening email, deleting items, creating items, indexing of new mail, server activities including start and stop. The progress of an activity on the mail server is logged as INFO and if the expected results of the activity fails and errors occurs, an exception is written to the log.

Note: You can set up logging options for a single account in order to trace account activity for one user without filing up mailbox.log with log messages for unrelated accounts. See : [Appendix A Command-Line Utilities](#), `zmprov miscellaneous`.

Reading records in the log The example below is a record showing that on June 25, 2007, the zimbra server with an IP address of 127.0.0.1 was in the process of deleting backups that were created on Monday, June 18, 2007 at 8 seconds after midnight Pacific Daylight Time (PDT) or older than that date.

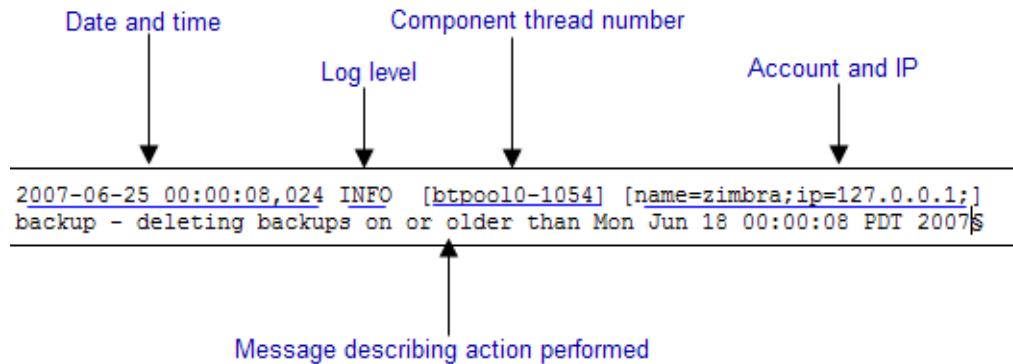

Note: ***Component thread number** identifies which thread managed by mailboxd is performing the action logged.*

Handler Exceptions and Stack Traces

If an error occurs during the progress of an activity, a handler exception is added to the end of the basic log record to notify you that an event occurred during the execution of the process that disrupted the normal flow. This signals that some type of error was detected.

```
007-06-25 00:00:10,379 INFO [btpool0-1064] [name=nriers@example.com;
mid=228;ip=72.255.38.207;ua=zimbra Desktop/0.38;] SoapEngine - handler
exception
```

Sometimes a stack trace is displayed after the exceptions notification. A stack logs the process in detail. A stack trace is a report of the threads and monitors in the zimbra's **mailboxd** service. This information aids in debugging, as the trace shows where the error occurred. The last few entries in the stack often indicate the origin of the problem. When the **caused by** descriptor is included in the log line, this is the root of the error. In the example below, the error was caused by 501, bad address syntax.

```
com.example.cs.mailbox.MailServiceException: Invalid address: Jon R
at com.example.cs.mailbox.MailServiceException.internal_SEND_FAILURE
(MailServiceException.java:412)
at com.example.cs.mailbox.MailServiceException.SEND_ABORTED_ADDRESS_
FAILURE MailServiceException.java:416)
.
.
.
at org.mortbay.thread.BoundedThreadPool$PoolThread.run(BoundedThread
Pool.java:442)
Caused by: com.example.cs.mailbox.MailSender$SafeSendFailedException
:501 Bad address syntax
; chained exception is:
com.sun.mail.smtp.SMTPAddressFailedException: 501 Bad address syntax
at com.sun.mail.smtp.SMTPTransport.rcptTo(SMTPTransport.java:1196)
at
com.sun.mail.smtp.SMTPTransport.sendMessage(SMTPTransport.java:584)
at javax.mail.Transport.send0(Transport.java:169)
at javax.mail.Transport.send(Transport.java:98)
at
com.example.cs.mailbox.MailSender.sendMessage(MailSender.java:409)
at
com.example.cs.mailbox.MailSender.sendMimeMessage(MailSender.java:26
2)
... 30 more
```

Mailbox log files

The mailbox.log files rotate daily. The mailbox log files are saved in **/opt/zimbra/log**. Previous mailbox.log file names include the date the file was made. The log without a date is the current log file. You can backup and remove these files.

mailbox.log examples

To review the mailbox.log for errors, search for the email address or the service that is experiencing the problem. Also, search for WARN or ERROR log levels, read the text of the message. When you find the error review the records, tracing the events that happened before the problem was recorded.

The following are examples of the three areas that can register exceptions, service, account and email.

Service Error - System Crashing

When your system crashes, look for the startup message and after finding that message, look for errors before the startup message date. This example shows an out-of-memory error on June 17, 2007.

```
2007-06-25 01:56:18,725 INFO [main] [] soap - Servlet SoapServlet
starting up
```

Look for errors before the startup message.

```
2007-06-17 20:11:34,194 FATAL [btpool0-3335]
[name=samd@example.com;aname=abcadmin@example.com;mid=142;ip=66.92.2
5.194;ua=zimbraConnectorForBES/5.0.207;] system - handler exception
java.lang.OutOfMemoryError: PermGen space
```

Mail Error - Mail Delivery problem

When you are looking for an error in mail delivery, start by looking for the “LmtpServer” service. This example includes a stack trace report with a **caused by** explanation that the recipient address was rejected as the address must be a fully-qualified address.

```

2007-06-25 10:47:43,008 INFO [LmtpServer-250]
[name=bigen@example.com;mid=30;msgid=<1291804360.35481182793659172.J
avaMail.root@dogfood.example.com>;] lmtp - rejecting message
bigen@example.com: exception occurred
com.zimbra.cs.mailbox.MailServiceException: redirect to too failed
at com.zimbra.cs.mailbox.MailServiceException.internal_SEND_FAILURE
(MailServiceException.java:412)
at com.zimbra.cs.mailbox.MailServiceException.SEND_FAILURE(MailServi
ceException.java:424)
at com.zimbra.cs.filter.zimbraMailAdapter.executeActions(zimbraMailA
dapter.java:286)
at org.apache.jsieve.SieveFactory.evaluate(SieveFactory.java:151)
at com.zimbra.cs.filter.RuleManager.applyRules(RuleManager.java:177)
at com.zimbra.cs.lmtpserver.zimbraLmtpBackend.deliverMessageToLocal
Mailboxes(zimbraLmtpBackend.java:325)
at com.zimbra.cs.lmtpserver.zimbraLmtpBackend.deliver(zimbraLmtpBack
end.java:140)
at com.zimbra.cs.lmtpserver.LmtpHandler.doDATA(LmtpHandler.java:441)
at com.zimbra.cs.lmtpserver.LmtpHandler.processCommand(LmtpHandler.
java:205)
at com.zimbra.cs.tcpserver.ProtocolHandler.processConnection(Protoc
olHandler.java:231)
at com.zimbra.cs.tcpserver.ProtocolHandler.run(ProtocolHandler.java
:198)
at EDU.oswego.cs.dl.util.concurrent.PooledExecutor$Worker.run(Unkn
own Source)
at java.lang.Thread.run(Thread.java:619)

```

```

Caused by: com.zimbra.cs.mailbox.MailSender$SafeSendFailedException:
504 <too>: Recipient address rejected: need fully-qualified address
; chained exception is:
com.sun.mail.smtp.SMTPAddressFailedException: 504 <too>: Recipient
address rejected: need fully-qualified address
at com.sun.mail.smtp.SMTPTransport.rcptTo(SMTPTransport.java:1196)
at
com.sun.mail.smtp.SMTPTransport.sendMessage(SMTPTransport.java:584)
at javax.mail.Transport.send0(Transport.java:169)
at javax.mail.Transport.send(Transport.java:120)
at
com.zimbra.cs.filter.zimbraMailAdapter.executeActions(zimbraMailAdap
ter.java:281)
... 10 more

```

Account Error- Log in error

Mailbox.log logs any successful or unsuccessful login attempts from IMAP, POP3 or ZWC. When you are looking for a login error, start by looking for "Auth." This example shows that someone from IP address 10.10.131.10 was trying to log in as admin on the Zimbra Web Client, using Firefox 2.0 in a Windows OS. Permission was denied because it was not an admin account.

```
2007-06-25 09:16:11,483 INFO [btpool0-251]
[ip=10.10.131.10;ua=zimbraWebClient - FF2.0 (Win);] SoapEngine -
handler exception
com.zimbra.common.service.ServiceException: permission denied: not
an admin account
at com.zimbra.common.service.ServiceException.PERM_DENIED(ServiceExc
eption.java:205)
at com.zimbra.cs.service.admin.Auth.handle(Auth.java:103)
```

Account Errors - IMAP or POP related

When you are looking for a log because of an IMAP or POP issue, look for “ImapServer/Pop3Server.” This example shows a fatal IMAP server error occurred while trying to connect siress@example.com.

```
mailbox.log.2007-06-19:2007-06-19 15:33:56,832 FATAL [ImapServer-
2444] [name=sires@example.com;ip=127.0.0.1;] system - Fatal error
occurred while handling connection
```

Reading a Message Header

Each email message includes a header that shows the path of an email from its origin to destination. This information is used to trace a message’s route when there is a problem with the message. The Zimbra email message header can be viewed from the Zimbra Web Client Message view. Right-click on a message and select **Show Original**.

The following lines are in the message header:

- **Date** - The date and time the message was sent. When you specify time, you can specify range by adding start and stop time to search for messages.
- **From** - The name of the sender and the email address
- **To** - The name of the recipient and the email address. Indicates primary recipients.
- **Message-ID** - Unique number used for tracing mail routing
- **In-Reply-To** - Message ID of the message that is a reply to . Used to link related messages together.
- **Received: from** - The name and IP address the message was sent from. The header displays Received: from information from the MTA to the LMTP and from the local host.

SNMP

SNMP Monitoring Tools

You will probably want to implement server monitoring software in order to monitor system logs, CPU and disk usage, and other runtime information.

Zimbra uses `swatch` to watch the `syslog` output to generate SNMP traps.

SNMP Configuration

Zimbra includes an installer package with SNMP monitoring. This package should be run on every server (Zimbra, OpenLDAP, and Postfix) that is part of the Zimbra configuration.

The only SNMP configuration is the destination host to which traps should be sent.

Errors Generating SNMP Traps

The ZCS error message generates SNMP traps when a service is stopped or is started. You can capture these messages using third-party SNMP monitoring software and direct selected messages to a pager or other alert system.

Checking MySQL


The MySQL database is automatically checked weekly to verify the health of the database. This check takes about an hour. If any errors are found, a report is sent to the administrator's account. The report name that runs the MySQL check is **zmbintegrityreport**, and the crontab is automatically configured to run this report once a week.

Note: *When the MySQL database is checked, running this report can consume a significant amount of I/O. This should not present a problem, but if you find that running this report does affect your operation, you can change the frequency with which **zmbintegrityreport** is run. See : [Appendix B ZCS Crontab Jobs](#).*

Checking for Latest ZCS Software Version

ZCS is configured to check for ZCS software updates. The default configuration is to check for updates daily and to automatically send a notification to the admin's mailbox when a new ZCS version is available.

You can change the configuration from the administration console **Overview pane>Tools>Software Updates** link.

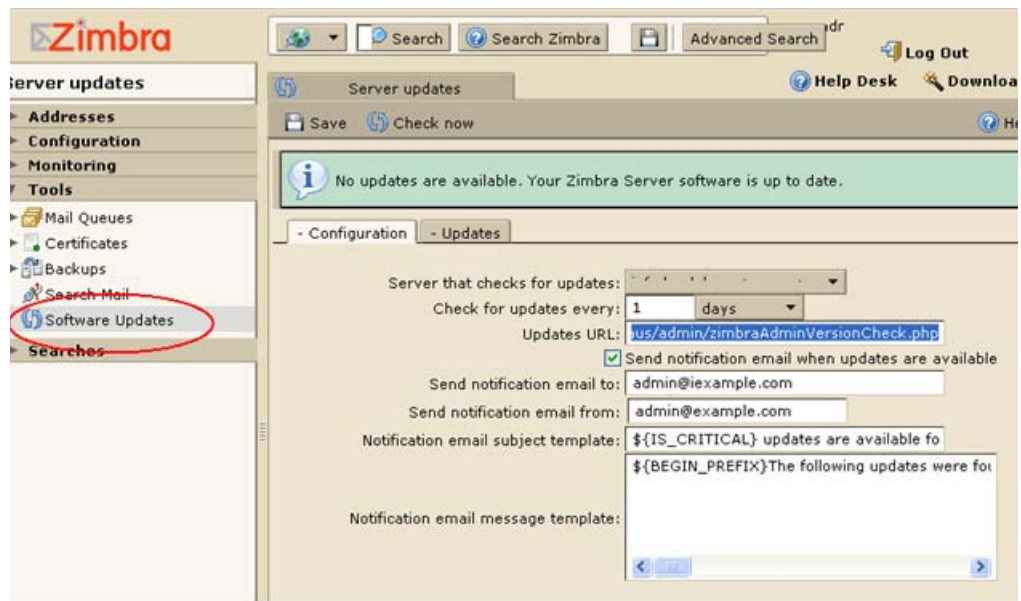

The dates and times ZCS checked for updates is saved to the **Updates** tab and an email notification is sent out until you update the ZCS version. If you do not want to receive an email notification of updates, disable **Send notification email when updates are available**.

You can check for updates any time by clicking the **Check now** link.

Appendix A Command-Line Utilities

Command Line Interface (CLI) can be used to create, modify and delete certain features and functions of the Zimbra Collaboration Suite. The administration console is the main tool for maintaining the Zimbra Collaboration Suite, but some functions can only be changed from the CLI utility.

The CLI utility can be used for the following:

- Provisioning accounts*
- Backup and Restore
- Starting and stopping a serviceMove mailboxes
- Cross-mailbox searches
- Installing self-signed certificates
- Local configuration

*In general, provisioning and managing accounts should be performed from the administration console.

General Tool Information

The Zimbra command-line utilities follow standard UNIX command-line conventions.

Follow these guidelines when using the commands

- CLI commands are run as the zimbra user, that is **su - zimbra**.
- The actual CLI commands are case-sensitive. You must type them in lower case.
- Press **ENTER** after you type a command.
- Typing the CLI command and then **-h** displays the usage options for the command. Example: **zmprov -h** lists all the options available for the zmprov utility.
- Each operation is invoked through command-line options. Many have a long name and a short name. For example, these two commands are equivalent:

```
zmprov createAccount joe@domain.com test123
```

```
zmprov ca joe@domain.com test123
```

Syntax Conventions

When demonstrating the syntax of each tool, the following conventions indicate required, optional, and alternate values:

- {attribute} in curly brackets is required information.
- [attribute] in square brackets are optional arguments or information.
- {a|b|c} or [a|b|c] options separated by the pipe character | means “a” OR “b” OR “c”
- For attribute names that may contain spaces, surround the name with double quotes.

Location of Command-Line Utilities

The command-line tools available for administrators are all located in the /opt/zimbra/bin directory on the Zimbra server.

Zimbra CLI Commands

The table below lists the CLI commands in /opt/zimbra/bin.

Zimbra CLI Commands

CLI	Description
ldap	Start, stop, or find the status of Zimbra LDAP
ldapsearch	Perform a search on an LDAP server
logmysqladmin	Send mysqladmin commands to the logger mysql
mailboxd	Start, stop, find the status of the mailboxd server
mysql	Enters interactive command-line MySQL session with the mailbox mysql
mysql.server	Start, stop the SQL instance for the mailbox package
mysqladmin	Send admin commands to MySQL
postconf	Postfix command to view or modify the postfix configuration
postfix	Start, stop, reload, flush, check, upgrade-configuration of postfix
qshape	Examine postfix queue in relation to time and sender/recipient domain
zmaccts	Lists the accounts and gives the status of accounts on the domain

Zimbra CLI Commands

CLI	Description
zmamavisctl	Start, stop, restart, or find the status of the Amavis-D New
zmantispsmctl	Start, stop, reload, status for anti-spam service
zmantivirusctl	Start, stop, reload, status for the anti-virus service
zmapachectl	Start, stop, reload, or check status of Apache service (for spell check)
zmauditswatchctl	Start, stop, restart, reload, status of the auditswatch
zmcalthk	Check consistency of appointments and attendees in the Zimbra calendar
zmcertmgr	Manage self-signed and commercial certificates
zmclamctl	Start, stop, or find the status of Clam AV
zmcleaniplanetics	Clean iPlanet ICS calendar files
zmcontrol (Start/Stop Service)	Start, stop, restart, status of the Zimbra servers. Also can use to find the Zimbra version installed.
zmconvertctl	Start, stop, the conversion server or find the status of the converted attachments conversion/indexing
zmdumpenv	General information about the server environment is displayed
zmgsautil	Create, delete the GAL sync account and initiate manual syncs.
zmhostname	Find the hostname of the Zimbra server
zmitemdatafile	Extracts and packs tgz files that ZCS uses for REST import/export
zmjava	Execute Java with Zimbra-specific environment settings
zmldappasswd	Changes the LDAP password
zmlmtpinject	Testing tool
zmlocalconfig	Used to set or get the local configuration of a Zimbra server
zmloggerctl	Start, stop, reload, or find the status of the Zimbra logger service
zmloggerhostmap	Used to manually map a DNS hostname to a zmhostname.
zmlogswatchctl	Start, stop, status of the swatch that is monitoring logging
zmmailbox	Performs mailbox management tasks
zmmailboxctl	Start, stop, reload, or find the status of the mailbox components (mailboxd, MySQL, convert)

Zimbra CLI Commands

CLI	Description
zmmetadump	Support tool that dumps an item's metadata in a human-readable form
zmmtaconfigctl	Start, stop, or find the status of the MTA configuration daemon
zmmtactl	Start, stop, or find the status of the MTA
zmmypasswd	Trace messages
zmmypasswd	Change MySQL passwords
zmmysqlstatus	Status of mailbox SQL instance
zmperditionctl	Start, stop, or find the status of the perdition IMAP proxy
zmprov (Provisioning)	Performs all provisioning tasks in Zimbra LDAP, including creating accounts, domains, distribution lists and aliases
zmproxyconfgen	Generates configuration for the nginx proxy
zmproxycctl	Start, stop, restart, and find the status of the IMAP proxy service
zmproxypurge	Purges POP/IMAP routing information from one or more memcached servers
zmpython	Ability to write Python scripts that access Zimbra Java libraries. It sets the ZCS class path and starts the Jython interpreter.
zmsaslauthdctl	Start, stop, or find the status of saslauthd (authentication)
zmshutil	Used for other zm scripts, do not use
zmskindeploy	Deploy skins for accounts from the command line
zmsoap	Print mail, account, and admin information in the SOAP format
zmspellctl	Start, stop, or find the status of the spell check server
zmsshkeygen	Generate Zimbra's SSH encryption keys
zmstat-chart	Generate charts from zmstat data collected in a directory
zmstat-chart-config	Outputs an XML configuration that describes the current state of the data gathered from zmstat-chart to generate charts on the administration console.
zmstatctl	Start, stop, check status, or rotate logs of zmstat data collectors
zmstorectl	Start, stop, or find the status of Zimbra store services

Zimbra CLI Commands

CLI	Description
zmswatchctl	Start, stop, or find the status of the Swatch process, which is used in monitoring
zmsyslogsetup	Used to setup system log config file
zmthrdump	Initiate a thread dump and save the data to a file with a timestamp
zmtlsctl	Set the Web server mode to the communication protocol options: HTTP, HTTPS or mixed
zmtrainsa	Used to train the anti-spam filter to recognize what is spam or ham
zmtzupdate	Provides mechanism to process timezone changes from the command line
zmupdateauthkeys	Used to fetch the ssh encryption keys created by zmsshkeygen
zmvolume	Manage storage volumes on your Zimbra Mailbox server
zmzimletctl	Deploy and configure Zimlets

Using non-ASCII Characters in CLIs

If you use non-ASCII characters in the CLI, in order for the characters to display correctly, you must change this setting to the desired UTF-8 before running the CLI command. To change this, type

```
export LC_All=<UTF_locale>
```

Important: The default locale on the zimbra user system account is **LANG=C**. This setting is necessary for starting ZCS services. Changing the default **LANG=C** setting may cause performance issues with amavisd-new and the IM services may fail to start.

zmprov (Provisioning)

The **zmprov** tool performs all provisioning tasks in Zimbra LDAP, including creating accounts, aliases, domains, COS, distribution lists, and calendar resources. Each operation is invoked through command-line options, each of which has a long name and a short name.

The syntax is **zmprov [cmd] [argument]**.

The syntax for modify can include the prefix “+” or “-” so that you can make changes to the attributes affected and do not need to reenter attributes that are not changing.

- Use + to add a new instance of the specified attribute name without changing any existing attributes.

- Use - to remove a particular instance of an attribute.

The following example would add the attribute **zimbraZimletUserProperties** with the value "blue" to user 1 and would not change the value of any other instances of that attribute.

```
zmprov ma user1 +zimbraZimletUserProperties  
"com_company_testing:favoriteColor:blue"
```

The attributes for the tasks zmprov can be used with are listed when you type `zmprov -h`. The task area divided into the following sections:

- Accounts
- Calendar
- Commands
- Config
- COS
- Domain
- Free/busy
- Distribution list (list)
- Mailbox
- Search
- Server
- Share

Short Name	Long Name	Syntax, Example, and Notes
-h	--help	display usage
-f	--file	use file as input stream
-s	--server	{host}[:{port}] server hostname and optional port
-l	--ldap	provision via LDAP instead of SOAP
-L	--log property file	log 4j property file, valid only with -l
-a	--account {name}	account name to auth as
-p	--password {pass}	password for account
-P	--passfile {file}	read password from file
-z	--zadmin	use Zimbra admin name/password from localconfig for admin/password
-y	--authtoken (authtoken)	use auth token string (has to be in JSON format) from command line
-Y	--authtoken (authtoken file)	use auth token string (has to be in JSON format) from command line file
-v	--verbose	verbose mode (dumps full exception stack trace)
-d/	--debug	debug mode (dumps SOAP messages)
-m	--master	use LDAP master. This only valid with -l

The commands in the following table are divided into the tasks types.

Long Name	Short Name	Syntax, Example, and Notes
Account Provisioning Commands		
addAccountAlias	aaa	{name@domain id adminName} {alias@domain} zmprov aaa joe@domain.com joe.smith@engr.domain.com

Long Name	Short Name	Syntax, Example, and Notes
checkPasswordStrength	cps	Syntax: {name@domain id} {password} Note: This command does not check the password age or history. zmprov cps joe@domain.com test123
createAccount	ca	Syntax: {name@domain} {password} [attribute1 value1 etc] Type on one line. zmprov ca joe@domain.com test123 displayName JSmith
createDataSource	cds	{name@domain} {ds-type} {ds-name} [attr1 value1 [attr2 value2...]]
createIdentity	cid	{name@domain} {identity-name} [attr1 value1 [attr2 value2...]]
createSignature	csig	{name@domain} {signature-name} [attr1 value1 [attr2 value2...]]
deleteAccount	da	Syntax: {name@domain id adminName} zmprov da joe@domain.com
deleteDataSource	dds	{name@domain id} {ds-name ds-id}
deleteIdentity	did	{name@domain id} {identity-name}
deleteSignature	dsig	{name@domain id} {signature-name}
getAccount	ga	Syntax: {name@domain id adminName} zmprov ga joe@domain.com
getAccountMembership	gam	{name@domain id}
getAllAccounts	gaa	Syntax: [-v] [{domain}] zmprov -l gaa zmprov gaa -v domain.com
getAllAdminAccounts	gaaa	Syntax: gaaa zmprov gaaa
getDataSources	gds	{name@domain id} [arg 1 [arg 2...]]
getIdentities	gid	{name@domain id} [arg 1 [arg 2...]]
getSignatures	gsig	{name@domain id} [arg 1 [arg 2...]]

Long Name	Short Name	Syntax, Example, and Notes
modifyAccount	ma	{name@domain id adminName} [attribute1 value1 etc] zmprov ma joe@domain.com zimbraAccountStatus maintenance
modifyDataSource	mds	{name@domain id} {ds-name ds-id} [attr 1 value 1 [attr2 value 2...]]
modifyIdentity	mid	{name@domain id} {identity-name} [attr 1 value 1 [attr 2 value 2...]]
modifySignature	msig	{name@domain id} {signature-name signature-id} [attr 1 value 1 [attr 2 value 2...]]
removeAccountAlias	raa	{name@domain id adminName} {alias@domain} zmprov raa joe@domain.com joe.smith@engr.domain.com
renameAccount	ra	{name@domain id} {newname@domain} zmprov ra joe@domain.com joe23@domain.com
setAccountCOS	sac	{name@domain id adminName} {cos- name cos-id} zmprov sac joe@domain.com FieldTechnician
setPassword	sp	{name@domain id adminName} {password} Note: Passwords cannot include accented characters in the string. Example of accented characters that cannot be used: ã, é, í, ú, ü, ñ. zmprov sp joe@domain.com test321
Calendar Resource Provisioning Commands		
createCalendarResource	ccr	{name@domain} [attr1 value1 [attr2 value2...]]
deleteCalendarResource	dcr	{name@domain id}
getAllCalendarResources	gacr	[-v] [{domain}]
getCalendarResource	gcr	{name@domain id}

Long Name	Short Name	Syntax, Example, and Notes
modifyCalendarResource	mcr	{name@domain id} [attr1 value1 {attr2 value2...}]
renameCalendarResource	rcr	{name@domain id} {newName@domain}
searchCalendarResources	scr	[-v] domain attr op value {attr op value...}
Free Busy Commands		
getAllFbp	gafbp	[-v]
getFreebusyQueueInfo	gfbqi	[{provider-name}]
pushFreebusy	pfb	{domain account-id} [account-id...]
Domain Provisioning Commands		
countAccount	cta	{domain id} This lists each COS, the COS ID and the number of accounts assigned to each COS
createAliasDomain	cad	{alias-domain-name} {local-domain-name id} [attr1 value1 [attr2 value2...]]
createDomain	cd	{domain} [attribute1 value1 etc] zmprov cd mktng.domain.com zimbraAuthMech zimbra
deleteDomain	dd	{domain id} zmprov dd mktng.domain.com
getDomain	gd	{domain id} zmprov gd mktng.domain.com
getDomainInfo	gdi	name id virtualHostname {value} [attr1 [attr2...]]
getAllDomains	gad	[-v]

Long Name	Short Name	Syntax, Example, and Notes
modifyDomain	md	{domain id} [attribute1 value1 etc] zmprov md domain.com zimbraGalMaxResults 500 Note: Do not modify zimbraDomainRenameInfo manually. This is automatically updated when a domain is renamed.
renameDomain	rd	{domain id} {newDomain} Note: renameDomain can only be used with “ zmprov -l/--ldap ”
COS Provisioning Commands		
copyCos	cpc	{src-cos-name id} {dest-cos-name}
createCos	cc	{name} [attribute1 value1 etc] zmprov cc Executive zimbraAttachmentsBlocked FALSE zimbraAuthTokenLifetime 60m zimbraMailQuota 100M zimbraMailMessageLifetime 0
deleteCos	dc	{name id} zmprov dc Executive
getCos	gc	{name id} zmprov gc Executive
getAllCos	gac	[-v] zmprov gac -v
modifyCos	mc	{name id} [attribute1 value1 etc] zmprov mc Executive zimbraAttachmentsBlocked TRUE
renameCos	rc	{name id} {newName} zmprov rc Executive Business
Server Provisioning Commands		
createServer	cs	{name} [attribute1 value1 etc]
deleteServer	ds	{name id} zmprov ds domain.com

Long Name	Short Name	Syntax, Example, and Notes
getServer	gs	{name id} zmprov gs domain.com
getAllServers	gas	[-v] zmprov gas
getAllReverseProxyBackends	garpb	
modifyServer	ms	{name id} [attribute1 value1 etc] zmprov ms domain.com zimbraVirusDefinitionsUpdateFrequency 2h
getAllReverseProxyURLs	garpu	Used to publish into nginx.conf what servers should be used for reverse proxy lookup.
getAllMtaAuthURLs	gamau	Used to publish into saslauthd.conf what servers should be used for saslauthd.conf MTA auth
getAllMemcachedServers	gamcs	Used to list memcached servers (for nginx use).
Config Provisioning Commands		
getAllConfig	gacf	[-v] All LDAP settings are displayed
getConfig	gcf	{name}
modifyConfig	mcf	attr1 value1 Modifies the LDAP settings.
Distribution List Provisioning Commands		
createDistributionList	cdl	{list@domain} zmprov cdl needlepoint-list@domain.com
addDistributionListMember	adlm	{list@domain id} {member@domain} zmprov adlm needlepoint-list@domain.com singer23@mail.free.net
removeDistributionListMember	rdlm	{list@domain id} zmprov rdlm needlepoint-list@domain.com singer23@mail.free.net
getAllDistributionLists	gadl	[-v]

Long Name	Short Name	Syntax, Example, and Notes
getDistributionListmembership	gdlm	{name@domain id}
getDistributionList	gdl	{list@domain id} zmprov gdl list@domain.com
modifyDistributionList	mdl	{list@domain id} attr1 value1 {attr2 value2...} zmprov md list@domain.com
deleteDistributionList	ddl	(list@domain id)
addDistributionListAlias	adla	{list@domain id} {alias@domain}
removeDistributionListAliases	rdla	{list@domain id} {alias@domain}
renameDistributionList	rdl	{list@domain id} {newName@domain}
Mailbox Commands		
getMailboxInfo---	gmi	{account}
getQuotaUsage---	gqu	{server}
reIndexMailbox	rim	{name@domain id} {action} [{reindex-by} {value1} [value2...]]
RecalculateMailboxCounts	rmc	{name@domain id} When unread message count and quota usage are out of sync with the data in the mailbox, use this command to immediately recalculate the mailbox quota usage and unread messages count. Important: Recalculating mailbox quota usage and message count should be schedule to run in off peak hours and used on one mailbox at a time.
selectMailbox	sm	{account-name} [{zmmailbox commands}]
Logs		

Long Name	Short Name	Syntax, Example, and Notes
addAccount Logger	aal	{name@domain id} {logging-category} {debug info warn error} Creates custom logging for a single account
getAccountLoggers	gal	[-s/--server hostname] {name@domain id} {logging-category} {debug info warn error}
getAllAccountLoggers	gaal	[-s/--server hostname] Shows all individual custom logger account
removeAccountLogger	ral	[-s/ --server hostname] {name@domain id} {logging-category} When name@domain is specified, removes the custom logger created for the account otherwise removes all accounts all account loggers from the system.

See the [zmprov Log Categories on page 173](#) for a list of logging categories.

Search

searchGAL	sg	{domain} {name} zmprov sg joe
autoCompleteGal	acg	{domain} {name}
searchAccounts	sa	[-v] {ldap-query} [limit] [offset] [sortBy {attribute} [sortAscending 0 1] [domain {domain}]]

Share Provisioning Commands

For a GUI view of results, see Distribution List Shares tab on the administration console

getPublishedDistributionListShareInfo	gpdlsi	{dl-name dl-id} [{owner-name owner-id}]
getShareInfo	gsi	{owner-name owner-id}
publishDistributionListShareInfo	pdlsi	{+ -} {dl-name@domain id} {owner-name owner-id} [{folder-path folder-id}]

Miscellaneous Provisioning Commands

Long Name	Short Name	Syntax, Example, and Notes
describe	desc	[[[-v] [-ni] [{entry-type}]] [-a {attribute-name}]] Prints all attribute names (account, domain, COS, servers, etc.).
generateDomainPreAuthKey	gdpak	{domain id} Generates a pre-authentication key to enable a trusted third party to authenticate to allow for single-sign on. Used in conjunction with GenerateDomainPreAuth.
generateDomainPreAuth	gdpa	{domain id} {name} {name id foreignPrincipal} {timestamp 0} {expires 0} Generates preAuth values for comparison.
syncGal	syg	{domain} [{token}]
flushCache	fc	[skin local account config cos domain server zimlet] [name1 id] Flush cached LDAP entries for a type. See Zimbra Directory Service chapter, Flushing LDAP Cache
getAccountLogger	gal	[-s /--server hostname] {name@domain id}

The following are zmprov commands that are specific to Zimbra IMAP/POP proxy.

--getAllReverseProxyURLs	-garpu	Used to publish into nginx.conf the servers that should be used for reverse proxy lookup
--getAllMtaAuthURLs	-gamau	Used to publish into saslauthd.conf the servers that should be used for saslauthd.conf MTA auth
--getAllMemcachedServers	-games	Used to list memcached servers (for Zimbra Proxy use)

Examples

- Create one account with a password that is assigned to the default COS.

```
zmprov ca name@domain.com password
```

- Create one account with a password that is assigned to a specified COS. You must know the COS ID number. To find a COS ID, type `zmprov gc <COSName>`.

```
zmprov ca name@domain.com password zimbraCOS  
cosIDnumberstring
```

- Create one account when the password is not authenticated internally.

```
zmprov ca name@domain.com ''
```

The empty single quote is required and indicates that there is no local password.

- Using a batch process to create accounts, see Managing the zimbra Collaboration Suite chapter for the procedure.

- Add an alias to an account.

```
zmprov aaa accountname@domain.com aliasname@domain.com
```

- Create distribution list. The ID of the distribution list is returned.

```
zmprov cdl listname@domain.com
```

- Add a member to a distribution list. Tip: You can add multiple members to a list from the administration console.

```
zmprov adlm listname@domain.com member@domain.com
```

- Change the administrator's password. Use this command to change any password. Enter the address of the password to be changed.

```
zmprov sp admin@domain.com password
```

- Create a domain that authenticates against zimbra OpenLDAP.

```
zmprov cd marketing.domain.com zimbraAuthMech zimbra
```

- Set the default domain.

```
zmprov mcf zimbraDefaultDomain domain1.com
```

- To list all COSs and their attribute values.

```
zmprov gac -v
```

- To list all user accounts in a domain (domain.com)

```
zmprov gaa domain.com
```

- To list all user accounts and their configurations

```
zmprov gaa -v domain.com
```

- To enable logger on a single server

```
zmprov +zimbraServiceEnabled logger
```

Then type `zmloggerctl start`, to start the logger.

- To modify the purge interval, set `zimbraMailPurgeSleepInterval` to the duration of time that the server should “sleep” between every two mailboxes. Type:

```
zmprov ModifyServer <server-name> zimbraMailPurgeSleepInterval <Xm>
```

X is the duration of time between mailbox purges; **m** represents minutes. You could also set **<xh>** for hours.

- Modify **zimbraNewMailNotification** to customize the notification email template. A default email is sent from Postmaster notifying users that they have received mail in another mailbox. To change the template, you modify the receiving mailbox account. The variables are

- **\${SENDER_ADDRESS}**
- **\${RECIPIENT_ADDRESS}**
- **\${RECIPIENT_DOMAIN}**
- **\${NOTIFICATION_ADDRESSS}**
- **\${SUBJECT}**
- **\${NEWLINE}**

You can specify which of the above variables appear in the **Subject**, **From**, or **Body** of the email. The following example is changing the appearance of the message in the body of the notification email that is received at **name@domain.com**. You can also change the template in a class of service, use **zmprov mc**. The command is written on one line.

```
zmprov ma name@domain.com zimbraNewMailNotificationBody  
'Important message from  
${SENDER_ADDRESS}.${NEWLINE}Subject:${SUBJECT}'
```

zmprov Log Categories

zimbra.account	Account operations
zimbra.acl	ACL operations
zimbra.backup	Backup and restore
zimbra.cache	Inmemory cache operations
zimbra.calendar	Calendar operations
zimbra.dav	DAV operations
zimbra.dbconn	Database connection tracing
zimbra.extensions	Server extension loading
zimbra.filter	Mail filtering
zimbra.gal	GAL operations
zimbra.imap	IMAP protocol operations
zimbra.index	Index operations
zimbra.io	Filesystem operations
zimbra.ldap	LDAP operations
zimbra.lmtp	LMTP operations (incoming mail)
zimbra.mailbox	General mailbox operations
zimbra.misc	Miscellaneous
zimbra.op	Changes to mailbox state
zimbra.pop	POP protocol operations
zimbra.redolog	Redo log operations
zimbra.security	Security events
zimbra.session	User session tracking
zimbra.smtp	SMTP operations (outgoing mail)
zimbra.soap	SOAP protocol
zimbra.sqltrace	SQL tracing
zimbra.store	Mail store disk operations
zimbra.sync	Sync client operations
zimbra.system	Startup/shutdown and other system messages
zimbra.wiki	Wiki operations
zimbra.zimlet	Zimlet operations

zmaccts

This command runs a report that lists all the accounts, their status, when they were created and the last time anyone logged on. The domain summary shows the total number of accounts and their status.

Syntax

zmaccts

zmcalkchk

This command checks the consistency of appointments on the Zimbra calendar and sends an email notification regarding inconsistencies. For example, it checks if all attendees and organizers of an event on the calendar agree on start/stop times and occurrences of a meeting.

See the output of **zmmailbox help appointment** for details on time-specs.

Syntax

zmcalkchk [-d] [-n <type>] <user> <start-time-spec> <end-time-spec>

Description

Short Name	Description
-d	Debugs verbose details
-m	Allows the user to specify the maximum number of attendees to check. The default value is 50.
-n	-n none user organizer attendee all Send email notifications to selected users if they are out of sync for an appointment

zmcontrol (Start/Stop Service)

This command is run to start or to stop services. You can also find which version of the zimbra Collaboration Suite is installed.

Syntax

zmcontrol [-v -h] **command** [args]

Description

Long Name	Short Name	Description
	-v	Displays ZCS software version.
	-h	Displays the usage options for this command.
	-H	Host name (localhost).
Command in...		
maintenance		Toggle maintenance mode.
restart		Restarts all services and manager on this host.
shutdown		Shutdown all services and manager on this host. When the manager is shutdown, you cannot query that status.
start		Startup manager and all services on this host.
startup		Startup manager and all services on this host.
status		Returns services information for the named host.
stop		Stop all services but leaves the manager running.

zmcertmgr

The CLI command **zmcertmgr** is used to manage your certificates from the command line. You can use the administration console to easily view, update and install self-signed and commercial certificates. See the administration console help for more information about using this tool.

Syntax

zmcertmgr {attribute} [arg]

Description

Name	Syntax, Example, Notes
viewdeployedcert	[all ldap mta proxy mailboxd] View the deployed certificate.
viewstagedcert	<self comm> [certfile]
gencsr	<self comm> [-new] [subject] [-subjectAltNames "host1,host2"] Generate the certificate signing request.
install	<self comm> [-new] [validation_days-] Install either a self signed or commercial signed certificate
viewcsr	<self comm> [csr_file] View the certificate signing request information
verifycert	<self comm> [priv_key] [certfile]

zmgsautil

The CLI command **zmgsautil** can be used to create or delete the GAL sync account and to force syncing of the LDAP data to the GAL sync account.

A GAL sync account is created when the GAL is configured on a domain. This account is created and the polling interval for performing a full sync is managed from the administration console.

To see attributes and settings for a GAL sync account, run **zmprov gds** against the account.

Long Name	Description
createAccount	Creates the GAL sync account. This should be done from the administration console.
deleteAccount	Deletes the GAL sync account and the references to the LDAP server. The account can also be deleted from the administration console. deleteAccount [-a {galsynceaccountname}]-i {account-id}]

Long Name	Description
<code>trickleSync</code>	<p>This syncs new and updated contact data only.</p> <p><code>trickleSync [-a {galsynceaccountname}] -i {account-id} [-d {datasource-id}] [-n {datasource-name}]</code></p> <p>The <code>datasource ID</code> is the LDAP <code>datasource ID</code>. The <code>datasource name</code> is the name of the address book (folder) in the GAL account created to sync LDAP to.</p> <p>A cron job can be set up to run <code>trickleSync</code>.</p>
<code>fullSync</code>	<p>This syncs all LDAP contact data. You can also set this from the administration console.</p> <p><code>fullSync [-a {galsynceaccountname}] -i {account-id} [-d {datasource-id}] [-n {datasource-name}]</code></p>
<code>forceSync</code>	<p>This should be used to reload the entire GAL if there is change in the filter, attribute mapping or LDAP server parameters.</p> <p><code>forceSync [-a {galsynceaccountname}] -i {account-id} [-d {datasource-id}] [-n {datasource-name}]</code></p>

zmldappasswd

The CLI command **zmldappasswd** changes the LDAP password on the local server. In multi node environments, this command must be run on the LDAP master server only.

This CLI command used with options changes other passwords.

For better security and audit trails the following passwords are generated in ZCS:

- **LDAP Admin password.** This is the master LDAP password. This is not new, but has been renamed.
- **LDAP Root password.** This is used for internal LDAP operations.
- **LDAP Postfix password.** This is the password used by the postfix user to identify itself to the LDAP server and must be configured on the MTA server to be the same as the password on the LDAP master server.
- **LDAP Amavis password.** This is the password used by the amavis user to identify itself to the LDAP server and must be configured on the MTA server to be the same as the password on the LDAP server.
- **LDAP Replication password.** This is the password used by the LDAP replication user to identify itself to the LDAP master and must be the same as the password on the LDAP master server.

Syntax

`opt/zimbra/bin/zmldappasswd [-h] [-r] [-p] [-l] new password`

Description

Name	Syntax, Example, Notes
-h	Displays the help
-a	Changes <code>ldap_amavis-password</code>
-l	Changes <code>ldap_replication_password</code>
-p	Changes <code>ldap_postfix_password</code>
-r	Changes <code>ldap_root_passwd</code>
-c	Updates the password in the config database on replicas. Must be used with <code>-1</code> .
Only one of <code>a</code> , <code>l</code> , <code>p</code> , or <code>r</code> can be specified. If options are not included, the <code>zimbra_ldap_password</code> is changed.	

zmlocalconfig

This command is used to set or get the local configuration for a zimbra server. Use `zmlocalconfig -i` to see a list of supported properties that can be configured by an administrator.

Syntax

`zmlocalconfig [options]`

To see the local config type `zmlocalconfig`

Description

Long Name	Short Name	Description
--config	-c	<arg> File in which the configuration is stored
--default	-d	Show default values for keys listed in [args]
--edit	-e	Edit the configuration file, change keys and values specified. The [args] is in the key=value form.
--force	-f	Edit the keys whose change is known to be potentially dangerous
--help	-h	Shows the help for the usage options for this tool
--info	-i	Shows the list of supported properties.

Long Name	Short Name	Description
--format	-m	<arg> Shows the values in one of these formats: plain (default), xml, shell, nokey.
--changed	-n	Shows the values for only those keys listed in the [args] that have been changed from their defaults
--path	-p	Shows which configuration file will be used
--quiet	-q	Suppress logging
--random	-r	This option is used with the edit option. Specified key is set to a random password string.
--show	-s	Forces the display of the password strings
--unset	-u	Remove a configuration key. If this is a key with compiled-in defaults, set its value to the empty string.
--expand	-x	Expand values

zmmailbox

The **zmmailbox** tool is used for mailbox management. The command can help administrators provision new mailboxes along with accounts, debug issues with a mailbox, and help with migrations.

You can invoke the **zmmailbox** command from within the **zmprov** command. You enter **selectMailbox** within **zmprov** to access the **zmmailbox** command connected to that specified mailbox. You can then enter **zmmailbox** commands until you type **exit**. Exit returns you to **zmprov**. This is useful when you want to create accounts and also pre-create some folders, tags, or saved searches at the same time.

Syntax

zmmailbox [args] [cmd] [cmd-args ...]

Description

Short Name	Long Name	Syntax, Example, and Notes
-h	--help	display usage
-f	--file	use file as input stream
-u	--url	http[s]://{host}[:{port}] server hostname and optional port. Must use admin port with -z/-a
-a	--account {name}	account name to auth as
-z	--zadmin	use zimbra admin name/password from localconfig for admin/password
-y	--authtoken (authtoken)	use authtoken string (has to be in JSON format) from command line
-Y	--authtoken (authtoken file)	use authtoken string (has be in JSON format) from command line
-m	--mailbox	mailbox to open
-p	--password {pass}	password for admin account and or mailbox
-P	--passfile {file}	read password from file
-r	--protocol	(proto req-proto/response-proto) specify request/response protocol [soap1, soap12, json]
-t	--timeout	timeout (in seconds)
-v	--verbose	verbose mode (dumps full exception stack trace)
-d	--debug	debug mode (dumps SOAP messages)

Specific CLI tools are available for the different components of a mailbox. Usage is described in the CLI help for the following.

zmmailbox help admin	help on admin-related commands
zmmailbox help commands	help on all commands
zmmailbox help appointment	help on appointment-related commands
zmmailbox help commands	help on all commands
zmmailbox help contact	help on contact-related commands (address book)
zmmailbox help conversation	help on conversation-related commands
zmmailbox help filter	help on filter-related commands
zmmailbox help folder	help on folder-related commands
zmmailbox help item	help on item-related commands
zmmailbox help message	help on message-related commands
zmmailbox help misc	help on miscellaneous commands
zmmailbox help permission	help on permission commands
zmmailbox help search	help on search-related commands
zmmailbox help tag	help on tag-related commands

Examples

- When you create an account, you may want to pre-create some tags and folders. You can invoke `zmmailbox` inside of `zmprov` by using “`selectMailbox(sm)`”

```
domain.example.com$ /opt/zimbra/bin/zmprov
prov> ca user10@domain.example.com test123
9a993516-aa49-4fa5-bc0d-f740a474f7a8
prov> sm user10@domain.example.com
mailbox: user10@domain.example.com, size: 0 B, messages: 0,
unread: 0
mbox user10@domain.example.com> createFolder /Archive
257
mbox user10@domain.example.com> createTag TODO
64
mbox user10@domain.example.com> createSearchFolder /unread
"is:unread"
258
mbox user10@domain.example.com> exit
prov>
```

- To find the mailbox size for an account

```
zmmailbox -z-m user@example.com gms
```

zmtlsctl

This command is used to set the Web server zimbraMailMode to the communication protocol options: HTTP, HTTPS, Mixed, Both and Redirect.

- **HTTP.** HTTP only, the user would browse to `http://zimbra.domain.com`.
- **HTTPS.** HTTPS only, the user would browse to `https://zimbra.domain.com`. `http://` is denied.
- **Mixed** If the user goes to `http://` it will switch to `https://` for the login only, then will revert to `http://` for normal session traffic. If the user browses to `https://`, then the user will stay `https://`
- **Both** A user can go to `http://` or `https://` and will keep that mode for the entire session.
- **Redirect** Like mixed if the user goes to `http://` it will switch to `https://` but they will stay `https://` for their entire session.

All modes use SSL encryption for back-end administrative traffic.

Important: Only zimbraMailMode HTTPS can ensure that no listener will be available on HTTP/port 80, that no client application will try to auth over HTTP, and that all data exchanged with the client application will be encrypted.

Mailboxd has to be stopped and restarted for the change to take effect.

Note: If you switch to HTTPS, you use the self-signed certificate generated during ZCS installation, in `/opt/zimbra/ssl/zimbra/server/server.crt`.

Syntax

`zmtlsctl [mode]`

mode = http, https, mixed, both, redirect

Steps to run

1. Type `zmtlsctl [mode]` and press **ENTER**.
2. Type `zmmailboxdctl stop` and press **ENTER**.
3. When mailboxd is stopped, type `zmmailboxdctl start` and press **ENTER**.

Limitations When Using Redirect

- Many client applications send an auth request in the initial HTTP request to the Server ("blind auth"). The implications of this are that this auth request is sent in the clear/unencrypted prior to any possible opportunity to redirect the client application to HTTPS.

- Redirect mode allows for the possibility of a man-in-the-middle attack, international/unintentional redirection to a non-valid server, or the possibility that a user will mis type the server name and not have certificate-based validity of the server.
- In many client applications, it is impossible for users to tell if they have been redirected (for example, ActiveSync), and therefore the users continue to use HTTP even if the auth request is being sent unencrypted.

zmmetadump

This command is a support tool that dumps the contents of an item's metadata in a human readable form.

Syntax

zmmetadump -m <mailbox id/email> -i <item id>

Or **zmmetadump -f <file containing encoded metadata>**

zmmypasswd

This command is used to change **zimbra_mysql_password**. If the **--root** option is specified, the **mysql_root_password** is changed. In both cases, MySQL is updated with the new passwords. Refer to the MySQL documentation to see how you can start the MySQL server temporarily to skip grant tables, to override the root password. This requires a restart for the change to take effect.

Syntax

zmmypasswd [--root] <new_password>.

zmproxyconfgen

This command generates the nginx proxy configuration files. It reads LDAP settings to replace template variables and generates the final nginx configuration.

Syntax

ProxyConfGen [options]

Description

Long Name	Short Name	Description
--config	-c	<arg> Overrides a config variable. The <arg> format should be name=value. To see a list of names, use -d or -D
--defaults	-d	Prints the default variable map
--definitions	-D	Prints the Definitions variable map after loading LDAP configuration and processing overrides
--help	-h	Displays help information
--include-dir	-i	<arg> Displays the directory path (relative to \$workdir/conf), where included configuration files are written
--dry-run	-n	Specifies not to write configuration and only display the files that would be written
--prefix	-p	<arg> Displays the config file prefix. The default value is nginx.conf
--template-prefix	-P	<arg> Displays the template file prefix. The default value is \$prefix
--server	-s	<arg> Specifies a valid server object. Configuration is generated based on the specified server's attributes. The default is to generate configuration based on global configuration values
--templatedir	-t	<arg> Specifies the proxy template directory. The default value is \$workdir/conf/nginx/templates
--verbose	-v	Displays verbose data
--workdir	-w	<arg> Specifies the proxy working directory. The default value is /opt/zimbra

zmproxypurge

This command purges POP/IMAP proxy routing information from one or more memcached servers. Available memcached servers are discovered by the **zmprov games** function. Others can be specified if necessary using the server port.

Syntax

ProxyPurgeUtil [-v] [-i] -a account [-L accountlist] [cache1 [cache2...]]

Description

Long Name	Short Name	Description
<code>--help</code>	<code>-h</code>	Shows the help for the usage options for this tool.
<code>--verbose</code>	<code>-v</code>	Displays verbose data
<code>--info</code>	<code>-i</code>	Displays account routing information
<code>--account</code>	<code>-a</code>	Displays account name
<code>--list</code>	<code>-L</code>	Displays file containing list of accounts, one per line
<code>--output</code>	<code>-o</code>	Specifies the format to be used for printing routing information with information. The fields that display by default are <ul style="list-style-type: none">• cache server• account name• route information
<code>cacheN</code>		(optional command) Specifies additional memcache server in the form of server:port

zmdeploy

This command simplifies the process of deploying skins in ZWC. This tool processes the skin deployment, enables the skin for all users of the ZWC deployment, and restarts the web server so that it recognizes the new skin.

For more information about this tool, see http://wiki.zimbra.com/index.php?title=About_Creating_ZCS_Themes

Syntax

zmdeploy <path/to/skin/dir/or/zipfile>

zmsoap

Prints mail, account, and admin information in the SOAP format.

Syntax

zmsoap [options] <path1 [<path2>...]

Description

Long Name	Short Name	Description
--help	-h	Prints usage information
--mailbox	-m	<name> Displays mailbox account name. Mail and account requests are sent to this account. This attribute is also used for authentication if -a and -z are not specified
--target		<name>Displays the target account name to which the requests are sent. Used only for non-admin sessions
--admin name	-a	<name>Displays the admin account name to authenticate as
--zadmin	-z	Displays the Zimbra admin name and password to authenticate as
--password	-p	<pass>Displays account password
--passfile	-P	<path> Reads password from a file
--element	-e	<path> Displays the root element path. If specified, all path arguments that do not start with a slash (/) are relative to this element
--type	-t	<type> Displays the SOAP request type. Can either be mail, account, or admin
--url	-u	<http[s]://...> Displays the server hostname and optional port value
--verbose	-v	Prints the SOAP request and other status information
path		<[path...]> Displays the element or attribute path and value. Roughly follows the XPath syntax as: [/]element1[/element2][/@attr][=value]

zmstat-chart

This command is used to collect statistical information for the CPU, IO, mailboxd, MTQueue, MySQL, and other components and to run a script on the csv files to display the usage details in various charts. These csv files are saved to **/opt/zimbra/zmstat/**.

You must enable zmstat to collect the performance charts data.

To enable zmstat for charting on each server

1. Enter `zmprov ms {hostname} zimbraServerEnable : stats.`
2. Restart the server, enter
`zmcontrol stop`
`zmcontrol start`

Syntax

`zmstat-chart -s <arg> -d <arg> [options]`

Description

Long Name	Short Name	Description
--aggregate-end-at		<arg> If this is specified, the aggregate computation ends at this timestamp. Usage is MM/dd/yyyy HH:mm:ss.
--aggregate-start-at		<arg> If this is specified, the aggregate computation starts at this timestamp. Usage is MM/dd/yyyy HH:mm:ss.
--end-at		<arg> If this is specified, all samples after the specified timestamp are ignored. Usage is MM/dd/yyyy HH:mm:ss.
--start-at		<arg> If this is specified, all samples before this timestamp are ignored.
--title		<arg> This gives the chart a title that displays. Defaults to the last directory name of srcdir.
--no-summary		Summary data generation is not included.
--conf	-c	<arg> Chart the configuration xml files.
--destdir	-d	<arg> The directory where the generated chart files are saved.
--srcdir		One or more directories where the csv files are located. The csv files are moved to directories listed by date under zmstat/.

zmstat-chart-config

This command generates an xml file `/opt/zimbra/conf/zmstat-chart.xml` from a template, taking into account the server setup including the LDAP node and the processes run, among other specifications.

zmstatctl

This is a control script for checking zmstat data collectors. It starts or stops monitoring processes, checks status or rotates logs.

Syntax

`zmstatctl start|stop|status|rotate`

zmthrdump

This command invokes a thread dump in the ZCS server process and prints the output file. It also gives the option of saving the thread dump to a file and inserts a timestamp on the logfile.

Syntax

zmthrdump [-h] [-i] [-t <timeout seconds>] [-p <pid file>] [-f <file>] [-o <out-file>]

Description

Short Name	Description
-h	Displays help messages
-i	Appends the timestamp to the LOGFILE before invoking SIGQUIT
-p	Returns the PID to send SIGQUIT. The default value can be found in zmmailboxd_java.pid
-f	Specifies the LOGFILE to save the thread dump output in. The default value is zmmailbox.out
-o	Specifies the output file of the thread dump. The default value is stdout
-t	Specifies the timeout value (in seconds) to exit if the process becomes unresponsive. The default value is 30 seconds.

zmtrainsa

This command is used to train the anti-spam filter. This command is run automatically every night to train the SpamAssassin filter from messages users mark as “junk” “not junk” from their mailbox. See Anti-Spam Training Filters on page 49.

The zmtrainsa command can be run manually to forward any folder from any mailbox to the spam training mailboxes. If you do not enter a folder name when you manually run zmtrainsa for an account, for spam, the default folder is Junk. For ham, the default folder is Inbox.

Syntax

zmtrainsa <user> spam|ham [folder]

zmtzupdate

This command is used to update time zone changes in existing appointments for specific users or all users. A .ics rule file should first be created to run with this command. A rule file lists a series of rules to match a time zone and the replacement time zone definitions. More information about this command can be found at http://wiki.zimbra.com/index.php?title=Changing_ZCS_Time_Zones

Syntax

zmtzupdate --rulefile <rule file> -a <“all” or list of specific email addresses> [--sync] [--after <date/time stamp>]

Description

Long Name	Short Name	Description
--account	-a	<arg> account email addresses separated by a white space. Use “all” for all accounts to be updated
--after		<arg> Appointments occurring after the specified date/time in this field are updated. The default cut off time is January 1 st , 2008
--help	-h	Displays help information
--rulefile		Specifies the .ics XML file that should be used to update time zone definitions
--server	-s	<arg> Specifies the mail server hostname. The default value is localhost
--sync		If specified, this option causes the zmtzupdate command to block till the server processes all requested accounts. The default value is no.

zmvolume

This command can be used to manage storage volumes from the CLI. Volumes can be easily managed from the administration console, Server, Volume tab.

Syntax

zmvolume {-a|-d|-l|-e|-dc|-sc} [options]

Description

Long Name	Short Name	Description
<code>--add</code>	<code>-a</code>	Adds a volume
<code>--compress</code>	<code>-c</code>	<code><arg></code> Compress BLOBs; "true" or "false"
<code>--compressionThreshold</code>	<code>-ct</code>	Compression threshold; default 4KB
<code>--delete</code>	<code>-d</code>	Deletes a volume
<code>--displayCurrent</code>	<code>-dc</code>	Displays the current volume
<code>--edit</code>	<code>-e</code>	Edits a volume
<code>--help</code>	<code>-h</code>	Shows the help for the usage options for this tool.
<code>--id</code>	<code>-id</code>	<code><arg></code> Volume ID
<code>--list</code>	<code>-l</code>	Lists volumes
<code>--name</code>	<code>-n</code>	<code><arg></code> Volume name
<code>--path</code>	<code>-p</code>	<code><arg></code> Root path
<code>--server</code>	<code>-s</code>	<code><arg></code> Mail server hostname. Default is localhost.
<code>--setCurrent</code>	<code>-sc</code>	Sets the current volume
<code>--type</code>	<code>-t</code>	<code><arg></code> Volume type (primaryMessage, secondaryMessage, or index)
<code>--turnOffSecondary</code>	<code>-ts</code>	Turns off the current secondary message volume

zmzimletctl

This command is used to manage Zimlets and to list all zimlets on the server. See Chapter 10, Managing Zimlets. Most Zimlet deployment can be completed from the zimbra administration console.

Syntax

`zmzimletctl {-l} {command} <zimlet.zip|config.xml|zimlet>Description`

Long Name	Short Name	Description
deploy		<zimlet.zip> Creates the Zimlet entry in the LDAP server, installs the zimlet files on the Server, grants, access to the members of the default COS, and turns on the Zimlet
undeploy		<zimlet> Uninstall a zimlet from the zimbra server
install		<zimlet.zip> Installs the Zimlet files on the host
ldapDeploy		<zimlet> Adds the Zimlet entry to the LDAP
enable		<zimlet> Enables the Zimlet
disable		<zimlet> Disables the Zimlet
acl		<zimlet> <cos1> {grant deny} [<cos2> {grant deny}...] Sets the access control, grant deny, to a COS
listAcls		<zimlet> Lists the ACLs for the Zimlets
listZimlets		View details about all Zimlets on the server
getConfigTemplate		<zimlet.zip> Extracts the configuration template from the Zimlet.zip file
configure		<config.xml>Installs the configuration
listPriority		Shows the current Zimlet priorities (0 is high, 9 is low)
setPriority		<zimlet> Sets the Zimlet priority

zmproxyconfig

This command is used to manage Zimbra proxy and should only be used when you have to make changes to Zimbra proxy after it has been installed. See Chapter 6, Working with Zimbra Proxy.

Note: Previous to ZCS 6.0, this command was called *zmproxyinit*.

Syntax

```
./zmpoxyconfig [-h] [-o] [-m] [-w] [-d [-r] [-s] [-a w1:w2:w3:w4] [-i p1:p2:p3:p4] [-p  
p1:p2:p3:p4] [-x mailmode]] [-e [-a w1:w2:w3:w4] [-i p1:p2:p3:p4] [-p p1:p2:p3:p4] [-x  
mailmode]] [-f] -H hostname
```

Description

Short Name	Description
-h	Displays help messages
-H	Hostname of the server on which enable/disable proxy functionality
-a	Colon separated list of Web ports to use. Format: HTTP-STORE:HTTP-PROXY:HTTPS-STORE:HTTPS-PROXY (Ex: 8080:80:8443:443)
-d	Disable proxy
-e	Enable proxy
-f	Full reset on memcached port and search queries and POP/IMAP throttling
-i	Colon separated list of IMAP ports to use. Format: IMAP-STORE:IMAP-PROXY:IMAPS-STORE:IMAPS-PROXY (Ex: 7143:143:7993:993)
-m	Toggle mail proxy portions
-o	Override enabled checks
-p	Colon separated list of POP ports to use. Format: POP-STORE:POP-PROXY:POPS-STORE:POPS-PROXY (Ex: 7110:110:7995:995)
-r	Run against a remote host. Note that this requires the server to be properly configured in the LDAP master
-s	Set Cleartext to FALSE (secure mode) on disable
-t	Disable reverse proxy lookup target for the store server. Only valid with -d. Make sure that you intend for all proxy functions for the server to be disabled.
-w	Toggle Web proxy portions

Short Name	Description
-x	zimbraMailMode to use on disable (Default is HTTP)

hostname is the value of the **zimbra_server_hostname** LC key for the server being modified.

Required options are -f by itself, or -f with -d or -e

Note that

- -d or -e require one or both of -m and -w.
- -i or -p require -m.
- -a requires -w.
- -x requires -w and -d for store.
- -x requires -w for proxy.

The following are the defaults for -a, -i, -p, and -x if they are not supplied as options.

- a default on enable: 8080:80:8443:443
- a default on disable: 80:0:443:0
- i default on enable: 7143:143:7993:993
- i default on disable: 143:7143:993:7993
- p default on enable: 7110:110:7995:995
- p default on disable: 110:7110:995:7995
- x default on store disable: http
- x default on proxy enable/disable: http

Appendix B ZCS Crontab Jobs

The crontab is used to schedule commands to be executed periodically on the Zimbra servers.

How to read the crontab

Each entry in a crontab file consists of six fields, specified in the following order

minute hour day month weekday command

The fields are separated by blank spaces or tabs.

Field	Description
• minute	0 through 59
• hour	0 through 23
• day of month	1 through 31
• month	1 through 12
• day of week	0 through 7 (0 or 7 is Sunday, 1 is Monday, etc., or use names)
• command	This is the complete sequence of commands to be executed for the job

When an asterisk (*) is displayed, it means all possible values for the field. For example, an asterisk in the hour time field would be equivalent to “every hour”

ZCS Cron Jobs

You can view the ZCS crontab by logging on as zimbra and typing **crontab -l**.

The following cron jobs are scheduled to run for ZCS

Log pruning

The log pruning deletes logs from **/opt/zimbra/log** that are over eight days old. The job runs at 2:30 a.m.

Status logging

zmstatuslog calls **zmcontrol status** and outputs its data into **syslog**. This is primarily so that the logger can read the data and keep the administration console status up-to-date. Status logging job runs every 2 minutes.

Jobs for crontab.store

Log pruning

The log pruning deletes logs from **/opt/zimbra/mailboxd/logs** that are over eight days old. The job runs at 2:30 a.m.

Clean up the quarantine dir

Mail identified with a virus or spam are not dropped immediately, but are put in quarantine. Messages older than seven days are deleted at 1:00 a.m. daily.

Table maintenance

The **ANALYZE TABLE** statement is run on all tables in the database to update the statistics for all indexes. This is done to make sure that the MySQL query optimizer picks the correct indexes when executing SQL statements. This script is run 1:30 a.m. on Sunday.

Report on any database inconsistencies

zmbdbintegrityreport is run weekly to check the MySQL database for corruption and will notify the administrator if any corruption is found. When this is run, it may consume a significant amount of I/O. If you find that it is an issue, you may want to change the frequency with which **zmbdbintegrityreport** is run by editing the ZCS crontab entry. This report runs at 11:00 p.m. Sundays.

Large sites may opt to disable this by setting **zmlocalconfig -e zmbdbintegrityreport_disabled=TRUE**.

If you choose to disable this, it is recommended that the integrity report be run by hand during the normal maintenance windows and prior to running any ZCS upgrades.

Monitor for multiple mysqld to prevent corruption

A script is executed to see if **mysqld** process is running to detect cases where corruption is likely to be caused. An email is generated if it finds more than 1 **mysqld** process running. The script runs every 5 minutes.

Jobs for crontab.logger

process logs

zmlogprocess runs every 10 minutes to parse logs and produce MTA metrics (as/av, volume, count, etc).

Daily reports

When the logger package is installed, a daily mail report is automatically scheduled in the crontab. The report runs every morning at 11:30 and is sent to the administrator's email address.

Jobs for crontab.mta

Queue logging

The `zmqueue` report status via the syslog is reviewed. This is logger data. The status is updated every 10 minutes.

Spam training

The `zmtrainsa` script is enabled to feed mail that has been classified as spam or a non-spam to the SpamAssassin application. SpamAssassin learns what signs are likely to mean spam or ham. This job should run only on one Zimbra MTA. The job runs at 11:00 p.m.

Spam training cleanup

`zmtrainsa` empties the spam and ham mailboxes each day. The job runs at 11:45 p.m.

DSPAM cleanup

This job does not run at this time.

Spam Bayes auto-expiry

Spam bayes auto-expiry maintains the spam-assassin Bayes database. This keeps the database to manageable size ensuring spam processing remains as quick as possible. This runs every day at 11:20 p.m.

Clean up amavisd/tmp

This job is used to clean up the amavisd temp files. It runs at 5:15 a.m. and at 8:15 p.m.

Single Server Crontab -l Example

```
[zimbra@example ~]$ crontab -l
# ZIMBRASTART -- DO NOT EDIT ANYTHING BETWEEN THIS LINE AND ZIMBRAEND
#
# Log pruning
#
30 2 * * * find /opt/zimbra/log/ -type f -name \*.log\* -mtime +8 -exec rm {} \;
> /dev/null 2>&1
35 2 * * * find /opt/zimbra/log/ -type f -name \*.out.???????????? -mtime +8 -ex
ec rm {} \; > /dev/null 2>&1
#
# Status logging
#
*/2 * * * * /opt/zimbra/libexec/zmstatuslog
#
# Backups
#
# BACKUP BEGIN
0 1 * * 6 /opt/zimbra/bin/zmbackup -f -a all
0 1 * * 0-5 /opt/zimbra/bin/zmbackup -i
0 0 * * * /opt/zimbra/bin/zmbackup -del 1m
# BACKUP END
#
# crontab.ldap
#
#
#
# crontab.store
#
# Log pruning
#
30 2 * * * find /opt/zimbra/mailboxd/logs/ -type f -name \*log\* -mtime +8 -exec
rm {} \; > /dev/null 2>&1
30 2 * * * find /opt/zimbra/log/ -type f -name stacktrace.\* -mtime +8 -exec rm
{} \; > /dev/null 2>&1
#
# Table maintenance
#
30 1 * * 7 /opt/zimbra/libexec/zmmaintaintables >> /dev/null 2>&1
#
# # Report on any database inconsistencies
#
0 23 * * 7 /opt/zimbra/libexec/zmdbintegrityreport -m
#
# Monitor for multiple mysqld to prevent corruption
#
*/5 * * * * /opt/zimbra/libexec/zmcheckduplicatemysqld -e > /dev/null 2>&1
#
```

```
# crontab.logger
#
# process logs
#
00,10,20,30,40,50 * * * * /opt/zimbra/libexec/zmlogprocess > /tmp/logprocess.out
2>&1
#
# Graph generation
#
10 * * * * /opt/zimbra/libexec/zmgengraphs >> /tmp/gengraphs.out 2>&1
```

```

#
# Daily reports
#
10 1 * * * /opt/zimbra/libexec/zmdailyreport -m
#
#
crontab.mta
#
#
# Queue logging
#
0,10,20,30,40,50 * * * * /opt/zimbra/libexec/zmqueueelog
#
# Spam training
#
0 23 * * * /opt/zimbra/bin/zmtrainsa >> /opt/zimbra/log/spamtrain.log 2>&1
#
# Spam training cleanup
#
45 23 * * * /opt/zimbra/bin/zmtrainsa --cleanup >> /opt/zimbra/log/spamtrain.log
2>&1
#
# Dspam cleanup
#
0 1 * * * [ -d /opt/zimbra/data/dspam/data/z/i/zimbra/zimbra.sig ] && find /opt/
zimbra/dspam/var/dspam/data/z/i/zimbra/zimbra.sig/ -type f -name \*sig -mtime +7
-exec rm {} \; > /dev/null 2>&1
8 4 * * * [ -f /opt/zimbra/data/dspam/system.log ] && /opt/zimbra/dspam/bin/dspa
m_logrotate -a 60 -l /opt/zimbra/data/dspam/system.log
8 8 * * * [ -f /opt/zimbra/data/dspam/data/z/i/zimbra/zimbra.log ] && /opt/zimbra
a/dspam/bin/dspam_logrotate -a 60 -l /opt/zimbra/data/dspam/data/z/i/zimbra/zimb
ra.log
#
# Spam Bayes auto-expiry
#
20 23 * * * /opt/zimbra/libexec/sa-learn -p /opt/zimbra/conf/salocal.cf --dbpath
/opt/zimbra/data/amavisd/.spamassassin--siteconfigpath/opt/zimbra/conf/spamas
sassin --force-expire --sync > /dev/null 2>&1
#
# Clean up amavisd/tmp
#
15 5,20 * * * find /opt/zimbra/data/amavisd/tmp -maxdepth 1 -type d -name 'amavi
s-*' -mtime +1 -exec rm -rf {} \; > /dev/null 2>&1
#
# Clean up the quarantine dir
#
0 1 * * * find /opt/zimbra/data/amavisd/quarantine -type f -mtime +7 -exec rm -f
{} \; > /dev/null 2>&1

# ZIMBRAEND -- DO NOT EDIT ANYTHING BETWEEN THIS LINE AND ZIMBRASTART
[zimbra@example ~]$

```

Appendix C Glossary

The Glossary lists terms and acronyms used in this document, and includes both industry terms and application-specific terms. If a general industry concept or practice has been implemented in a specific way within the product, that is noted as well.

A record

A (Address) records map the hostname to the numeric IP address. For zimbra, the A record is the IP address for the zimbra server.

Account Policy

Class of Service as exposed in Zimbra administration console.

AD

Microsoft Active Directory Server. Used in Zimbra as an optional choice for authentication and GAL, along with OpenLDAP for all other Zimbra functions.

Alias

An “also known as” email address, which should be routed to a user at a different email address.

Attribute

Contains object-related data for directory server entries. Attributes store information such as a server host name or email forwarding address.

Authentication

Process by which user-supplied login information is used to validate that user's authority to enter a system.

Blacklist

Anti-spam term, indicates a known bad IP address. This could be one that has been hijacked by spammers, or also one from a poorly maintained but legitimate site that allows mail relaying from unauthorized parties.

BLOB

Binary Large Object.

Class of Service (COS)

Describes an object in the Zimbra LDAP data schema, which contains settings for things like user mail quotas. Each Zimbra account includes a COS, and the account inherits all the settings from the selected COS.

CLI

Command-Line Interface. Used to refer to the collective set of Zimbra command-line tools, such as **zmprov**.

Cluster

A type of network configuration for high availability, using clusters of servers (nodes). If one server fails or drops off the network, a spare takes over.

Contacts

Within Zimbra, Contacts are a user-interface feature listing that user's personal collection of address and contact information.

Conversation

Within Zimbra, Conversations are a user-interface feature that presents email threads (emails sharing the same subject line) as a single Conversation listing. Users can expand the Conversation to view all emails within it.

DHTML

Dynamic HTML. A technology employed in the Zimbra Web Client.

DNS

Domain Name System is an Internet directory service. DNS is how domain names are translated into IP addresses and DNS also controls email delivery. Correctly configured DNS is required for Postfix to route messages to remote destinations

Edge MTA

Generic term used to refer to any mail transfer agent that is the first line of defense in handling incoming email traffic. Functions that may occur on the Edge MTA include spam filtering.

Entry

An item in the directory server, such as an account or mail host.

Failover

Takeover process where a spare server machine detects that a main server is unavailable, and the spare takes over processing for that server.

FQDN

Fully qualified domain name. The hostname and the path to the host. For example, **www.Zimbra.com** is a fully qualified domain name. **www** is the host, **Zimbra** is the second-level domain, and **.com** is the top level domain.

GAL

Global Address List, the Outlook version of a company directory. Lists contact information, including email addresses, for all employees within an organization.

Global Configuration

A Zimbra object containing default settings for servers and Class of Service.

High Availability

Abbreviated as HA, high availability refers to the availability of resources in a computer system in the wake of component failures in the system.

HTTP

HyperText Transfer Protocol, used along with SOAP for UI integration.

IMAP

Internet Message Access Protocol is a method of accessing mail from a remote message store as if the users were local.

Store

Within Zimbra, a directory area that stores all the indexing information for mail messages on a particular mailbox server.

Indexing

The process of parsing incoming email messages for search words.

Java

Java is an industry standard object-oriented programming language. Used for the core Zimbra application server.

JavaScript

Scripting largely developed by Netscape that can interact with HTML source code. Technology used in the Zimbra Web Client.

LDAP

Lightweight Directory Access Protocol, an industry standard protocol used for authentication.

Zimbra administration console

The Zimbra administrator interface.

Zimbra Web Client

The Zimbra end-user interface.

LMTP

Local Mail Transfer Protocol, used for transferring messages from Postfix MTA to the Zimbra server for final delivery.

Mailbox Server

Alternative term for Zimbra server.

MAPI

Messaging Application Programming Interface. A system built into Microsoft Windows to enable different email applications to work together.

Message Store

Within Zimbra, a directory area that stores the mail messages on a particular mail-box server.

MDA

Mail Delivery Agent, sometimes known as a mail host. The Zimbra server functions as an MDA.

Metadata

Data that describes other data, rather than actual content. Within Zimbra, meta-data consists of user folders, threads, message titles and tags, and pointers.

MIME

Multipurpose Internet Mail Extensions, a specification for formatting non-ASCII Internet message content such as image files. Format used to store messages in Message Store.

MTA

Message Transfer Agent. MTA is a program that delivers mail and transports it between machines. A Zimbra deployment assumes both the Postfix MTA and an edge MTA.

MX Record

Mail eXchange. An MX record is an entry in a domain name database that identifies the mail server that is responsible for handling emails for that domain name. The email system relies on DNS MX records to transmit emails between domains. When mail is processed, the MX record is checked before the A record for the destination address.

OOO

Common shorthand for “out of the office”, used when sending vacation messages.

Open Source

Refers to software created by groups of users for non-commercial distribution, where source code is published rather than proprietary.

OS

Operating system, such as Linux, UNIX, or Microsoft Windows.

POP

Post Office Protocol is used to retrieve email from a remote server over TCP/IP and save it to the local computer.

Provisioning

The process of creating accounts or other data, usually in batch or automated fashion.

RBH

Real-time black hole. Usually refers to web sites that, as a public service, provide lists of known bad IP addresses from which mail should be blocked, because the

servers are either known to be spammers, or are unsecured and exploited by spammers.

Redo Logs

Detailed transaction log for the Zimbra server, used for replay and replication.

SAN

Storage Array Network. A high-availability data storage area.

Schema

Describes the data structures in use for by directory services at a particular organizational site.

SMTP

Simple Mail Transfer Protocol. Used in Zimbra deployments between the Edge MTA and the Postfix MTA.

SNMP

Simple Network Monitoring Protocol. Used by monitoring software to pick up critical errors from system logs.

SOAP

Simple Object Access Protocol, an XML-based messaging protocol used for sending requests for Web services. The Zimbra servers use SOAP for receiving and processing requests, which can come from Zimbra command-line tools or Zimbra user interfaces.

Spam

Unsolicited commercial email. Spammers refer to their output as “bulk business email”.

SQL

Structured Query Language, used to look up messages in the Message Store.

SSL

Secure Sockets Layer.

Tags

A Zimbra Web Client feature. Users can define tags and apply them to mail messages for searching.

TCO

Total Cost of Ownership. Zimbra reduces total cost of ownership (TCO) by reducing requirements for server hardware, OS licensing fees, supporting application license fees, disk storage requirements, and personnel (IT, help desk, consulting).

TLS

Transport Layer Security.

UCE

Unsolicited commercial email, also known as spam.

Virtual Alias

A type of mail alias recognized in the Postfix MTA.

Whitelist

Anti-spam term for a known good mail or IP address. Mail coming from such an address may be “automatically trusted”.

XML

eXtended Markup Language.

Index

A

- abort backup, CLI 183
- account
 - assign to mailbox server 91
 - deleting 93
 - other configuration settings 113
- account authentication 34
- account distribution by COS 90
- account limits by domain 79
- account provisioning, zmprov 162
- account quota 115
- account quota and MTA 48
- account status 92
- account types by COS, setting 80
- account types, tracking number assigned 80
- account, creation date 87
- account, password restriction 91
- account, provision with zmprov 170
- accounts
 - batch provisioning 89
- accounts object 38
- accounts, list all 171
- accounts, number used 73
- accounts, setting up and configuring 88
- accounts, user 57
- active status 92
- address book size limit, configuring 108
- address book, features 108
- addresses, search for 62
- admin console, tasks 59
- admin extensions 84
- admin password, change 171
- administration console 14, 55
- administration tasks 87
- administrator message of the day 60, 61
- administrator password, change 56
- advanced ZWC 99
- alias, add with zmprov CLI 171
- anti-spam component 15
- anti-spam protection 49
- anti-spam settings 69
- anti-spam statistics 137
- anti-spam training filter 49
- anti-virus component 15
- anti-virus protection 48
- anti-virus settings 70
- anti-virus statistics 137
- anti-virus updates 48, 70
- application packages, Zimbra 17
- appointment reminder 112
- appointment reminder popup, Yahoo!BrowserPlus 112
- appointments, disabling editing of 110
- attachment settings
 - global settings 67
- attachment viewing options, setting 119
- attachment viewing, setting account options 118
- attachments
 - blocking 67
- audit log 143
- auth token, immediate session end 118
- authentication 34
- authentication modes 78
- authentication, custom 35
- autho token lifetime 118
- autocomplete, name ranking 106
- autoCompleteGal, zmprov 169
- auto-grouped backup method 84
- automatic purge of messages, setting up 118

B

- backup 28
- backup process, overview 20
- backup, CLI commands 176
- backup, standard method, auto-grouped method 84
- backups cron job 220
- batch provisioning new accounts 89
- blocking attachments 67
- bounced delivery report 138
- Briefcase feature 113

C

- calendar preferences 111
- calendar resource provisioning, zmprov 164
- calendar sync, zmcalthk 110
- calendar, enabling personal appointments only 109
- calendar, filtering appointments 110

- calendar, nested 109
- calender, features 109
- change administrator password 56
- change password page, configure 91
- changing account status 92
- changing password 91
- checking for latest ZCS software updates 152
- Clam AntiVirus software 48
- clamd.log 143
- class of service 89
 - about 39, 89
- class of service object 39
- class of service, COS 57
- clean up amavisd/tmp cron job 221
- clean up the quarantine dir cron job 220
- CLI command to move
 - mailbox, zmmailboxmove 88
- CLI commands, provisioning 160
- CLI commands, start/stop service 191
- CLI for account management
 - zmmailbox 88
 - zmmboxsearch 88
 - zmprov 88
- CLI utilities 155
- closed status 93
- company directory 41
- component thread number 147
- components, Zimbra 15
- config provisioning, zmprov 167
- configuration, typical example 22
- contact 11
- contact lists 108
- core functionality 14
- COS account types, setting 80
- COS provisioning, zmprov 166
- COS, list all 171
- COS, password restriction 91
- creating accounts 89
- crontab jobs 219
- crontab store jobs 220
- crontab, how to read 219
- crontab.logger cron jobs 221
- crontab.mta jobs 221
- cross mailbox search 88
- cross mailbox search, CLI 194
- custom authentication 35

D

- daily reports 138
- data store 19, 27
 - about 27
 - file location 21
- deleting accounts 93

- dictionary, adding words to ignore in 85
- directory structure 20
- disable 121
- disk full alerts 139
- disk layout 26
- disk space monitoring 139
- distribution list provisioning, zmprov 167
- distribution list used for sharing 95
- distribution list, create with zmprov CLI 171
- distribution list, maximum members 94
- distribution list, sharing items 114
- distribution lists object 39
- distribution lists, group sharing 95
- distribution lists, managing 94
- documentation 10
- Documents, features 113
- domain provisioning, zmprov 165
- domain rename process 80
- domain renaming 80
- domain, account limits 79
- domain, after domain is renamed 80
- domain, create with zmprov CLI 171
- domain, set default with zmprov CLI 171
- domains
 - authentication modes 78
 - virtual hosts 78
- domains object 39
- domains, global address list mode 76
- domains, managing 74

E

- edge MTA 46
- email messaging, features 100
- equipment resources 95
- error report, daily 138
- exclude items in mailbox move 94
- export preferences on ZWC 107
- external AD account authentication 34
- external LDAP account authentication 34

F

- failed logging policy, setting 116
- features, core 14
- features, web client 15
- filtering, calendar items 110
- flushCache, zmprov 170
- forwarding address, hidden 102
- free/busy interoperability 70
- free/busy, zmprov 165

G

- GAL 41

- LDAP search filter used 41
- search options 41
- search parameter settings 42
- GAL access for COS 105
- GAL attributes 41
- GAL mode 76
- GAL sync account 77
- generateDomainPreAuth, zmprov 170
- global configuration 65
- global configuration object 40
- global settings 58
 - anti-spam 69
 - anti-virus 70
 - HSM 72
 - license 73
 - MTA 67
 - POP and IMAP 69
- group calendar, enabling 109
- group sharing, using distribution lists for 95

H

- ham mailbox 49
- handler exceptions in mailbox log 147
- hidden forwarding address 102
- high availability support 13
- horizontal scalability 13
- HSM
 - scheduling 83
- HSM, CLI 202
- HSM, global setting 72

I

- IMAP access 106
- IMAP global settings 69
- IMAP, class of service 90
- import preferences on ZWC 107
- incoming mail routing 26
- index messages 18
- index store 19, 27
 - file location 21
- index volume 83
- index/search
 - back-end technologies used 27
- indexing 28
- install certificate, CLI 195
- internal account authentication 34
- internal authentication mechanism 34
- interop 70

K

- keyboard shortcuts, enable 105

L

LDAP

- directory traffic 32
- hierarchy 32
- implementation 32
- overview 31
- schema include files for Zimbra 33
- LDAP schema 33
- license ID 73
- license information 73
- license, number of accounts used 73
- license, renew within 73
- license, updating 73
- local configuration, CLI 197
- localconfig list of properties 197
- location resources 95
- lockout status 93
- log files 29
- log files, description of 142
- log pruning cron job 220
- log, how to read mailbox.log records 146
- log4j pre-defined zimbra categories 144
- log4j, used to configure logging 144
- logger 136
- logger_myslow.log 143
- logging levels 144
- logging on to admin console 55
- Lucene 27

M

- mail filters 105
- mail filters, working with spam check 105
- mail identities 103
- mail notification 103
- mail report, change 138
- mail reports 138
- mailbox full notification 115
- mailbox log examples 148
- mailbox log records 146
- mailbox log, how to read 146
- mailbox management tool 88
- mailbox move, CLI 192
- mailbox quota, enforcing 93
- mailbox quotas
 - specifying 115
- mailbox quotas, monitoring 141
- mailbox search 88
- mailbox server
 - overview 25
- mailbox, move 88, 93
- mailbox, reindexing 92
- mailbox, view from admin console 91
- mailbox, zmprov 168

- mailbox.log 143
- main.cf file 46
- management tasks 58
- management tasks from CLI 59
- managing resource accounts 97
- managing resources 95
- mandatory 121
- mandatory signatures 85
- mandatory zimlets 121
- master.cf file 46
- maximum number in distribution lists 94
- message header information 151
- message lifetime 119
- message of the day for administrators 60, 61
- message search 88
- message store 18, 19, 26
 - file location 22
 - single-copy 26
- message store, MIME format 19
- message volume 83, 137
- messages received and sent report 138
- messages, purging 118
- modes, set with zmtlsctl CLI 201
- Monitor for multiple mysqld tp prevent corruption
 - cron job 220
- monitoring quotas 141
- monitoring server status 137
- monitoring tool 136
- move mailbox 88, 192
- moving a mailbox 93
- MTA functionality 47
- MTA package, Zimbra 18
- MTA queues 52
- MTA settings, how to configure 67
- MySQL 19
- MySQL, database check 152

N

- nested calendars 109

O

- offline restore, CLI 188
- open source components 15
- out of office reply 102

P

- password policy, setting 115
- password restriction 91
- password, admin change 171
- password, change password page 91
- password, changing admin 56
- password, failed login policy 116

- performance charts 208
- performance statistics 137
- persona 103
- polling interval for GAL sync 77
- POP 69
- POP3, external access 104
- Postfix 46
- Postfix configuration files 46
- postfix error report 138
- process logs cron job 221
- product overview 13
- protocol, set with CLI 201
- provisioning, CLI commands 160
- public service host name 75
- public service host name, setting up 76
- publishing shares 95
- purge messages 119
- purge, setting up 118

Q

- query backup, CLI 184
- queue logging cron job 221
- queues 52
- quota out of sync 168
- quota, address book 115
- quota, setting up notification 115
- quotas and message delivery 48
- quotas, monitoring 141
- quotas, setting 115

R

- recalculate mailbox count command 168
- recipient object 39
- recipients, most active report 138
- redo log 29
- reindexing a mailbox 92
- relay host settings 47
- rename a domain 80
- renew license 73
- report on any database inconsistencies cron
 - job 220
- report, daily mail 138
- report, database inconsistencies 220
- reports, MySQL 152
- resource accounts, managing 97
- resource calendar, sharing 97
- resource conflict rules 97
- resources, maintaining calendars 96
- resources, managing 95
- resources, scheduling policy 96
- REST URL 75
- restore backup, CLI 186

S

- schedule backups, CLI 181
- scheduling policy for resources 96
- schema, LDAP 33
- screen resolution, standard web client 99
- search 62
- search across mailboxes 88
- searchGAL, zmprov 169
- senders, most active report 138
- server
 - admin extensions 84
 - managing zimlets 84
 - volume settings 83
- server mode, changing 201
- server pool by COS 90
- server provisioning, zmprov 166
- server settings
 - services 82
- server statistics 137
 - message count 137
 - message volume 137
- server statistics, enable on admin console 136
- server status 137
- server, Zimbra
 - managing 81
- service,start/stop 191
- session idle lifetime 118
- session time out policy, 118
- sessions, expire 118
- shared items, managing 114
- shares tab, distribution list 114
- sharing, notifying distribuion list 95
- signatures, maximum length 103
- signatures, system-wide 85
- single-copy message storage 26
- single-copy store 26
- skins 120
- smart host 47
- SMTP authentication 47
- SMTP restrictions 47
- SNMP monitoring 152
- SNMP package, Zimbra 19
- SNMP traps, error 152
- software version checking 152
- spam bayes auto-expiry cron job 221
- spam mailbox 49
- spam message lifetime 119
- spam training cleanup cron job 221
- spam training cron tab 221
- spam training filter 49
- spam training, CLI 211
- spam white list, for mail filters 105
- spam, turning on/off training attributes 50

- spamtrain .log 143
- spell, adding words to ignore 85
- stack traces in mailbox log 147
- standard web client, setting as default 99
- standard ZWC 99
- start service 191
- statistics 58
 - anti-spam 137
- status 58
- status logging cron job 220
- stop service 191
- store package 18
- support 11
- sync.log 143
- syncGAL, zmprov 170
- system architecture 16
- system architecture graphic 17
- system-wide signatures 85

T

- Table maintenance cron job 220
- tasks feature 112
- tasks from admin console 59
- themes 120
- themes, setting account options 120
- third-party software bundled with 15
- timezone, enabling for Calendar 110
- training filter for spam 49
- transaction log 29
- trashed message lifetime 119

U

- unread message count out of sync 168
- updating a license 73
- updating anti-virus software 48, 70
- upgrading zimlets 133
- user auth token lifetime, expire 118
- user warning message, navigation from ZCS 122

V

- vacation message 102
- view mailbox from admin console 91
- view quota 115
- virtual host 78
- volume settings 83
- volumes, managing with CLI 212

W

- Web client features 15

Z

- Zimbra applications 100

- zimbra cron jobs 219
- Zimbra logger 136
- Zimbra mobile 121
- Zimbra monitor host 136
- Zimbra MTA 45
- Zimbra objects
 - ldap 38
- Zimbra Schema 33
- Zimbra web client, import/export account data 107
- zimbraProxyAllowedDomains, zimlets 127
- zimlet gallery 125
- zimlet, enable 121
- Zimlets, configuring for accounts 121
- zimlets, disabling 130
- zimlets, listing all 214
- zimlets, managing 84
- zimlets, modify COS 127
- zimlets, remove 132
- zimlets, specify COS to use 128
- zimlets, upgrading 133
- zmbbackup 176, 186
- zmbdbintegrityreport 220
- zmbdbintegrityreport disable 220
- zmprov CLI 160
- zmstat-chart 208
- zmtrainsa CLI command for spam training 49
- zmtrainsa spam training tool 49
- ZWC versions 99