

# Week-9

GZW

2023-10-18

#Slide 8

```
# Tidy
library(tidyverse)
```

```
## -- Attaching core tidyverse packages ----- tidyverse 2.0.0 --
## v dplyr      1.1.2      v readr      2.1.4
## v forcats    1.0.0      v stringr   1.5.0
## v ggplot2     3.4.3      v tibble    3.2.1
## v lubridate  1.9.2      v tidyr     1.3.0
## v purrr      1.0.2
## -- Conflicts ----- tidyverse_conflicts() --
## x dplyr::filter() masks stats::filter()
## x dplyr::lag()     masks stats::lag()
## i Use the conflicted package (<http://conflicted.r-lib.org/>) to force all conflicts to become errors
```

```
tidydata <- tribble(
  ~country, ~year, ~cases, ~population,
  "Afghanistan", 1999, 745, 19987071,
  "Afghanistan", 2000, 2666, 20595360,
  "Brazil", 1999, 37737, 172006362,
  "Brazil", 2000, 80488, 174504898,
  "China", 1999, 212258, 1272915272,
  "China", 2000, 213766, 1280428583)
```

```
tidydata
```

```
## # A tibble: 6 x 4
##   country      year  cases population
##   <chr>      <dbl> <dbl>      <dbl>
## 1 Afghanistan  1999     745    19987071
## 2 Afghanistan  2000    2666    20595360
## 3 Brazil       1999   37737   172006362
## 4 Brazil       2000   80488   174504898
## 5 China        1999 212258  1272915272
## 6 China        2000 213766  1280428583
```

```
# Non-tidy
```

```
nontidydata <- tribble(
```

```

~country, ~year, ~rate,
"Afghanistan",1999,"745/19987071",
"Afghanistan",2000,"2666/20595360",
"Brazil",1999,"37737/172006362",
"Brazil",2000,"80488/174504898",
"China",1999,"212258/1272915272",
"China",2000,"213766/1280428583")

```

```
nontidydata
```

```

## # A tibble: 6 x 3
##   country      year rate
##   <chr>      <dbl> <chr>
## 1 Afghanistan 1999 745/19987071
## 2 Afghanistan 2000 2666/20595360
## 3 Brazil      1999 37737/172006362
## 4 Brazil      2000 80488/174504898
## 5 China       1999 212258/1272915272
## 6 China       2000 213766/1280428583

```

#Slide 11

```
# Tidy-ing data: Example-1
```

```
nontidydata
```

```

## # A tibble: 6 x 3
##   country      year rate
##   <chr>      <dbl> <chr>
## 1 Afghanistan 1999 745/19987071
## 2 Afghanistan 2000 2666/20595360
## 3 Brazil      1999 37737/172006362
## 4 Brazil      2000 80488/174504898
## 5 China       1999 212258/1272915272
## 6 China       2000 213766/1280428583

```

```

tidieddata <- nontidydata %>%
  separate(rate, into = c("cases","population"),
    sep = "/")
tidieddata

```

```

## # A tibble: 6 x 4
##   country      year cases population
##   <chr>      <dbl> <chr>   <chr>
## 1 Afghanistan 1999  745    19987071
## 2 Afghanistan 2000  2666    20595360
## 3 Brazil      1999 37737    172006362
## 4 Brazil      2000 80488    174504898
## 5 China       1999 212258    1272915272
## 6 China       2000 213766    1280428583

```

#Slide 12

```
# Tidy-ing data: Example-1
```

```
newtidieddata <- tidieddata %>%  
  pivot_longer(  
    cols = cases:population,  
    names_to = "measurement",  
    values_to = "value")  
  
newtidieddata
```

```
## # A tibble: 12 x 4  
##   country      year measurement value  
##   <chr>      <dbl> <chr>      <chr>  
## 1 Afghanistan 1999 cases      745  
## 2 Afghanistan 1999 population 19987071  
## 3 Afghanistan 2000 cases      2666  
## 4 Afghanistan 2000 population 20595360  
## 5 Brazil      1999 cases      37737  
## 6 Brazil      1999 population 172006362  
## 7 Brazil      2000 cases      80488  
## 8 Brazil      2000 population 174504898  
## 9 China       1999 cases      212258  
## 10 China      1999 population 1272915272  
## 11 China      2000 cases      213766  
## 12 China      2000 population 1280428583
```

```
#Slide 14
```

```
# Tidy-ing data: Example-2
```

```
df <- tribble(  
  ~id, ~bp1, ~bp2,  
  "A", 100, 120,  
  "B", 140, 115,  
  "C", 120, 125)  
  
df
```

```
## # A tibble: 3 x 3  
##   id      bp1  bp2  
##   <chr> <dbl> <dbl>  
## 1 A      100   120  
## 2 B      140   115  
## 3 C      120   125
```

```
# Tidy-ing data: Example-2
```

```
df %>%  
  pivot_longer(  
    cols = bp1:bp2,  
    names_to = "measurement",  
    values_to = "value")
```

```
## # A tibble: 6 x 3
##   id    measurement value
##   <chr> <chr>      <dbl>
## 1 A      bp1          100
## 2 A      bp2          120
## 3 B      bp1          140
## 4 B      bp2          115
## 5 C      bp1          120
## 6 C      bp2          125
```

#Slide 18

```
# Reshaping data: Example-3
newtidieddata
```

```
## # A tibble: 12 x 4
##   country    year measurement value
##   <chr>      <dbl> <chr>      <chr>
## 1 Afghanistan 1999 cases      745
## 2 Afghanistan 1999 population 19987071
## 3 Afghanistan 2000 cases      2666
## 4 Afghanistan 2000 population 20595360
## 5 Brazil      1999 cases      37737
## 6 Brazil      1999 population 172006362
## 7 Brazil      2000 cases      80488
## 8 Brazil      2000 population 174504898
## 9 China       1999 cases      212258
## 10 China      1999 population 1272915272
## 11 China      2000 cases      213766
## 12 China      2000 population 1280428583
```

```
newtidieddata %>%
  pivot_wider(
    names_from="measurement",
    values_from="value")
```

```
## # A tibble: 6 x 4
##   country    year cases population
##   <chr>      <dbl> <chr>      <chr>
## 1 Afghanistan 1999 745      19987071
## 2 Afghanistan 2000 2666     20595360
## 3 Brazil      1999 37737    172006362
## 4 Brazil      2000 80488    174504898
## 5 China       1999 212258   1272915272
## 6 China       2000 213766   1280428583
```

#Slide 19

```
# Reshaping data: Example-4
df <- tribble(
  ~id, ~measurement, ~value,
  "A", "bp1", 100,
```

```
"B", "bp1", 140,
"B", "bp2", 115,
"A", "bp2", 120,
"A", "bp3", 105)
```

```
df
```

```
## # A tibble: 5 x 3
##   id   measurement value
##   <chr> <chr>      <dbl>
## 1 A     bp1         100
## 2 B     bp1         140
## 3 B     bp2         115
## 4 A     bp2         120
## 5 A     bp3         105
```

```
# Reshaping data: Example-4
df %>%
  pivot_wider(
    names_from = measurement,
    values_from = value
  )
```

```
## # A tibble: 2 x 4
##   id      bp1    bp2    bp3
##   <chr> <dbl> <dbl> <dbl>
## 1 A      100    120    105
## 2 B      140    115     NA
```

# Challenge-9

GZW

2023-10-18

#Challenge 1

```
library(tidyverse)
```

```
## -- Attaching core tidyverse packages ----- tidyverse 2.0.0 --
## v dplyr      1.1.2      v readr      2.1.4
## v forcats    1.0.0      v stringr   1.5.0
## v ggplot2    3.4.3      v tibble    3.2.1
## v lubridate  1.9.2      v tidyr     1.3.0
## v purrr      1.0.2
## -- Conflicts ----- tidyverse_conflicts() --
## x dplyr::filter() masks stats::filter()
## x dplyr::lag()     masks stats::lag()
## i Use the conflicted package (<http://conflicted.r-lib.org/>) to force all conflicts to become errors
```

```
billboard
```

```
## # A tibble: 317 x 79
##   artist      track date.entered  wk1  wk2  wk3  wk4  wk5  wk6  wk7  wk8
##   <chr>      <chr> <date>      <dbl> <dbl> <dbl> <dbl> <dbl> <dbl> <dbl> <dbl>
## 1 2 Pac      Baby~ 2000-02-26    87   82   72   77   87   94   99   NA
## 2 2Ge+her    The ~ 2000-09-02    91   87   92   NA   NA   NA   NA   NA
## 3 3 Doors D~ Kryp~ 2000-04-08    81   70   68   67   66   57   54   53
## 4 3 Doors D~ Loser 2000-10-21    76   76   72   69   67   65   55   59
## 5 504 Boyz   Wobb~ 2000-04-15    57   34   25   17   17   31   36   49
## 6 98~0       Give~ 2000-08-19    51   39   34   26   26   19    2    2
## 7 A*Teens    Danc~ 2000-07-08    97   97   96   95  100   NA   NA   NA
## 8 Aaliyah    I Do~ 2000-01-29    84   62   51   41   38   35   35   38
## 9 Aaliyah    Try ~ 2000-03-18    59   53   38   28   21   18   16   14
## 10 Adams, Yo~ Open~ 2000-08-26    76   76   74   69   68   67   61   58
## # i 307 more rows
## # i 68 more variables: wk9 <dbl>, wk10 <dbl>, wk11 <dbl>, wk12 <dbl>,
## #   wk13 <dbl>, wk14 <dbl>, wk15 <dbl>, wk16 <dbl>, wk17 <dbl>, wk18 <dbl>,
## #   wk19 <dbl>, wk20 <dbl>, wk21 <dbl>, wk22 <dbl>, wk23 <dbl>, wk24 <dbl>,
## #   wk25 <dbl>, wk26 <dbl>, wk27 <dbl>, wk28 <dbl>, wk29 <dbl>, wk30 <dbl>,
## #   wk31 <dbl>, wk32 <dbl>, wk33 <dbl>, wk34 <dbl>, wk35 <dbl>, wk36 <dbl>,
## #   wk37 <dbl>, wk38 <dbl>, wk39 <dbl>, wk40 <dbl>, wk41 <dbl>, wk42 <dbl>, ...
```

```
tidydata <- billboard %>%
  pivot_longer(
```

```

cols = starts_with("wk"),
names_to = "week",
values_to = "rank",
values_drop_na = TRUE) %>%
mutate(week = parse_number(week))
tidydata

```

```

## # A tibble: 5,307 x 5
##   artist track date.entered week rank
##   <chr> <chr> <date> <dbl> <dbl>
## 1 2 Pac Baby Don't Cry (Keep... 2000-02-26 1 87
## 2 2 Pac Baby Don't Cry (Keep... 2000-02-26 2 82
## 3 2 Pac Baby Don't Cry (Keep... 2000-02-26 3 72
## 4 2 Pac Baby Don't Cry (Keep... 2000-02-26 4 77
## 5 2 Pac Baby Don't Cry (Keep... 2000-02-26 5 87
## 6 2 Pac Baby Don't Cry (Keep... 2000-02-26 6 94
## 7 2 Pac Baby Don't Cry (Keep... 2000-02-26 7 99
## 8 2Ge+her The Hardest Part Of ... 2000-09-02 1 91
## 9 2Ge+her The Hardest Part Of ... 2000-09-02 2 87
## 10 2Ge+her The Hardest Part Of ... 2000-09-02 3 92
## # i 5,297 more rows


```

```

#Plot

ggplot(tidydata,
  aes(x = week,
      y = rank,
      group = track)) +
geom_line()

```

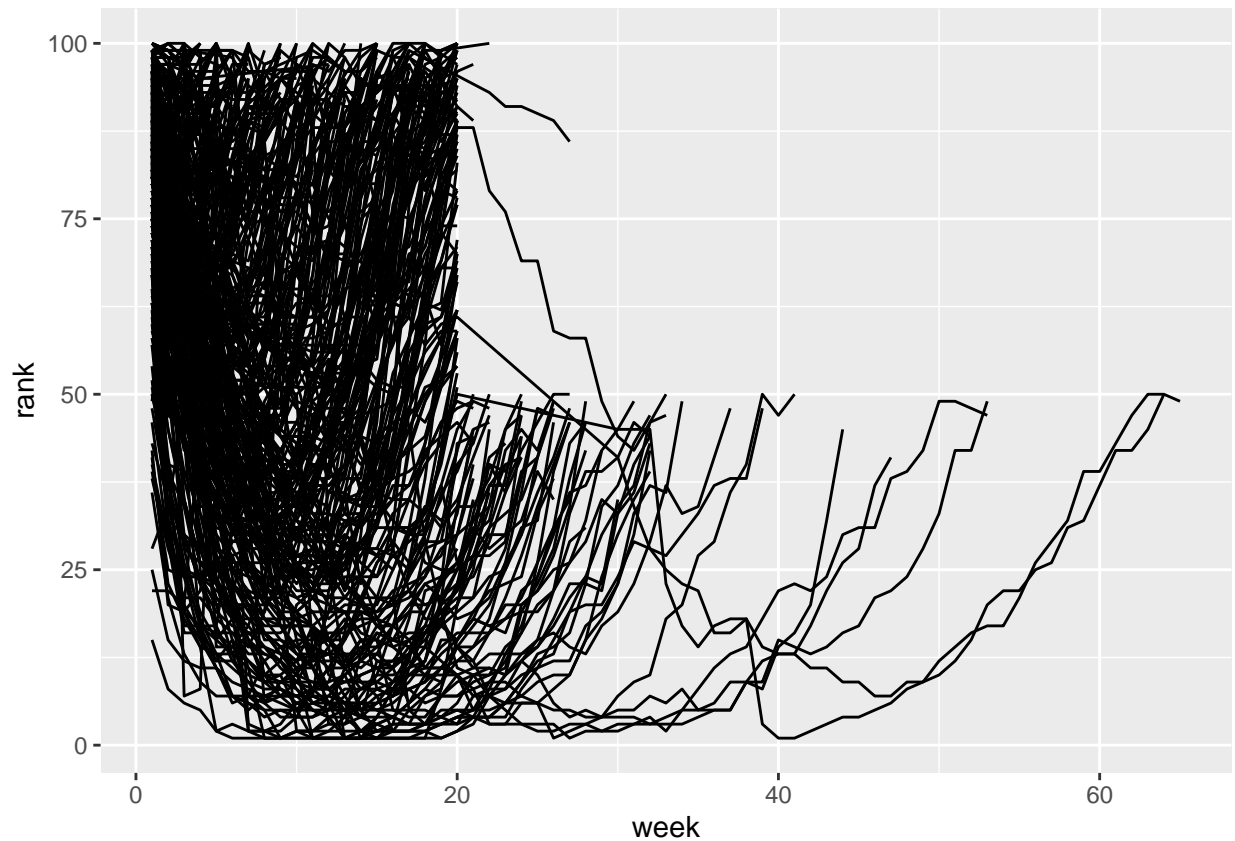

#Challenge 2

cms\_patient\_experience

```
## # A tibble: 500 x 5
##   org_pac_id org_nm          measure_cd measure_title prf_rate
##   <chr>      <chr>          <chr>      <chr>          <dbl>
## 1 0446157747 USC CARE MEDICAL GROUP INC CAHPS_GRP~ CAHPS for MI~      63
## 2 0446157747 USC CARE MEDICAL GROUP INC CAHPS_GRP~ CAHPS for MI~      87
## 3 0446157747 USC CARE MEDICAL GROUP INC CAHPS_GRP~ CAHPS for MI~      86
## 4 0446157747 USC CARE MEDICAL GROUP INC CAHPS_GRP~ CAHPS for MI~      57
## 5 0446157747 USC CARE MEDICAL GROUP INC CAHPS_GRP~ CAHPS for MI~      85
## 6 0446157747 USC CARE MEDICAL GROUP INC CAHPS_GRP~ CAHPS for MI~      24
## 7 0446162697 ASSOCIATION OF UNIVERSITY PHYSI~ CAHPS_GRP~ CAHPS for MI~      59
## 8 0446162697 ASSOCIATION OF UNIVERSITY PHYSI~ CAHPS_GRP~ CAHPS for MI~      85
## 9 0446162697 ASSOCIATION OF UNIVERSITY PHYSI~ CAHPS_GRP~ CAHPS for MI~      83
## 10 0446162697 ASSOCIATION OF UNIVERSITY PHYSI~ CAHPS_GRP~ CAHPS for MI~      63
## # i 490 more rows
```

```
tidy_cms <- cms_patient_experience %>%
  pivot_wider(
    id_cols = starts_with("org"),
    names_from="measure_cd",
    values_from="prf_rate")
tidy_cms
```



```
## # A tibble: 95 x 8
##   org_pac_id org_nm CAHPS_GRP_1 CAHPS_GRP_2 CAHPS_GRP_3 CAHPS_GRP_5 CAHPS_GRP_8
##   <chr>      <chr>      <dbl>      <dbl>      <dbl>      <dbl>      <dbl>
## 1 0446157747 USC C~         63         87         86         57         85
## 2 0446162697 ASSOC~         59         85         83         63         88
## 3 0547164295 BEAVE~         49         NA         75         44         73
## 4 0749333730 CAPE ~         67         84         85         65         82
## 5 0840104360 ALLIA~         66         87         87         64         87
## 6 0840109864 REX H~         73         87         84         67         91
## 7 0840513552 SCL H~         58         83         76         58         78
## 8 0941545784 GRITM~         46         86         81         54         NA
## 9 1052612785 COMMU~         65         84         80         58         87
## 10 1254237779 OUR L~         61         NA         NA         65         NA
## # i 85 more rows
## # i 1 more variable: CAHPS_GRP_12 <dbl>
```