

ScholarMatch

Find the collaborator share similar research interest with yours

Alan Wen Zhuo Xue · Zhijie Yuan · Marian Lin · Guancheng Chen



Specification

Specification

What We Built

1.Register & Verify

Register

 First Name

 Last Name

 Email

Send Code

 Verification Code

 Password

 Confirm Password

 Register

Specification

What We Built

2.Update Profile

Basic Info

EMAIL

guancheng@example.edu

Verified university email

INSTITUTION

ACADEMIC LEVEL

Graduate Student

RESEARCH FIELD

Computer Science

LOOKING FOR

Co Author

FUNDING STATUS

Institutional Funding

WEEKLY AVAILABILITY (HOURS)

20

PHONE NUMBER

555-0100

H-INDEX

8

TOTAL CITATIONS

150

COLLABORATION DESCRIPTION

Open to co-authoring papers on distributed systems and databases.

Research Interest

RESEARCH INTERESTS

e.g. Reinforcement Learning

Add

collaboration
computer science

Remove Selected

PUBLICATIONS

Papers (auto-filled from Semantic User)

Your name (author search)

Search Author

e.g. Geoffrey Hinton

Guancheng Chen — [University of Toronto] (12 ...

Import This Author's Papers

Note: Semantic User's free API is rate-limited. If it's temporarily back to a small built-in sample (5 classic papers, e.g. "Attention Residual Learning for Image Recognition") — other queries may live API is available again.

Education

Specification

What We Built

3.Recommend



 Recommend

 View Matched

 Chat

 Opportunities

 My Postings

 My Applications

 Profile

 Account Settings



Ada Lovelace

✓ **Verified university email**

University of Toronto · Faculty

Looking for: Co Author

Field: Mathematics Funding: Institutional Funding Availability: 20 h/wk

h-index: 8 Citations: 150

Looking for collaborators on computational number theory.

 EDUCATION

None on file

 PUBLICATIONS

None on file

 RESEARCH DESCRIPTION

Focused on mathematics research.

 RESEARCH INTERESTS

collaboration, mathematics

 **Dislike**

 **Skip**

 **Connect**

Specification

What We Built

4.Connect / Dislike / Skip



Ada Lovelace

✓ Verified university email

University of Toronto · Faculty

Looking for: Co Author

Field: Mathematics Funding: Institutional Funding Availability: 20 h/wk

h-index: 8 Citations: 150

Looking for collaborators on computational number theory.

🎓 EDUCATION

None on file

📄 PUBLICATIONS

None on file

🧪 RESEARCH DESCRIPTION

Focused on mathematics research.

🔖 RESEARCH INTERESTS

collaboration, mathematics

👎 Dislike

⏭ Skip

✓ Connect

Specification

What We Built

5. See contact info & Chat

AL

Ada Lovelace

University of Toronto · Faculty

Email: ada@example.edu Phone: 555-0100

Field: Mathematics Looking for: Co Author Funding: Institutional Funding

Availability: 20 h/wk

h-index: 8 Citations: 150

EDUCATION

None on file

PUBLICATIONS

None on file

ML

Marian Lin

Massachusetts Institute of Technology · Graduate Student

Email: marian@example.edu Phone: 555-0100

Field: Data Science Looking for: Peer Review Funding: Institutional Funding

Availability: 20 h/wk

h-index: 8 Citations: 150

EDUCATION

None on file

PUBLICATIONS

None on file

Ada Lovelace

Hi! I saw your profile — would you be interested in co-authoring something on algorithmic number theory?

Jul 28, 17:03

Absolutely, I'd love to. Do you have a specific problem in mind?

Jul 28, 18:03

I do — let's set up a call this week to go over it.

Jul 28, 18:43

Send

COLLABORATION DESCRIPTION

Specification

What We Built

Looking for an ML co-author

Posted Jul 26, 2026

Posted by Alan Turing

Verified university email

Seeking a collaborator for a paper on reinforcement learning applied to program synthesis.

Machine learning • Co author • 0 of 2 accepted

Open

Apply

Compiler research group forming

Posted Jul 26, 2026

Posted by Grace Hopper

Starting a small research group on next-generation compiler optimizations — all levels welcome.

Software engineering • Research group • 0 of 5 accepted

Open

Apply

6. Creat/Browse Posting

Create a Posting

Share the collaboration opportunity and what you need from applicants.

Posting title

Description

Research field

Collaboration type

Team capacity (leave blank for unlimited)

Cancel

Create Posting

Specification

What We Built

6. Apply to/Review Posting

Apply to Posting

Looking for an ML co-author

Posted by u-alan

Machine learning • Co author • 0 of 2 accepted

Posting summary

Seeking a collaborator for a paper on reinforcement learning applied to program synthesis.

Application message

Introduce yourself, explain your relevant interests or experience, and describe why you would like to collaborate.

0 characters

Cancel

Submit Application

Undergrad RA wanted for NLP project

Open

Jul 26, 2026 • Natural language processing • Research group

Verified university email

Looking for an undergraduate research assistant to help build an annotated dataset for a summarization project.

2 applicants • 0 of 3 accepted

Close Posting

Applications (2)

Marian Lin

Applied Jul 28, 2026 • Pending

Accept

Decline

I've worked with annotated NLP datasets before and would love to help.

Specification

What We Built

8. Account settings

Account Settings

Change Email

Current Email

guancheng.chen@mail.utoronto.ca

Send Code

Change Email

Change Password

Change Password

Delete Account

Permanently delete your account and all associated data.

Delete Account

Specification

Why We Build - TeamUserStories

Problem

- Alan is a CS student full of ML research ideas
- but no one to talk them through with.
- Finding the right collaborator is harder than having a good idea.

Solution - TeamUserStories

- Alan creates a ScholarMatch account,
- create an academic profile based on his research interest
- Receives collaborator recommendations based on that profile.
- Matched with somebody with similar academic interest chat about ML everyday
- Got an RA position by applying to Lab's recruitment Posting

Division of Labor

Member	UserCase
Team	1.Postings create_posting / apply_to_posting / close_posting / load_postings 2.Applications: accept_application / decline_application/ load_my_applications
AlanWenZhuoXue	1.Auth: login / register / request_email_verification / logout 2.Account Settings: change_email / change_password /delete_account
ZhijieYuan	1.Profile: load_profile / update_profile / paper_lookup
MarianLin	1.Connect/Dislike/Skip — connect / dislike / skip
GuanchengChen	1.Recommend & Matches: recommend/load_matches 2.Messaging: send_message / load_message

- 24 use cases total - 7 Team Usercase

The background of the slide features a scenic landscape. In the foreground, there's a body of water reflecting the sky. A rainbow is visible in the sky, arching from the left side towards the right. The sky is a mix of light blue and white, suggesting a clear day. The overall tone is bright and positive.

DEMO TIME !

API Usage

API Usage · Two Concrete Endpoints

API 1: Semantic Scholar API

Use for:

- PaperLookup: Search paper by name

EXAMPLE API Endpoint:

```
GET https://  
api.semanticscholar.org/graph/  
v1/author/search?  
query=<name>&fields=authorId,  
name,affiliations,paperCount  
,hIndex,citationCount
```

- Returns a list of similarly named candidates' key academic metrics

The screenshot shows a REST client interface with the following details:

- URL:** `https://api.semanticscholar.org/graph/v1/author/search`
- Method:** GET
- Query Params:**

Key	Value	Description
query	Geoffrey+Hinton	
fields	authorId,name,affiliations,paperCount,hln...	
- Status:** 200 OK, 198 ms, 2.98 KB
- Response Body (JSON):**

```
{  
  "total": 19,  
  "offset": 0,  
  "data": [  
    {  
      "authorId": "2287034803",  
      "name": "Geoffrey Hinton",  
      "affiliations": [],  
      "paperCount": 5,  
      "citationCount": 452,  
      "hIndex": 1  
    },  
    {  
      "authorId": "2264335208",  
      "name": "Geoffrey E. Hinton",  
      "affiliations": [],  
      "paperCount": 4,  
      "citationCount": 628,  
      "hIndex": 2  
    }  
  ]  
}
```


API Usage • Two Concrete Endpoints

API 2: scholarmatch-server

Use for:


- Recommendation System
 - 1) Embedding Generation
 - 2) Similarity Calculation

EXAMPLE API Endpoint:

GET <https://scholarmatch-server-production.up.railway.app/api/recommend>

-H "Authorization: Bearer
<TOKEN>"

- Returns 20 scholar profiles ranked by similarity

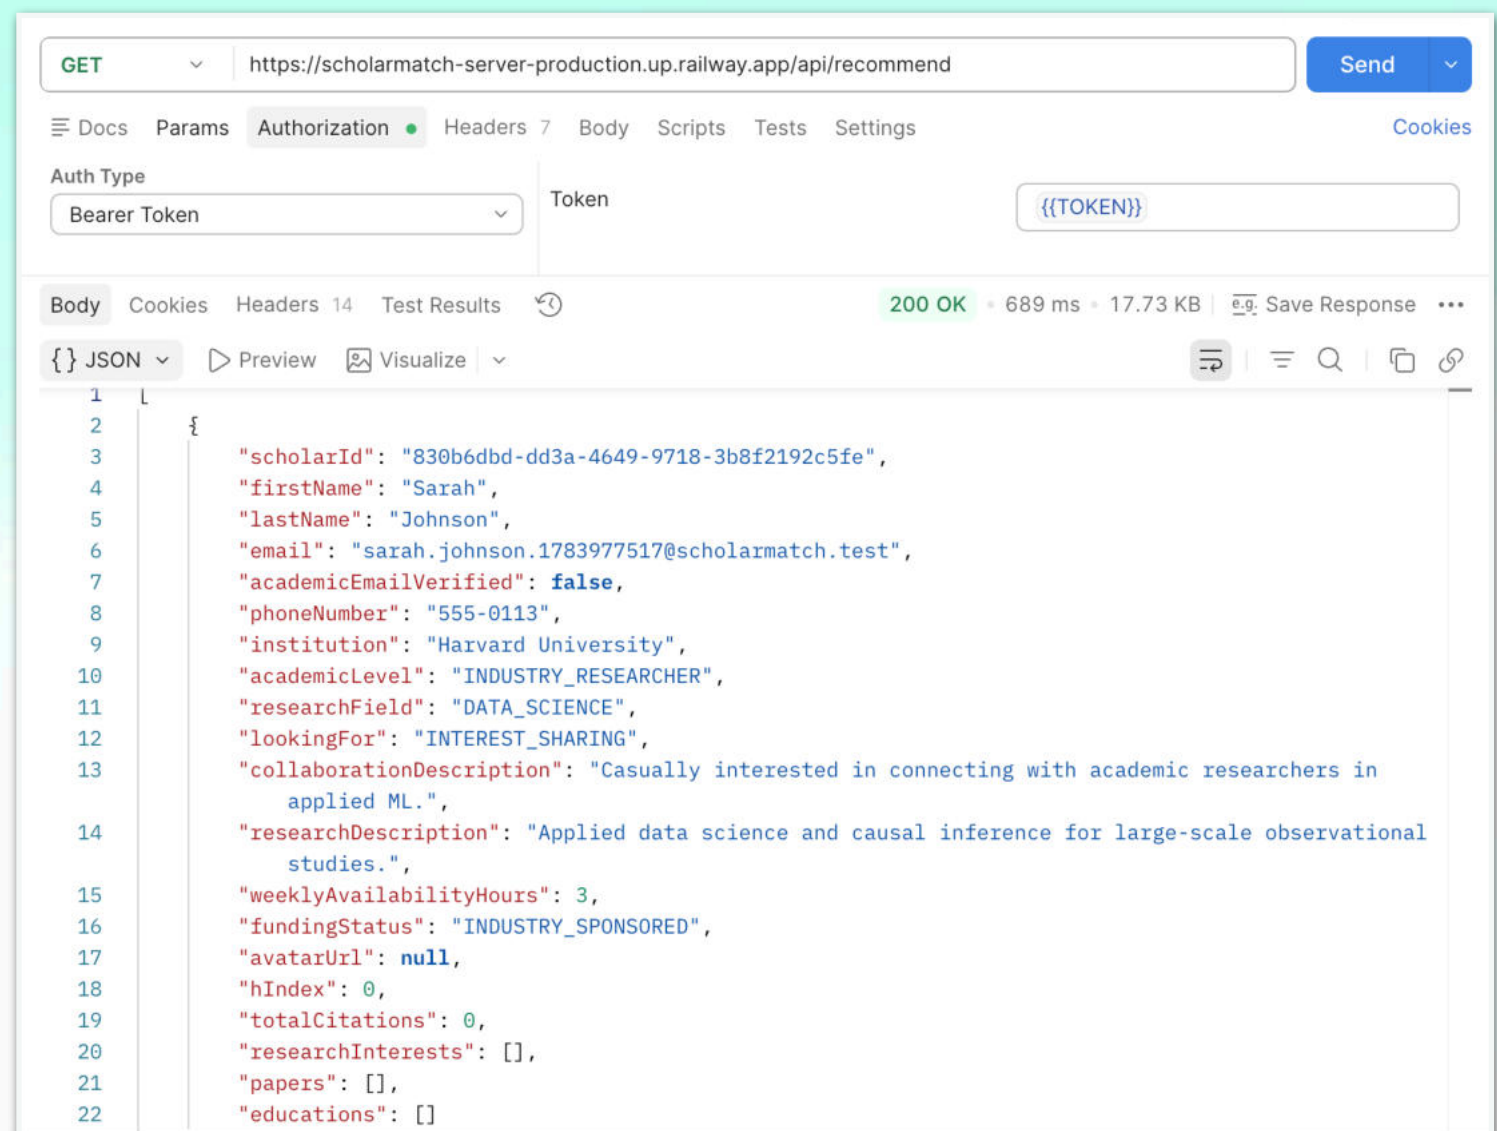


Clean Architecture

Clean Architecture

4 Layers

[Open CA visuals for every usecase](#)

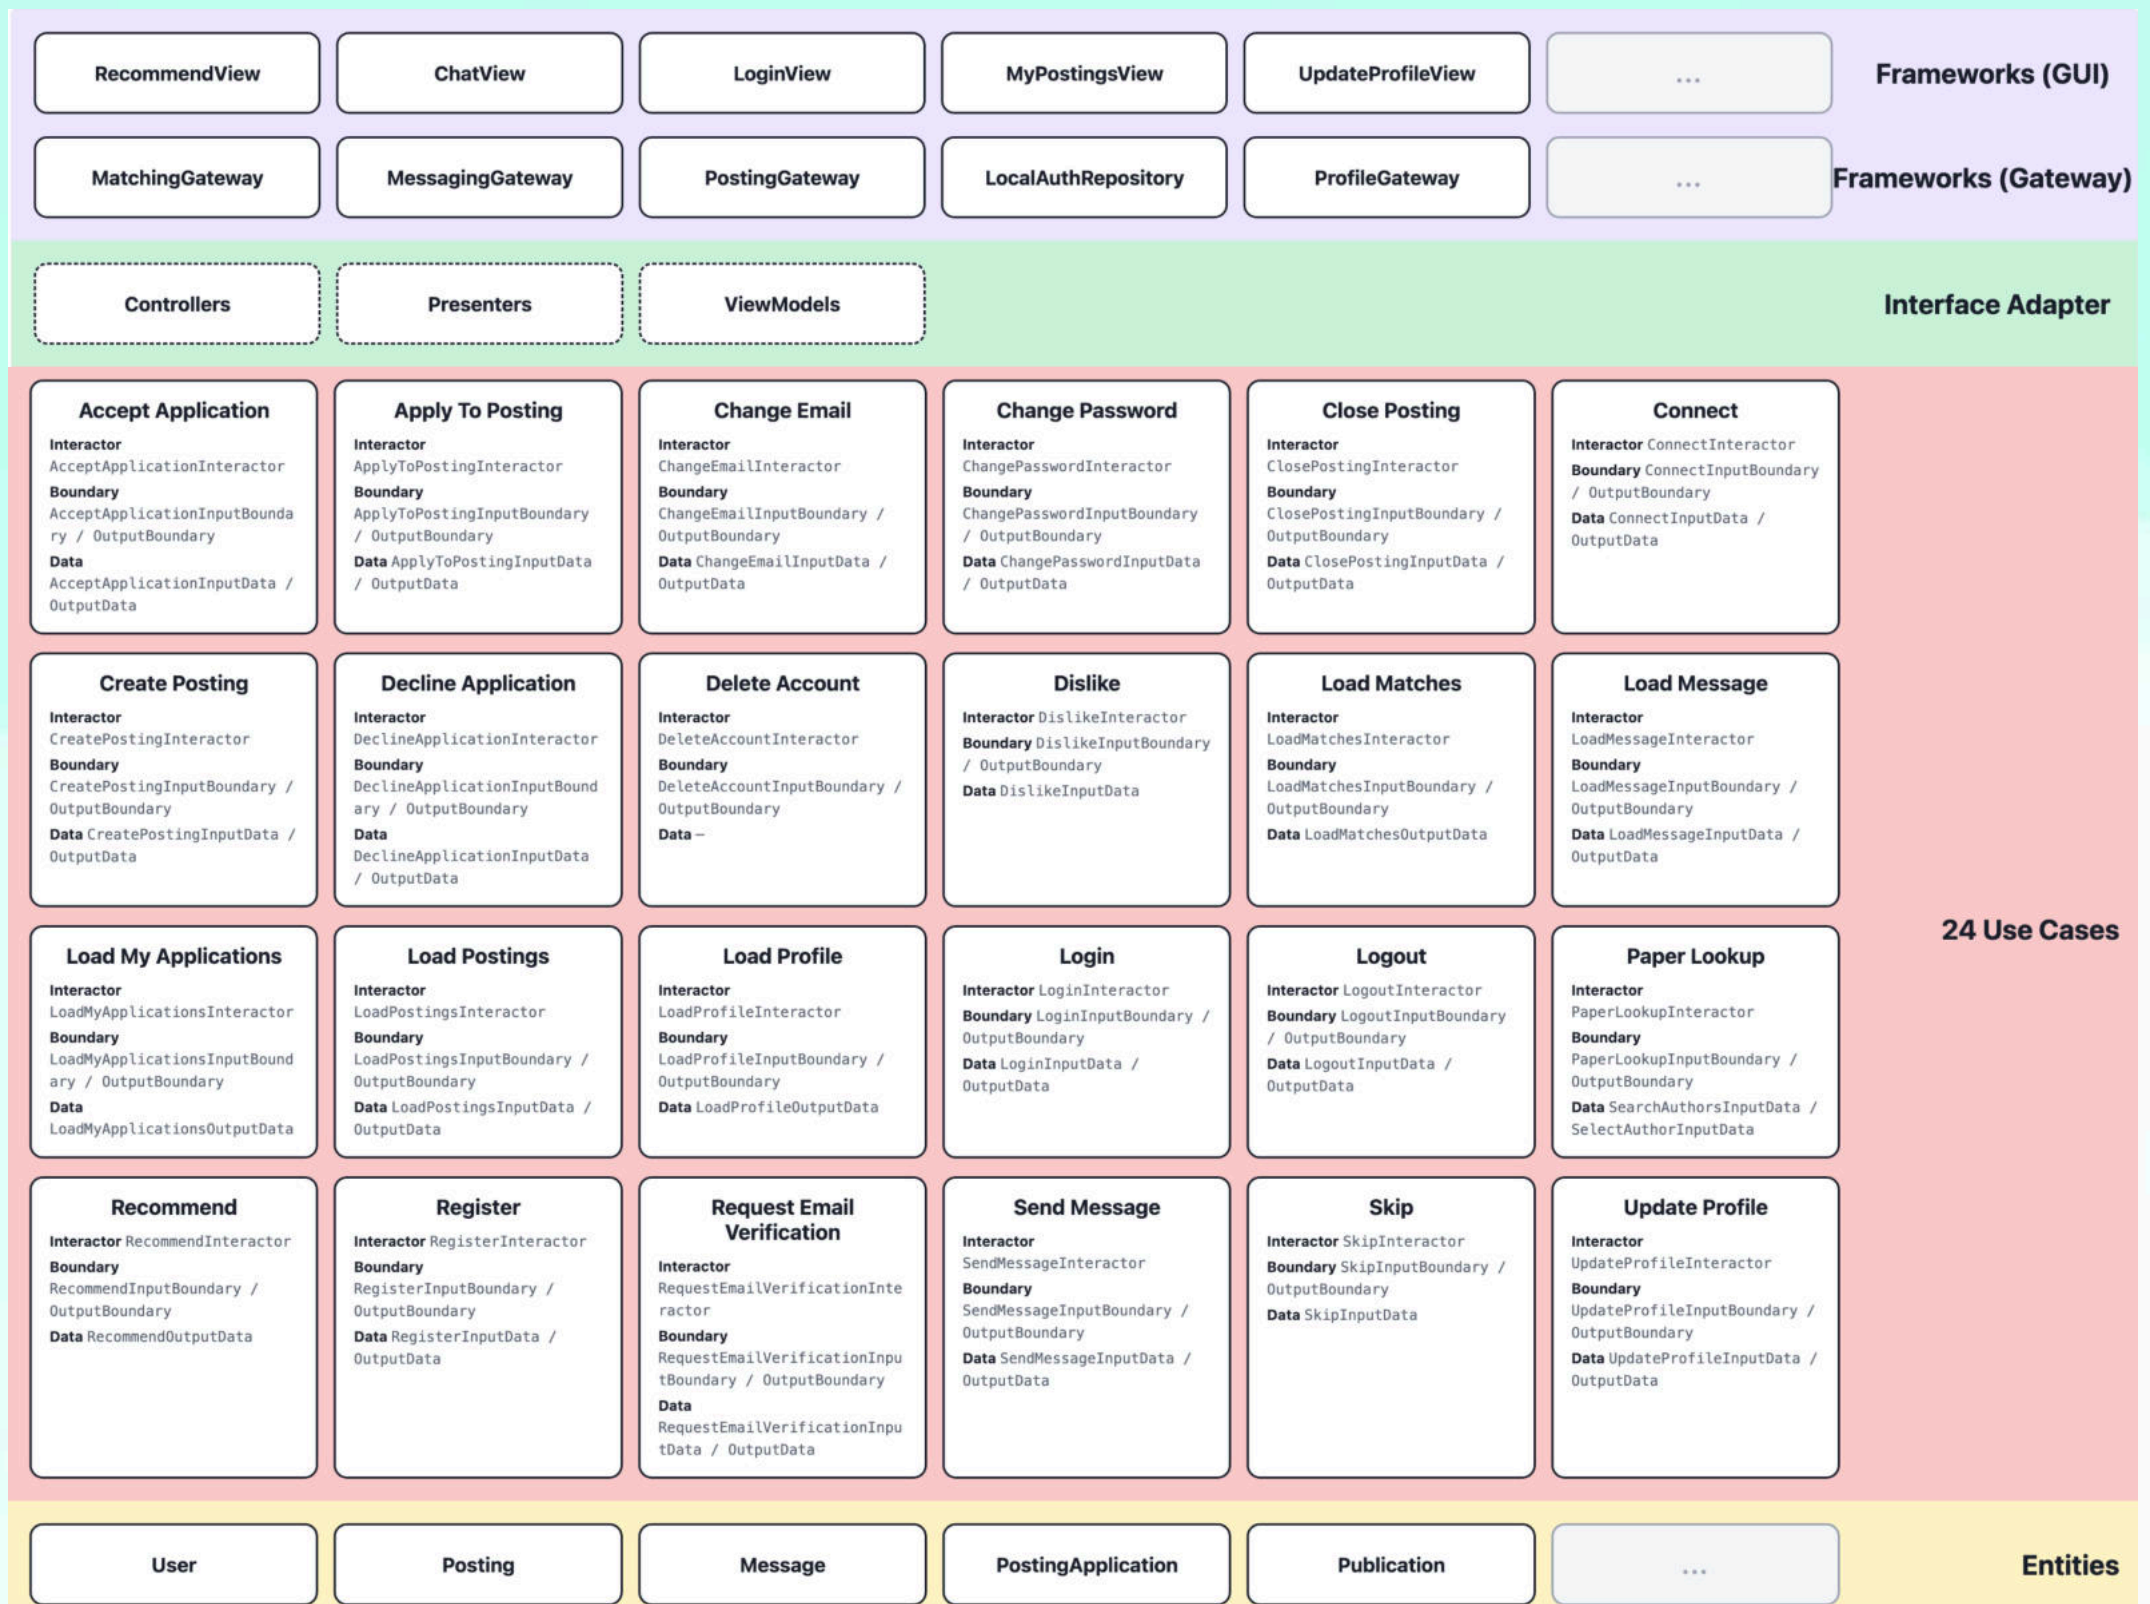

Some Interesting UserCase

Alan · User Story — Request Email Verification

“As a ScholarMatch user, I want a verification code sent before an email is accepted as mine, so I can prove I own the address.”

Why important?

- Protect the database from malicious injection
- Prevent fake users

Alan · Before / After — Request Email Verification

BEFORE

Register

Email entered; no feedback yet

AFTER

Register

Verification code sent to 12345@qq.com

ScholarMatch

Verify your account

Hello,

We received a request that requires verifying your ScholarMatch account. Please use the verification code below to continue.

3 4 9 2 4 1

This code expires in 10 minutes and can only be used once.

If you did not request this, no action is needed — your account remains secure and you can disregard this message.

Controller → Input Boundary → Presenter → ViewModel

RegisterView observes RegisterViewModel; the Presenter updates success/error properties.

Alan · RequestEmailVerificationInteractor Code

```
RequestEmailVerificationInteractor.java
public void execute(RequestEmailVerificationInputData
inputData) {
    final String email = normalize(inputData.email());
    if (!EMAIL_PATTERN.matcher(email).matches()) {
        outputBoundary.prepareFailView(
            "Enter a valid email address before
requesting a code.");
        return;
    }
    try {
        emailSender.requestVerificationCode(email);
        outputBoundary.prepareSuccessView(
            new
RequestEmailVerificationOutputData(email));
    } catch (DataAccessException exception) {
        outputBoundary.prepareFailView(exception.getMessage());
    }
}
```

1 Input Boundary:

Controller passes InputData into execute().

2 Dependency inversion:

Interactor depends on the sender interface, not an HTTP class.


3 Output Boundary:

Presenter selects success or failure feedback.


Three explicit paths
invalid input · sent · data-access
failure

Alan · Full Class Diagram — Request Email Verification

REQUEST PATH

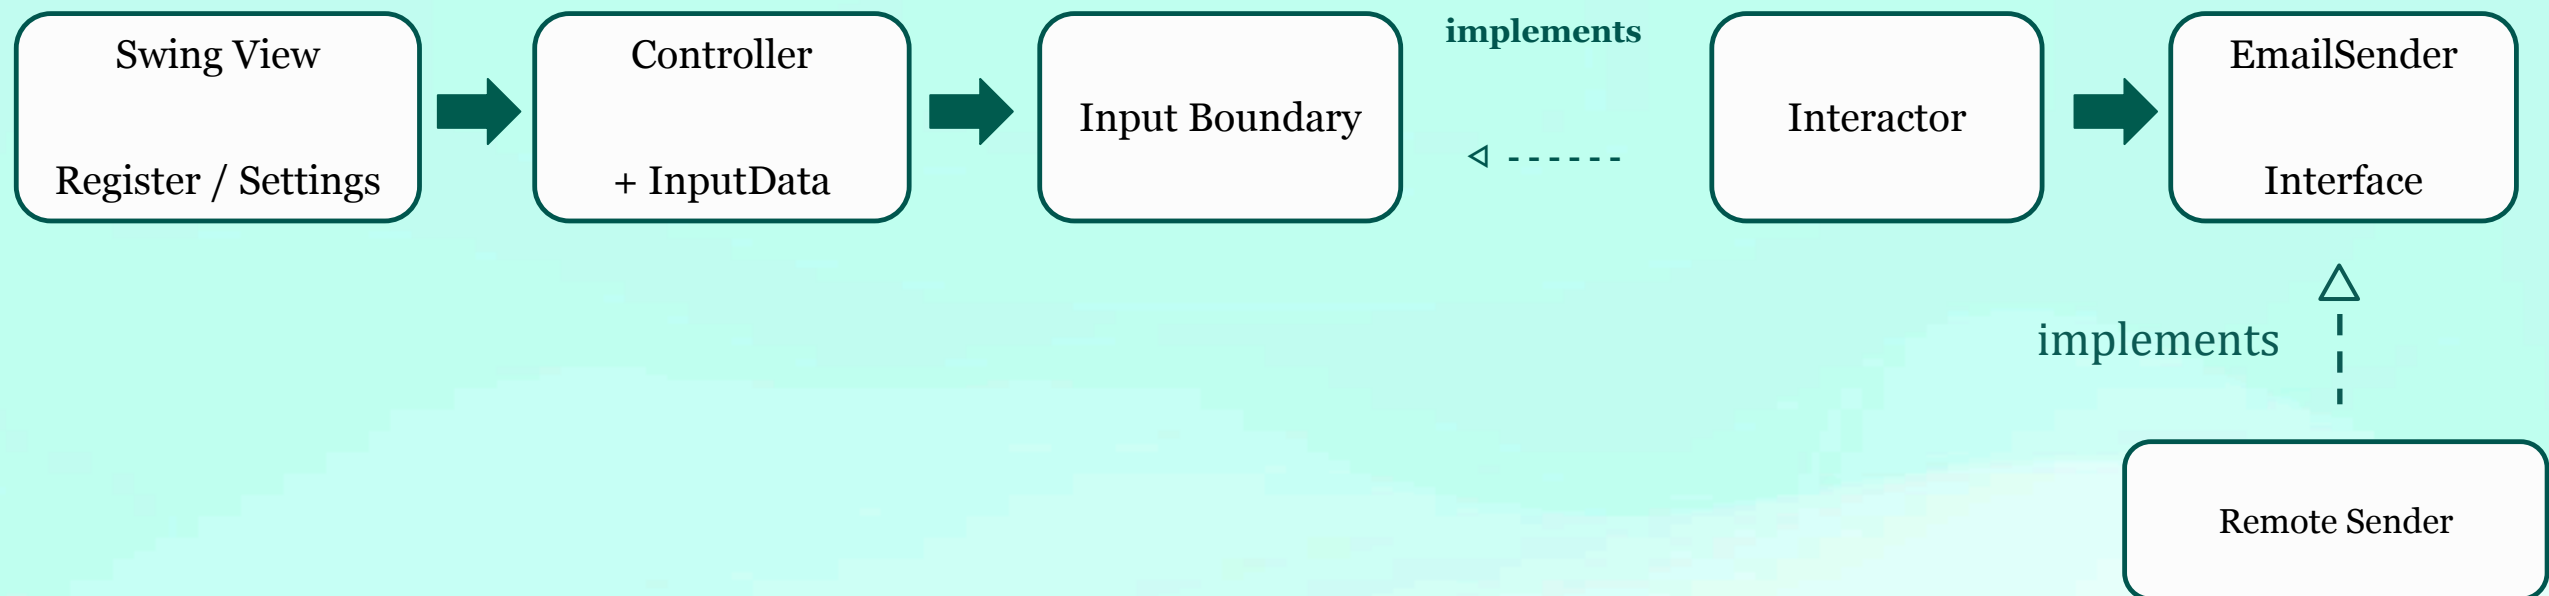

RETURN PATH

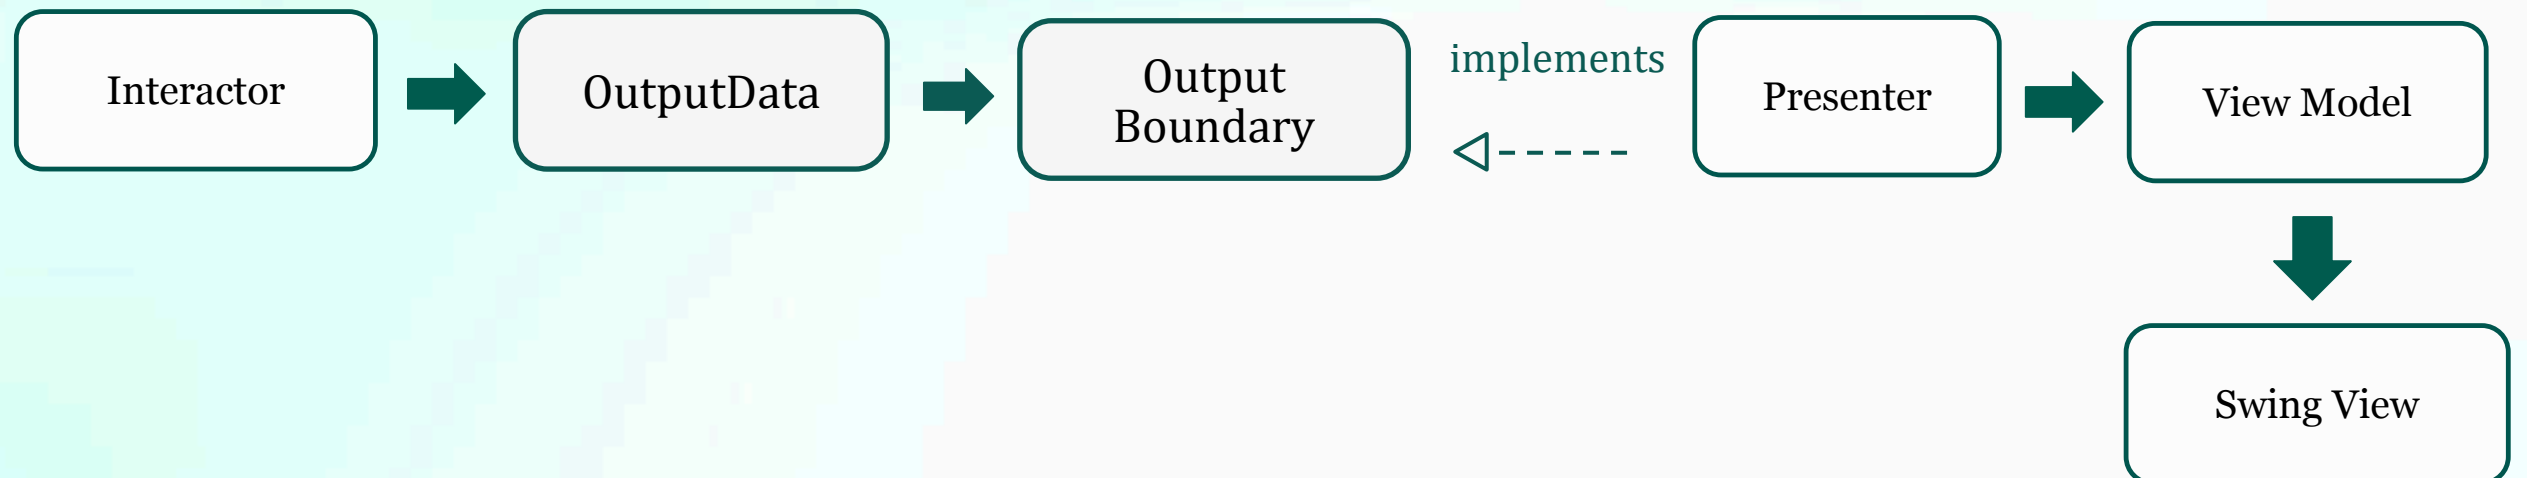

Solid arrow = calls / updates

Dashed line + hollow triangle = implements

Zhijie · User Story — Paper Lookup

1 Search by name

2 Select the correct scholar

3 Import publications

The user chooses the right identity before any papers are imported.

Why important?

- Auto-import your publications to save time

REAL LOCAL RUN · GEOFFREY HINTON

PUBLICATIONS

Papers (auto-filled from Semantic User)

Search Author

e.g. Geoffrey Hinton

Geoffrey E. Hinton — 466 papers

Geoffrey E. Hinton — 3 papers

G. Hinton — 12 papers

Geoffrey E. Hinton — 7 papers

Import This Author's Papers

Scaling Forward Gradient With Local Losses (2018)

A Generalist Framework for Panoptic Segmentation (2018)

Analog Bits: Generating Discrete Data using Diffusion Models (2022)

Remove Selected Paper

Note: Semantic User's free API is rate-limited. If it's temporarily back to a small built-in sample (5 classic papers, e.g. "Attention is All you Need") — other queries may take longer to load. Live API is available again.

Zhijie · Before / After

SEARCH RESULTS

PUBLICATIONS

Papers (auto-filled from Semantic User)

e.g. Geoffrey Hinton

Geoffrey E. Hinton — 466 papers

Geoffrey E. Hinton — 3 papers

G. Hinton — 12 papers

Geoffrey E. Hinton — 7 papers

Scaling Forward Gradient With Local Losses (2017)
A Generalist Framework for Panoptic Segmentation
Analog Bits: Generating Discrete Data using Diffusion Models

Note: Semantic User's free API is rate-limited. If it's temporarily back to a small built-in sample (5 classic papers, e.g. "Attention Residual Learning for Image Recognition") — other queries may live API is available again.



AFTER SAVE & RELOAD

PUBLICATIONS

Papers (auto-filled from Semantic User)

e.g. Geoffrey Hinton

Scaling Forward Gradient With Local Losses (2017)
A Generalist Framework for Panoptic Segmentation
Analog Bits: Generating Discrete Data using Diffusion Models

Note: Semantic User's free API is rate-limited. If it's temporarily back to a small built-in sample (5 classic papers, e.g. "Attention Residual Learning for Image Recognition") — other queries may live API is available again.

Imported publications remain in the profile.

h-index and total citations are entered manually in the current version.

Zhijie · Paper Lookup — Core Logic

RANK THE CANDIDATES

PaperLookupInteractor.java

```
final List<AuthorCandidateDataAccessInterface>
    gatewayResults = userApiGateway
        .searchAuthors(normalizedName);

final List<AuthorCandidateData> candidates =
    rankCandidates(searchResults);


outputBoundary.prepareAuthorCandidates(candidates);

return candidates.stream()
    .sorted((first, second) -> Integer.compare(
        citationCount(second),
        citationCount(first)))
    .limit(MAX_AUTHOR_CANDIDATES)
    .toList();
```

Search through the gateway, then sort candidate authors by citation count.

Zhijie · Clean Architecture Flow

REQUEST PATH

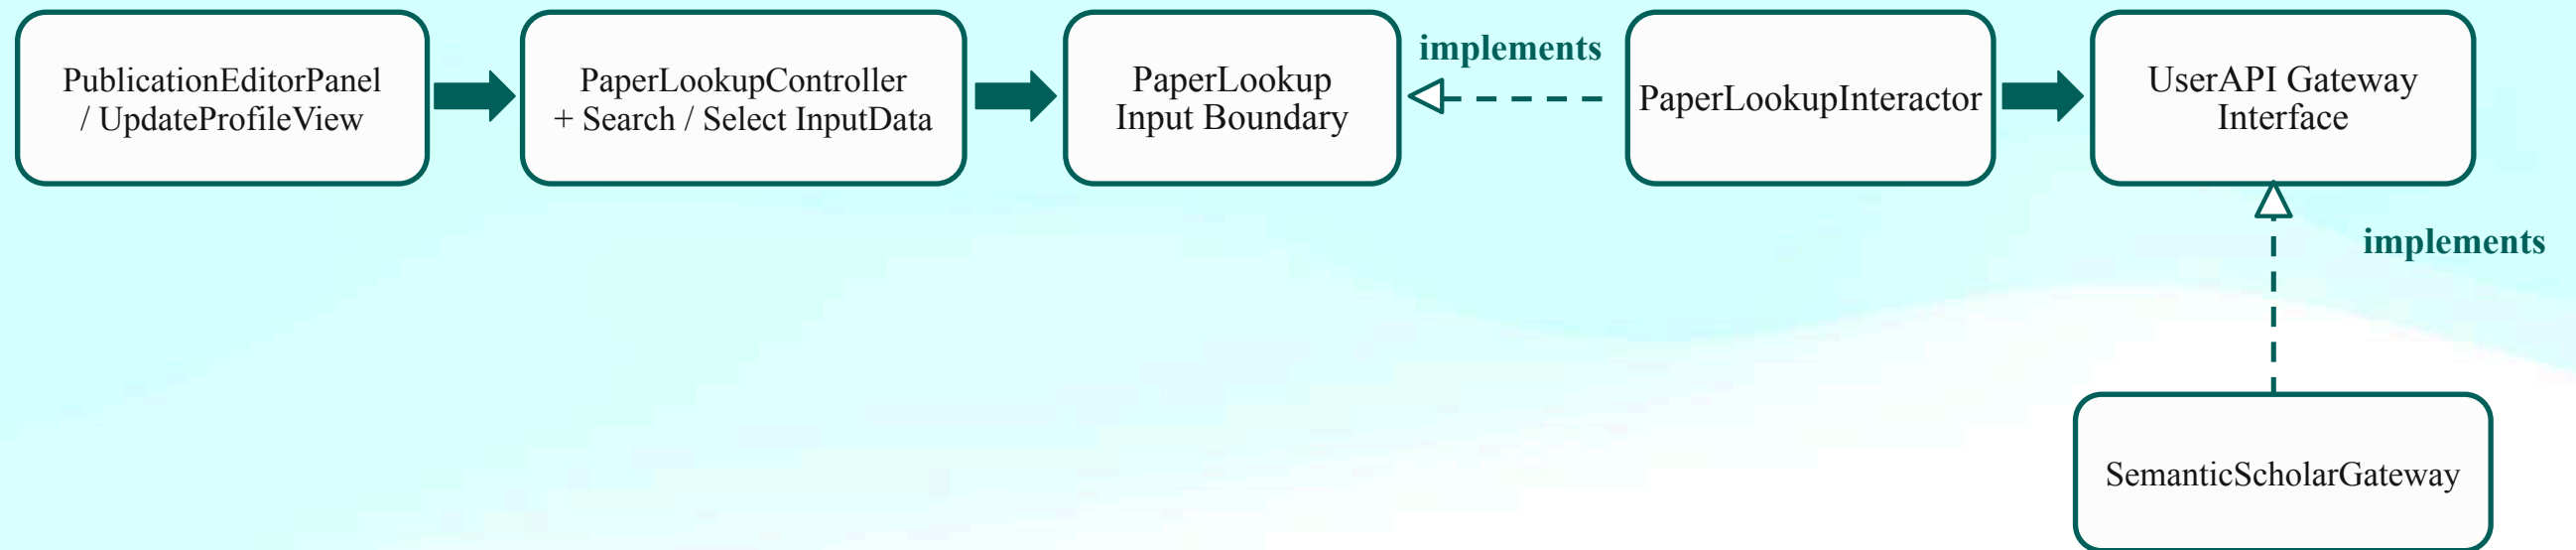

RETURN PATH



Solid arrow = calls / updates

Dashed line + hollow triangle = implements


Guancheng · User Story — Recommend

What my UserCase try to help?

- Alan spend a lot of time cold emailing people
- But most of them have research interest

Why important?


- help you better find collaborate who share similar research interest

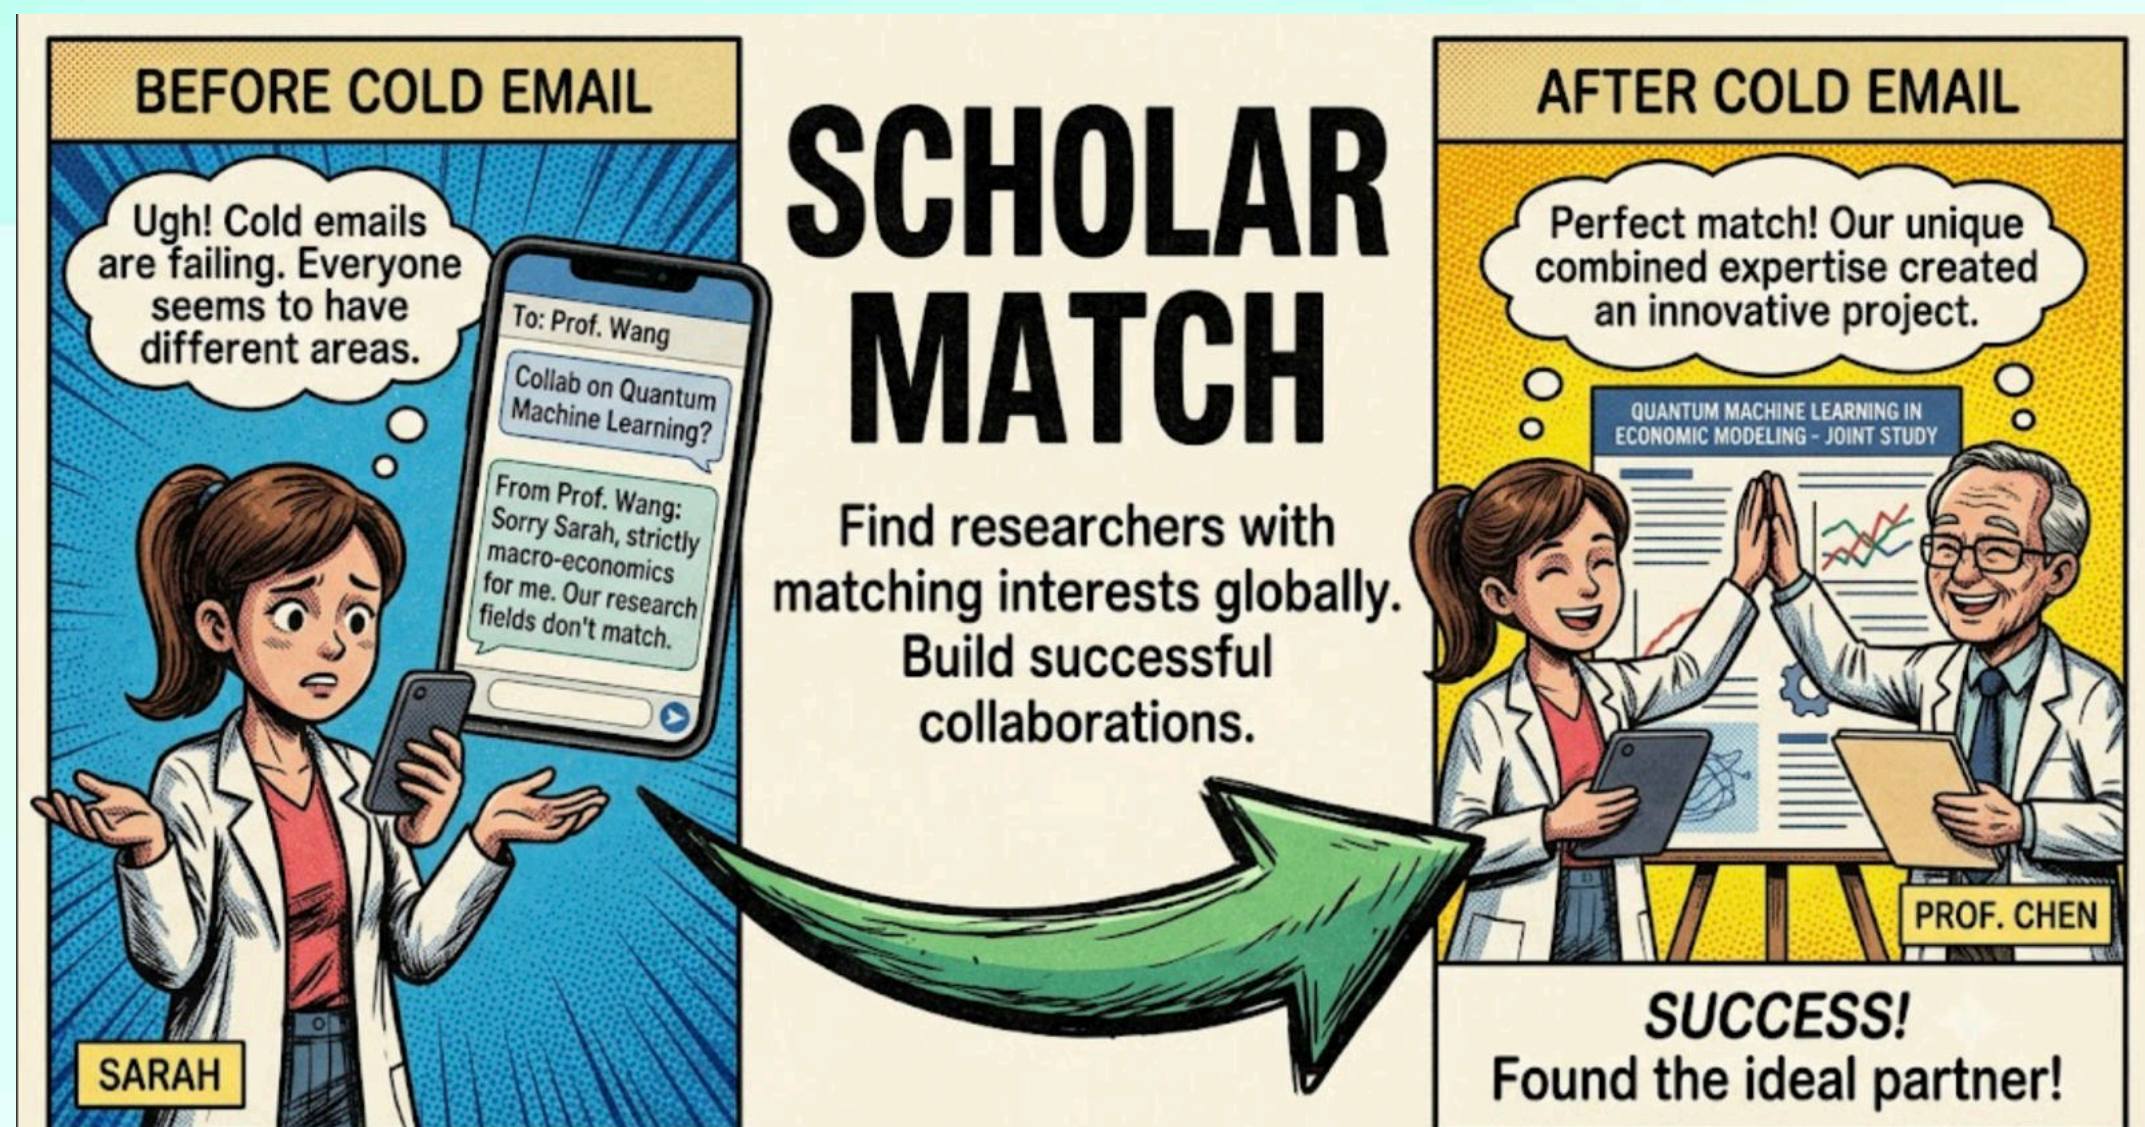


How we do it?

Little bit about our Recommendation System

1.Upload your profile

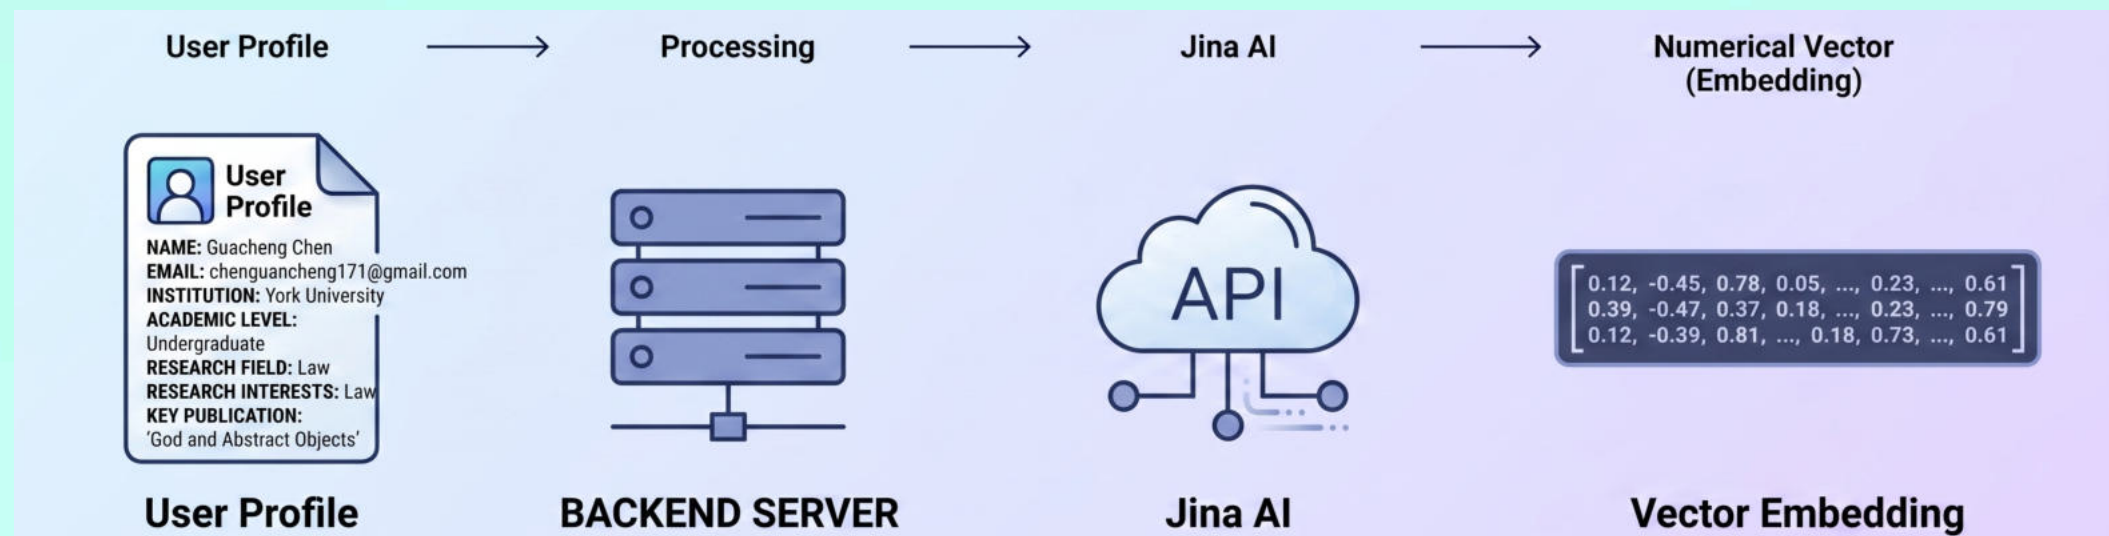


2.Recommend UserCae is called

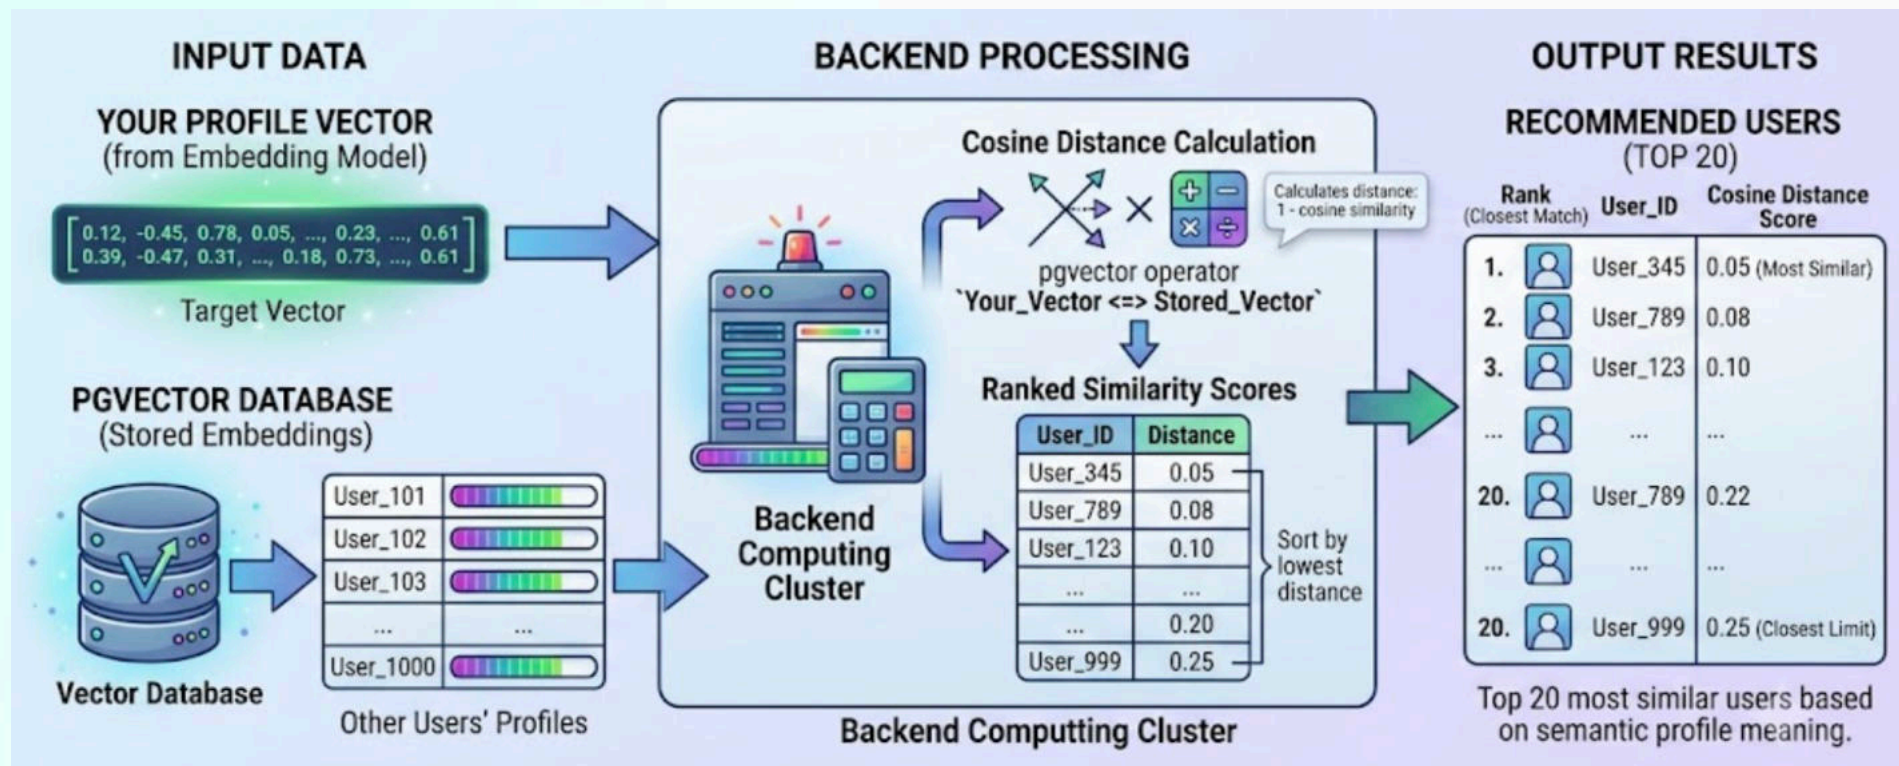


Guancheng · Before / After

Before

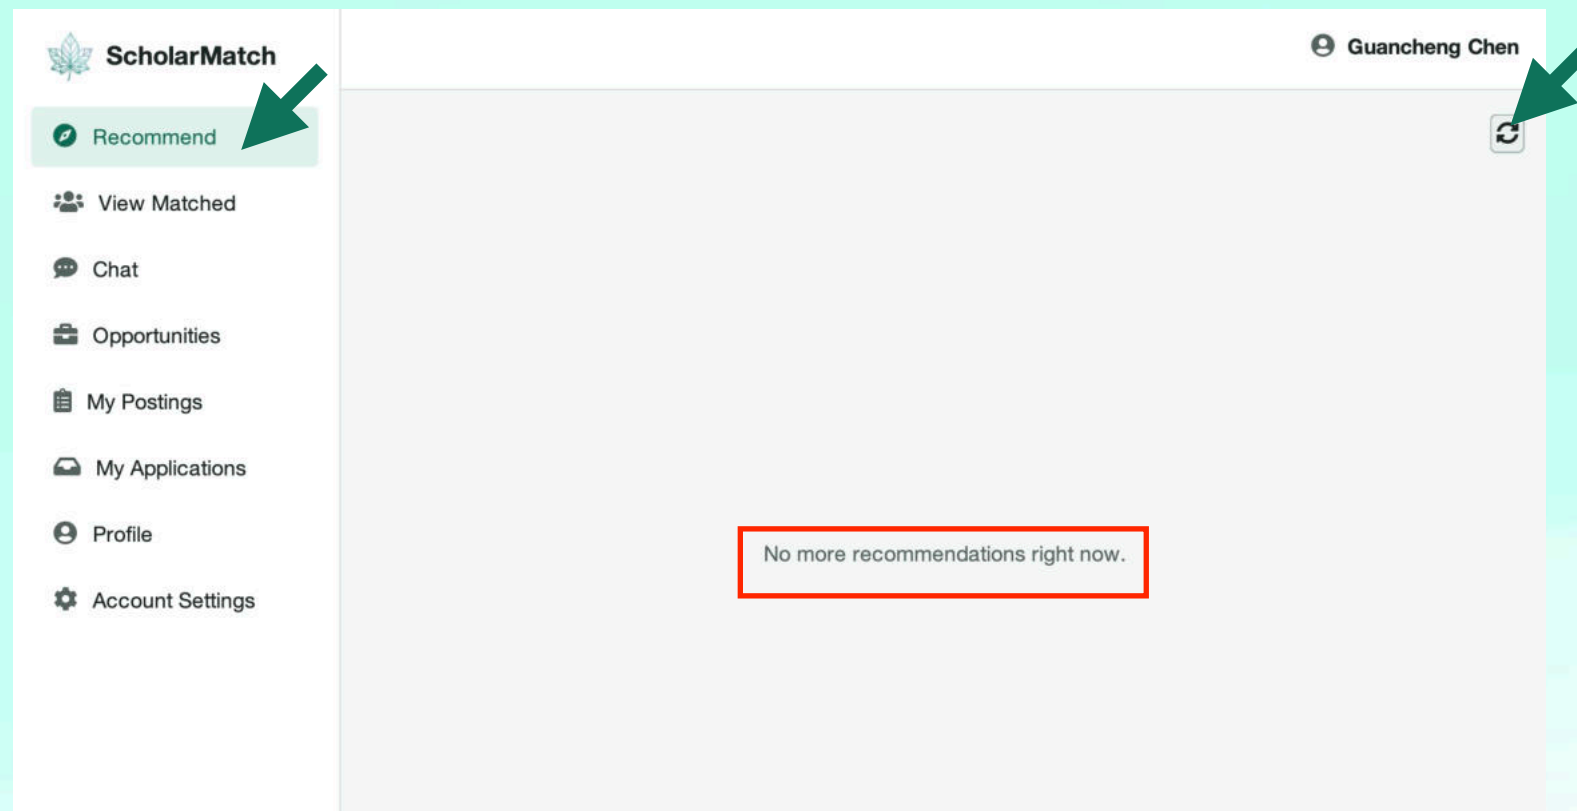


After


SuccessView

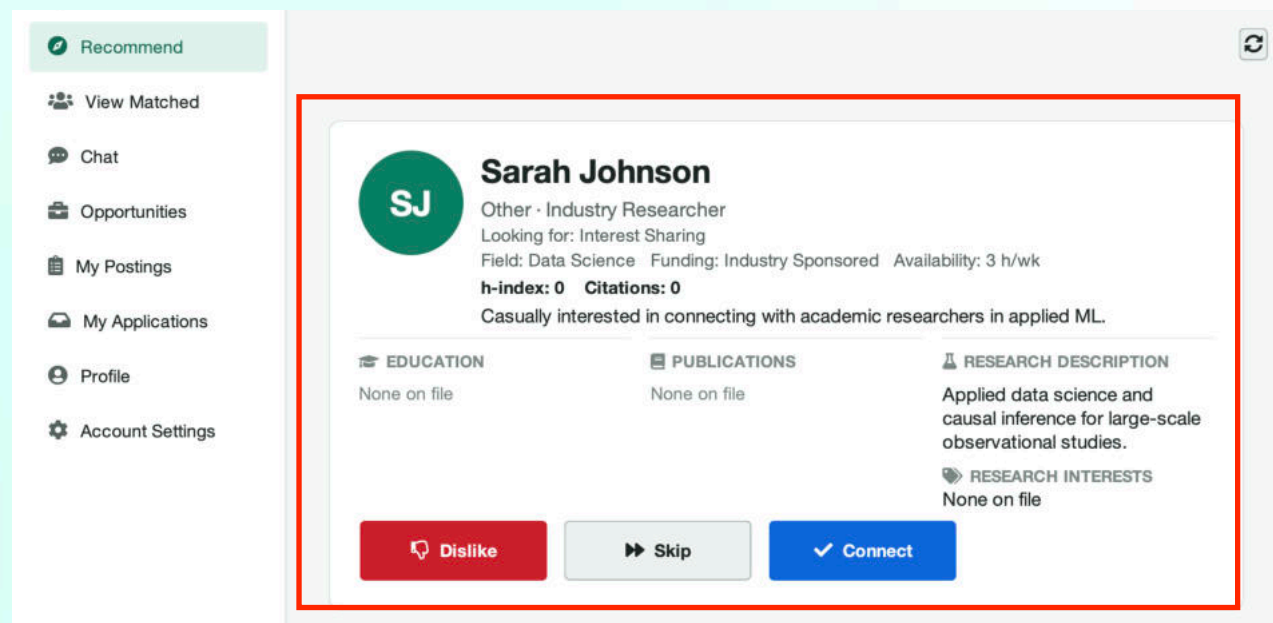

FailView

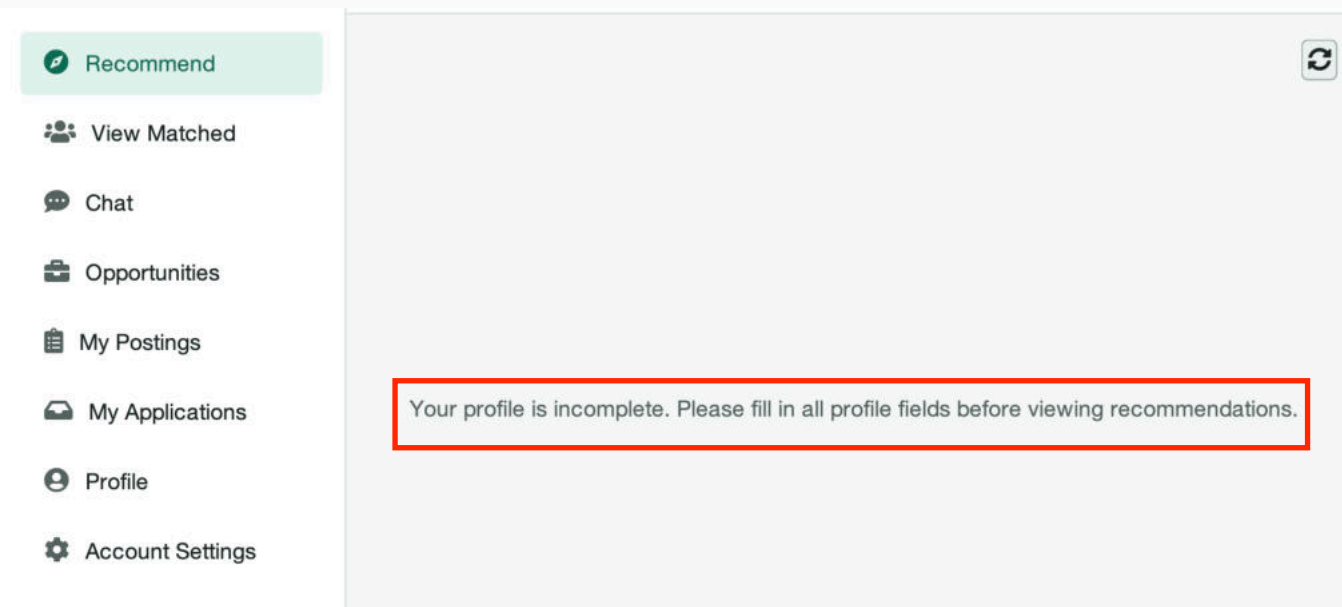

Guancheng · Full Class Diagram

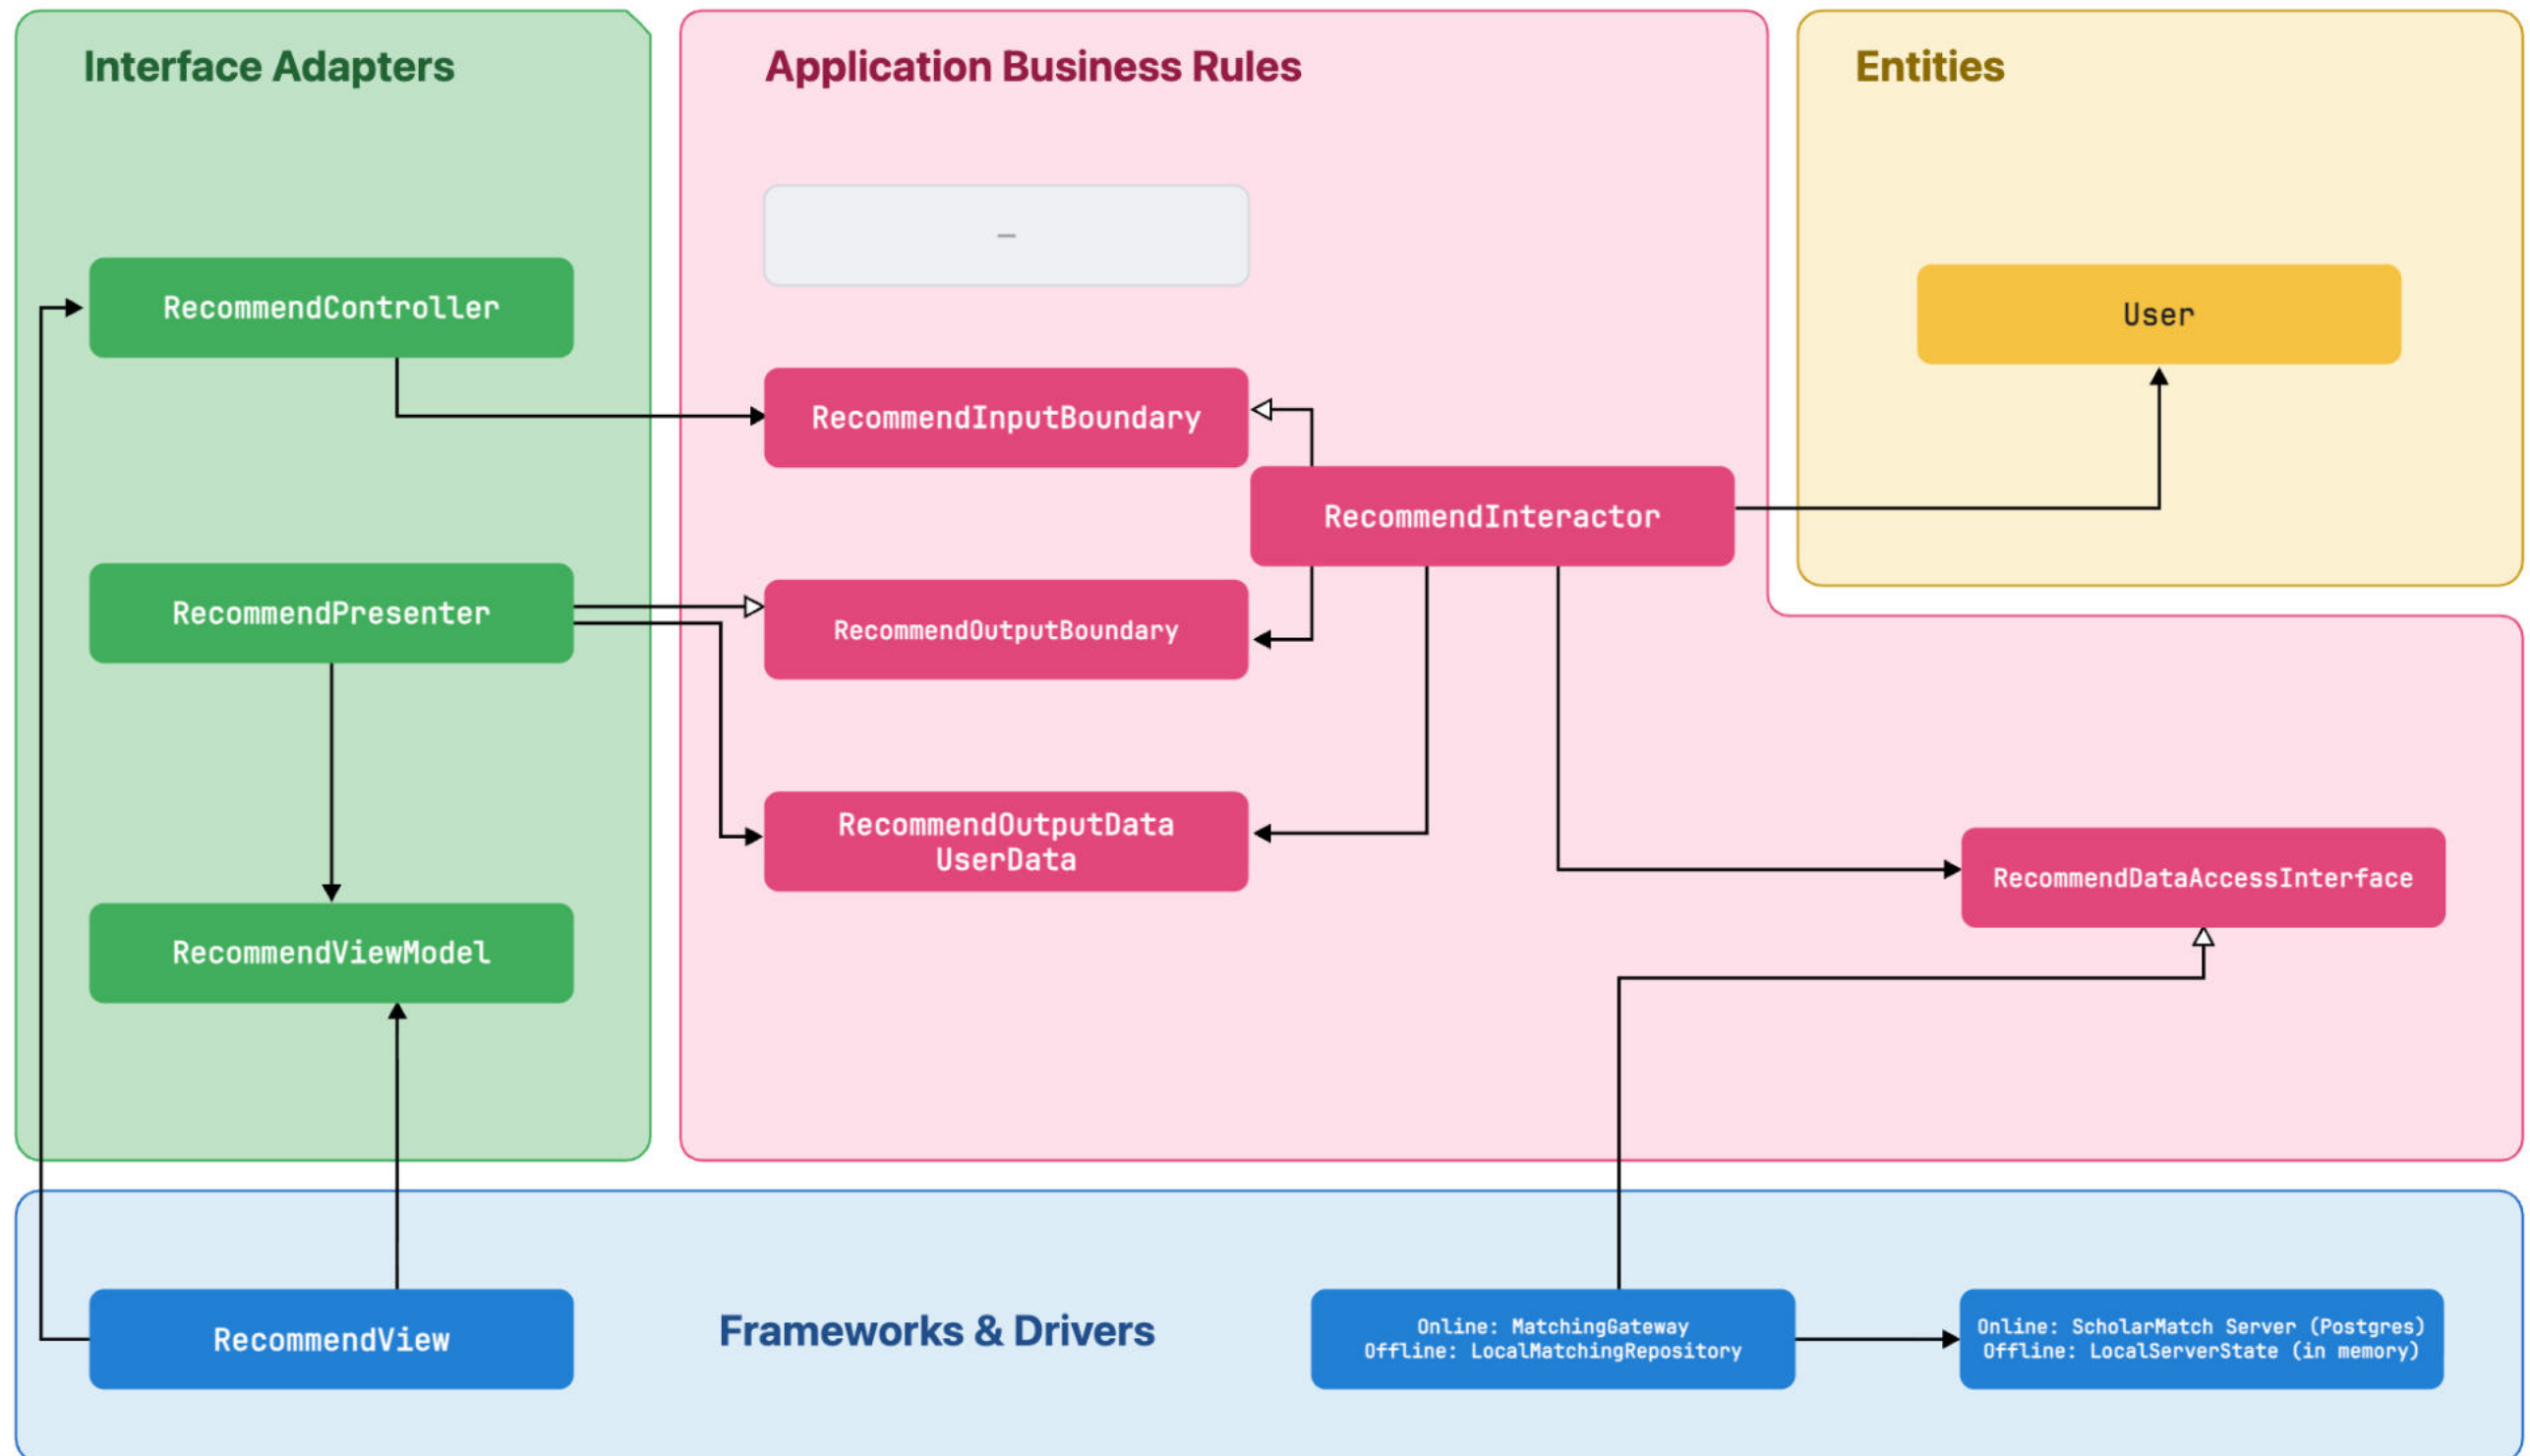

Guancheng

RecommendInteractor Code

- Before running, reads the user's own profile
- Calls `User.isProfileComplete()` for the business-rule check
- Rejects outright if incomplete
- The business rule lives in the Entity — the Interactor only coordinates

```
@Override
public void execute() {
    try {
        final User currentUser = recommendDataAccessObject.getProfile();
        if (!currentUser.isProfileComplete()) {
            outputBoundary.prepareFailView(INCOMPLETE_PROFILE_MESSAGE);
            return;
        }
        final List<User> recommendations = recommendDataAccessObject.getRecommendations();
        outputBoundary.prepareSuccessView(new RecommendOutputData(UserData.fromAll(recommendations)));
    } catch (final DataAccessException e) {
        outputBoundary.prepareFailView(e.getMessage());
    }
}
```

Marian

User Story – Connect

- “As a researcher, David clicks Connect on a recommendation card; a few days later the other person also clicks Connect, and both are recorded as matched”
- A match is created only when both users choose Connect.


Why important?

- A mutual connection ensures that both parties are genuinely interested in each other's research

Marian · Before / After

Before

Step1: Leon click connect

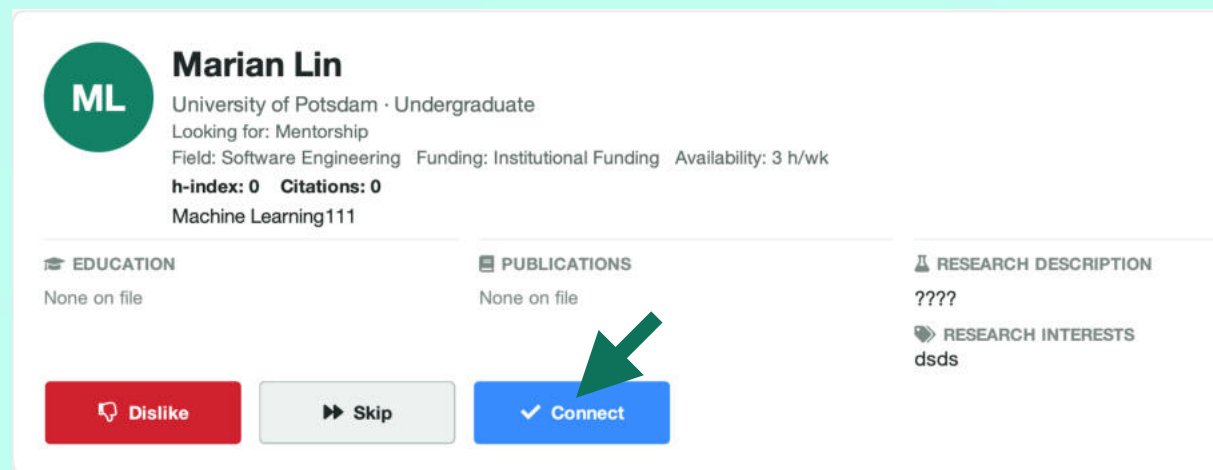

Marian Lin
University of Potsdam · Undergraduate
Looking for: Mentorship
Field: Software Engineering Funding: Institutional Funding Availability: 3 h/wk
h-index: 0 Citations: 0
Machine Learning111

EDUCATION
None on file


PUBLICATIONS
None on file

RESEARCH DESCRIPTION
????

RESEARCH INTERESTS
dsds

Step2: Marian click connect

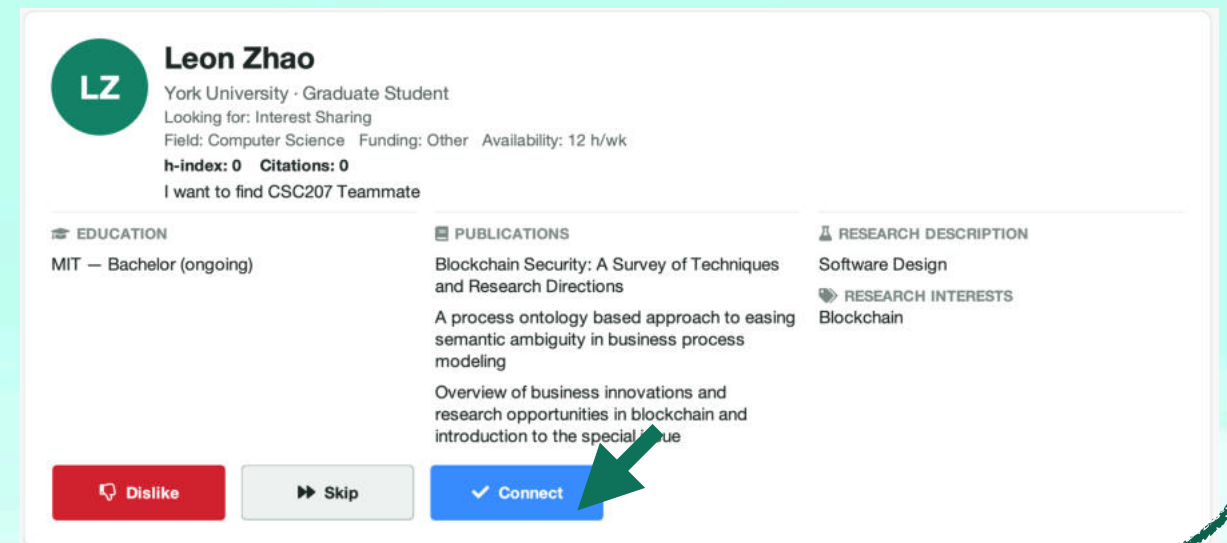


Leon Zhao
York University · Graduate Student
Looking for: Interest Sharing
Field: Computer Science Funding: Other Availability: 12 h/wk
h-index: 0 Citations: 0
I want to find CSC207 Teammate

EDUCATION
MIT — Bachelor (ongoing)

PUBLICATIONS
Blockchain Security: A Survey of Techniques and Research Directions
A process ontology based approach to easing semantic ambiguity in business process modeling
Overview of business innovations and research opportunities in blockchain and introduction to the special issue

RESEARCH DESCRIPTION
Software Design

RESEARCH INTERESTS
Blockchain


After Marian click Connect

If matched, then there is a notification

Profile card just change



♥ You matched with Leon Zhao!

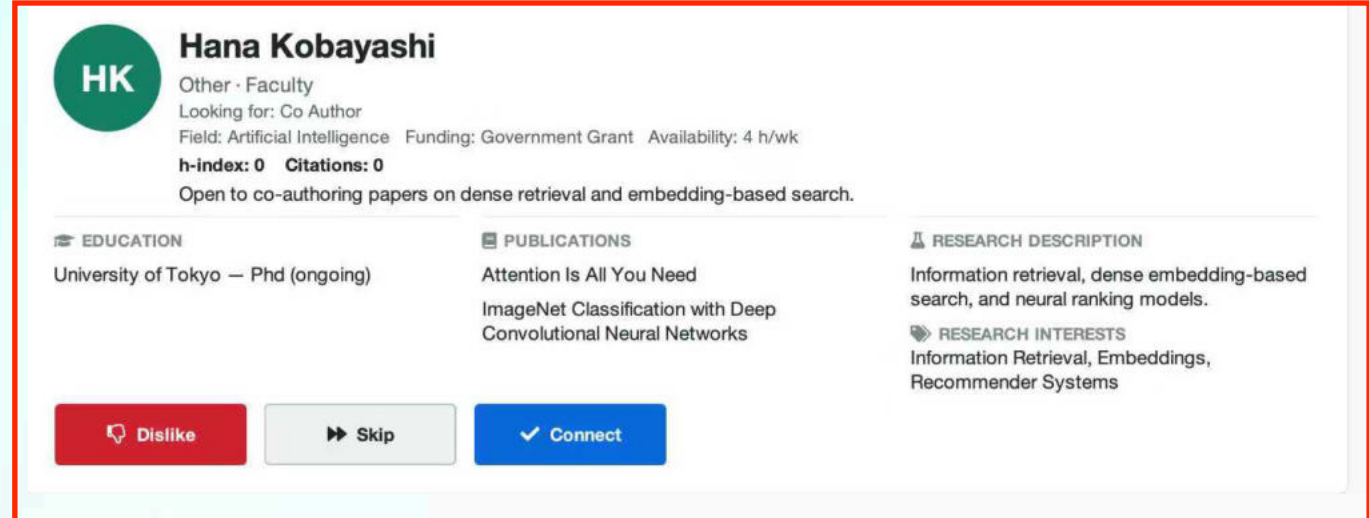


Hana Kobayashi
Other · Faculty
Looking for: Co Author
Field: Artificial Intelligence Funding: Government Grant Availability: 4 h/wk
h-index: 0 Citations: 0
Open to co-authoring papers on dense retrieval and embedding-based search.

EDUCATION
University of Tokyo — Phd (ongoing)

PUBLICATIONS
Attention Is All You Need
ImageNet Classification with Deep Convolutional Neural Networks

RESEARCH DESCRIPTION
Information retrieval, dense embedding-based search, and neural ranking models.

RESEARCH INTERESTS
Information Retrieval, Embeddings, Recommender Systems

Marian · Connect


ConnectInteractor Code

- Receives a Connect action
- Checks for a mutual match
- Updates the connection status

```
@Override
public void execute(final ConnectInputData inputData) {
    try {
        final boolean matched = connectDataAccessObject.connect(inputData.getConnectedUserId());
        if (matched) {
            outputBoundary.prepareMatchFound(new ConnectOutputData(inputData.getConnectedUser()));
        } else {
            outputBoundary.prepareNoMatch();
        }
    } catch (final DataAccessException e) {
        outputBoundary.prepareNoMatch();
    }
}
```

Marian · Full Class Diagram

REQUEST PATH

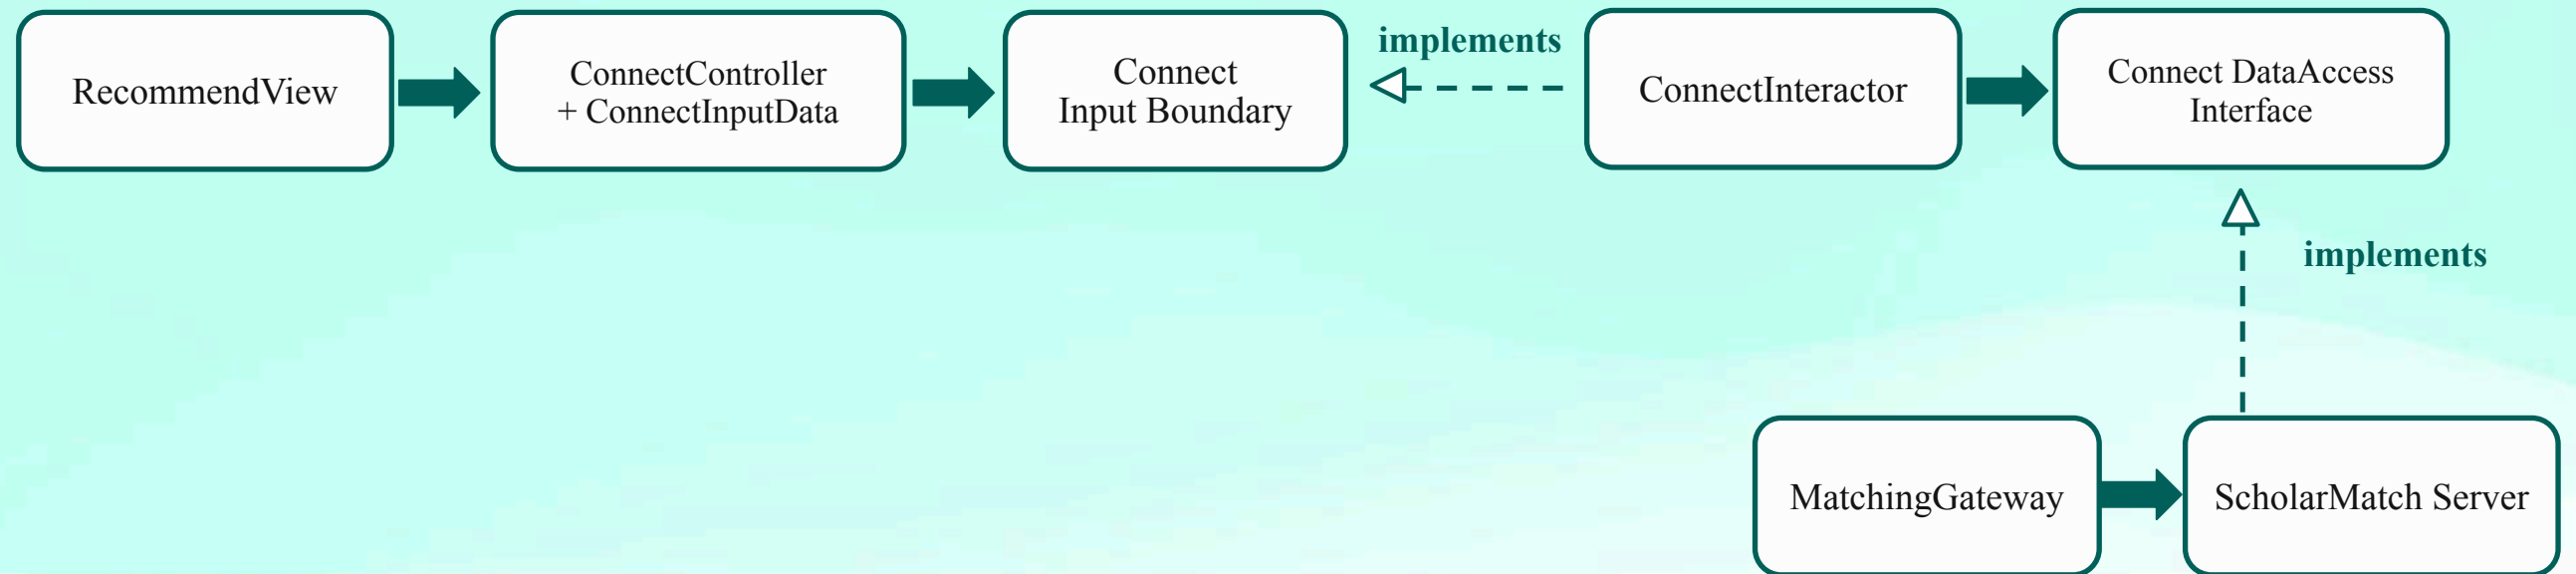

RETURN PATH



Solid arrow = calls / updates

Dashed line + hollow triangle = implements


A pixelated landscape with a blue sky, green hills, and a yellow path leading to a red area.

SOLID

SOLID

Interface Segregation (ISP)

Each use case depends on one focused interface—not one giant DAO.

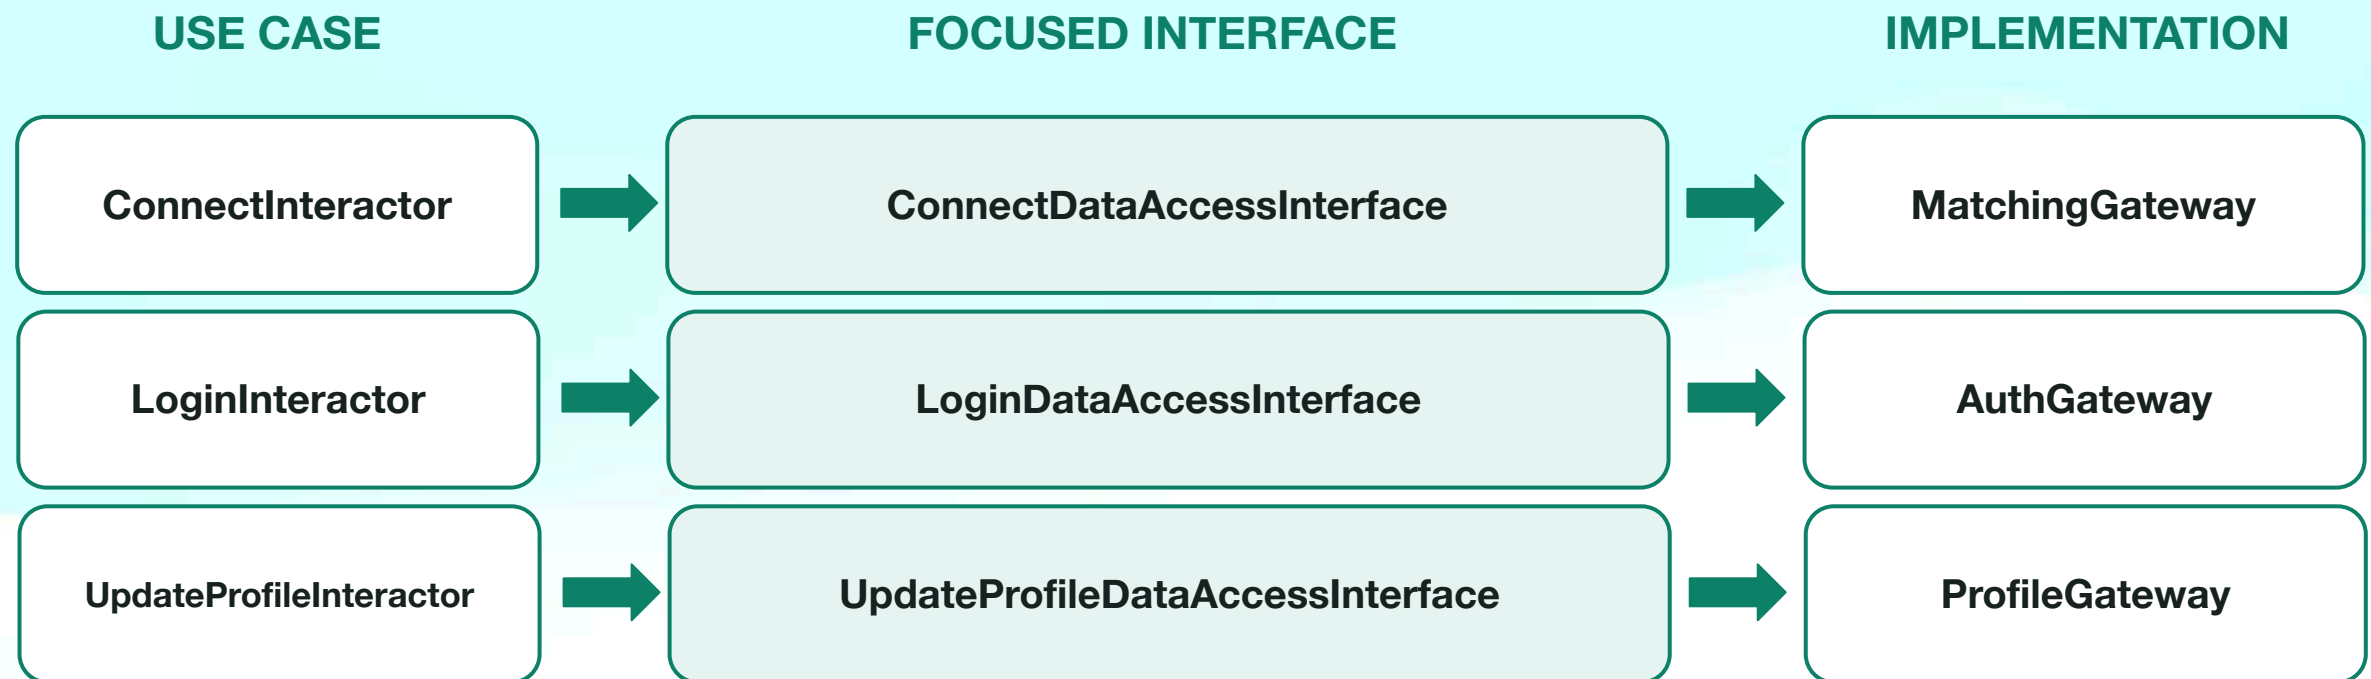


Benefit

Lower Coupling: One Interface changes only affect one interactor

Easy unit testing: You only need to implement a small, focused interface for testing.

SOLID

Dependency Inversion (DIP)

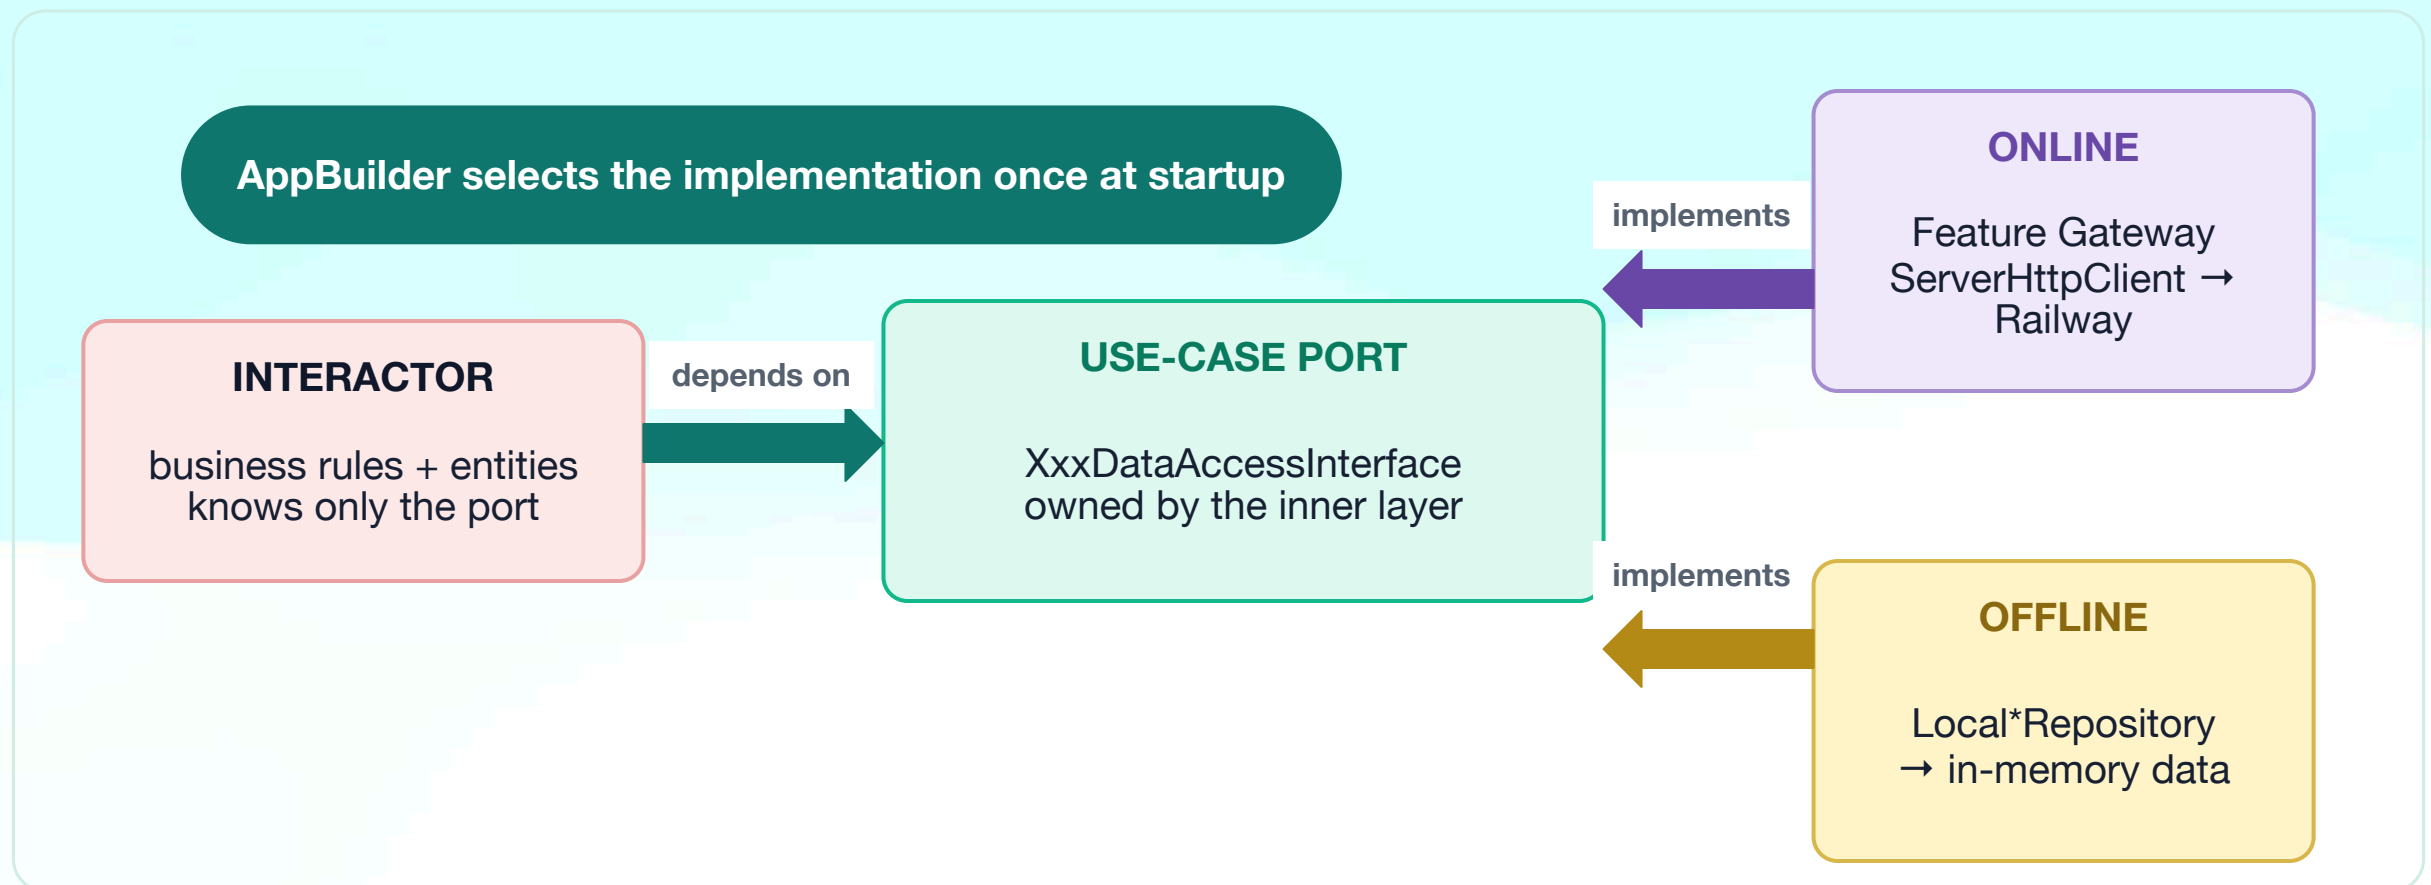

Benefit


Infrastructure Independence:
No UI or Interactor code changes when switching modes or changing to another database.

Design Patterns

Design Patterns

BUILDER PATTERN- AppBundle turns startup wiring into readable steps

Each step creates the objects needed by the next layer.

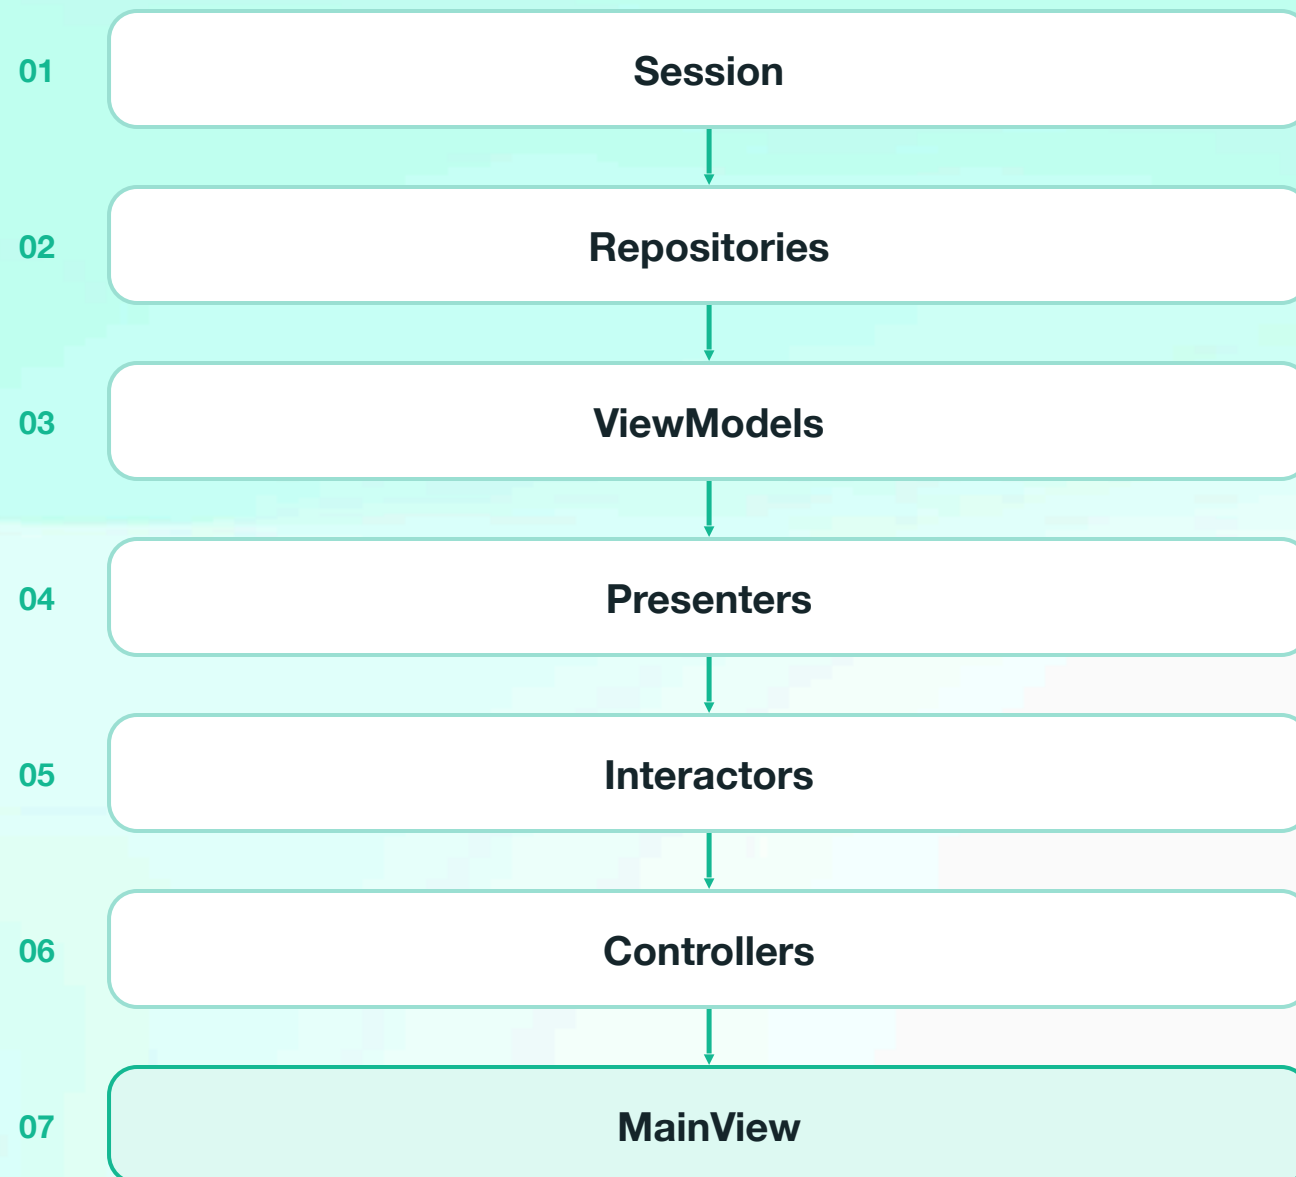

ScholarMatchApp.java

```
1 new AppBundle()
2     .addSession()
3     .addRepositories()
4     .addViewModels()
5     .addPresenters()
6     .addInteractors()
7     .addControllers()
8     .build();
```


WHY IT HELPS

The construction order is visible, and skipped steps fail fast.

Design Patterns

FACADE PATTERN · ServerHttpClient


Gateways call the facade; ServerHttpClient, which delegates the operations to HttpSender, ObjectMapper, and CurrentUserProviderInterface.

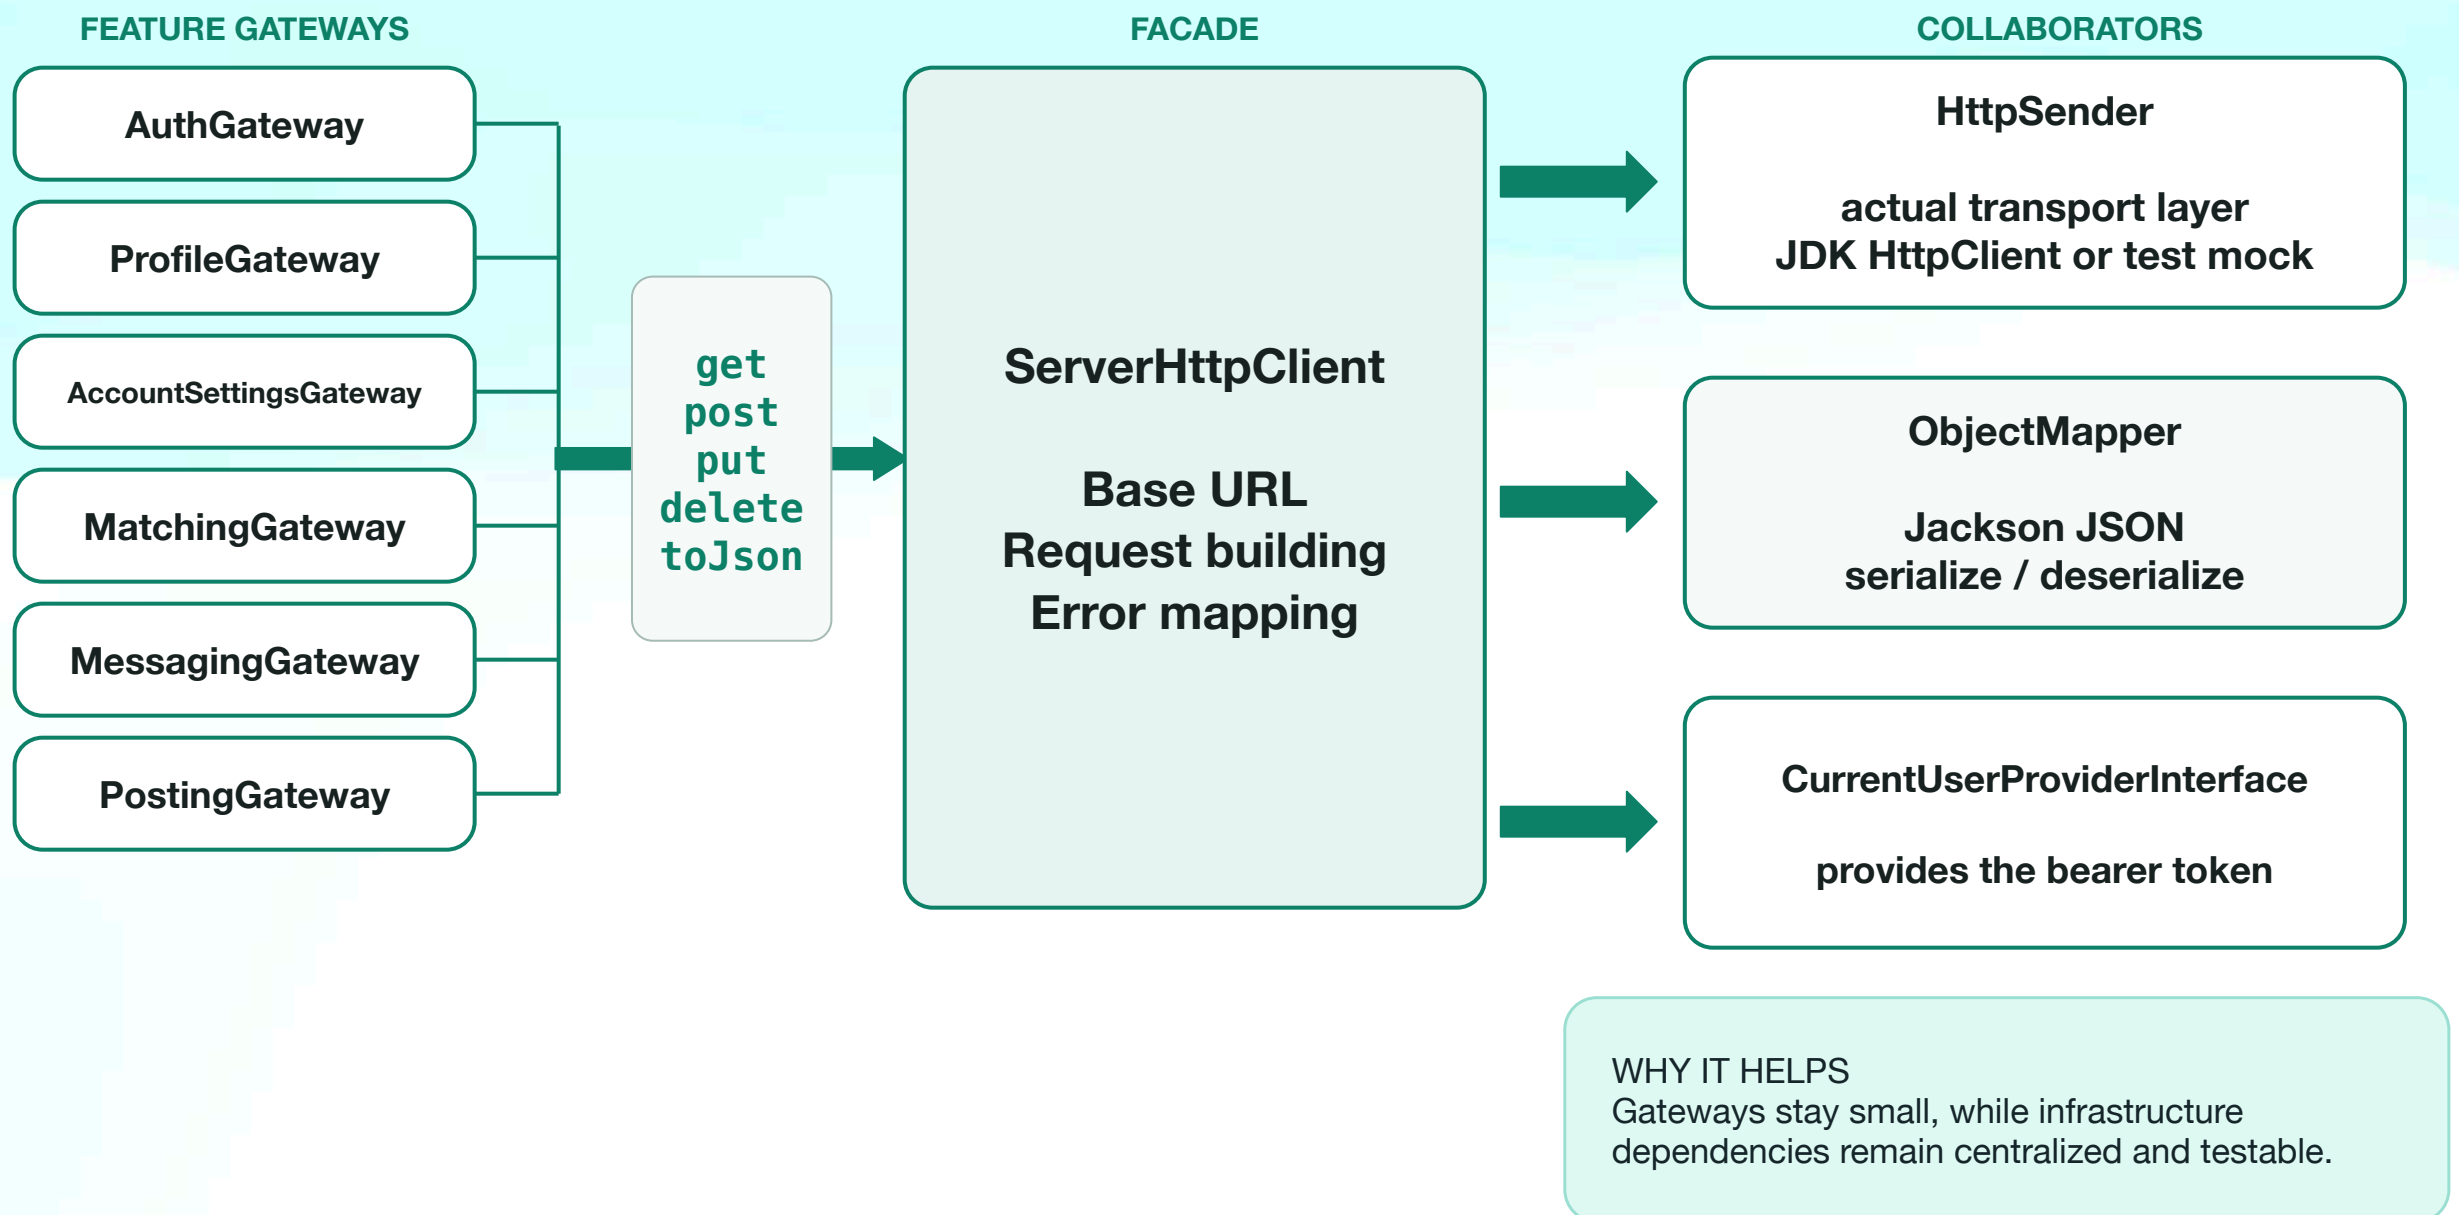

Design Patterns

OBSERVER PATTERN - Views subscribe to observable ViewModel state

A state change travels to the UI without the Presenter touching Swing.

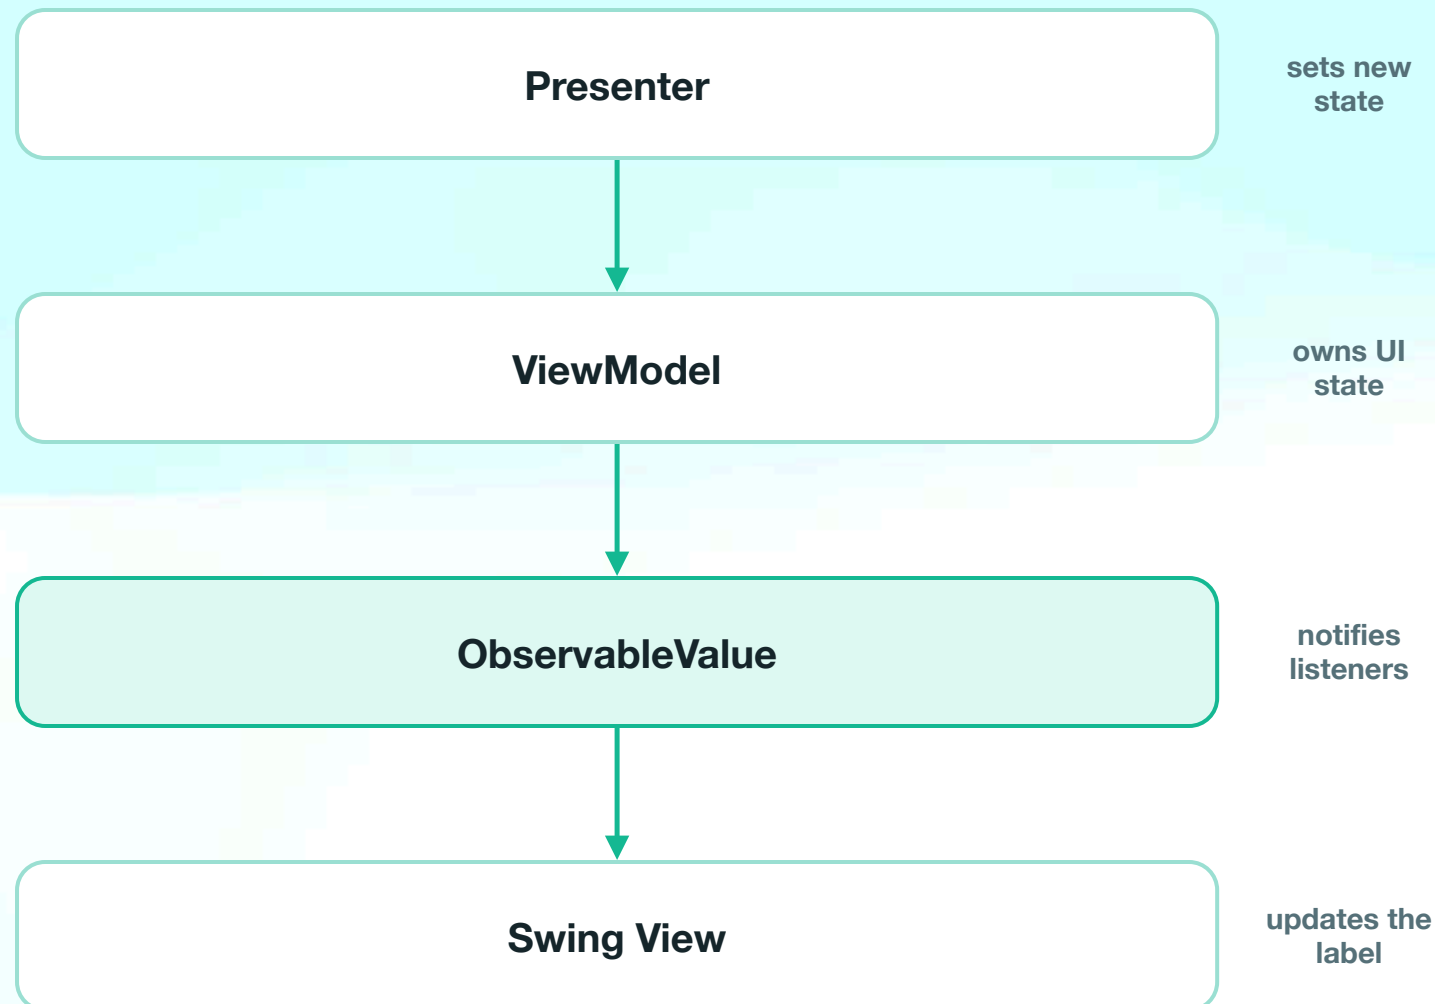

```
LoadMatchesView.java

1  viewModel
2    .errorMessageProperty()
3    .addListener(
4      errorLabel::setText);
5
6
```


WHY IT HELPS

The Presenter changes state; every subscribed View refreshes automatically.

Code Organization

Code Organization

1.Overall - Package by layer

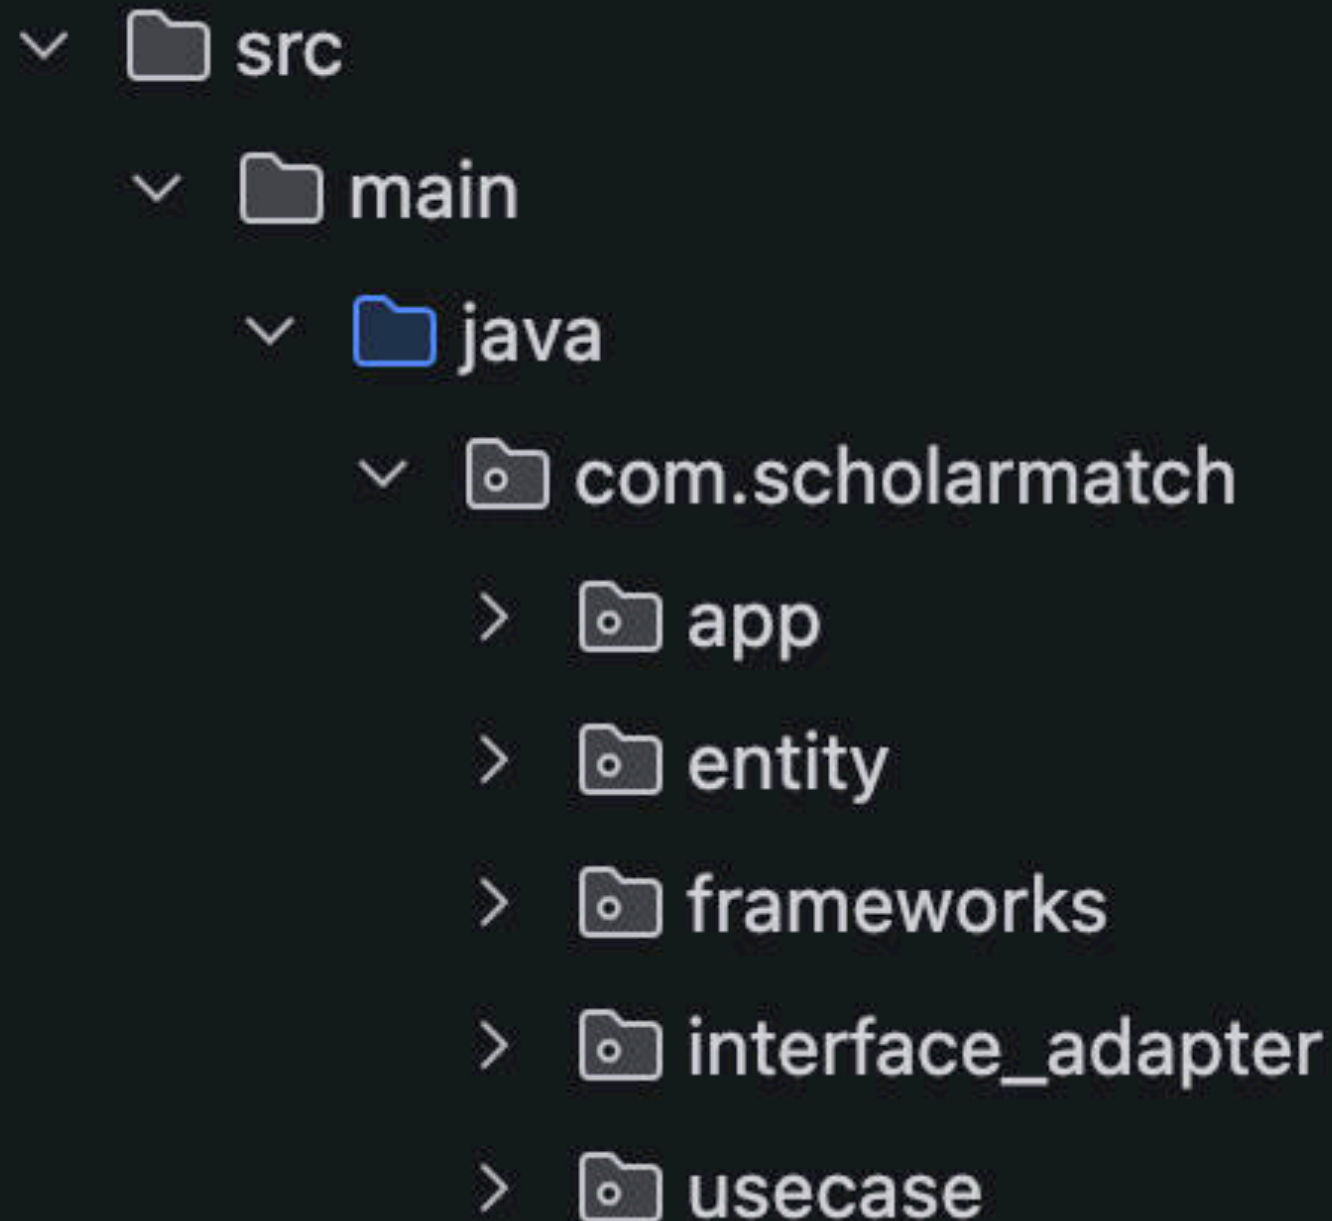


```
src
├── main
│   └── java
│       └── com.scholarmatch
│           ├── app
│           ├── entity
│           ├── frameworks
│           ├── interface_adapter
│           └── usecase
```

Code Organization •

Inside UserCase - Package by feature

Reduce merge conflicts

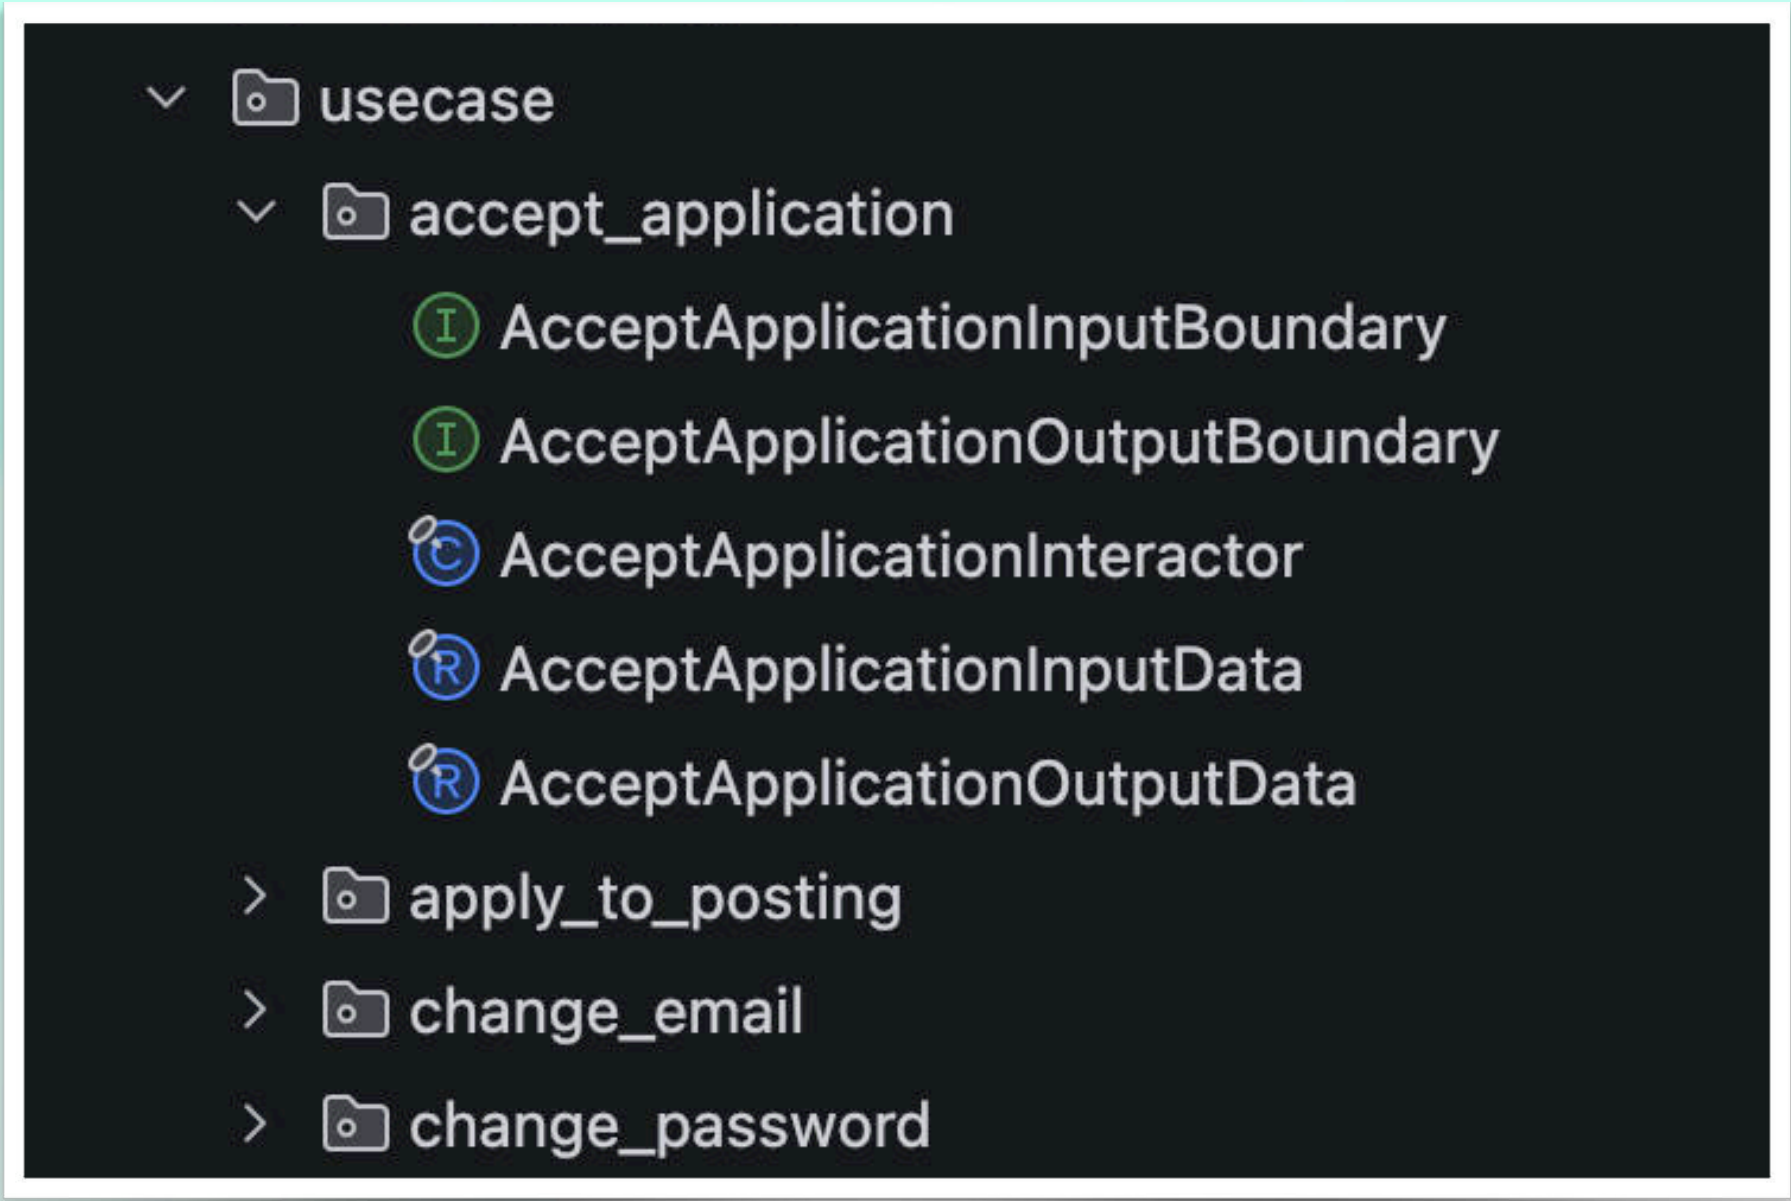

```

  ▾ usecase
    ▾ accept_application
      ⓘ AcceptApplicationInputBoundary
      ⓘ AcceptApplicationOutputBoundary
      ⓘ AcceptApplicationInteractor
      ⓘ AcceptApplicationInputData
      ⓘ AcceptApplicationOutputData
    > apply_to_posting
    > change_email
    > change_password

```

The screenshot displays a file explorer view of a code project. The 'usecase' directory is expanded, revealing a sub-directory 'accept_application'. This sub-directory contains five files: 'AcceptApplicationInputBoundary', 'AcceptApplicationOutputBoundary', 'AcceptApplicationInteractor', 'AcceptApplicationInputData', and 'AcceptApplicationOutputData'. Each file is preceded by a circular icon containing a letter: 'I' for the two boundary files, 'C' for the interactor, and 'R' for the two data files. Below the 'accept_application' directory, three other sub-directories are listed and collapsed: 'apply_to_posting', 'change_email', and 'change_password'.

Code Quality

Code Quality

1.Checkstyle

```
a22930@MariandeMacBook-Air-4 ScholarMatch % mvn checkstyle:check
[INFO] Scanning for projects...
[INFO]
[INFO] -----< com.scholarmatch:scholarmatch-prev >-----
[INFO] Building ScholarMatch 1.0-SNAPSHOT
[INFO]   from pom.xml
[INFO] -----[ jar ]-----
[INFO]
[INFO] --- checkstyle:3.3.1:check (default-cli) @ scholarmatch-prev ---
[INFO] Starting audit...
Audit done.
[INFO] You have 0 Checkstyle violations.
[INFO] -----
[INFO] BUILD SUCCESS
[INFO] -----
[INFO] Total time:  1.039 s
[INFO] Finished at: 2026-08-01T17:25:13-04:00
[INFO] -----
```

Code Quality

2. Testing: JUnit5 + Mockito + JaCoCo

DAOs are mocked with Mockito - no real database is needed

Code Coverage:

- 492 / 492 tests passed
- 237 production classes analyzed
- 99.92% line coverage
- 99.88% instruction coverage
- 99.75% method coverage
- 99.77% branch coverage

Element	Missed Instructions	Cov.	Missed Branches	Cov.	Missed	Cxty	Missed	Lines	Missed	Methods	Missed	Classes
com.scholarmatch.frameworks.gui.view		99%		100%	2	208	1	1,000	2	134	0	18
com.scholarmatch.frameworks.gui.component		100%		100%	0	310	0	1,660	0	187	0	27
com.scholarmatch.frameworks.data.access.object.localMockServer		100%		100%	0	194	0	451	0	83	0	13
com.scholarmatch.frameworks.data.access.object.server		100%		100%	0	152	0	394	0	51	0	10
com.scholarmatch.entity		100%		100%	0	153	0	342	0	119	0	15
com.scholarmatch.app		100%		100%	0	59	0	221	0	24	0	2
com.scholarmatch.frameworks.gui		100%		100%	0	46	0	219	0	25	0	3
com.scholarmatch.frameworks.data.access.object		100%		100%	0	86	0	203	0	50	0	6
com.scholarmatch.interface.adapter.view.model		100%		100%	0	104	0	199	0	97	0	13
com.scholarmatch.usecase.dto		100%		100%	0	79	0	151	0	72	0	4
com.scholarmatch.frameworks.gui.style		100%		100%	0	40	0	119	0	24	0	8
com.scholarmatch.interface.adapter.presenter		100%		100%	0	72	0	187	0	70	0	23
com.scholarmatch.usecase.update_profile		100%		100%	0	50	0	107	0	25	0	3
com.scholarmatch.interface.adapter.controller		100%		n/a	0	55	0	134	0	55	0	24
com.scholarmatch.usecase.paper_lookup		100%		100%	0	30	0	82	0	21	0	4
com.scholarmatch.usecase.register		100%		100%	0	32	0	71	0	21	0	4
com.scholarmatch.interface.adapter.view.model.support		100%		100%	0	22	0	53	0	18	0	2
com.scholarmatch.usecase.send_message		100%		100%	0	14	0	35	0	8	0	3
com.scholarmatch.usecase.change_email		100%		100%	0	13	0	27	0	7	0	3
com.scholarmatch.usecase.load_postings		100%		100%	0	6	0	25	0	5	0	4
com.scholarmatch.usecase.change_password		100%		100%	0	10	0	24	0	4	0	3
com.scholarmatch.usecase.login		100%		n/a	0	8	0	27	0	8	0	3
com.scholarmatch.usecase.create_posting		100%		100%	0	6	0	18	0	4	0	3
com.scholarmatch.usecase.request_email_verification		100%		100%	0	8	0	18	0	6	0	3
com.scholarmatch.usecase.connect		100%		100%	0	8	0	22	0	7	0	3
com.scholarmatch.usecase.recommend		100%		100%	0	5	0	18	0	4	0	2

- 1% uncovered: Interactive Swing callbacks involving button clicks.
- better suited for end-to-end testing.

Code Quality

3.Unified naming convention

ScholarMatch / docs / format-conventions / branch_naming_convention_eg.md

 Guancheng-Chen docs(format-conventions): Add development format convention documents

c81c741 · 2 months ago  History

Preview

Code

Blame

17 lines (10 loc) · 350 Bytes



Raw



Template

Plaintext

```
issue-<issue number>-<name>-<CA layer/test>-<use case/module name, separated by hyphens>
```



(Note: CA refers to Clean Architecture)

Examples

- `issue-10-GuanchengChen-UserCase-SwipeRightUseCase`
- `issue-11-GuanchengChen-Test-UserCaseInteractorTest`
- `issue-12-GuanchengChen-Entity-ResearcherProfile`

Code Quality

3. Not change main branch

 main ▾

 100 Branches 

issue-162-GuanchengChen-GUI-Visual-Polish



2 weeks ago

issue-165-alan746-GUI-Posting-Owner-Summary



2 weeks ago

issue-164-alan746-UseCase-Posting-Owner-Summary



2 weeks ago

issue-163-alan746-UseCase-Public-Profile-Cleanup



2 weeks ago

issue-146-alan746-UseCase-Public-Profile



2 weeks ago

issue-145-alan746-Entity-Posting-Owner-Identity



2 weeks ago

issue-140-alan746-Framework-Account-Settings



2 weeks ago

issue-144-alan746-GUI-Posting-Verification



2 weeks ago

issue-143-alan746-GUI-Recommend-Verification



2 weeks ago

issue-142-alan746-Entity-Posting-Verification



2 weeks ago

Code Quality

4. Issue & PR

☐ Open 0 ☒ Closed 76

Implement Education entity and its DegreeType enum #13

☒ Closed #23

Guancheng-Chen opened on Jul 6 Last edited by Guancheng-Chen Owner

Goal:

- Create Education — one entry in a User 's education history
- Create the DegreeType enum that types its degreeType field instead of using a raw string.

Files to edit:

- src/main/java/com/scholarmatch/entity/DegreeType.java
- src/main/java/com/scholarmatch/entity/Education.java
- src/test/java/com/scholarmatch/entity/EducationTest.java

Expected behaviour:

- DegreeType : HIGH_SCHOOL , BACHELOR , MASTER , PHD , POSTDOC .
- Education is an immutable value object (institution , degreeType , startYear , startMonth , endYear , endMonth); isOngoing() returns true exactly when endYear == 0 .

Testing:

Write and pass one ongoing/one-completed test for Education.isOngoing() .

Create sub-issue

- Guancheng-Chen assigned ShiinaMahiruOvO on Jul 6
- ShiinaMahiruOvO mentioned this 1mo ago
- Implement Education entity #23
- Guancheng-Chen closed this as completed in #23 1mo ago

☐ 0 Open ☒ 107 Closed

Implement Education entity #23

Merged Guancheng-Chen merged 3 commits into main from issue-13-ZhijieYuan-Entity-Education-DegreeType last m

Conversation 1 Commits 3 Checks 0 Files changed 3

ShiinaMahiruOvO commented last month Collaborator

Description

Implemented the Education entity and DegreeType enum for the Profile domain model.

Fixes #13

Behaviours Completed

- Added the DegreeType enum used by Education.
- Added the immutable Education value object with getters and isOngoing() logic.
- Added unit tests for ongoing and completed education entries.

Files Changed

- src/main/java/com/scholarmatch/entity/DegreeType.java
- src/main/java/com/scholarmatch/entity/Education.java
- src/test/java/com/scholarmatch/entity/EducationTest.java

Brief Explanation

DegreeType captures supported degree categories. Education stores one education-history entry as an immutable domain value object, and isOngoing() checks whether endYear is 0.

Testing

- Ran mvn clean test .
- Confirmed 0 Checkstyle violations.
- Confirmed 2 tests passing.

Unsure About

N/A

Accessibility Report

Accessibility Report

docs/accessibility_report.md

ScholarMatch / docs / accessibility-report.md

Guancheng-Chen docs: Rewrite accessibility report's market and ethics paragraphs

fd07986 · 4 days ago History

Preview Code Blame 34 lines (26 loc) · 7.77 KB

Raw Copy Download Edit History

Accessibility Report


Audience. Students, researchers, and academics using a desktop app to find collaborators, discover research opportunities, and message potential matches. **Model.** We follow the **social model of disability**: barriers live in the product environment, so we design the default UI for everyone—no separate "accessible mode".

Universal Design principles → current status

Principle	Status	What's in ScholarMatch today	Next steps (high-impact)
1. Equitable Use	Partial	One UI for all users; no segregated interface. Nav items and cards pair an icon with a text label rather than icon-only controls (<code>NavigationBar</code> , <code>RecommendUserCard</code> , <code>MatchedUserCard</code>).	Add programmatic name/role/state (<code>AccessibleContext</code>) to custom Swing components; none is set today.
2. Flexibility in Use	Improving	Single hardcoded light theme (<code>scholarmatch-light.properties</code> , <code>FlatLaf</code>); font sizes are fixed point values set throughout view code, not user-adjustable.	Add a dark theme and a real zoom/text-scale setting; audit/complete keyboard-only navigation (see below).

Accessibility Report

Universal Principles - Tolerance for Error

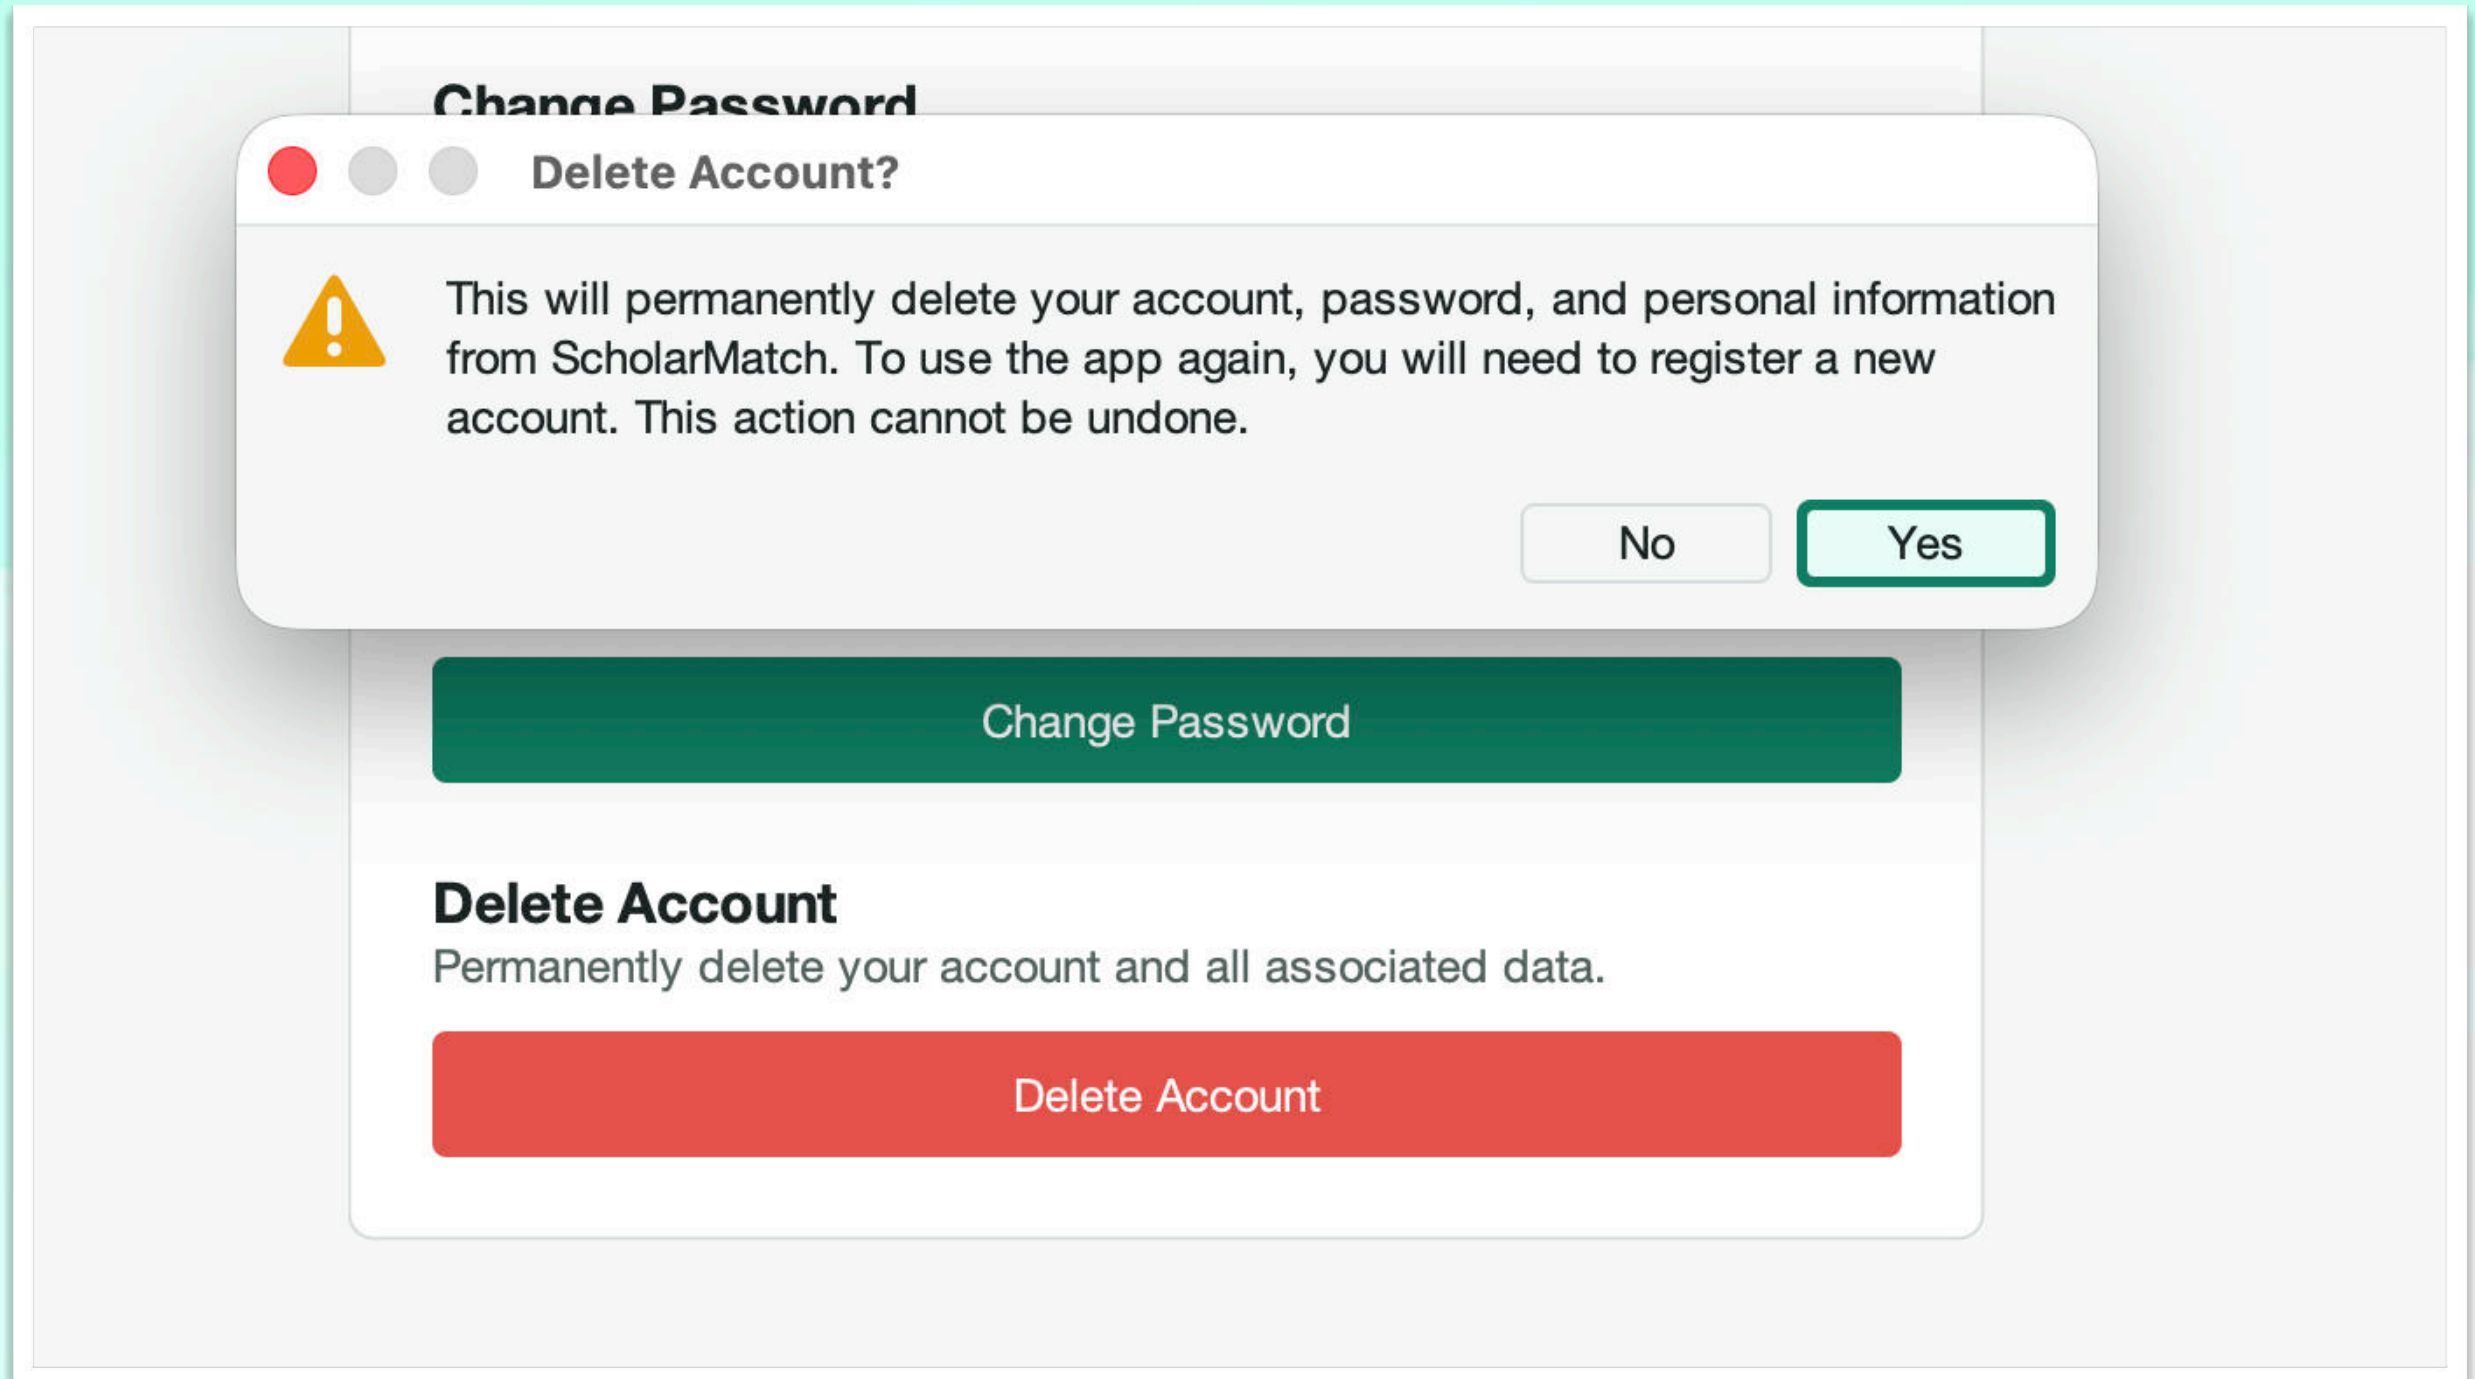

Accessibility Report

Universal Principles - Simple and Intuitive Use





Ada Lovelace

✓ **Verified university email**

University of Toronto · Faculty

Looking for: Co Author

Field: Mathematics Funding: Institutional Funding Availability: 20 h/wk

h-index: 8 Citations: 150

Looking for collaborators on computational number theory.

 **EDUCATION**

None on file

 **PUBLICATIONS**

None on file

 **RESEARCH DESCRIPTION**

Focused on mathematics research.

 **RESEARCH INTERESTS**

collaboration, mathematics

 **Dislike**

 **Skip**

 **Connect**

Accessibility Report

Target Users & Group Who May Struggle

Target Users

- Graduate students & researchers
- Universities & research offices


Group Who May Struggle

Keyboard-only users

Fixs



Add Keyboard Shortcut

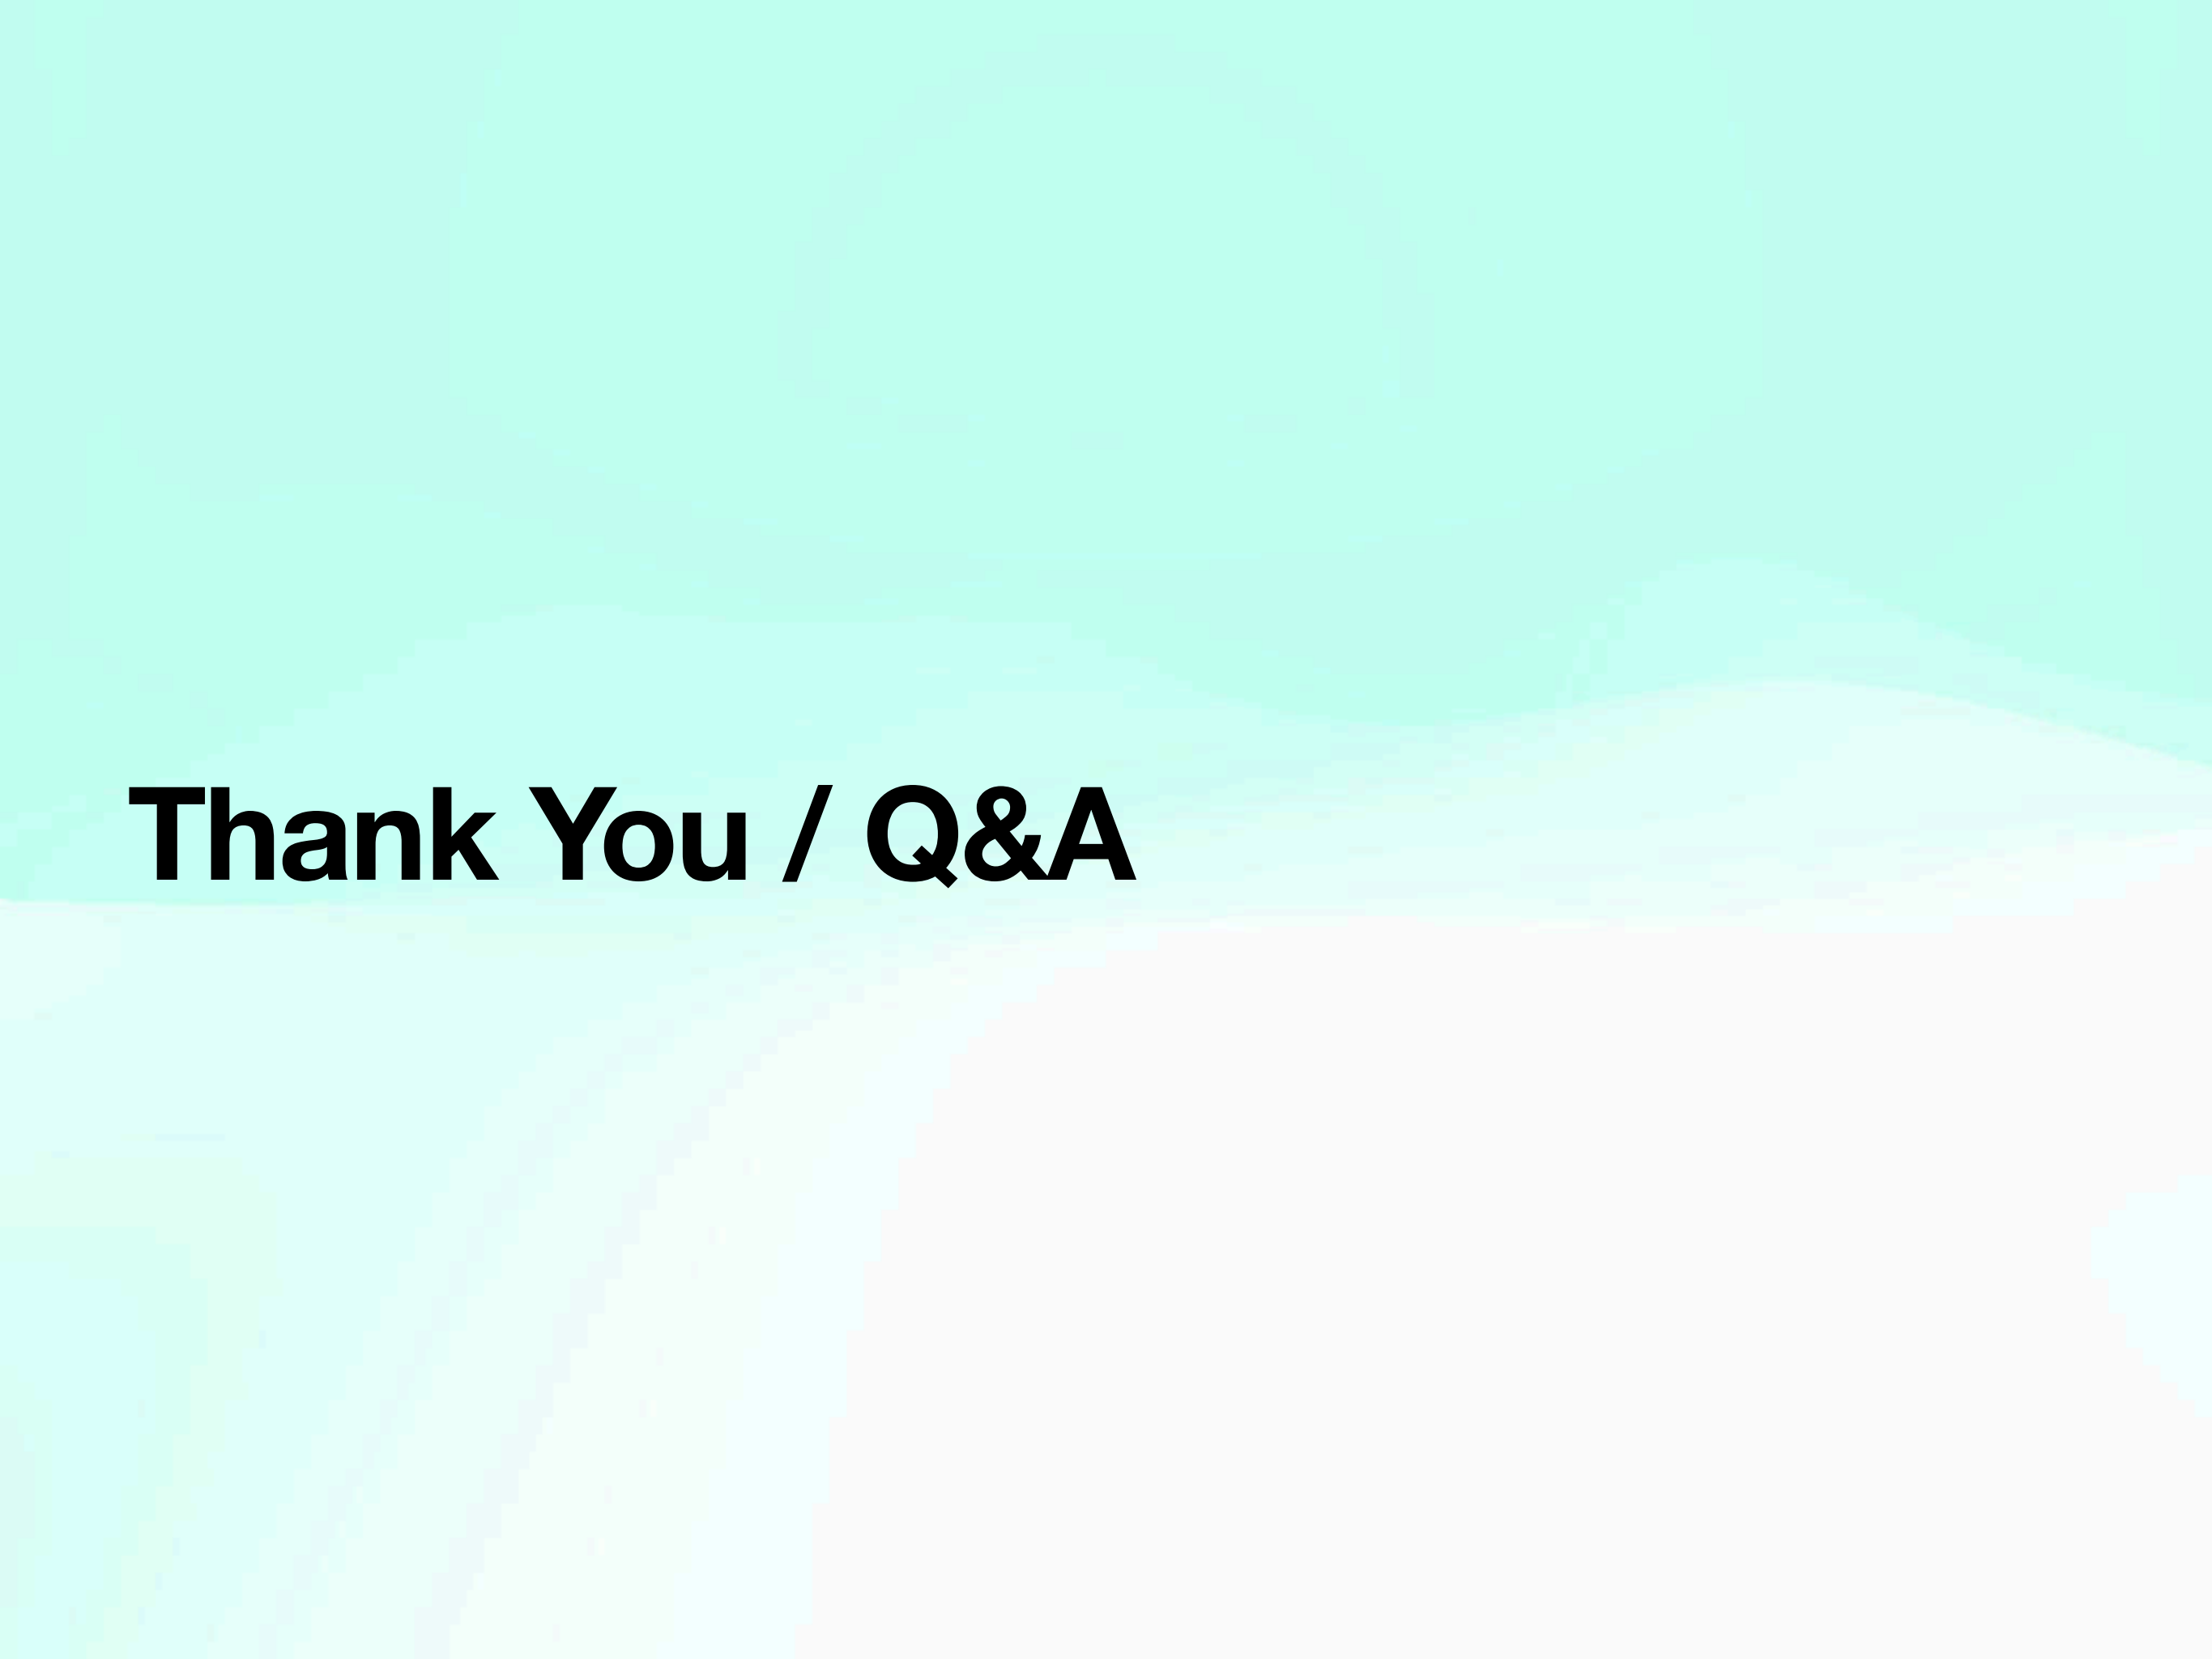The background of the slide features a soft-focus photograph of a sunset or sunrise. The sky is a mix of light blue, green, and yellow, with a faint rainbow visible on the left side. The water in the foreground is calm, reflecting the colors of the sky. The overall mood is peaceful and serene.

Thank You / Q&A