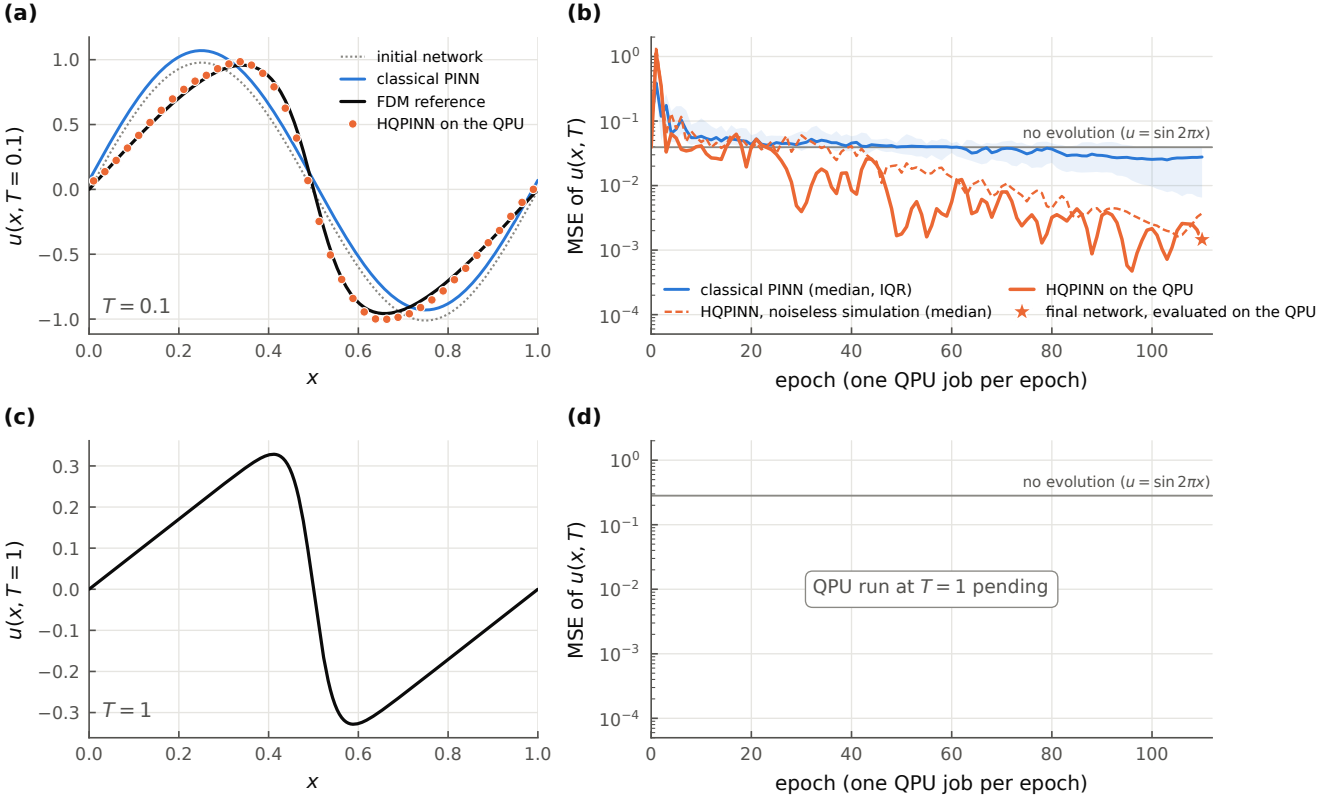
(a)
initial network
classical PINN
FDM reference
HQPINN on the QPU
$u(x, T = 0.1)$
$T = 0.1$
x
(b)
no evolution ($u = \sin 2\pi x$)
MSE of $u(x, T)$
classical PINN (median, IQR)
HQPINN, noiseless simulation (median)
HQPINN on the QPU
final network, evaluated on the QPU
epoch (one QPU job per epoch)
(c)
$u(x, T = 1)$
$T = 1$
x
(d)
no evolution ($u = \sin 2\pi x$)
MSE of $u(x, T)$
QPU run at $T = 1$ pending
epoch (one QPU job per epoch)