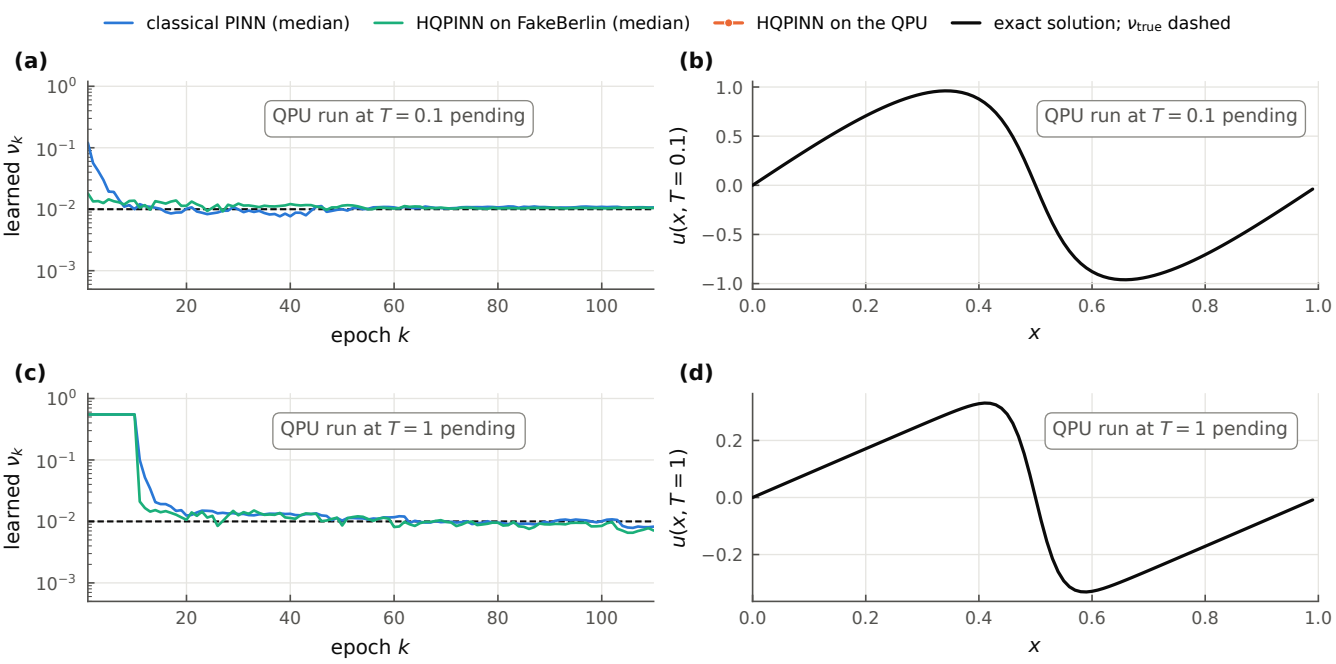
classical PINN (median)
HQPINN on FakeBerlin (median)
HQPINN on the QPU
exact solution; ν_{true} dashed
(a)
learned ν_k
QPU run at $T = 0.1$ pending
epoch k
(b)
$u(x, T = 0.1)$
QPU run at $T = 0.1$ pending
x
(c)
learned ν_k
QPU run at $T = 1$ pending
epoch k
(d)
$u(x, T = 1)$
QPU run at $T = 1$ pending
x