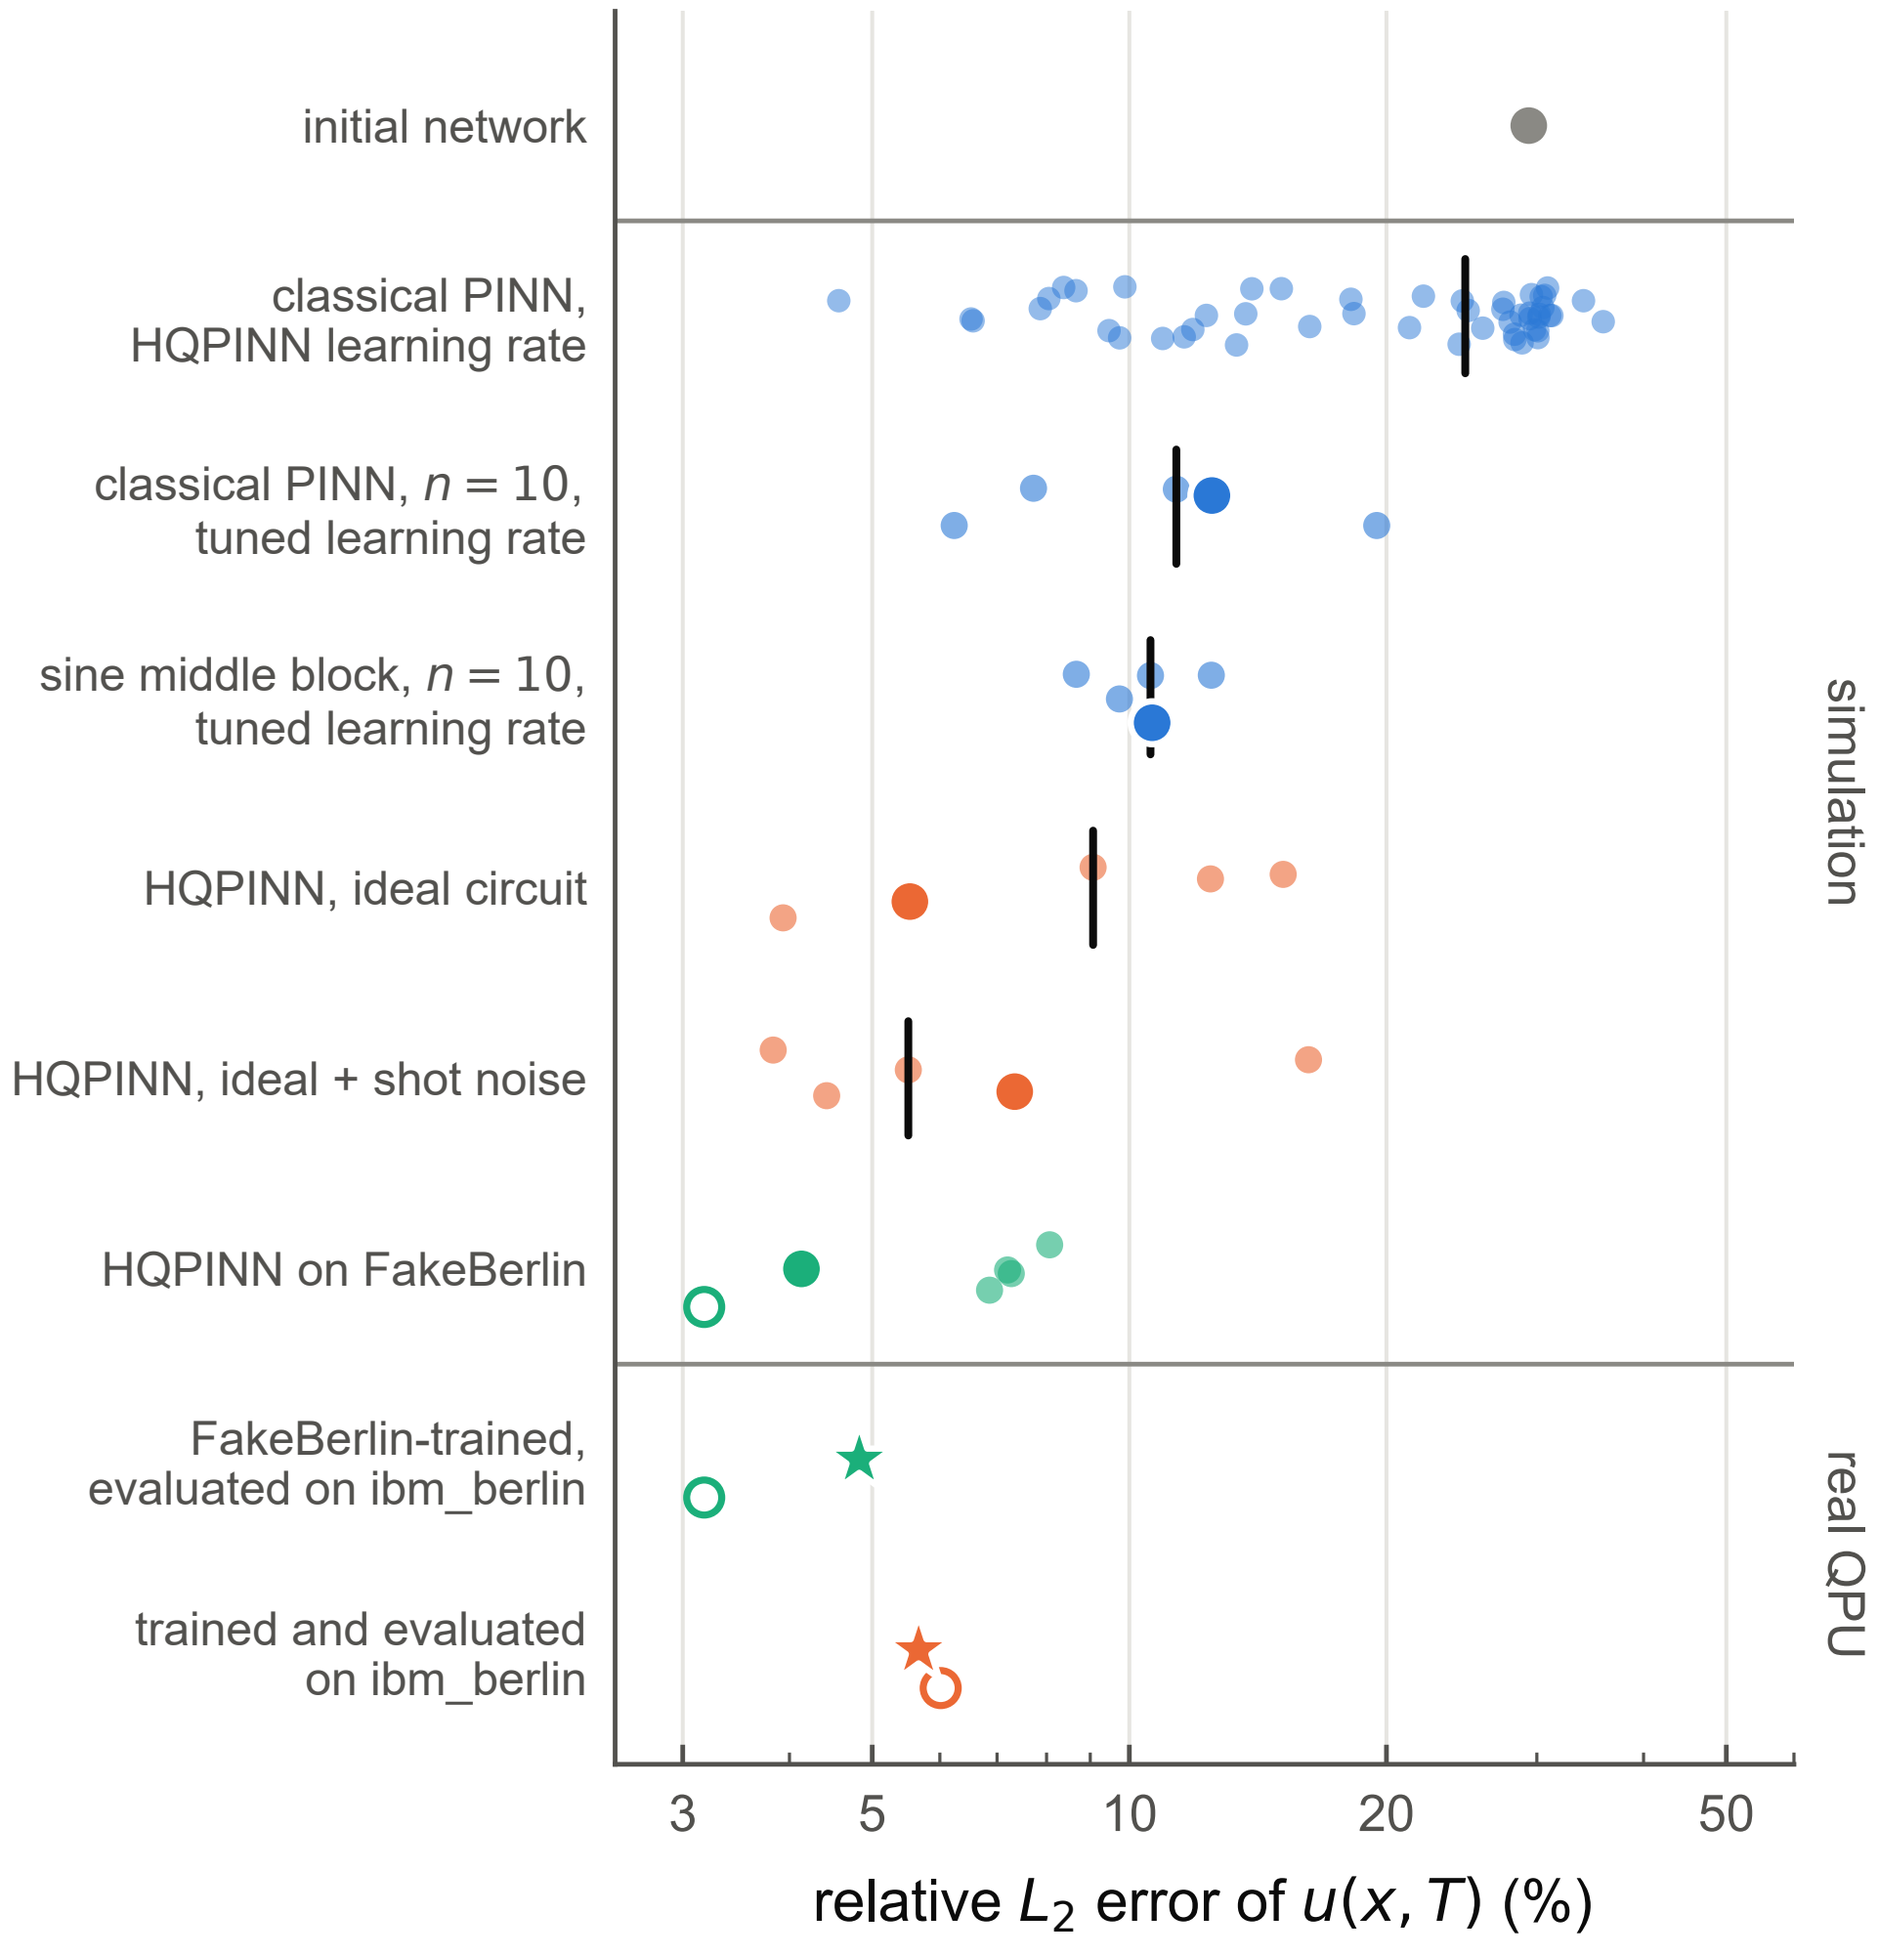
initial network
classical PINN, HQPINN learning rate
classical PINN, $n = 10$, tuned learning rate
sine middle block, $n = 10$, tuned learning rate
HQPINN, ideal circuit
HQPINN, ideal + shot noise
HQPINN on FakeBerlin
FakeBerlin-trained, evaluated on ibm_berlin
trained and evaluated on ibm_berlin
simulation
real QPU
3
5
10
20
50
relative L_2 error of $u(x, T)$ (%)