



PRACTICAS ESTRUCTURAS SELECTIVAS

Presenta:

Guillermo Ponce Diñiguez


Materia:

Introducción a la programación:


Profesor:

Miriam Puente Jimenez.


Practica 12

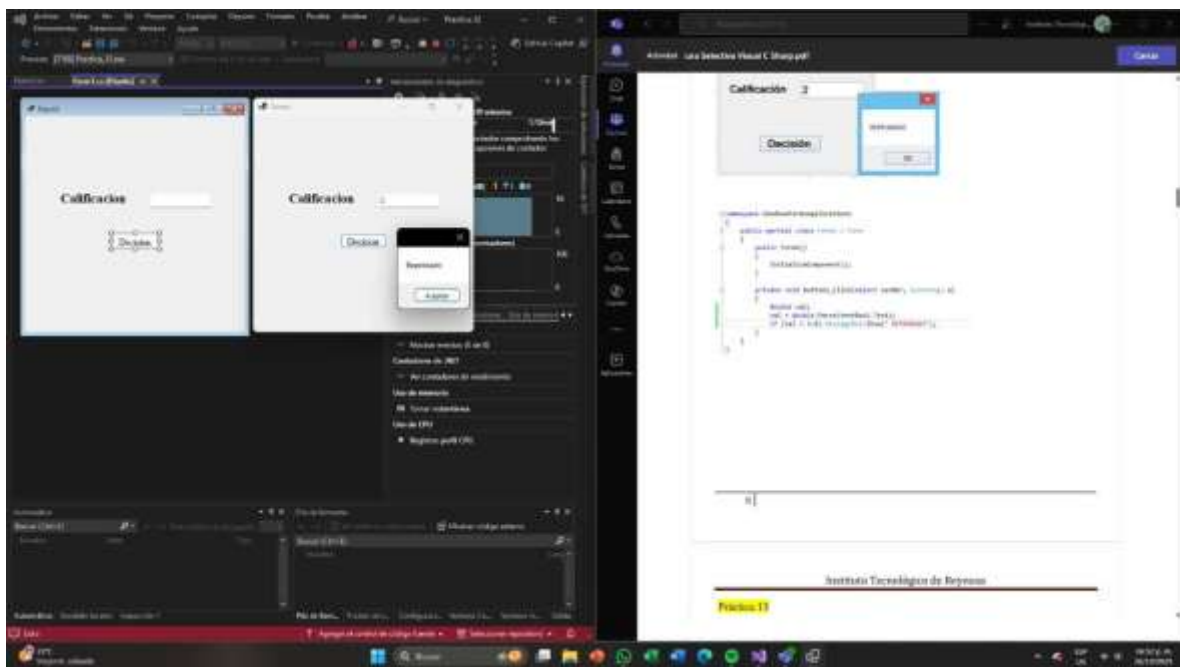


Practica 13

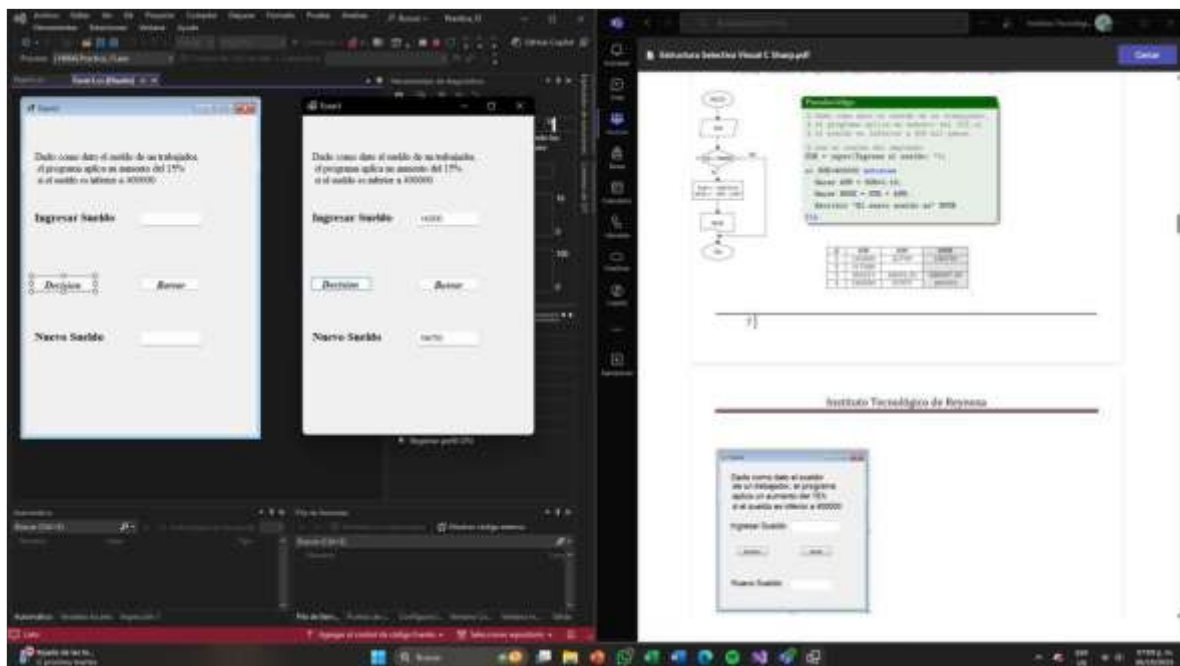


Practica 14

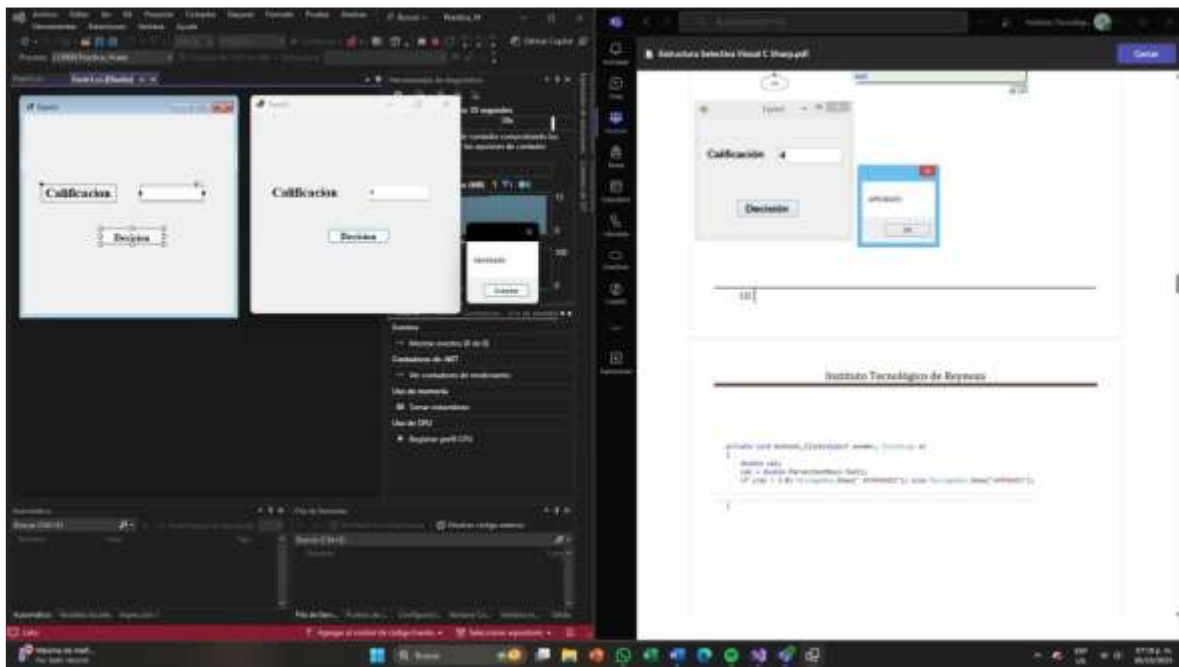


Practica 15

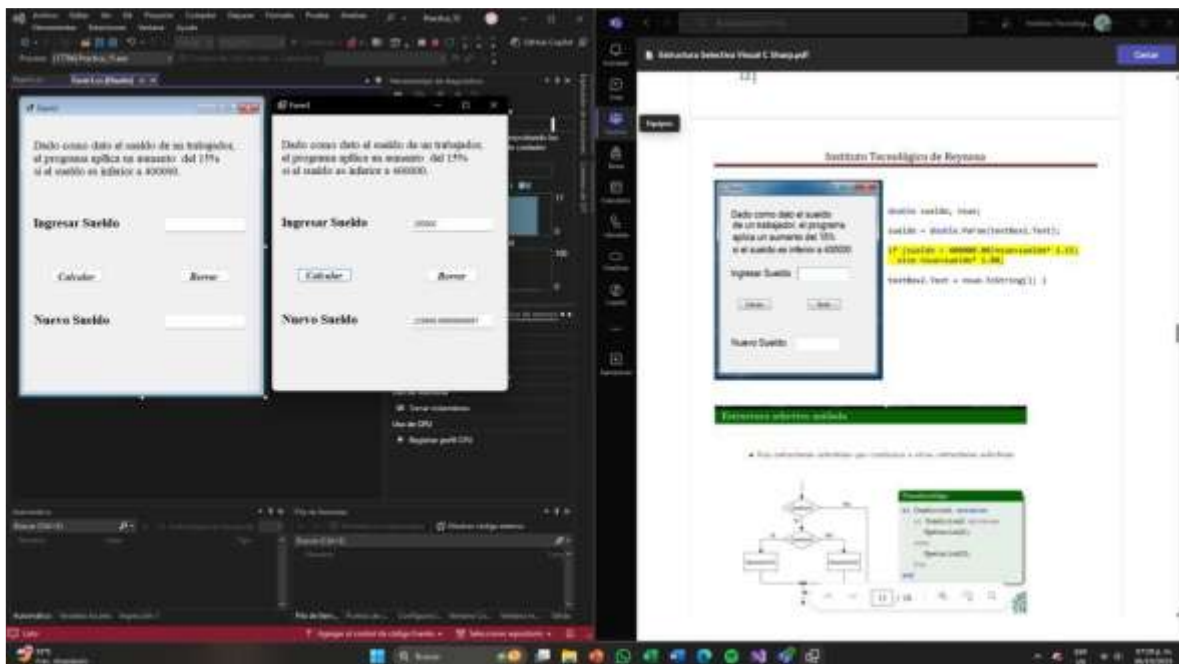

Practica 16

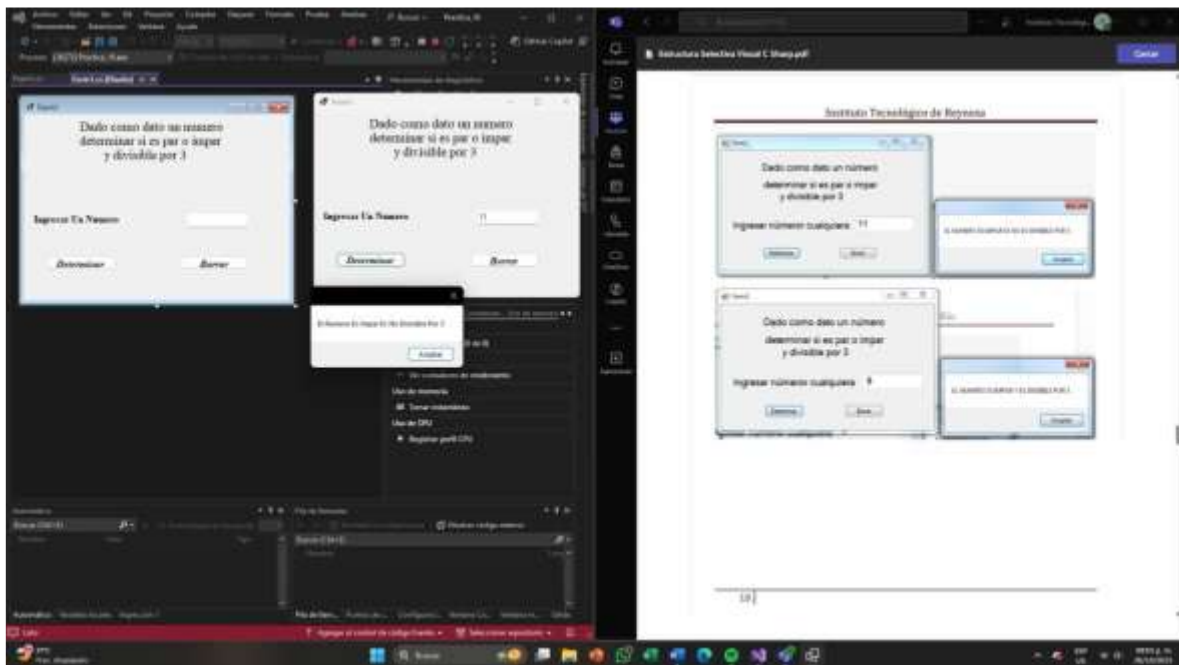

Practica17

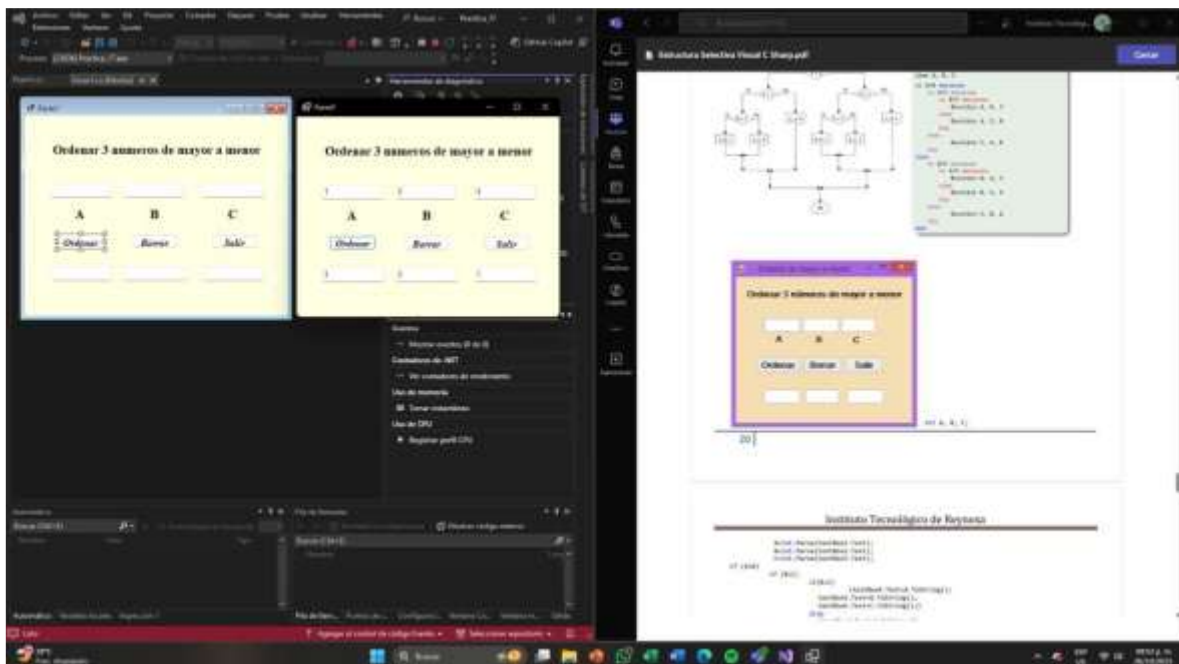

Practica 18

The image displays a C# application for classifying triangles based on the lengths of their three sides. The application is shown in three overlapping windows:

- Design Diagram:** A UML-like diagram showing the layout of the application. It includes three text boxes for "Longitud lado A", "Longitud lado B", and "Longitud lado C", a "Decidir" button, and a label for "Tipo De Triángulo".
- Flowchart:** A logic flowchart starting with "Inicio", followed by input for side lengths, and decision diamonds for "a==b", "a==c", and "b==c". The flowchart branches to "Equilátero", "Isósceles", or "Escaleno" based on the side comparisons.
- Running Application:** The application window titled "Instituto Tecnológico de Reynosa". It contains the same UI elements as the design diagram. The input fields are populated with "1", "5", and "5". The "Decidir" button is highlighted, and the output shows "Tipo Triángulo: Isosceles".

The C# code snippet shown in the background implements the logic for the "Decidir" button click:

```
private void Decidir_Click(object sender, EventArgs e)
{
    double lado1, lado2, lado3;
    lado1 = double.Parse(textBox1.Text);
    lado2 = double.Parse(textBox2.Text);
    lado3 = double.Parse(textBox3.Text);
    if ((lado1 == lado2) && (lado2 == lado3))
    {
        textBox4.Text = "Equilátero";
    }
    else if ((lado1 == lado2) || (lado1 == lado3) || (lado2 == lado3))
    {
        textBox4.Text = "Isosceles";
    }
    else
    {
        textBox4.Text = "Escaleno";
    }
}
```