IMPLEMENTATION GUIDE OF ANDROID SOFTWARE DEVELOPMENT KIT

Version 1.0

SSL WIRELESS

93 B New Eskaton Road
Dhaka 1000, Bangladesh
Work: +880 9666 77 6969. +880 2 4831 6969
Fax: +880 2 913 2172
E-mail: info@sslwireless.com
www.sslwireless.com

DOCUMENT REVISION HISTORY

Version:	V1.0
Release Date:	June 17, 2019
Document Owner:	Software Shop Limited
Document Classification:	Confidential

This page intentionally left blank

Table of Contents

Steps to Implement SSL COMMERZ SDK on Users Project **5**

Step 1 5

Step 2 5

Step 3 6

Optional Initializer **7**

Customer Initializer 7

EMI Initializer 7

Product Initializer 7

Shipment Initializer 7

Additional Initializer 7

Method to Submit Optional Data **7**

Return Type **8**

Steps to Implement SSL COMMERZ SDK on Users Project


Step 1

Users need to add below dependency to their build.gradle (app module) :

implementation 'androidx.appcompat:appcompat:1.2.0'
implementation 'com.google.android.material:material:1.2.1'
implementation 'com.google.code.gson:gson:2.8.5'
implementation 'androidx.localbroadcastmanager:localbroadcastmanager:1.0.0'
implementation 'androidx.swiperefreshlayout:swiperefreshlayout:1.1.0'

Step 2

To insert the **Dependency Mentioned in step 1**, users need to follow the below steps:
From top left corner of project pane,
"Select" **Project app libs "Paste"**
sslCommerzSdk.aar in libs folder

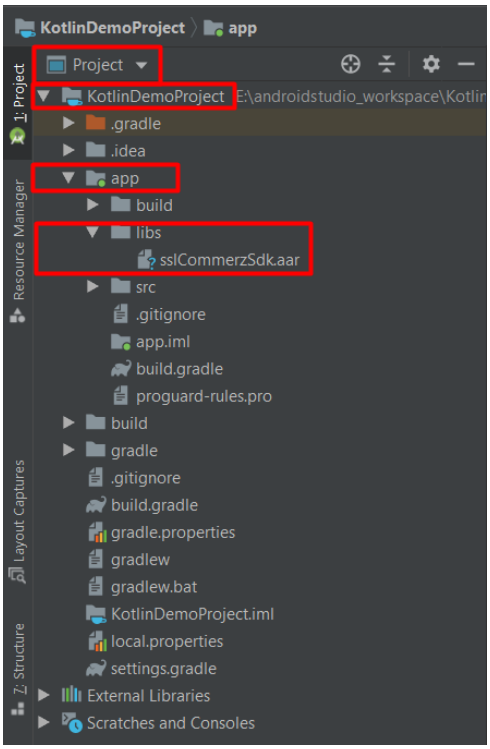


Afterwards, users need to additional codes to the project after inserting sslCommerzSdk.aar in libs folder by following steps below:

"Select" **Project app build.gradle (app module)** and add below code and **sync project**:

```
repositories {
   flatDir {
      dirs 'libs'
   }
}
implementation (name: 'sslCommerzSdk', ext:'aar')
```

Afterwards, users need to sync the project and the below code will appear on the project pan:

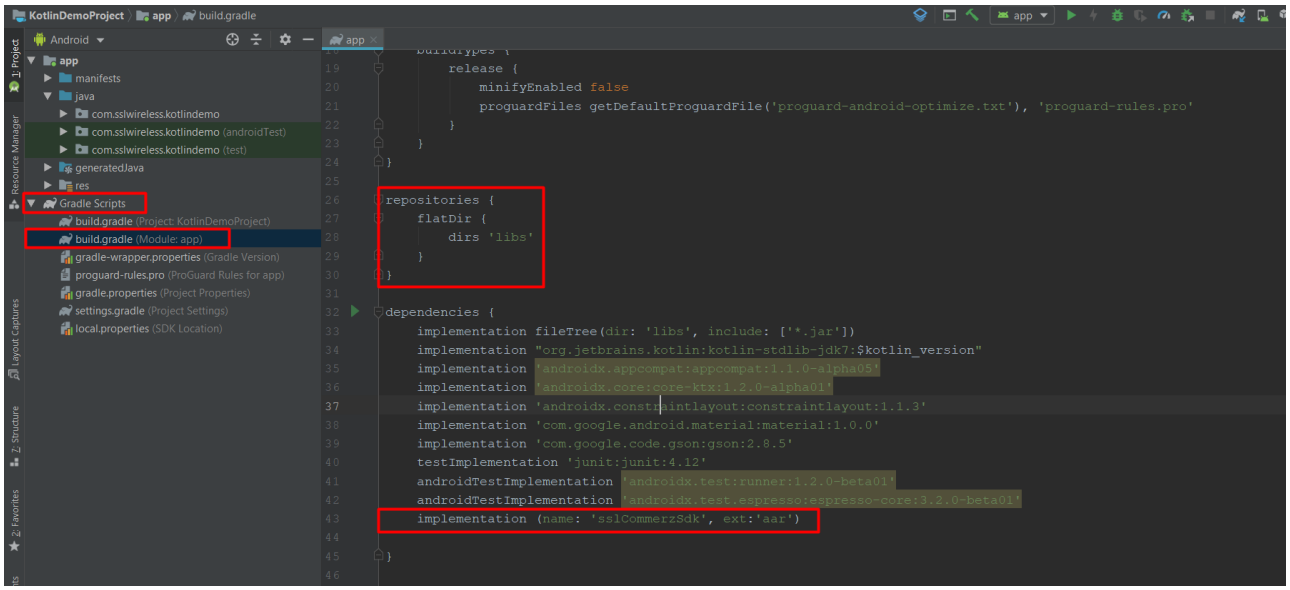

Step 3

After successfully completing SDK integration, users can request for transaction. In order to commence transaction, users need to pass SSLCommerzInitialization.

SSLCommerzInitialization (Mandatory to initiate SSL Commerz):

final SSLCommerzInitialization sslCommerzInitialization = new SSLCommerzInitialization ("yourStoreID","yourPassword", amount, SSLCCurrencyType.BDT,"123456789098765", "yourProductType", SSLCSdkType.TESTBOX);

Also, users can add optional field like below:
final SSLCommerzInitialization sslCommerzInitialization = new SSLCommerzInitialization ("yourStoreID","yourPassword", amount, SSLCCurrencyType.BDT,"123456789098765", "yourProductType", SSLCSdkType.TESTBOX).addMultiCardName(“”).addIpnUrl(“”);

Afterwards, user need to call below class to connect with SSLCommerz:
IntegrateSSLCommerz
.getInstance(context)
.addSSLCommerzInitialization(sslCommerzInitialization)
.buildApiCall(this);

Note: *In addition to* SSLCommerzInitialization, *user can also pass optional initializers if required.*

Optional Initializer

Customer Initializer

```
final SSLCCustomerInfoInitializer customerInfoInitializer = new
SSLCCustomerInfoInitializer("customer name", "customer email",
        "address", "dhaka", "1214", "Bangladesh", “phoneNumber”);
```

EMI Initializer

```
final SSLCEMITransactionInitializer emiTransactionInitializer = new
SSLCEMITransactionInitializer(1);
```

Product Initializer

```
final SSLCProductInitializer productInitializer = new SSLCProductInitializer ("food", "food",
    new SSLCProductInitializer.ProductProfile.TravelVertical("Travel", "10",
        "A", "12", "Dhk-Syl", "N/A", "AAA",
        "DDD"));
```

Shipment Initializer

```
final SSLCShipmentInfoInitializer shipmentInfoInitializer = new SSLCShipmentInfoInitializer
("Courier",
    2, new SSLCShipmentInfoInitializer.ShipmentDetails("AA","Address 1",
    "Dhaka","1000","BD"));
```

Additional Initializer

```
final SSLCAdditionalInitializer additionalInitializer = new SSLCAdditionalInitializer ();
additionalInitializer.setValueA("Value Option 1");
additionalInitializer.setValueB("Value Option 1");
additionalInitializer.setValueC("Value Option 1");
additionalInitializer.setValueD("Value Option 1");
```

Note: *User add optional field as mentioned in STEP 3 and simply call specific class add Method.*

Method to Submit Optional Data

```
IntegrateSSLCommerz
    .getInstance(context)
    .addSSLCommerzInitialization(sslCommerzInitialization)
    .addEMITransactionInitializer(emiTransactionInitializer)
    .addCustomerInfoInitializer(customerInfoInitializer)
    .addProductInitializer(productInitializer)
    .buildApiCall(this);
```

Return Type

SL	Type	Method	Description
1.	String	getAPIConnect()	API Connection Status - **INVALID_REQUEST** : Invalid data imputed to call the API **FAILED** : API Authentication Failed **INACTIVE** : API User/Store ID is Inactive **DONE** : API Connection Success
2.	String	getStatus()	Return **VALID/VALIDATED** or **FAILED** status for this transaction.
3.	String	getSessionkey()	An unique session id for this transaction generated from SSLCOMMERZ gateway.
4.	String	getTranDate()	Transaction Date and time.
5.	String	getTranId()	Transaction ID that was generated and sent from Merchant-end.
6.	String	getValId()	A Validation ID against the Transaction which is provided by SSLCOMMERZ.
7.	String	getAmount()	The total Transaction Amount sent from Merchant-end including the Commissions added by SSLCOMMERZ and Bank.
8.	String	getStoreAmount()	The total Transaction Amount sent from Merchant-end.
9.	String	getBankTranId()	An unique transaction id generated by bank for this Transaction.
10.	String	getCardType()	The Bank Gateway Name that customer selected.
11.	String	getCardNo()	Customer's Card number; only for BRAC and DBBL, not for Internet Banking.
12.	String	getCardIssuer()	Credit/Debit Card Issuer Bank/Company Name
13.	String	getCardBrand()	Credit/Debit Card Brand Name. Like VISA, Master etc
14.	String	getCardIssuerCountry()	Card issuer country in full length.
15.	String	getCardIssuerCountryCode()	Card issuer country code.
16.	String	getCurrencyType()	Merchant Store Provided Currency. Like : **USD** , **BDT**
17.	String	getCurrencyAmount()	Merchant Store Provided Amount.
18.	String	getCurrencyRate()	Without Our Default Currency(BDT) if any merchant provide Other Currency then Conversion rate will be sent.(Google Currency Rate)
19.	String	getBaseFair()	Merchant Store Provided Amount.
20.	String	getValueA()	If any kind of optional value.

21.	**String**	**getValueB()**	If any kind of optional value.
22.	**String**	**getValueC()**	If any kind of optional value.
23.	**String**	**getValueD()**	If any kind of optional value.
24.	**String**	**getAPIConnect()**	Valid/Invalid (Based on Your Credentials)
25.	**String**	**getValidatedOn()**	First Validation Date time
26.	**String**	**getGwVersion()**	Version of payment gateway.
27.	**String**	**getRiskLevel()**	Get risk-level for this transaction. The return value will be 0 or 1. If 0 then the transaction is safe . If 1 then the transaction is risky.
28.	**String**	**getRiskTitle()**	Get the status of the transaction.

--- End of Document ---