IMPLEMENTATION GUIDE OF IOS FRAMEWORK

Version 1.0.0

SSL WIRELESS

93 B New Eskaton Road
Dhaka 1000, Bangladesh
Work: +880 9666 77 6969. +880 2 4831 6969
Fax: +880 2 913 2172
E-mail: info@sslwireless.com
www.sslwireless.com

DOCUMENT REVISION HISTORY

Version:	V1.0.0
Release Date:	June 18, 2019
Document Owner:	Software Shop Limited
Document Classification:	Confidential

This page intentionally left blank


Table of Contents

Steps to Implement SSL COMMERZ SDK on Developers Project 5
Step 1 5
Step 2 5
Step 3 5
Optional Information 6
Customer Information 6
EMI Information.....6
Product Information 6
Physical Good 6
General Good 6
Non Physical Good 6
Airline Ticket 6
Telecom Vertical.....6
Travel Vertical 6
Shipment Information.....7
Shipment Required.....7
Shipment Not Required.....7
Additional Information 7
Transaction Status.....8
Return Type.....9

Steps to Implement SSL COMMERZ SDK on Developers Project

Step 1


Developers need to **Drag and Drop** SSL COMMERZ framework to their application framework as exhibited below.

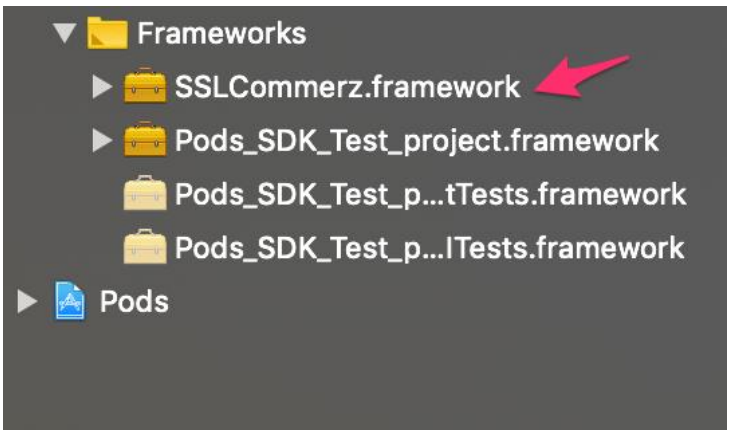

Step 2

Afterwards, Developers need to add the framework to embedded binaries framework by following these steps : **Project → General → Embedded Binaries**

After successfully adding the binary framework, it will be shown in Linked Frameworks and Libraries list.

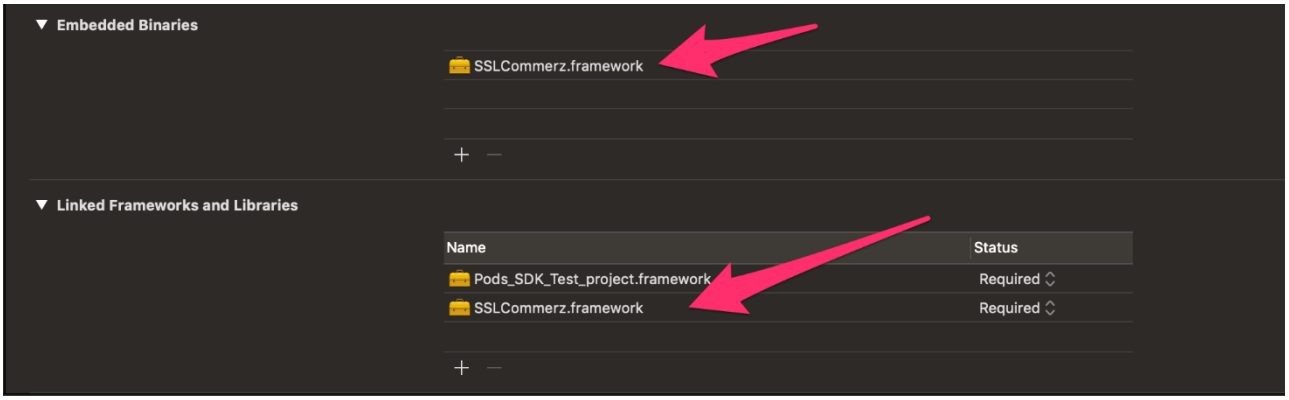

Step 3

After successfully completing SDK integration, Developers can request for transaction. User needs to add ***Import SSLCommerz*** to initiate the framework. In order to commence transaction, Developers need to pass **IntegrationInformation.**

IntegrationInformation (Mandatory to initiate SSL Commerz):

IntegrationInformation.init(storeID: "abc", storePassword: "123", totalAmount: 10.00, currency: "BDT", transactionId: "123id", productCategory: "product")

Optional Information

Customer Information

CustomerInformation.init(customerName: "john", customerEmail: "ssl@ssl.com", customerAddressOne: "address1", customerCity: "city", customerPostCode: "123", customerCountry: "Bangaldesh", customerPhone: “12434")

EMI Information

EMIInformation.init(emiOption: .HasEMI)

EMIInformation.init(emiOption: .NoEMI)

Product Information

Each category of product has its own product information. Below product information for each category is given

Physical Good

ProductInformation.init(productName: "product", productCategory: "category", productProfile: ProductProfileOption.PhysicalGoods.profile)

General Good

ProductInformation.init(productName: "product", productCategory: "category", productProfile: ProductProfileOption.General.profile)

Non Physical Good

ProductInformation.init(productName: "product", productCategory: "category", productProfile: ProductProfileOption.NonPhysicalGoods.profile)

Airline Ticket

ProductInformation.init(productName: "product", productCategory: "category", productProfile: ProductProfileOption.AirlineTickets(hoursTillDeparture: "3", flightType: "domestic", pnr: "pnr", journeyFromTo: "from", thirdPartyBooking: true).profile)

Telecom Vertical

ProductInformation.init(productName: "product", productCategory: "category", productProfile: ProductProfileOption.TelecomVertical(productType: "type", topupNumber: "23234", countryTopup: "aa").profile)

Travel Vertical

ProductInformation.init(productName: "product", productCategory: "category", productProfile: ProductProfileOption.TravelVertical(hotelName: "hotel", lengthOfStay: "3 month", checkInTime: "time", hotelCity: “city"))

Shipment Information

Shipment Required

ShipmentOption.Required(numberOfItem: 2, shippingName: "shipping", shippingAddressOne: "address1", shippingAddressTwo: "address2", shippingCity: "city", shippingPostCode: "234", shippingCountry: "Bangladesh")
(integrationInformation: IntegrationInformation, emiInformation: EMIInformation?, customerInformation: CustomerInformation?, shipmentInformation: ShipmentInformation?, productInformation: ProductInformation?, additionalInformation: AdditionalInformation?)

Shipment Not Required

ShipmentOption.NotRequired(shippingMethod: "courier", numberOfItem: 2)

Additional Information

```
let additionalInfo = AdditionalInformation.init()
    additionalInfo.paramA = ""
    additionalInfo.paramB = ""
    additionalInfo.paramC = ""
    additionalInfo.paramD = ""
```

If Developers do not want to pass the parameter, they need to put NIL in the code lines. The initializer given below is an example of such:

sslCom = SSLCommerz.init(integrationInformation: .init(storeID: "asdf", storePassword: "32423", totalAmount: 10.00, currency: "BDT", transactionId: "2343", productCategory: "asd"), emiInformation: nil, customerInformation: .init(customerName: "doe", customerEmail: "ss@ss.com", customerAddressOne: "one", customerCity: "two", customerPostCode: "111", customerCountry: "BD", customerPhone: "00000"), shipmentInformation: nil, productInformation: nil, additionalInformation: nil)

Note: *In addition to* **Integrationinformation**, *user can also pass optional initializers if required. Please check* ***Optional Information*** *section for further information.*

Transaction Status

The following codes will initiate the transaction:
sslCom?.delegate = self
sslCom?.start(in : self, shouldRunInTestMode: false)

Notes:
If "**shouldRunInTestMode**" is **true,** then the SSLCOMMERZ framework is in **Test Mode.**
If "**shouldRunInTestMode**" is **false,** then the SSLCOMMERZ framework is in **Live Mode.**

Developers need to input following code to show the transaction status after the completion of a transaction. Developers will receive the data from the following Delegate:

func transactionCompleted(withTransactionData transactionData: TransactionDetails?){

}

```
//
//  ViewController.swift
//  SDK_Test_project
//
//  Created by Jamil Hasnine Tamim on 17/6/19.
//  Copyright © 2019 SSL Wireless. All rights reserved.
//

import UIKit
import SSLCommerz


class ViewController: UIViewController,SSLCommerzDelegate {

    func transactionCompleted(withTransactionData transactionData: TransactionDetails?) {

    }


    var sslCom: SSLCommerz?

    override func viewDidLoad() {
        super.viewDidLoad()
        // Do any additional setup after loading the view.
    }

    @IBAction func sdkInitAction(_ sender: Any) {
        sslCom = SSLCommerz.init(integrationInformation: .init(storeID: "demosslUIlive", storePassword: "5C060F120E17949230", totalAmount: 10.00, currency:
            "BDT", transactionId: "blahbladfah049", productCategory: "blahProduct"), emiInformation: nil, customerInformation: .init(customerName: "doe",
            customerEmail: "ss@ss.com", customerAddressOne: "one", customerCity: "two", customerPostCode: "111", customerCountry: "BD", customerPhone:
            "01617459005"), shipmentInformation: nil, productInformation: nil, additionalInformation: nil)


        sslCom?.delegate = self
        sslCom?.start(in: self, shouldRunInTestMode: false)
    }

}
```

Return Type

SL	Parameter	Type	Description
1.	**getAPIConnect()**	**String**	API Connection Status - **INVALID_REQUEST** : Invalid data imputed to call the API **FAILED** : API Authentication Failed **INACTIVE** : API User/Store ID is Inactive **DONE** : API Connection Success
2.	**getStatus()**	**String**	Return **VALID/VALIDATED** or **FAILED** status for this transaction.
3.	**getSessionkey()**	**String**	An unique session id for this transaction generated from SSLCOMMERZ gateway.
4.	**getTranDate()**	**String**	Transaction Date and time.
5.	**getTranId()**	**String**	Transaction ID that was generated and sent from Merchant-end.
6.	**getValId()**	**String**	A Validation ID against the Transaction which is provided by SSLCOMMERZ.
7.	**getAmount()**	**String**	The total Transaction Amount sent from Merchant-end including the Commissions added by SSLCOMMERZ and Bank.
8.	**getStoreAmount()**	**String**	The total Transaction Amount sent from Merchant-end.
9.	**getBankTranId()**	**String**	An unique transaction id generated by bank for this Transaction.
10.	**getCardType()**	**String**	The Bank Gateway Name that customer selected.
11.	**getCardNo()**	**String**	Customer's Card number; only for BRAC and DBBL, not for Internet Banking.
12.	**getCardIssuer()**	**String**	Credit/Debit Card Issuer Bank/Company Name
13.	**getCardBrand()**	**String**	Credit/Debit Card Brand Name. Like VISA, Master etc
14.	**getCardIssuerCountry()**	**String**	Card issuer country in full length.
15.	**getCardIssuerCountryCode()**	**String**	Card issuer country code.
16.	**getCurrencyType()**	**String**	Merchant Store Provided Currency. Like : **USD** , **BDT**
17.	**getCurrencyAmount()**	**String**	Merchant Store Provided Amount.
18.	**getCurrencyRate()**	**String**	Without Our Default Currency(BDT) if any merchant provide Other Currency then Conversion rate will be sent.(Google Currency Rate)
19.	**getBaseFair()**	**String**	Merchant Store Provided Amount.
20.	**getValueA()**	**String**	If any kind of optional value.
21.	**getValueB()**	**String**	If any kind of optional value.

SL	Parameter	Type	Description
22.	getValueC()	String	If any kind of optional value.
23.	getValueD()	String	If any kind of optional value.
24.	getValidatedOn()	String	First Validation Date time
25.	getGwVersion()	String	Version of payment gateway.
26.	getRiskLevel()	String	Get risk-level for this transaction. The return value will be 0 or 1. If 0 then the transaction is safe. If 1 then the transaction is risky.
27.	getRiskTitle()	String	Get the status of the transaction.

--- End of Document ---