

Voice Agent Platform — End-User Manual & Site Guide

Complete Operational Walkthrough · RBAC Roles · Webhook Hub · Standalone Receiver Site


1. Platform Overview & Role-Based Access Control (RBAC)

The Voice Agent Service operates on a strict multi-tenant, user-based model. Each authenticated session is cryptographically bound to a **Workspace ID** and assigned an operational **Role**. Standard **User** accounts have full access to operational tools (Overview, Call Desk, Audio Player, Softphone, Profile), while administrative tools (Agent Builder, SIP Trunks, API Keys, Webhook Configuration) are reserved for **Product Admins**.

Role Persona	Authorized Views	Restricted Views	Security Scope
User (Agent/Operator)	Overview, Call Desk, Audio Waveform Player, WebRTC Softphone, Profile, User Guide	Agent Builder, Telephony, API Keys, Webhook Hub, User Management	Protected via HTTP 403 & auto-redirect (?denied=admin)
Product Admin	Unrestricted access across all operational, telephony, agent, and webhook configuration pages	None (Full Administrative Control)	Can mint API tokens, rotate secrets, and invite members


2. User Authentication & Passwordless OTP Login

Users authenticate via passwordless One-Time Password (OTP) sent to their registered email or phone number. Upon verification, an encrypted HttpOnly session cookie (va_session) is minted, containing the user's workspace scope and authorization role. Sessions auto-refresh and can be revoked at any time from User Profile.

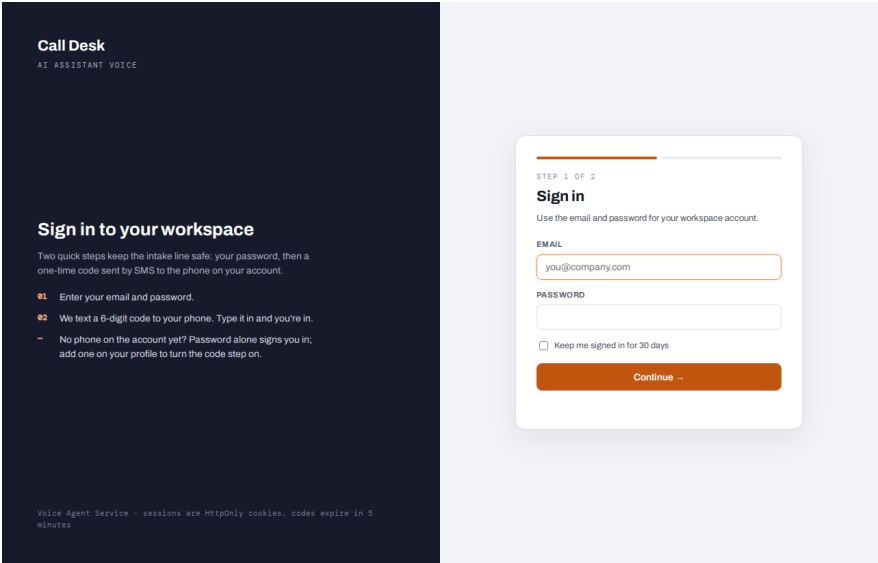


3. Workspace Overview & Live KPI Dashboard

The Overview screen displays aggregated metrics across all calls handled by the workspace. Operators can track total volume, total duration, inbound vs outbound distribution, and sentiment polarity (Positive, Neutral, Negative) in real time. The KPI row updates dynamically as calls conclude.

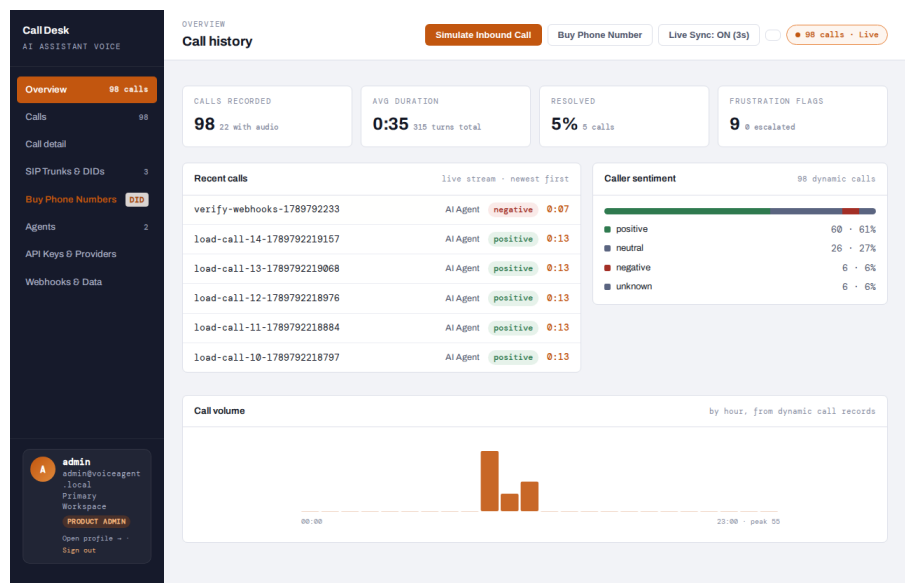


4. Live Call Desk, Transcripts & Entity Extraction

The Call Desk provides deep forensic analysis of every conversation. Operators can inspect the full waveform audio player, review turn-by-turn speaker-attributed transcripts, read executive summaries generated by Gemini AI, and inspect structured CRM fields (such as caller name, phone number, and case matter) extracted from the call.

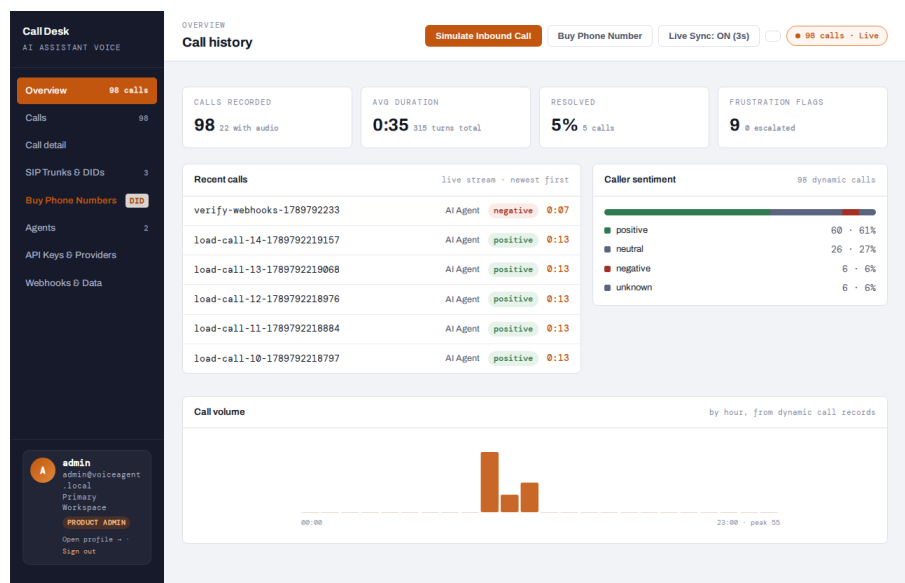


5. In-Browser WebRTC Softphone Dialer & DTMF

Operators can place and receive live calls directly inside the browser using the built-in WebRTC Softphone. Features include full DTMF touch-tone dialing, live call timer, one-click mute/unmute, audio hold, and warm transfer to external phone numbers or human support agents.

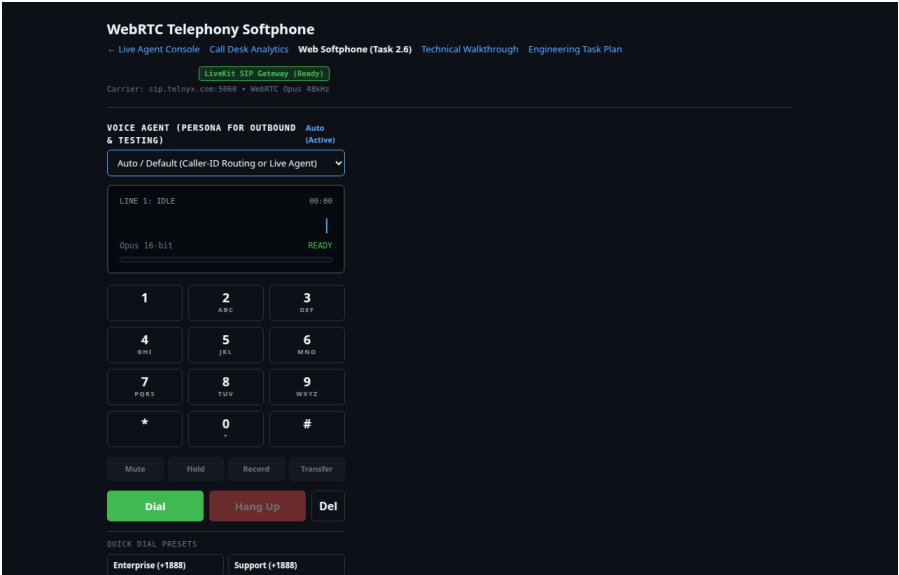


6. User Profile, Workspace Scope & Theme Controls

Accessible from the sidebar rail foot on any page, the Profile view displays account metadata, active workspace bindings, rate limits, assigned role, and theme preferences (Light / Dark mode). Users can also view active browser sessions and perform a secure one-click sign out.

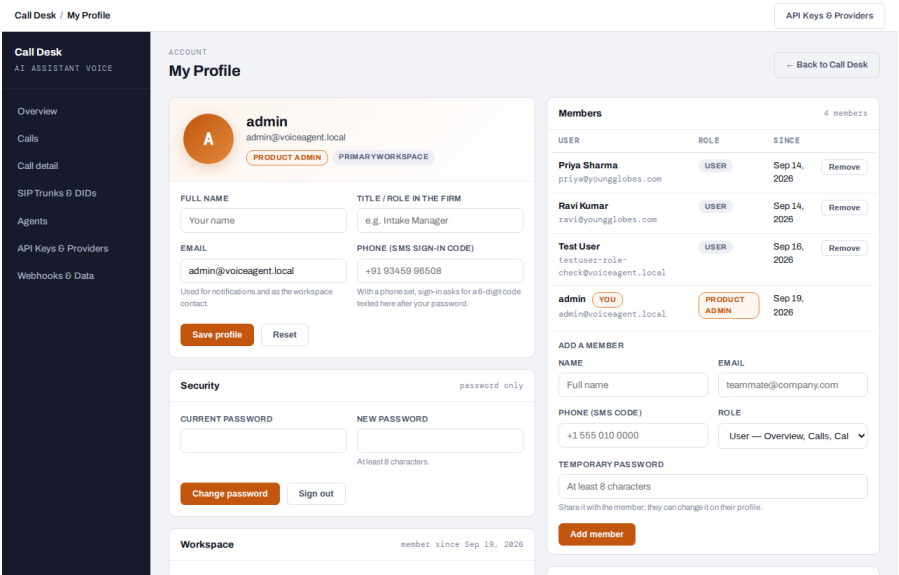


7. Webhook & Real-Time Event Dispatcher Hub

The Webhook Hub (located at /webhooks) enables administrators to configure external webhook endpoints. It features a top KPI bar, secret rotation, delivery attempt logs, Dead-Letter Queue (DLQ) controls, and an interactive Webhook Simulator that lets operators dispatch test events directly to external endpoints.

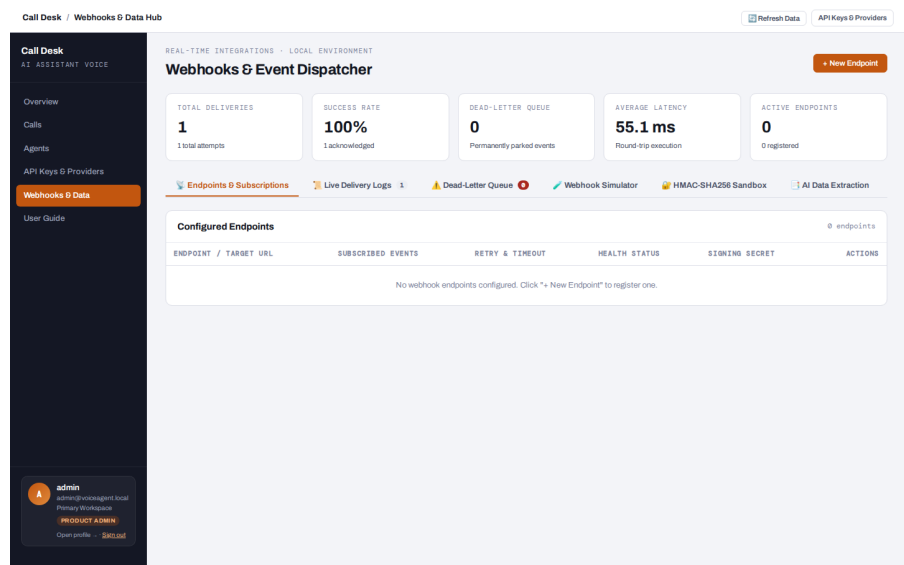


Interactive Event Simulator: Dispatch synthetic events with custom payloads to verify receiver reachability.

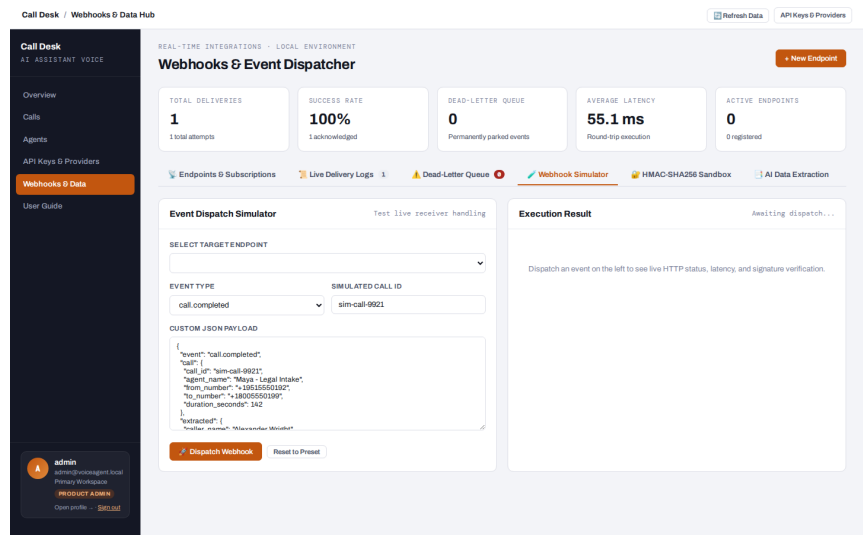


8. Dedicated Webhook Collector & Storage Site (Port 8095)

To verify that webhooks are successfully transmitted and stored, the platform includes a dedicated standalone receiver application located in `webhook_receiver/` and accessible at `http://localhost:8095`. It persists all incoming requests into an SQLite database (`webhooks.db`) and provides an auto-updating live stream.

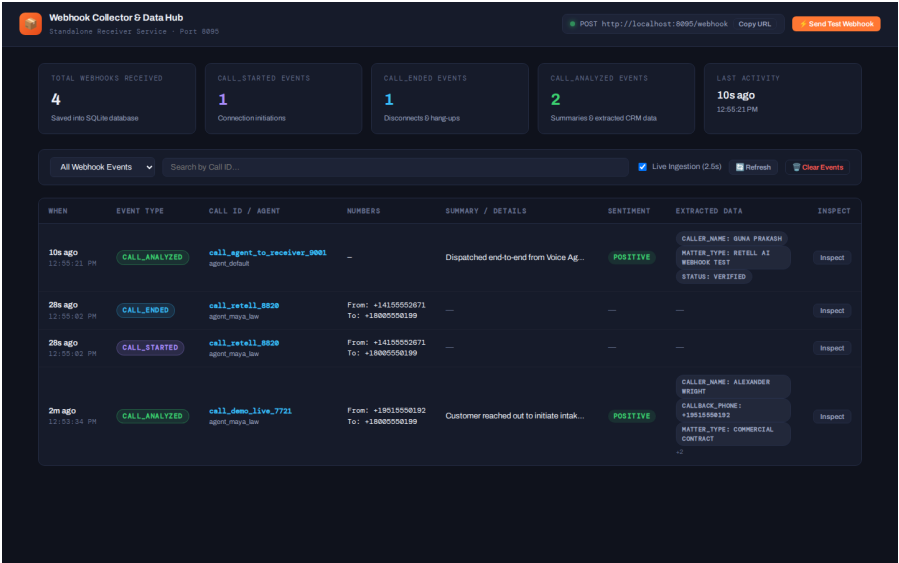

Deep Event Inspector: Inspecting Retell AI payloads, AI summaries, and extracted CRM entities:

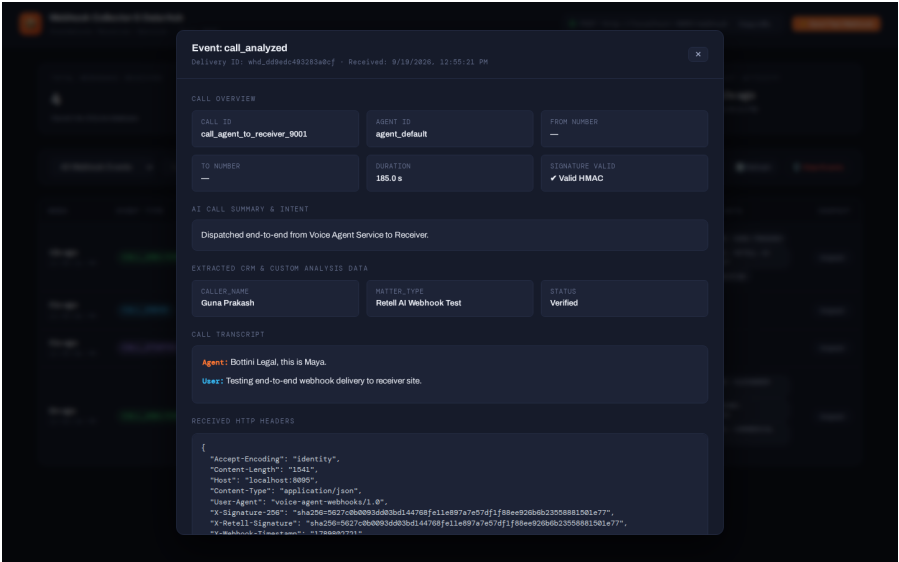

9. Retell AI Webhook Configuration Guide

The platform natively generates the exact **Retell AI Webhook Specification**, enabling seamless drop-in integration with automation tools like **n8n**, **Make**, and **Zapier**. Integrators can subscribe to three primary events:

Event Name	Trigger Moment	Retell AI Payload Content
call_started	Immediately when phone connects	Basic call info: call_id, agent_id, from/to numbers, call_status: 'ongoing'
call_ended	The instant call hangs up	Duration ms, disconnection_reason, formatted transcript and transcript_object
call_analyzed	When Gemini AI finishes analysis	Full package: call_analysis, call_summary, user_sentiment, custom_analysis_data

10. Summary of Key Operational URLs

Service	URL	Target Persona
Main Voice Platform	http://localhost:8091 (or 8080)	All Users & Administrators
Call Desk	http://localhost:8091/call-desk/calls	Operators & Support Agents
Softphone Dialer	http://localhost:8091/softphone.html	Live Calling Operators
Webhook Hub	http://localhost:8091/webhooks	Product Admins & Integrators
Webhook Receiver Site	http://localhost:8095	Developers & QA Engineers