

You will have to Click the button to display the extracted part of the string.

H



- Substring

```
<!DOCTYPE html>
```

```
<html>
```

```
<body>
```

```
<p>Click the button to extract characters from the string.</p>
```

```
<button onclick="myFunction()">Try it</button>
```

```
<p id="demo"></p>
```

```
<script>
```

```
function myFunction() { var str = "Hello world!";
```

```
var res = str.substring(1, 4); document.getElementById("demo").innerHTML = res;
```

```
}
```

```
</script>
```


```
</body>
```

```
</html>
```

```

C:\Users\Prasad\Downloads\frames5.html - Notepad++
File Edit Search View Encoding Language Settings Tools Macro Run Plugins Window ?
index1.html frames3.html Course1.html Dark.html Course2.html Login.html Successful.html T1.html enjoy.html frames5.html
1 <!DOCTYPE html>
2 <html>
3 <body>
4 <p>Click the button to extract characters from the string.</p>
5 <button onclick="myFunction()">Try it</button>
6 <p id="demo"></p>
7 <script>
8 function myFunction() { var str = "Hello world!";
9 var res = str.substring(1, 4); document.getElementById("demo").innerHTML = res;
10 }
11 </script>
12 </body>
13 </html>
14
15
16
17
18
19
20
Hyper Text Markup Language file length: 350 lines: 20 Ln: 11 Col: 10 Sel: 0 | 0 Windows (CR LF) UTF-8 OVR
Type here to search 21:05 08-04-2021

```



Click the button to extract characters from the string.

ell



- Substr

```
<!DOCTYPE html>
```

```
<html>
```

```
<body>
```

```
<p>Click the button to extract parts of the string.</p>
```

```
<button onclick="myFunction()">Try it</button>
```

```
<p id="demo"></p>
```

```
<script>
```

```
function myFunction() { var str = "Hello world!"; var res = str.substr(1, 4);
```

```
document.getElementById("demo").innerHTML = res;
```

```
}
```

```
</script>
```

```
</body>
```


```
</html>
```

```

1 <!DOCTYPE html>
2 <html>
3 <body>
4
5
6 <p>Click the button to extract parts of the string.</p>
7
8
9
10 <button onclick="myFunction()">Try it</button>
11
12
13 <p id="demo"></p>
14
15
16 <script>
17 function myFunction() { var str = "Hello world!"; var res = str.substr(1, 4);
18 document.getElementById("demo").innerHTML = res;
19 }
20 </script>
21 </body>
22 </html>
23
24
25
26
27
28
29
30

```

Hyper Text Markup Language file      length : 361    lines : 30    Ln : 24    Col : 1    Sel : 0 | 0    Windows (CR LF)    UTF-8    CVR



Click the button to extract parts of the string.

[Try it](#)

ello



- ToUpperCase

Code:

```
<!DOCTYPE html>
```

```
<html>
```

```
<body>
```

```
<p>Click the button to convert the string to uppercase letters.</p>
```

```
<button onclick="myFunction()">Try it</button>
```

```
<p id="demo"></p>
```

```
<script>
```

```
function myFunction() { var str = "This is java world";
```


```
var res = str.toUpperCase(); document.getElementById("demo").innerHTML = res;
```

```
}
```


```
</script>
```

```
</body>
```

```
</html>
```

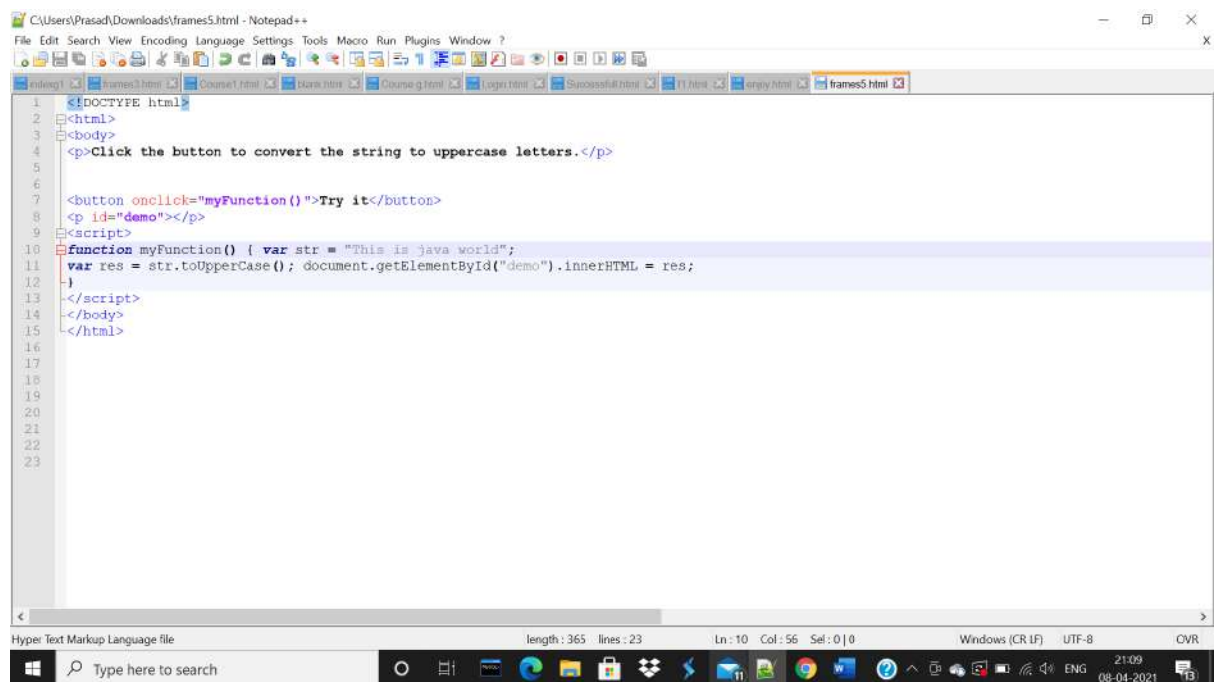

Date: 10/4/21



Click the button to convert the string to uppercase letters.

Try it

THIS IS JAVA WORLD



- ToLowerCase

Code:

```
<!DOCTYPE html>
```

```
<html>
```

```
<body>
```

```
<p>Click the button to convert the string to lowercase letters.</p>
```

```
<button onclick="myFunction()">Try it</button>
```

```
<p id="demo"></p>
```

```
<script>
```

```
function myFunction() { var str = "This is java WORLD !";
```

```
var res = str.toLowerCase(); document.getElementById("demo").innerHTML = res;
```

```
}
```

```
</script>
```

```
</body>
```

```
</html>
```

```


1 <!DOCTYPE html>
2 <html>
3 <body>
4
5
6 <p>Click the button to convert the string to lowercase letters.</p>
7
8 <button onclick="myFunction()">Try it</button>
9
10
11 <p id="demo"></p>
12
13
14 <script>
15
16 function myFunction() { var str = "This is java WORLD !";
17 var res = str.toLowerCase(); document.getElementById("demo").innerHTML = res;
18 }
19 </script>
20
21
22 </body>
23 </html>
24
25
26
27
28
29

```

Hyper Text Markup Language file      length: 379    lines: 29    Ln: 16    Col: 58    Sel: 0 | 0    Windows (CR LF)    UTF-8    CVR



Date: 10/4/21

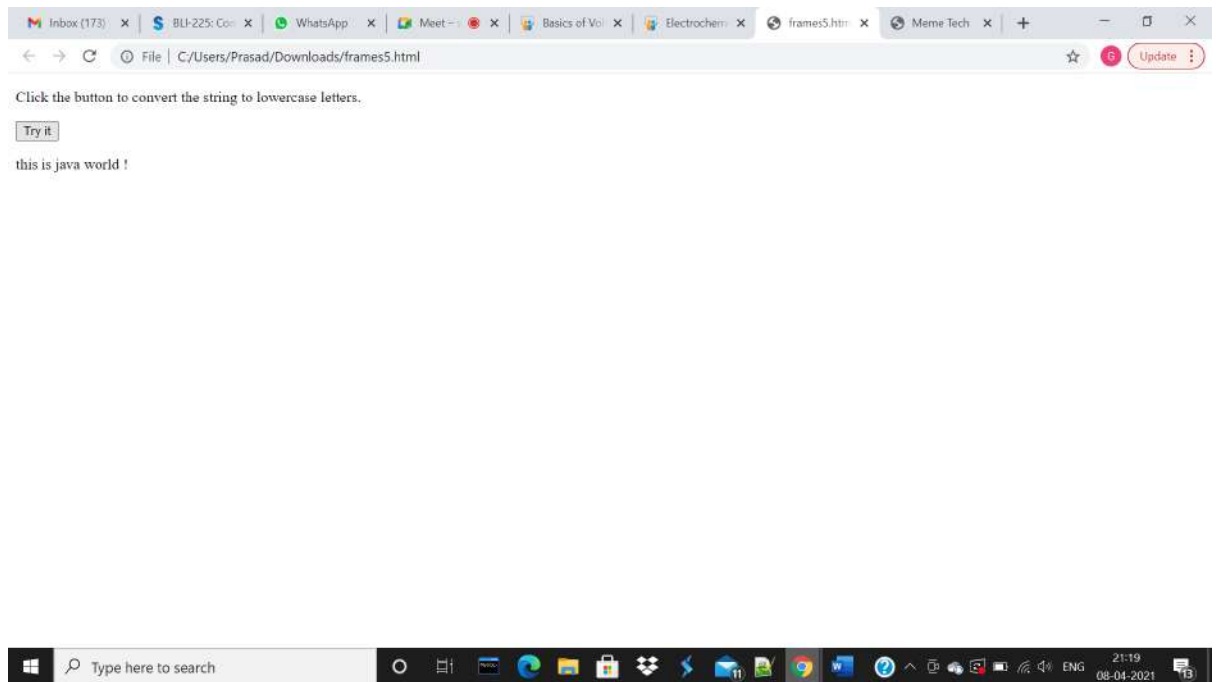

- Replace

```
<!DOCTYPE html>
```

```
<html>
```

```
<body>
```

```
<p>Click the button to replace "Fruits" with "Vegetables" in the paragraph below:</p>
```

```
<p id="demo">Visit Fruits</p>
```

```
<button onclick="myFunction()">Try it</button>
```

```
<script>
```

```
function myFunction() {
```


```
var str = document.getElementById("demo").innerHTML; var res =  
str.replace("Fruits" , "Vegetables"); document.getElementById("demo").innerHTML  
= res;
```


```
}
```

```
</script>
```

```
</body>
```

```
</html>
```

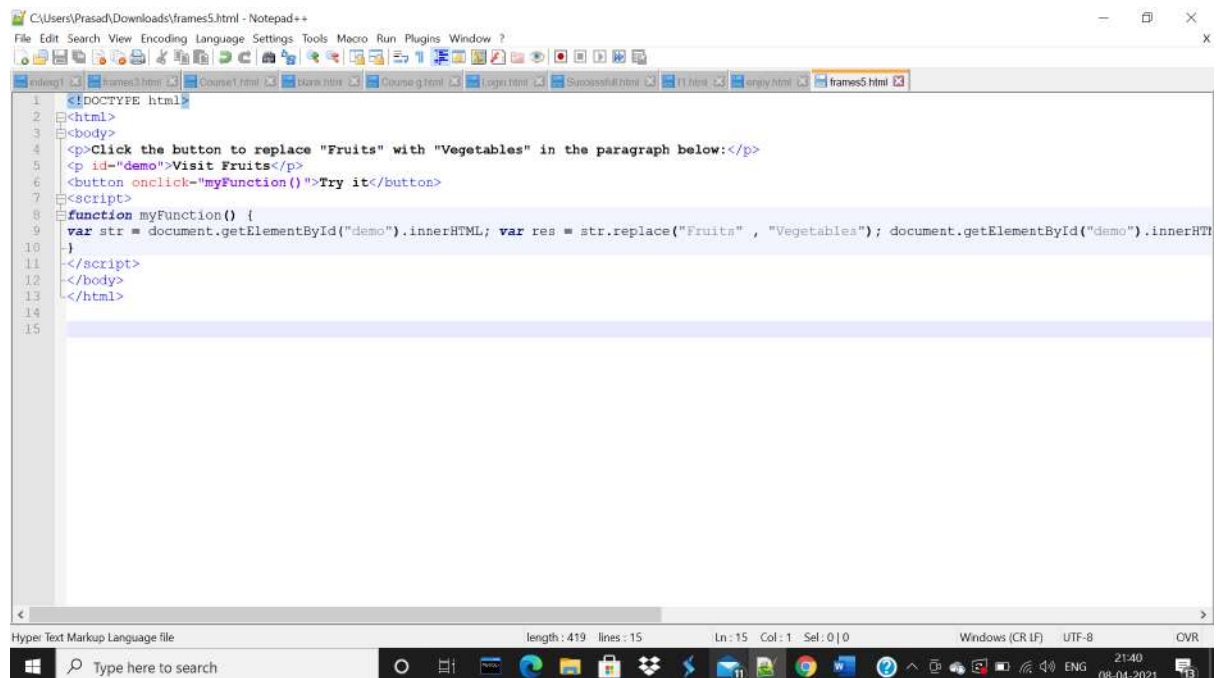




Click the button to replace "Fruits" with "Vegetables" in the paragraph below:

Visit Fruits

Try it



Click the button to replace "Fruits" with "Vegetables" in the paragraph below:

Visit Vegetables

Try it



- Concat

Code:

```
<!DOCTYPE html>
```

```
<html>
```

```
<body>
```

```
<p>Click the button to join two strings into one new string.</p>
```

```
<button onclick="myFunction()">Try it</button>
```

```
<p id="demo"></p>
```

```
<script>
```

```
function myFunction() { var str1 = "How are"; var str2 = " u";
```


```
var res = str1.concat(str2); document.getElementById("demo").innerHTML = res;
```

```
}
```

```
</script>
```

```
</body>
```

```
</html>
```

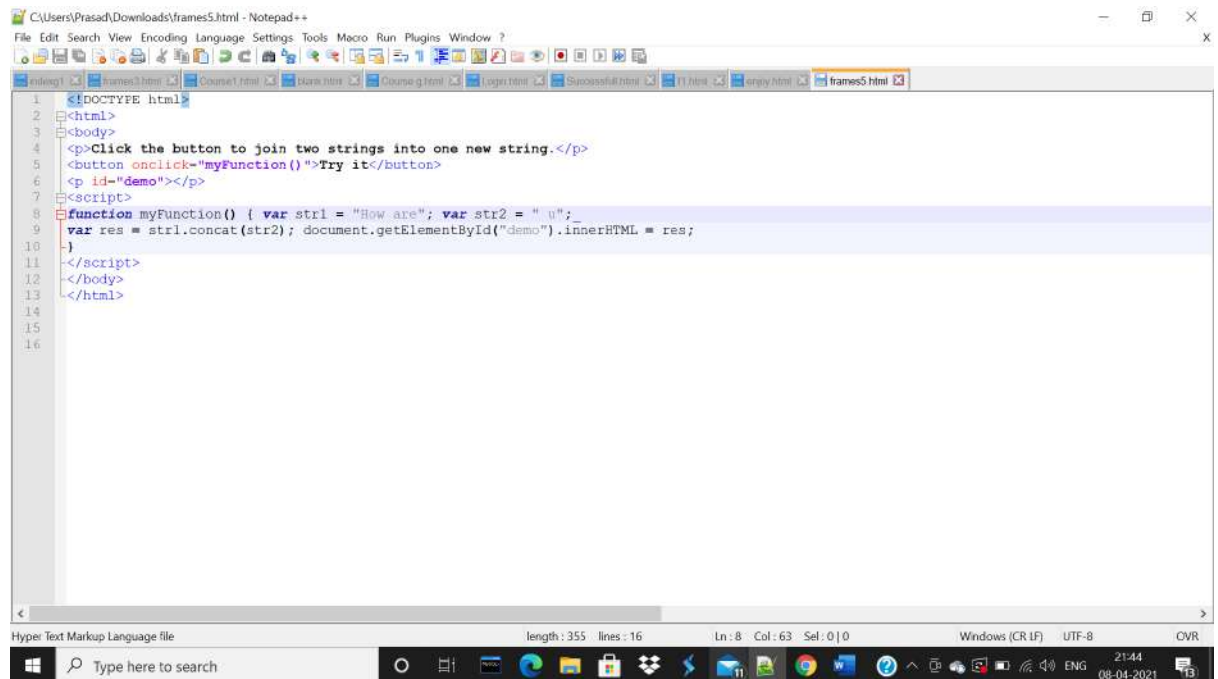


```

1 <!DOCTYPE html>
2 <html>
3 <body>
4 <p>Click the button to join two strings into one new string.</p>
5 <button onclick="myFunction()">Try it</button>
6 <p id="demo"></p>
7 <script>
8 function myFunction() { var str1 = "How are"; var str2 = " u";
9 var res = str1.concat(str2); document.getElementById("demo").innerHTML = res;
10 }
11 </script>
12 </body>
13 </html>
14
15
16

```

Date: 10/4/21



Click the button to join two strings into one new string.

How are u



- charAt

Code:

```
<!DOCTYPE html>
```

```
<html>
```

```
<body>
```

```
<p>Click the button to display the first character of the string "This is JAVA"</p>
```

```
<button onclick="myFunction()">Try it</button>
```

```
<p id="demo"></p>
```

```
<script>
```

```
function myFunction() {
```

```
var str = "This is JAVA"; var res = str.charAt(0)
```


```
document.getElementById("demo").innerHTML = res;
```

```
}
```


```
</script>
```

```
</body>
```

```
</html>
```

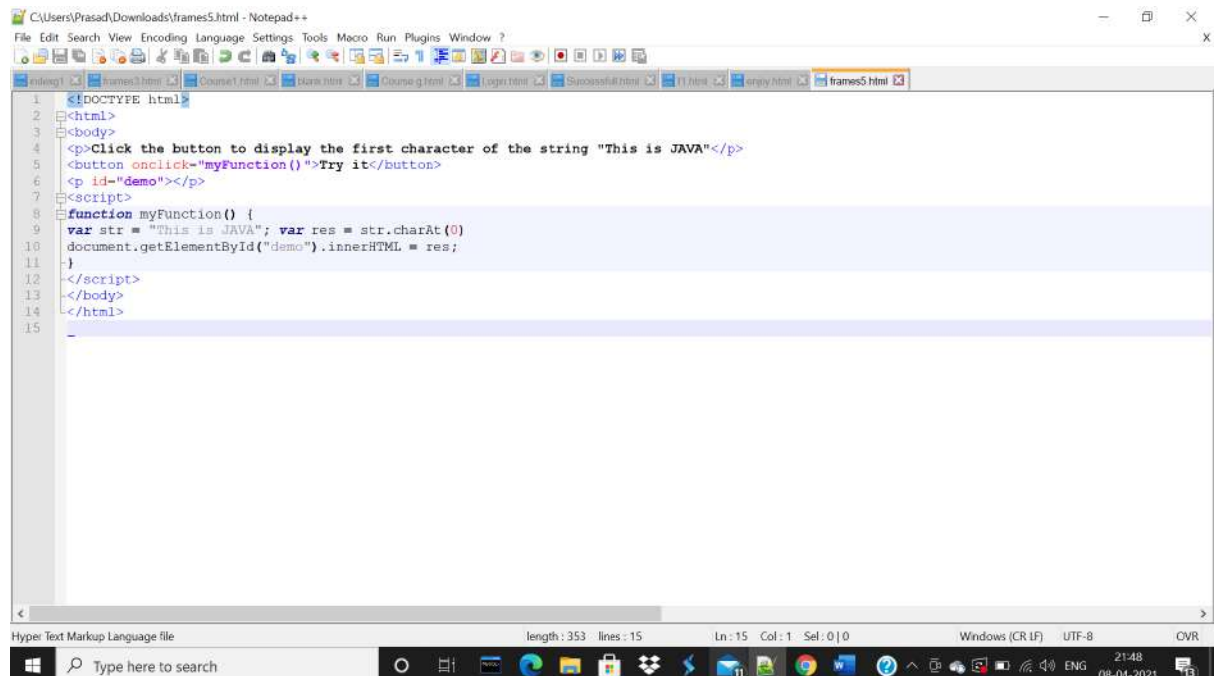

Date: 10/4/21



Click the button to display the first character of the string "This is JAVA"

Try it

T



- charCodeAt

Code:

```
<!DOCTYPE html>
```

```
<html>
```

```
<body>
```

```
<p>Click the button to display the unicode of the first character in the string "This is  
JAVA".</p>
```

```
<button onclick="myFunction()">Try it</button>
```

```
<p id="demo"></p>
```

```
<script>
```

```
function myFunction() {
```

```
var str = "This is JAVA"; var n = str.charCodeAt(0);
```


```
document.getElementById("demo").innerHTML = n;
```

```
}
```


```
</script>
```

```
</body>
```

```
</html>
```

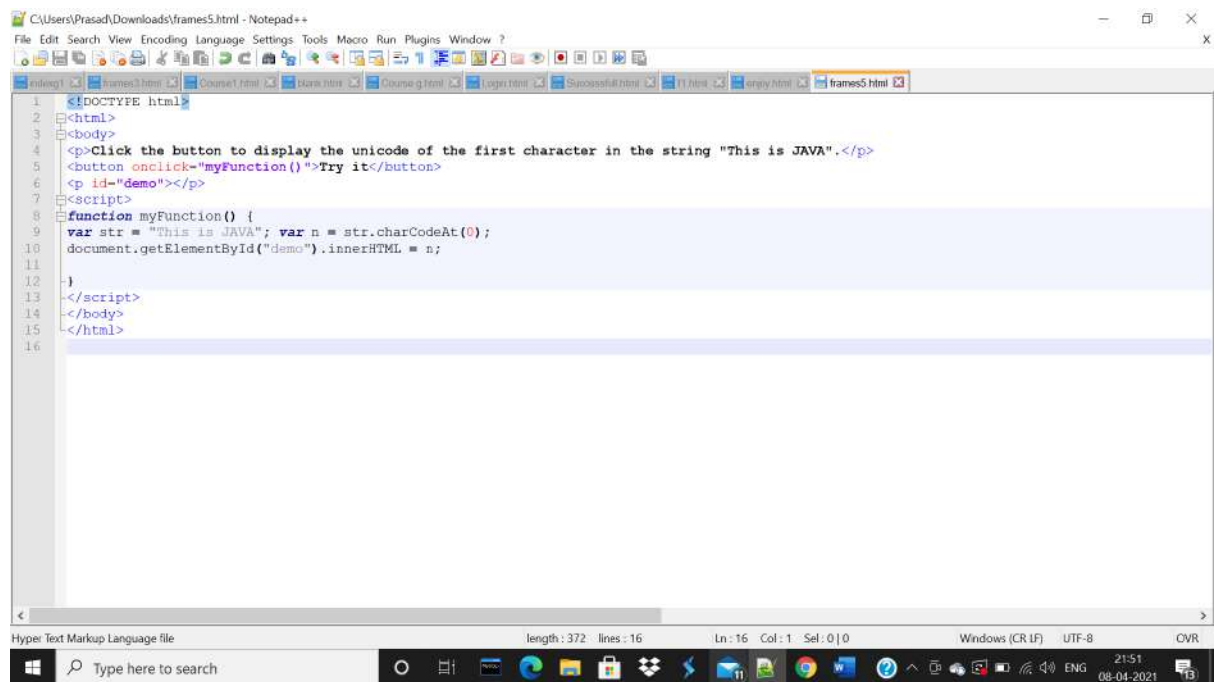





Click the button to display the unicode of the first character in the string "This is JAVA".

Try it

84

