

Habfuzz: A tool to calculate the instream hydraulic habitat suitability using fuzzy logic and fuzzy Bayesian inference

Christos Theodoropoulos^{1, 2}, Nikolaos Skoulidakis¹, and Anastasios Stamou²

¹Hellenic Centre for Marine Research

²National Technical University of Athens

21 September 2016

Paper DOI: <http://dx.doi.org/10.21105/joss.00082>

Software Repository: <https://github.com/chtheodoro/Habfuzz>

Software Archive: <https://dx.doi.org/10.5281/zenodo.163291>

Summary

Habfuzz is a Fortran tool (Adams et al. 1997), which implements the Mamdani - Assilian fuzzy inference process (Mamdani and Assilian 1975) and the Bayesian joint probability inference method as described in Brookes, Kumar, and Lane (2010), but with fuzzified inputs in order to calculate the instream habitat suitability, given the flow velocity, the water depth and the substrate type of a hydraulically simulated river reach. While it is specifically structured to quickly calculate the fuzzy-logic- (or fuzzy-Bayesian)-based instream habitat suitability for fish or freshwater macroinvertebrates, it can be applied to wider research topics requiring fuzzy logic to be addressed.

The main Habfuzz routine reads three files containing the flow velocities (V), the water depths (D) and the substrate types (S), as derived from a hydrodynamic/hydraulic simulation of the river reach (each node of the computational grid being an array element) and three additional user-defined parameters (the inference process to be implemented, the management scenario and the defuzzification method) and calls the relevant subroutines to implement the selected inference process. The output of Habfuzz is a .txt file containing an array with the habitat suitabilities for each node of the initial computational grid of the hydrodynamic simulation and a .txt log file containing the internal parameters of the inference process.

As described in detail by Ross (2010) and implemented in Habfuzz (Theodoropoulos, Skoulidakis, and Stamou 2016), the process of deriving the fuzzy-based habitat suitability includes three steps:

1. Fuzzification of V and D using trapezoidal membership functions
2. Application of a fuzzy operator (IF-THEN rules according to a given reference dataset)
3. Defuzzification - four defuzzification methods are supported to derive the output habitat suitability (a) centroid, (b) weighted average, (c) maximum membership and (d) mean-max membership.

while the fuzzy Bayesian process includes (i) fuzzification of V and D, (ii) application of the joint probability rules and (iii) classification of the habitat suitability according to a modified ‘expected utility’ function.

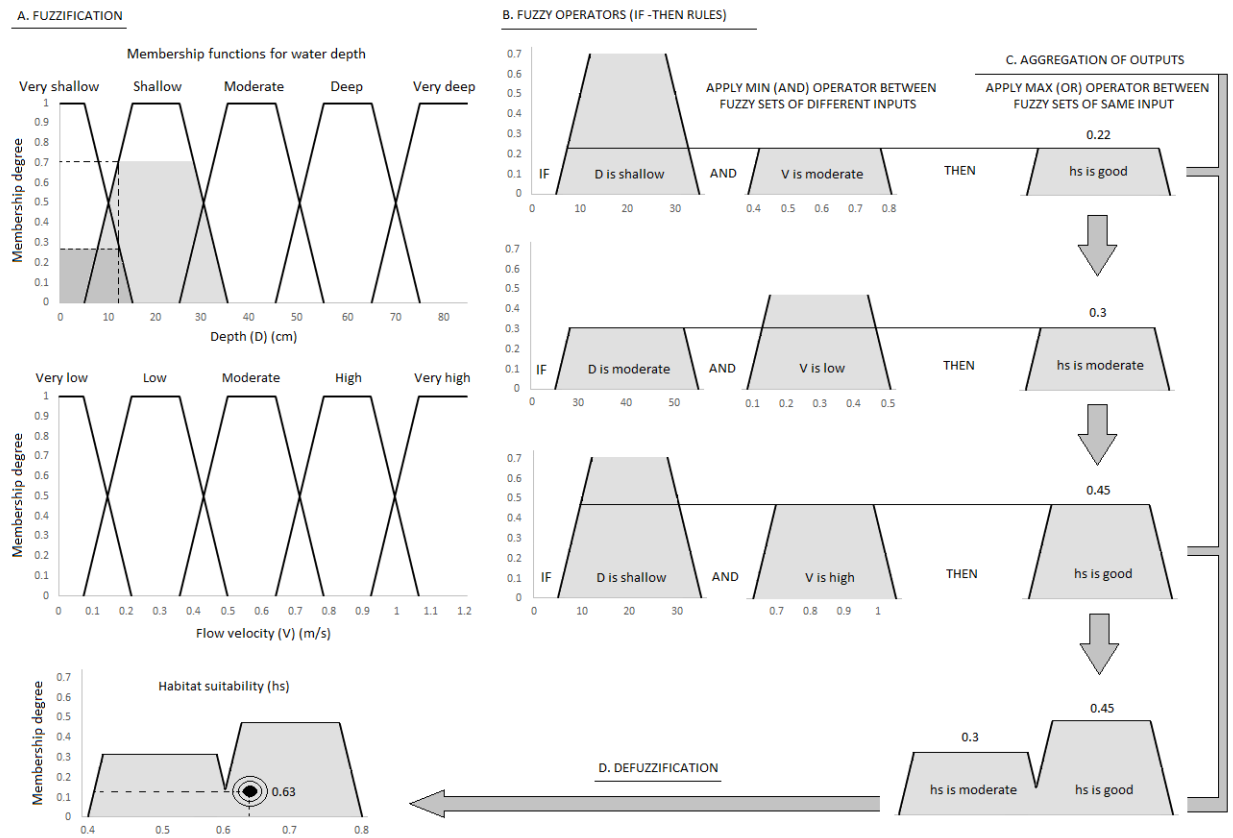


Figure 1: figure_2

References

- Adams, J.C., W.S. Brainerd, J.T. Martin, B.T. Smith, and J.L. Wagener. 1997. *Fortran 95 Handbook - Complete ISO/ANSI Reference*. The MIT Press, Cambridge, Massachusetts, London, England. <https://mitpress.mit.edu/books/fortran-95-handbook>.
- Brookes, C.J., V. Kumar, and S.N. Lane. 2010. "A Comparison of Fuzzy, Bayesian and Weighted Average Formulations of an in-Stream Habitat Suitability Model." <http://www.iemss.org/iemss2010/papers/S20/S.20.07.Model%20selection%20and%20uncertainty%20A%20comparison%20of%20Fuzzy,%20Bayesian%20and%20Weighted%20Average%20formulations%20of%20an%20instream%20habitat%20suitability%20model%20-%20CHRISTOPHER%20BROOKES.pdf>.
- Mamdani, E.H., and S. Assilian. 1975. "An Experiment in Linguistic Synthesis with a Fuzzy Logic Controller." *International Journal of Man-Machine Studies* 7: 1–13. doi:10.1016/S0020-7373(75)80002-2.
- Ross, T.J. 2010. *Fuzzy Logic with Engineering Applications*. John Wiley; Sons, UK. <https://mitpress.mit.edu/books/fortran-95-handbook>.
- Theodoropoulos, C., N. Skoulikidis, and A. Stamou. 2016. "Habfuzz: A Tool to Calculate the Instream Hydraulic Habitat Suitability Based on Fuzzy Logic and Fuzzy Bayesian Inference." <https://github.com/chtheodoro/habfuzz>.