


TRAINING REPORT (TR-102)

DAY: -21 (8 JULY 2024)

Install ReactJS on Windows

Steps to Install React JS on Windows

Step 1: Install Node.js installer for Windows. Here, install the LTS version (the one present on the left). Once downloaded, open NodeJS without disturbing other settings, and click on the **Next** button until it's completely installed.

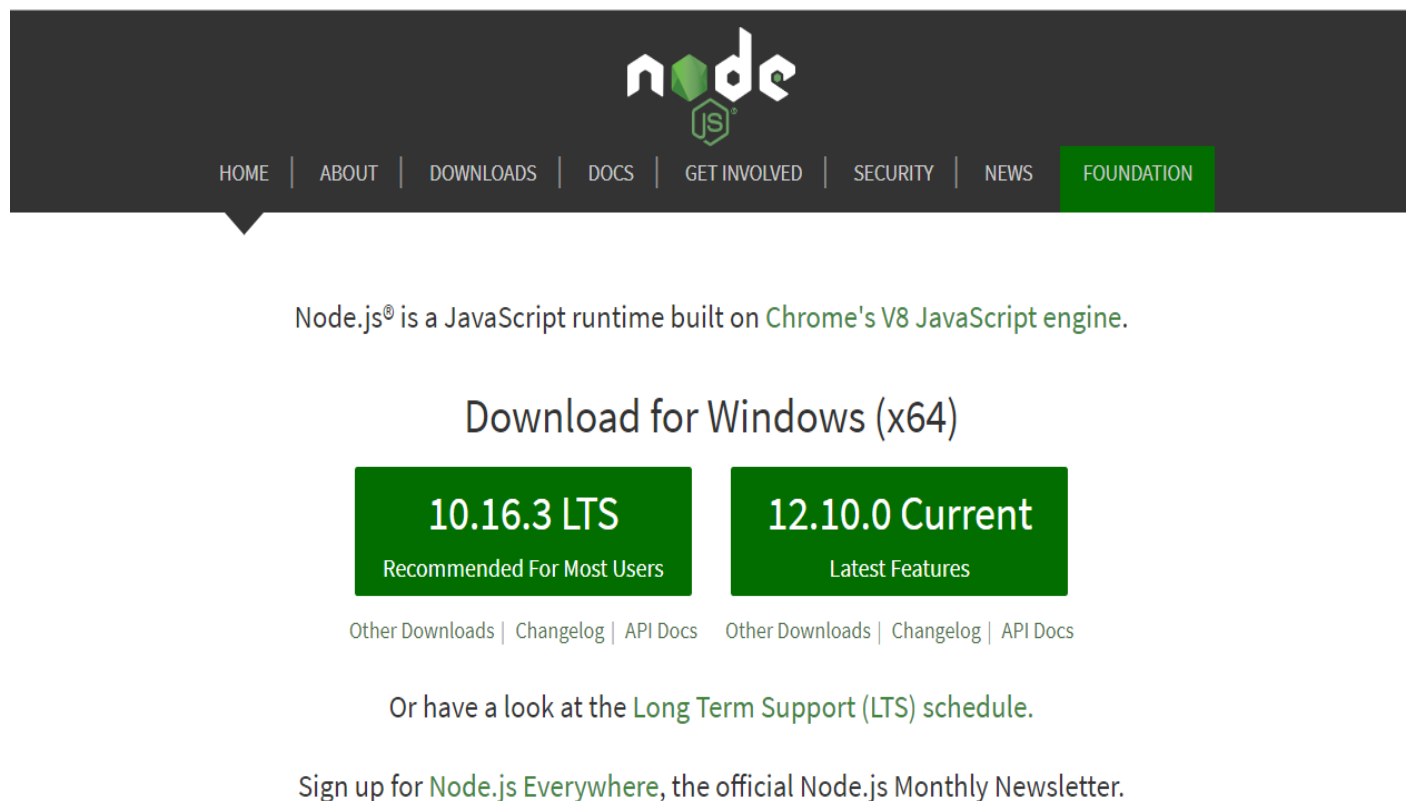

Node.js® is a JavaScript runtime built on [Chrome's V8 JavaScript engine](#).


Download for Windows (x64)

10.16.3 LTS	12.10.0 Current
Recommended For Most Users	Latest Features

[Other Downloads](#) | [Changelog](#) | [API Docs](#) [Other Downloads](#) | [Changelog](#) | [API Docs](#)

Or have a look at the [Long Term Support \(LTS\) schedule](#).

Sign up for [Node.js Everywhere](#), the official Node.js Monthly Newsletter.

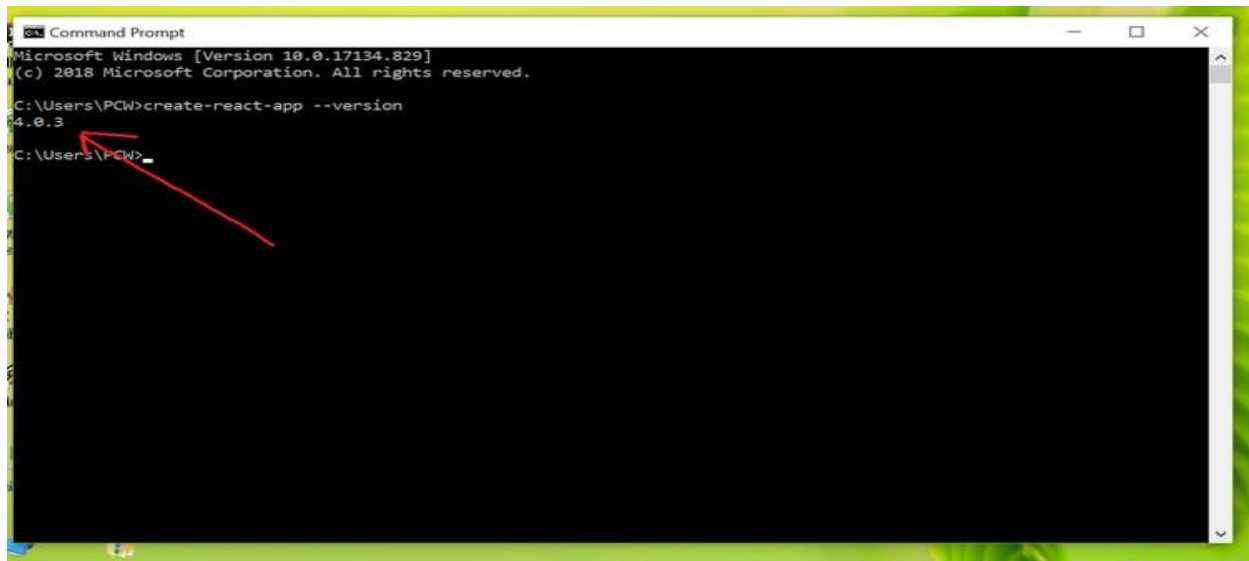

```
Command Prompt
Microsoft Windows [Version 10.0.17134.829]
(c) 2018 Microsoft Corporation. All rights reserved.

C:\Users\PCW>create-react-app --version
4.0.3
C:\Users\PCW>
```

version 4.0.3

If everything went well it will give you the installed version of react app

Step 4: Now Create a new folder where you want to make your react app using the below command:

```
mkdir newfolder
```

Note: The *newfolder* in the above command is the name of the folder and can be anything




```
Command Prompt
Microsoft Windows [Version 10.0.17134.829]
(c) 2018 Microsoft Corporation. All rights reserved.

C:\Users\PCW>mkdir newfolder
```

Move inside the same folder using the below

command: `cd newfolder` (your folder name)

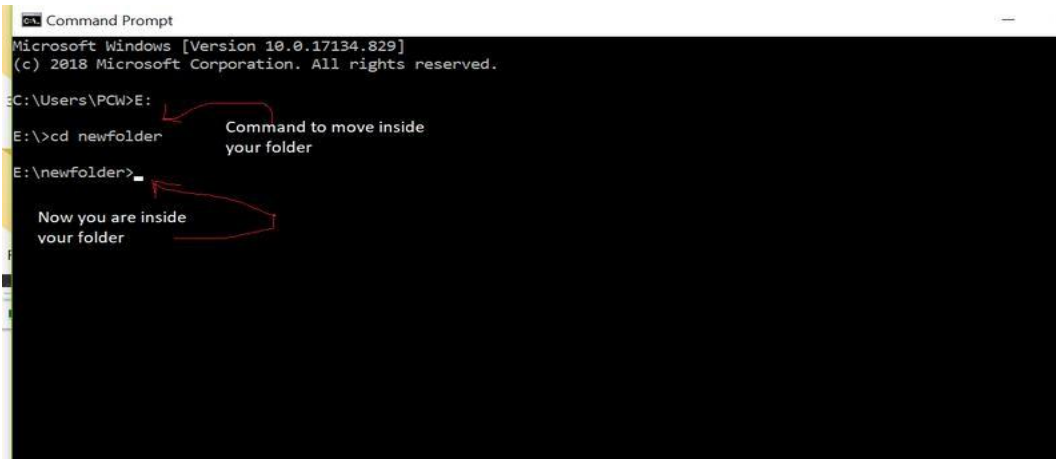


```
Command Prompt
Microsoft Windows [Version 10.0.17134.829]
(c) 2018 Microsoft Corporation. All rights reserved.

C:\Users\PCW>E:
E:\>cd newfolder
E:\newfolder>
```

Command to move inside your folder

Now you are inside your folder

Step 5: Now inside this folder run the command → create-react-app reactfile YOUR_FILE_NAME

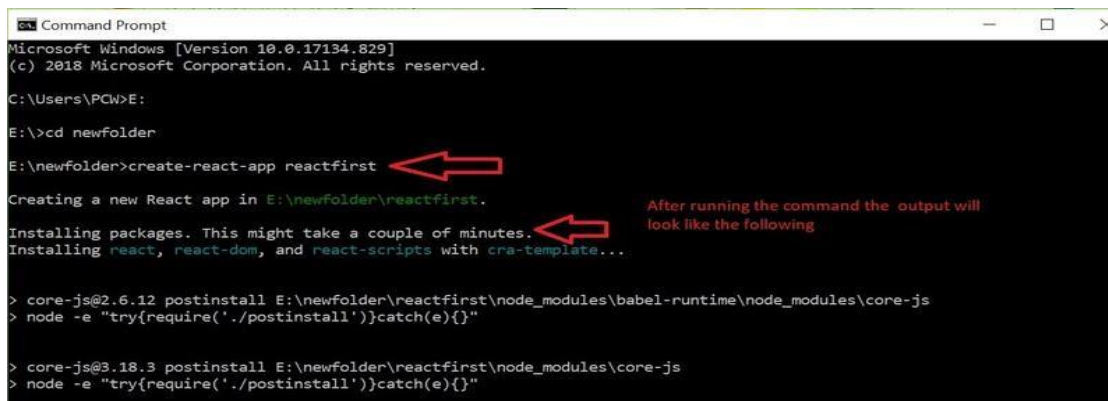

```
Command Prompt
Microsoft Windows [Version 10.0.17134.829]
(c) 2018 Microsoft Corporation. All rights reserved.

C:\Users\PCW>E:
E:\>cd newfolder
E:\newfolder>create-react-app reactfirst

Creating a new React app in E:\newfolder\reactfirst.
Installing packages. This might take a couple of minutes.
Installing react, react-dom, and react-scripts with cra-template...

> core-js@2.6.12 postinstall E:\newfolder\reactfirst\node_modules\babel-runtime\node_modules\core-js
> node -e "try{require('./postinstall')}catch(e){}"

> core-js@3.18.3 postinstall E:\newfolder\reactfirst\node_modules\core-js
> node -e "try{require('./postinstall')}catch(e){}"
```

After running the command the output will look like the following

It will take some time to install the required dependencies


NOTE: Due to npm naming restrictions, names can no longer contain capital letters, thus type your app's name in lowercase.

```
C:\Users\sa552>create-react-app FirstReact
Cannot create a project named "FirstReact" because of npm naming restrictions:

  * name can no longer contain capital letters


Please choose a different project name.
```

Step 6: Now open the IDE of your choice for eg. Visual studio code and open the folder where you have installed the react app **newfolder** (in the above example) inside the folder you will see your app's name **reactapp** (In our example). Use the terminal and move inside your app name folder. Use command **cd reactapp** (your app name)

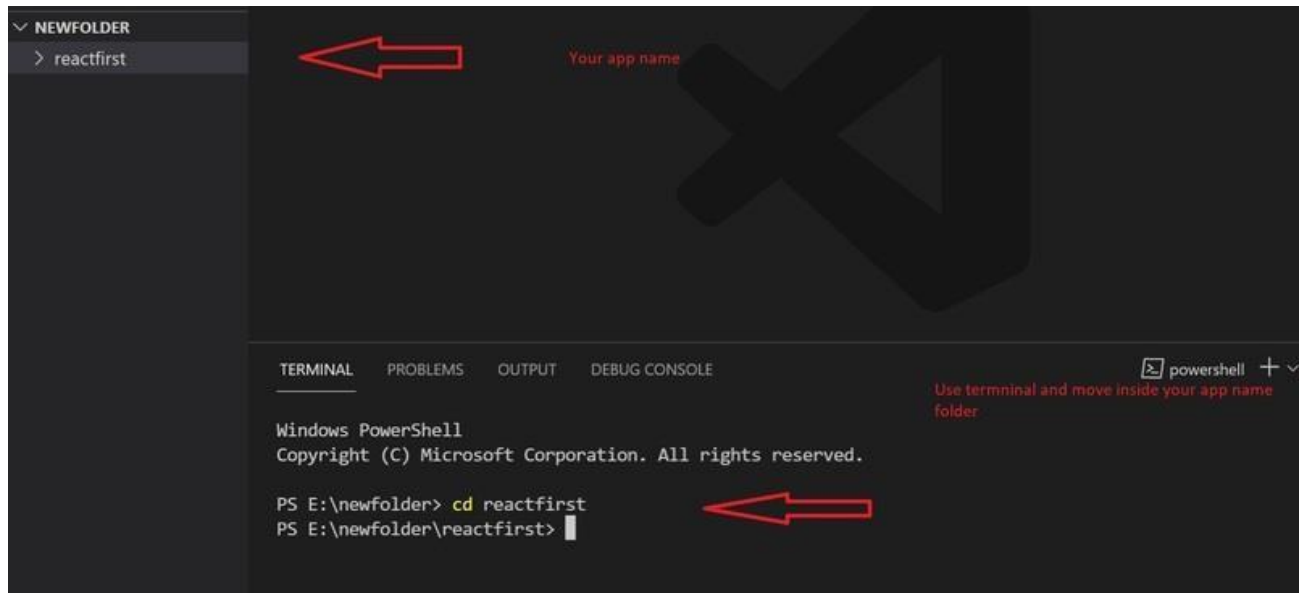

Step 7: To start your app run the below

command: `npm start`

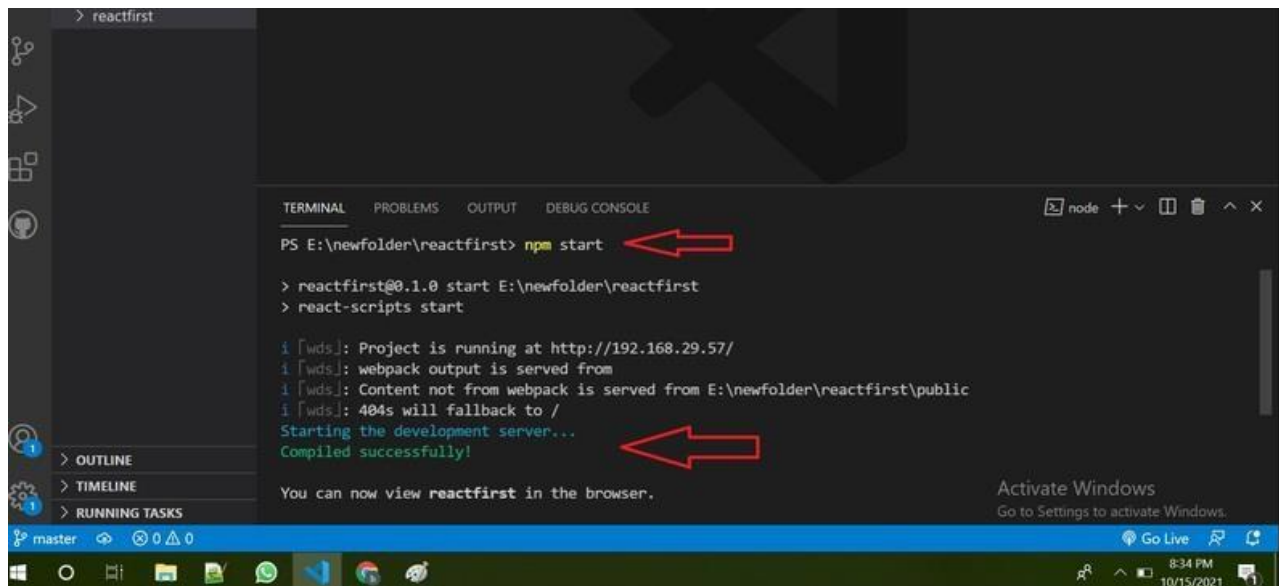

The screenshot shows the Visual Studio Code interface with a terminal window open. The terminal displays the following output:

```
PS E:\newfolder\reactfirst> npm start  
  
> reactfirst@0.1.0 start E:\newfolder\reactfirst  
> react-scripts start  
  
i [wds]: Project is running at http://192.168.29.57/  
i [wds]: webpack output is served from  
i [wds]: Content not from webpack is served from E:\newfolder\reactfirst\public  
i [wds]: 404s will fallback to /  
Starting the development server...  
Compiled successfully!  
  
You can now view reactfirst in the browser.
```

Two red arrows point to the `npm start` command and the `Compiled successfully!` message. The Windows taskbar at the bottom shows the time as 8:34 PM on 10/15/2021.

Once you run the above command a new tab will open in your browser showing React logo as shown below:



Congratulation you have successfully installed the react-app and are ready to build awesome websites and app.

Install React JS in Visual Studio Code

1. Install Visual Studio Code

Before you dive into React development, make sure you have Visual Studio Code installed on your machine. You can download it from the official website [here](#).

2. Set Up Node.js and npm

React JS relies on Node.js and npm (Node Package Manager) for managing dependencies and building applications. If you don't have Node.js installed, download it from the official website [here](#). Once installed, npm will be available in your command line.

3. Create a React App

Open your terminal and run the following command to create a new React app:

```
npx create-react-app my-react-app
```

4. Navigate to the App Directory

Move to the app directory using the following command:

```
cd my-react-app
```

5. Launch Visual Studio Code

Open the app in Visual Studio Code using the following command:

```
code .
```

6. Start the Development Server

In the terminal within Visual Studio Code, start the development server:

```
npm start
```

Your React app will now be running locally on a development server.

7. Begin Coding: You're all set to start coding your React app! Open the src directory and begin exploring and modifying the code to create your desired application.