GROUP PROJECT

TEAM MEMBERS



Aditya Kumar Sharma
(Team leader)
ID:20261651006



Sonam Raj
ID:20261651086



Aditi Choudhary
ID:20261651003




Sujit Kumar
ID:20261651089




Guru Prashad Panda
ID:20261651039


EVENT CARD:

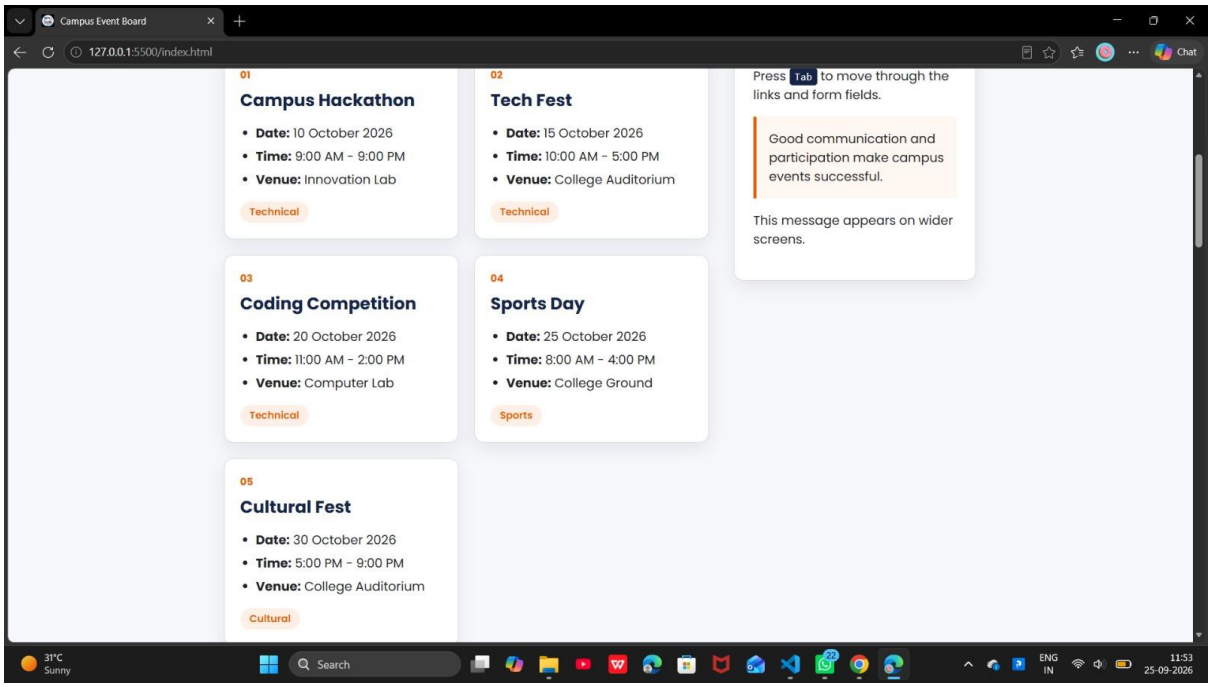


MOBILE VIEW:

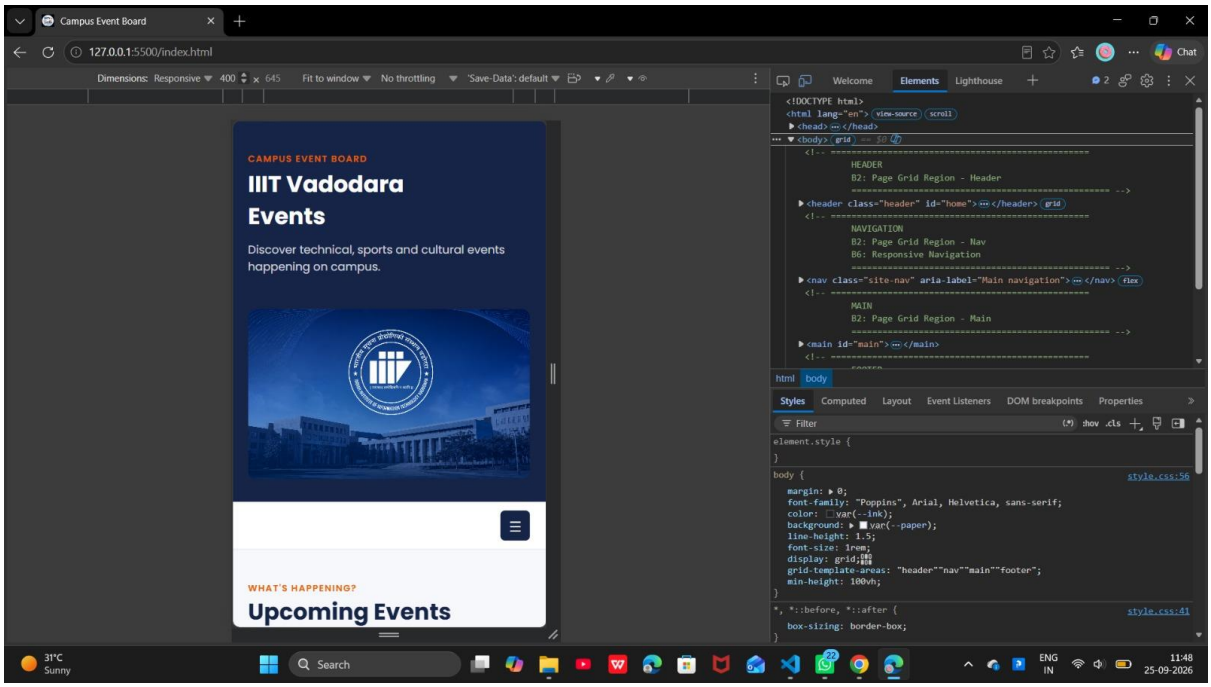


DESKTOP VIEW:

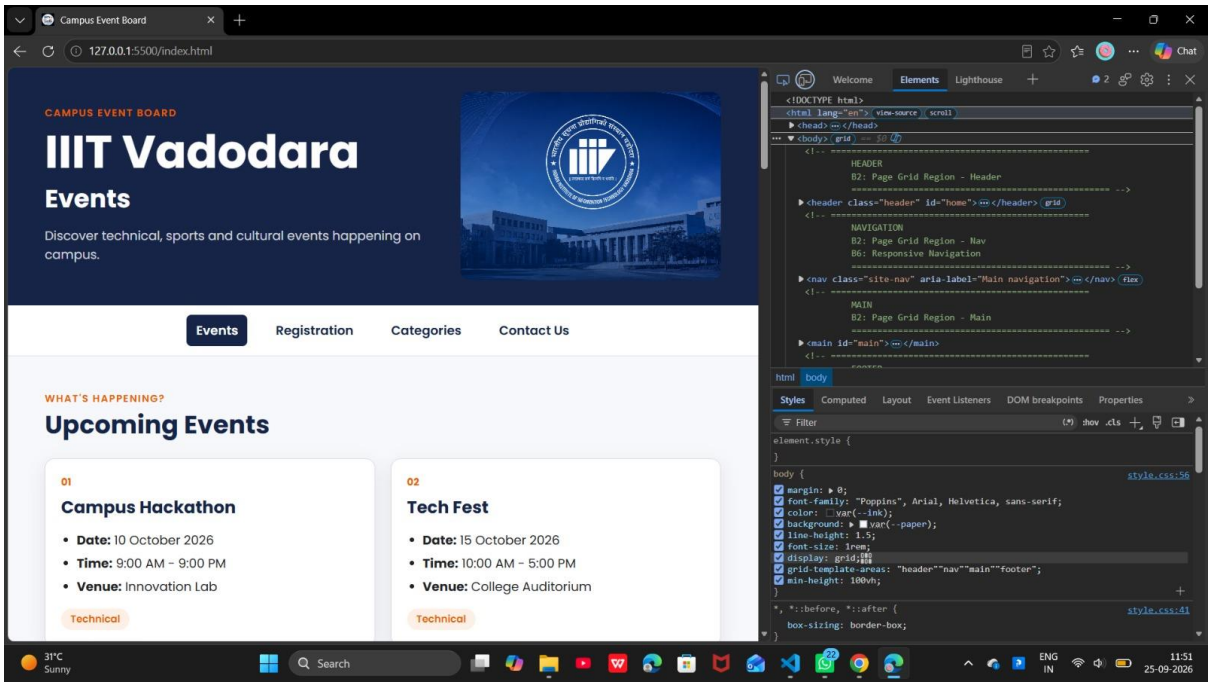

W3C HTML VALIDATOR:

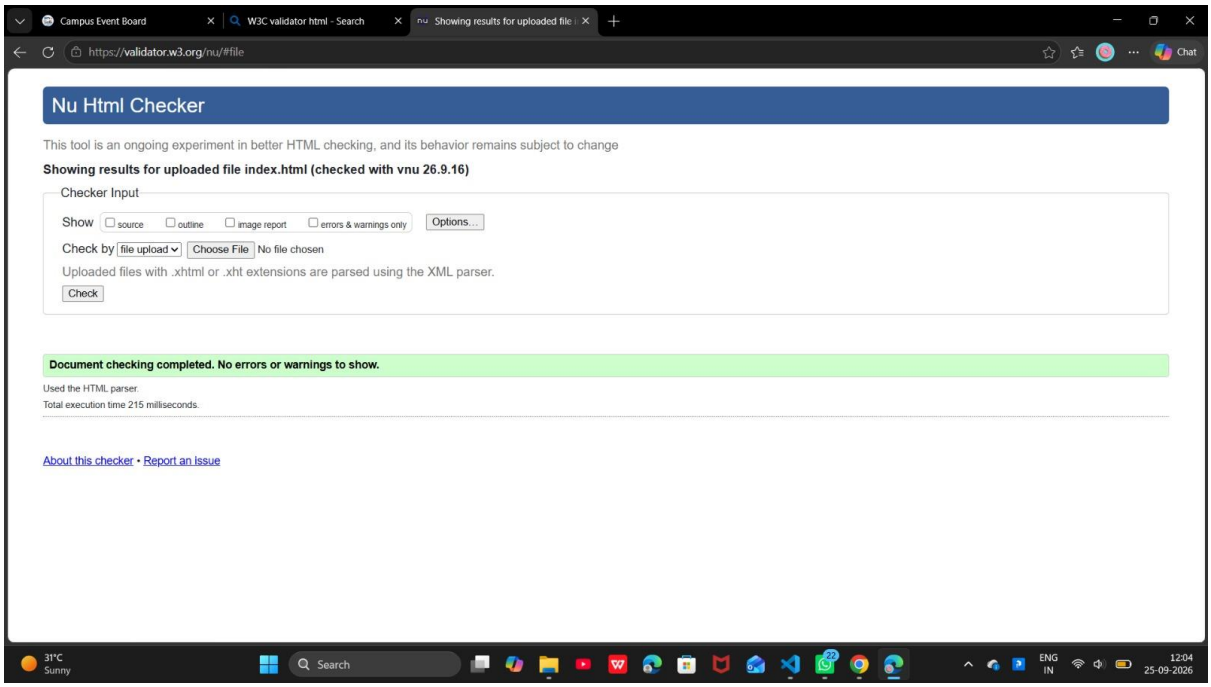

W3C CSS VALIDATOR:

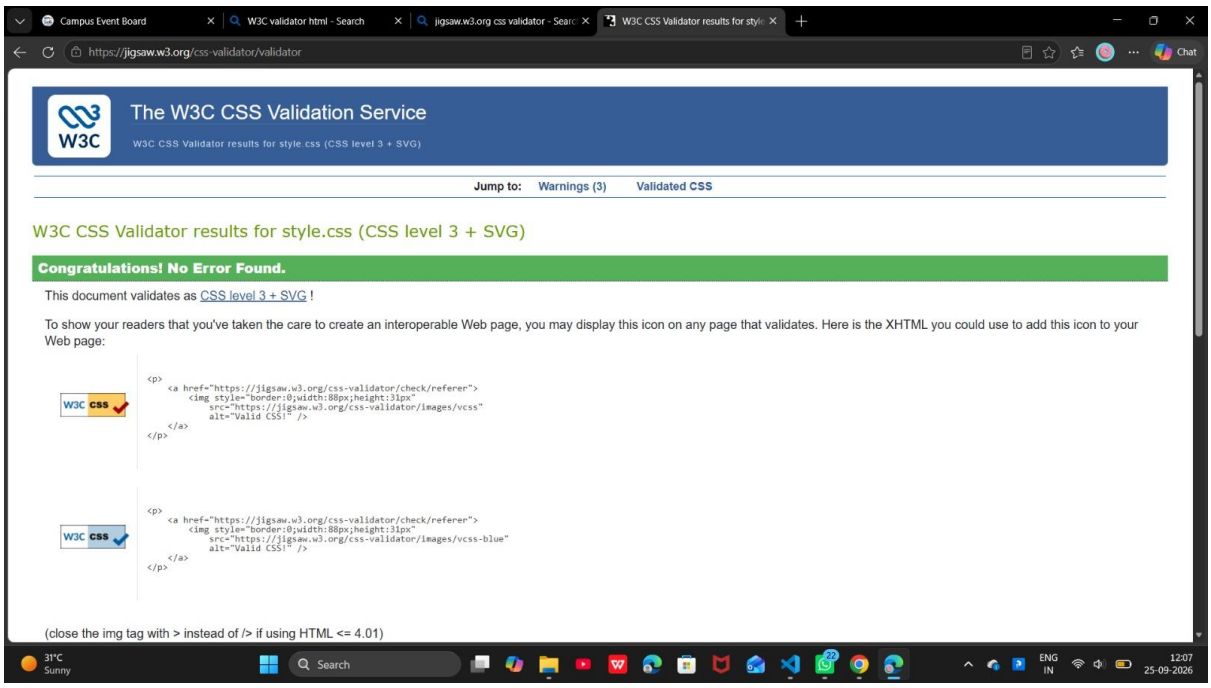

The GitHub live page link:

https://aadi0622.github.io/event-board/

Answers

1. Show your :root palette. Why are named variables better than repeating hex codes across the file?

```
:root {
  --color-bg: #0d1117;
  --color-surface: #161b22;
  --color-text: #e6edf3;
  --color-primary: #4f8cff;
  --color-accent: #ff6b6b;
  --color-border: #30363d;
  --space-md: 1rem;
  --radius-md: 8px;
}
```

- Change a colour in one place, updates everywhere
- Name explains purpose, hex code doesn't
- No risk of typo mismatches (#4f8cff vs #4f8dff)
- Enables easy theming (redefine vars per theme)
- Readable/editable via JavaScript at runtime

2. Give one use each of hex, rgb() and hsl() from your CSS, and say where you used a semi-transparent colour and why.

```
background-color: #161b22;                /* hex */
background-color: rgb(0 0 0 / 55%);        /* rgb - semi-transparent */
background-color: hsl(221 100% 66%);       /* hsl */
```

- hex → card background
- rgb() → modal backdrop overlay
- hsl() → button hover state
- Semi-transparent: rgb(0 0 0 / 55%) on modal backdrop
- Why: dims page content but keeps it faintly visible underneath

3. Why prefer rem over px for fonts and spacing? Show one calc() and one clamp() you used and what each does.

- rem scales with root font-size; px stays fixed
- Respects user's browser font-size/accessibility settings
- One change to root size scales entire page proportionally

```
height: calc(100vh - 4rem);
font-size: clamp(1.5rem, 4vw + 1rem, 3rem);
```

- calc(100vh - 4rem): fills space below a fixed 4rem header
- clamp(1.5rem, 4vw + 1rem, 3rem): heading scales with viewport, min 1.5rem, max 3rem

4. A box has width: 200px; padding: 20px; border: 5px. What is its actual rendered width with content-box, and with border-box? Which did you use and why?

- content-box: 200 + (20+20) + (5+5) = 250px
- border-box: total stays 200px (content area shrinks to 150px)
- Used: border-box
- Why: width value = actual space used, easier layout math

5. Name the four layers of the box model, from the inside out.

- 1. Content
- 2. Padding
- 3. Border
- 4. Margin

6. What does repeat(auto-fit, minmax(15rem, 1fr)) do, and why does it need no media query?

- Creates as many 15rem-minimum columns as fit the row
- auto-fit collapses empty tracks, remaining columns stretch (1fr)
- Responds to actual available space, not fixed breakpoints
- No media query needed — grid recalculates columns itself

7. Mobile-first: why write the phone styles as the base and add layout with min-width queries? And why is the viewport <meta> tag essential?

- Phones get simplest CSS first, no wasted overrides
- Matches progressive enhancement (add complexity, don't undo it)
- min-width queries layer on larger layouts as space allows
- Viewport meta needed: without it, mobile browsers fake a ~980px wide viewport and zoom out
- That fake width breaks min-width queries; meta tag forces real device width at 1:1 scale

8. Paste your grid-template-areas map. Which regions span more than one column, and how did you make them?

```
grid-template-areas:
  "header header header"
  "nav    main   aside"
  "footer footer footer";
```

- header and footer span all 3 columns
- nav, main, aside each occupy 1 column
- Made by repeating the same area name across adjacent cells in a row

9. Name one responsive technique for images and one for type that need no media query.

- Images: srcset + sizes (browser picks best-fit image) — or simply width:100%; height:auto;
- Type: clamp() for fluid font-size (e.g. font-size: clamp(1rem, 0.5vw + 0.9rem, 1.125rem);)

10. Prepare a GitHub repo for event-board and paste your final index.html and style.css — the outcome of all the assignments. Give the repo link (and Pages link if live), and confirm it has a README and a readable commit history.

- Needs your own finished files/GitHub account — can't fabricate these for you

```
git init
git add index.html style.css
git commit -m "Initial commit: base layout and styles"
git branch -M main
git remote add origin https://github.com/<your-username>/event-board.git
git push -u origin main
# GitHub: Settings > Pages > Deploy from branch: main / root
```

GitHub Repository:

https://github.com/Aadi0622/event-board.git

GitHub Pages (Live):

https://aadi0622.github.io/event-board/