

Great question 👍 HTTP errors are grouped by **status code ranges**. Each range tells you **who is responsible** (client or server) and **what went wrong**.

Types of HTTP Status Codes (Errors + Others)

1xx – Informational

Request received, still processing

- 100 Continue
- 101 Switching Protocols

👉 Rarely seen by users

2xx – Success

Request was successful

- 200 OK
- 201 Created
- 204 No Content

👉 These are **not errors**, just FYI

3xx – Redirection

Resource moved or redirected

- 301 Moved Permanently
- 302 Found (Temporary Redirect)
- 304 Not Modified

👉 Browser is redirected elsewhere

4xx – Client Errors

👉 **Your request is wrong** (frontend / user issue)

- 400 Bad Request – Invalid request format
- 401 Unauthorized – Login required
- 403 Forbidden – No permission
- 404 Not Found – URL doesn't exist
- 405 Method Not Allowed – Wrong HTTP method
- 408 Request Timeout
- 409 Conflict
- 429 Too Many Requests

🧠 Mostly frontend, API request, or auth issues


💣 5xx – Server Errors

👉 Server failed to handle a valid request (backend issue)

- 500 Internal Server Error
- 502 Bad Gateway
- 503 Service Unavailable
- 504 Gateway Timeout

🧠 Backend, database, server crash, deployment problems

🖼️ Visual overview (easy to remember)

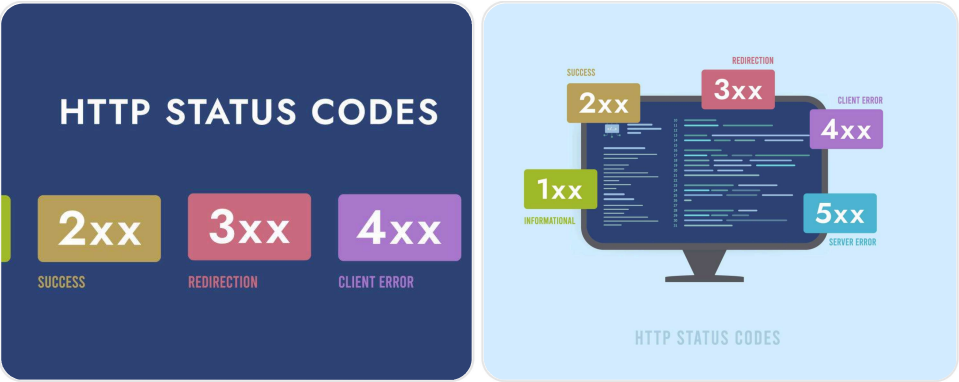

🧑💻 Real-life mapping (IT / Developer view)

Error Type	Who fixes it?
4xx	Frontend / API consumer
5xx	Backend / DevOps
3xx	Config / Routing
2xx	🎉 All good

If you want, I can also explain:

- HTTP errors with real API examples
- Errors commonly asked in interviews
- Errors you'll see in Angular / React / Java apps

Just say the word 😊