

Lists, Stacks, Queues, and Priority Queues

Data Structure 数据结构


- A **data structure** or **collection** is a collection of data organized in some fashion
数据结构 或 集合 是以某种方式组织的数据集合
 - not only stores data but also supports operations for accessing and manipulating the data
不仅存储数据，还支持访问和控制数据的操作
 - 为特定任务选择最佳数据结构和算法是开发高性能软件的关键之一
- In object-oriented thinking, a data structure, also known as a **container**, is an object that stores other objects, referred to as **elements**
在面向对象的思维中，数据结构，也称为 容器，是存储其他对象的对象（元素）

Java Collection Framework hierarchy 集合类框架层级


- Java provides several data structures that can be used to organize and manipulate data efficiently, commonly known as **Java Collections Framework**
Java 拥有丰富并且全面的集合类，统称为 **Java 集合框架**
- The Java Collections Framework supports **two types of containers**:
Java 支持**两种类型的集合框架**:
 - One for **storing** a collection of **elements**, simply called a **collection**
一个用于 **存储元素** 集合，简称为 **集合**
 - **Lists** store an ordered collection of elements
列表可以有序地存储一组元素，允许重复
 - **Sets** store a group of nonduplicate elements
Set 存储一组没有重复数据的元素
 - **Stacks** store objects that are processed in a last-in, first-out fashion
栈存储的元素需要按照先进后出的原则来取用
 - **Queues** store objects that are processed in a first-in, first-out fashion
队列存储的元素需要按照先进先出的原则来取用
 - **PriorityQueues** store objects that are processed in the order of their priorities
优先级队列中的元素会按照优先级来进行排序
 - One for storing **key/value pairs**, called a **map**
另一种是**键值对**，被称为 **map**:
 - Note: this is called a **dictionary** in Python
Java 的 map 在 Python 中相当于“字典”
- 所有的 Java 集合类都被存放在 **java.util** 包中，Java 的集合类提供了非常优秀的接口、抽象类和实体类的使用案例

- The **interfaces** define the framework/general API
接口用来定义基本的框架以及通用的 API
- The **abstract classes** provide partial implementation
抽象类用来进行局部的实现
 - Providing an abstract class that partially implements an interface makes it convenient for the user to write the code for the specialized containers
提供实现部分接口方法的抽象类可以**方便用户为专用容器编写代码**
 - **AbstractCollection** is provided for convenience (for this reason, it is called a **convenience abstract class**)
AbstractCollection是为了方便而提供的（因此，它被称为一个**方便的抽象类**）
- The **concrete classes** implement the interfaces with concrete data structures
实例类的任务就是实现接口并设置具体的数据结构
- The **Collection** interface is the **root interface** for manipulating a collection of objects
Collection **接口**是用于作对象集合的**根接口**
 - The **AbstractCollection** class provides **partial implementation** for the **Collection** interface (all the methods in **Collection** except the **add**, **size**, and **iterator** methods)
AbstractCollection类提供了**Collection**接口的**部分实现** (**Collection**中的所有方法，除了**add**、**size**和**迭代器**方法)
 - Note: the **Collection** interface implements the **Iterable** interface
Collection 接口实现了 **Iterable** 接口，因此事实上所有的集合类都是可以使用迭代器的
 - We can obtain an **Iterator** object for traversing elements in the collection
我们可以获取一个 **Iterator 对象** 来遍历集合中的元素
 - Also used by for-each loops
当然 For-each 增强 for 循环也可以，并且理论上来讲增强 for 循环的效率更高，只不过 iterator 更方便并且适合 stream 操作。

Java 集合类继承关系图

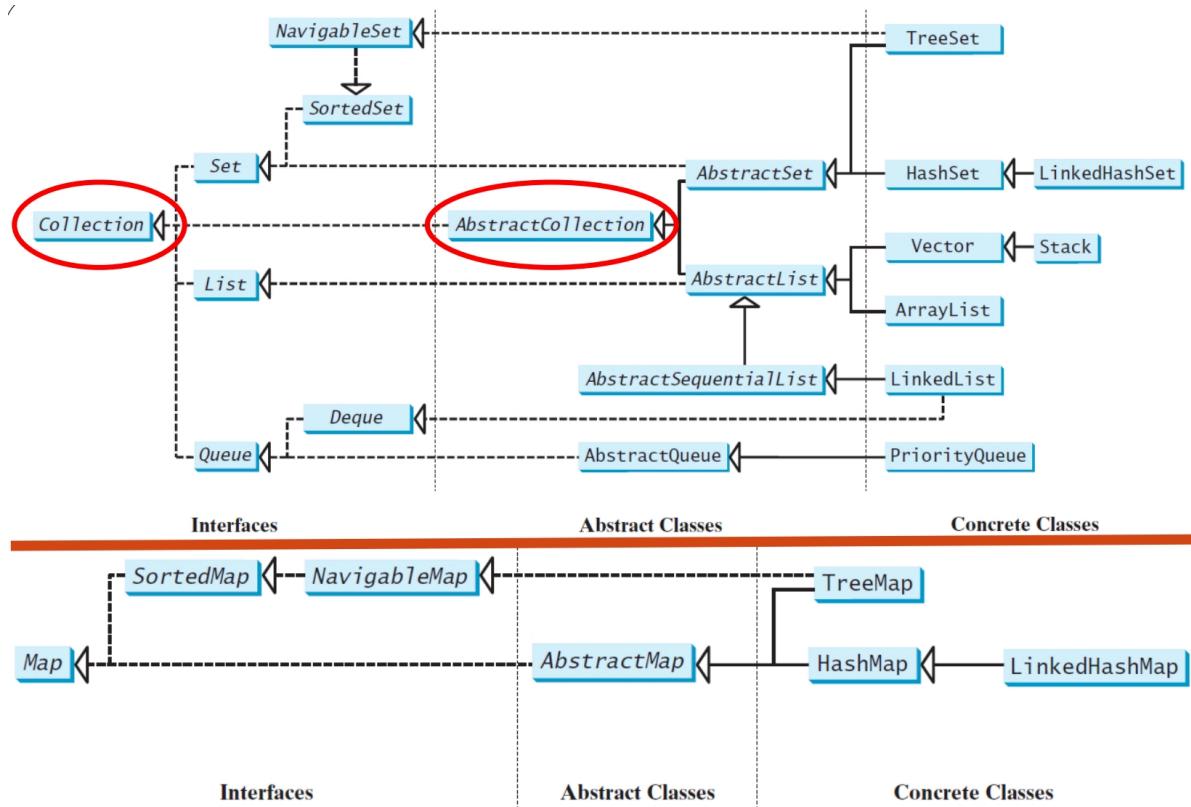

Java Collections 接口和 Iterable 接口之间的关系

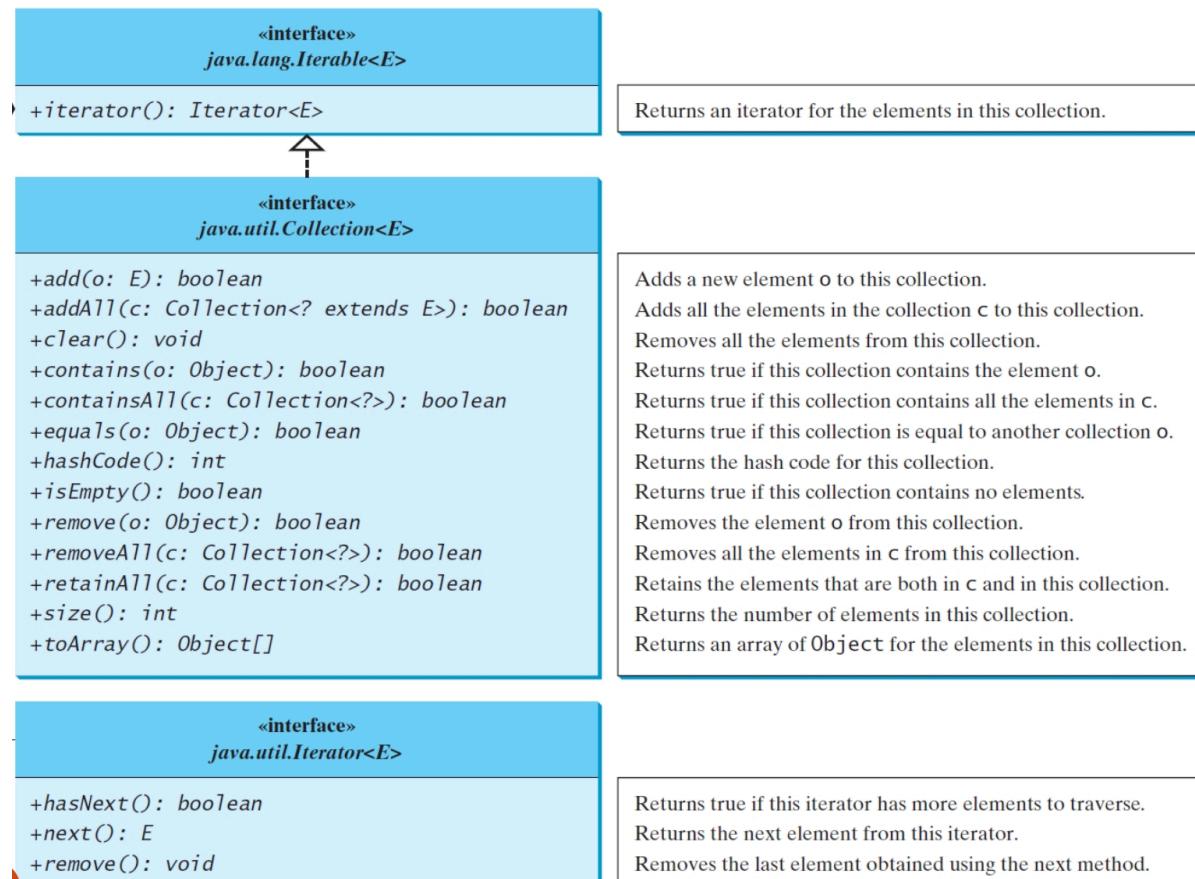

Example of using the methods in the Java Collection Framework

```
import java.util.*;
public class TestCollection {
    public static void main(String[] args) {
        ArrayList<String> collection1 = new ArrayList<>();
        collection1.add("New York"); // add
        collection1.add("Atlanta");
        collection1.add("Dallas");
        collection1.add("Madison");
        // 打印当前列表中的内容
        System.out.println("A list of cities in collection1:");
        System.out.println(collection1);
        /**
         * A list of cities in collection1:
         * [New York, Atlanta, Dallas, Madison]
         */

        // the Collection interface's contains method
        System.out.println("\nIs Dallas in collection1? " +
collection1.contains("Dallas")); // contains
        /**
         * Is Dallas in collection1? true
         */

        // the Collection interface's remove method
        collection1.remove("Dallas"); // remove

        // the Collection interface's size method
        System.out.println("\n" + collection1.size() + " cities are in
collection1 now");
        /**
         * 3 cities are in collection1 now
         */

        Collection<String> collection2 = new ArrayList<>();
        collection2.add("Seattle");
        collection2.add("Portland");
        System.out.println("\nA list of cities in collection2:");
        System.out.println(collection2);
        /**
         * A list of cities in collection2:
         * [Seattle, Portland]
         */

        ArrayList<String> c1 = (ArrayList<String>)(collection1.clone()); // clone
        c1.addAll(collection2); // addAll
        System.out.println("\ncities in collection1 or collection2:");
        System.out.println(c1);
        /**
         * Cities in collection1 or collection2:
         * [New York, Atlanta, Madison, Seattle, Portland]
         */
    }
}
```

```

        c1 = (ArrayList<String>)(collection1.clone());
        c1.addAll(collection2); // retainAll
        System.out.print("\ncities in collection1 and collection2:");
        System.out.println(c1);
        /**
         * Cities in collection1 and collection2: []
         */

        c1 = (ArrayList<String>)(collection1.clone());
        c1.removeAll(collection2); // removeAll
        System.out.print("\ncities in collection1, but not in 2: ");
        System.out.println(c1);
        /**
         * Cities in collection1, but not in 2: [New York, Atlanta, Madison]
         */
    }
}

```

- All the concrete classes in the Java Collections Framework implement the **java.lang.Cloneable** and **java.io.Serializable** interfaces except that **java.util.PriorityQueue** does not implement the **Cloneable** interface

Java Collections Framework 中的所有具体类都实现了 Java.lang.Cloneable 和 Java.io.Serializable 接口，除了 **java.util.PriorityQueue** 没有实现 **Cloneable** 接口

- Some of the methods in the **Collection** interface cannot be implemented in the concrete subclass (e.g., the read-only collections cannot add or remove)

Java 中的 **Collection** 接口定义了一些通用的方法（如 add、remove 等），但这些方法在某些具体的子类中可能无法真正实现，因为子类的特性限制了这些方法的行为。

- In this case, the method would throw **java.lang.UnsupportedOperationException**, like this:

对于只读或不可变集合来说，修改操作（如 add、remove）是不合理的，因此它们会抛出 **UnsupportedOperationException** 来表示这些操作不被支持。

```

public void someMethod() {
    throw new UnsupportedOperationException("Method not supported");
}

```

Iterators 迭代器

- Each collection is **Iterable**

每个集合都是可以使用**迭代器**

- **Iterator** is a classic design pattern for walking through a data structure without having to expose the details of how data is stored in the data structure

Iterator 是一种经典的设计模式，用于遍历数据结构，而不必公开数据在数据结构中存储方式的详细信息

- Also used in for-each loops:

```
// 增强 for 循环
for(String element: collection)
    System.out.print(element + " ");
```

- The **Collection** interface extends the **Iterable** interface

Collection 接口扩展了 Iterable 接口

- You can obtain a collection **Iterator** object to traverse all the elements in the collection with the **iterator()** method in the **Iterable** interface which returns an instance of **Iterator**

您可以使用 **Iterable** 接口中的 **iterator()** 方法获取一个集合 **Iterator** 对象，以遍历集合中的所有元素，该方法返回 **Iterator** 的实例

- The **Iterable** interface defines the **iterator** method, which returns an **Iterator**


Iterable 接口定义了 **iterator** 方法，该方法返回一个 **Iterator** 对象

```
import java.util.*;
public class TestIterator {
    public static void main(String[] args) {
        Collection<String> collection = new ArrayList<>();
        collection.add("New York");
        collection.add("Atlanta");
        collection.add("Dallas");
        collection.add("Madison");
        // 创建集合对象的迭代器
        // List 实现了 Iterable
        Iterator<String> iterator = collection.iterator(); // 获取 Iterator
        // 循环迭代当前集合，通过 iterator
        while (iterator.hasNext()) {
            // 获取读取到的下一个值，并且修改为全大写
            System.out.print(iterator.next().toUpperCase() + " ");
        }
        System.out.println();
    }
}

// Output: NEW YORK ATLANTA DALLAS MADISON
```

使用增强 for 循环的优势就是我们不需要知道当前的集合内的数据的数量

List 接口

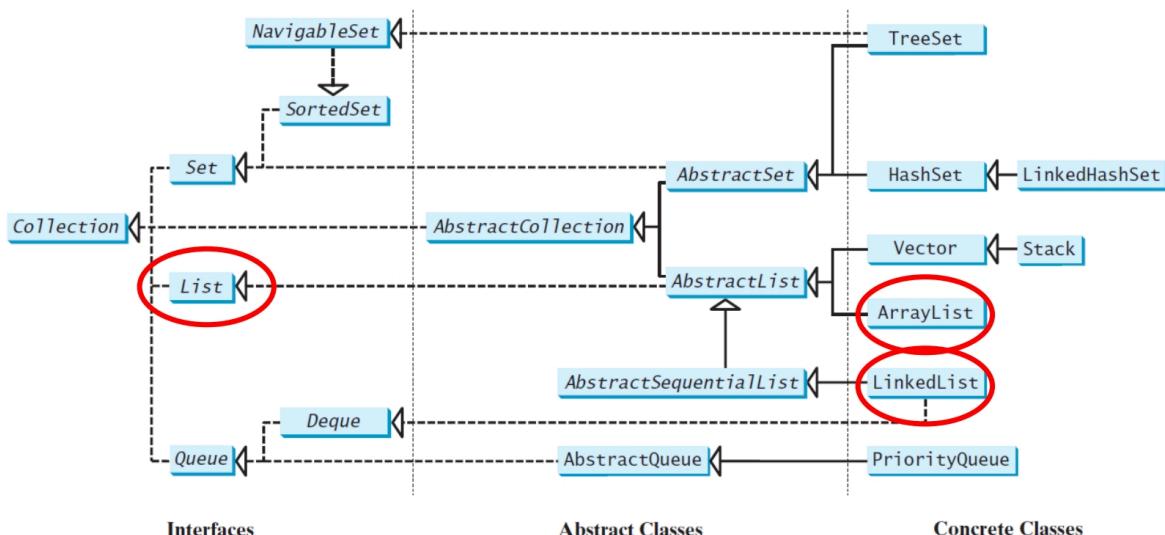


- A **list** collection stores elements in a **sequential** order, and allows the user to specify where the element is stored

list 集合按 **顺序** 有序存储元素，并允许用户指定元素的存储位置

- The user can also access the elements by **index**
用户还可以通过 **索引** 访问元素
- The **List** interface stores elements in sequence and permits duplicates
List接口按顺序存储元素，并允许重复元素
- Two concrete classes in Java Collections Framework: **ArrayList** and **LinkedList**
Java集合框架中的两个具体类：**ArrayList** 和 **LinkedList**

Java List 的继承关系

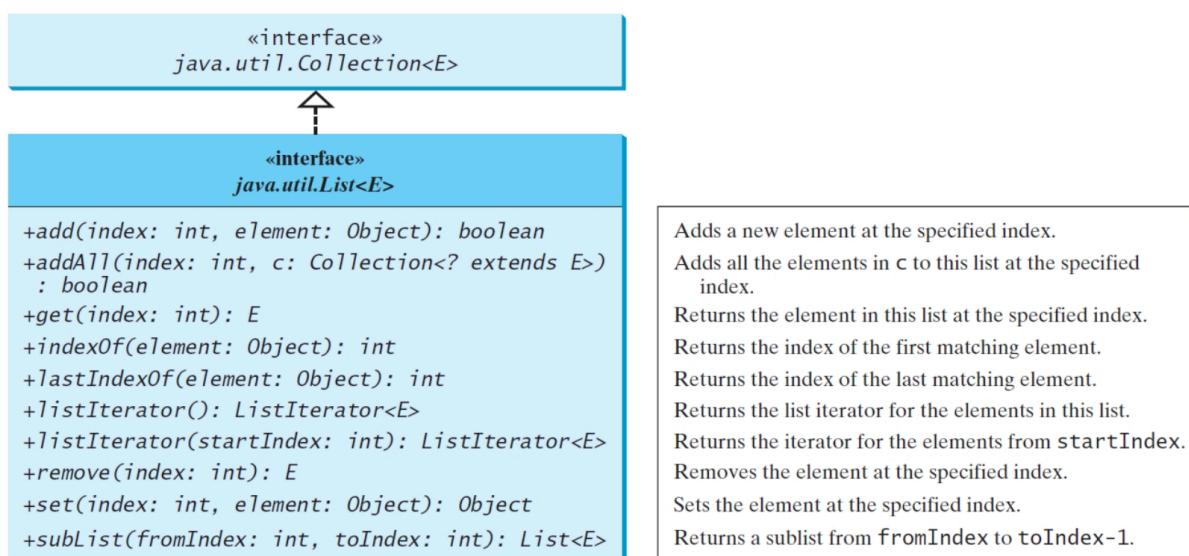

ListIterator

- The **listIterator()** and **listIterator(startIndex)** methods return an instance of **ListIterator**
listIterator() 和 **listIterator(startIndex)** 方法返回 **ListIterator** 的实例
- The **ListIterator** interface extends the **Iterator** interface for bidirectional traversal of the list and add elements to the list


ListIterator 接口扩展了 **Iterator** 接口，用于双向遍历列表并向列表中添加元素

- The **nextIndex()** method returns the index of the next element in the iterator, and the **previousIndex()** returns the index of the previous element in the iterator
nextIndex() 方法返回迭代器中下一个元素的索引，**previousIndex()** 方法返回迭代器中前一个元素的索引
- The **add(element)** method inserts the specified element into the list immediately before the next element that would be returned by the **next()** method defined in the **Iterator** interface
add(element) 方法在 **Iterator** 接口中定义的 **next()** 方法返回的下一个元素之前插入指定的元素到列表中

```
List<String> list = new ArrayList<>(Arrays.asList("A", "B", "C"));
ListIterator<String> iterator = list.listIterator();

iterator.next(); // 游标移动到 "A" 的后面，指向 "B"
iterator.add("X"); // 在 "B" 之前插入 "X"
System.out.println(list); // 输出 [A, X, B, C]
```

Java 中 ListIterator 是怎么拓展 Iterator 接口的

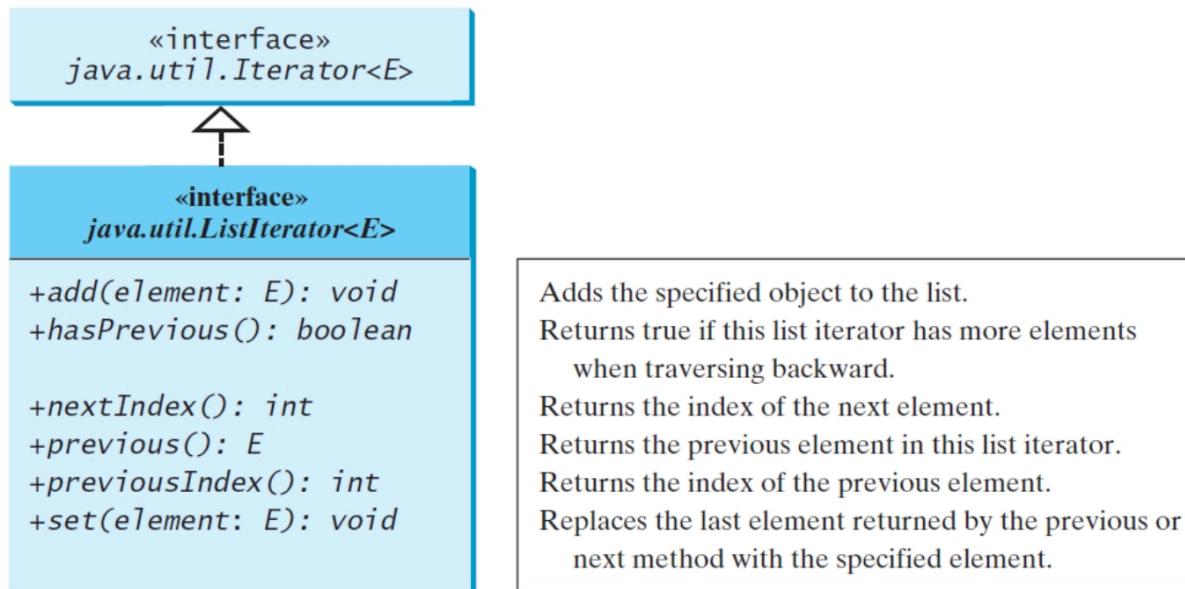

ArrayList and LinkedList

- The **ArrayList** class and the **LinkedList** class are concrete implementations of the **List** interface

ArrayList 类和 **LinkedList** 类是 **List** 接口的具体实现

- A list can grow or shrink dynamically

列表可以动态增大或收缩

- While an array is fixed once it is created

当数组在创建起长度就是固定的

- If your application does not require insertion or deletion of elements, the most efficient data structure is an **array**

如果读多写少，那么 Array 类型会比 Linked 类型更合适

- Which of the two classes **ArrayList** class and the **LinkedList** class you use depends on your specific needs:
 - The critical difference between them pertains to internal implementation, which affects their performance.
它们之间的关键区别在于内部的实现方式，这会影响它们的性能。
 - If you need to support random access through an index **without inserting or removing** elements from any place **other than the end**, **ArrayList** offers the most efficient collection
如果需要支持通过索引的随机访问，而不需要从末尾以外的任何位置插入或删除元素，那么**ArrayList**提供了最有效的集合
 - If your application requires the insertion or deletion of elements from **at the beginning of the list**, you should choose **LinkedList**
如果应用程序需要插入或删除列表开头的元素，您应该选择**LinkedList**

- The **get(i)** method is available for a **linked list**, but it is a more time-consuming operation to find each element

ArrayList 实现了 **RandomAccess** 接口，所以可以直接通过索引定位，但是 **LinkedList** 没有，所以每次查找都需要从头开始。

- 建议在通过 **LinkedList** 查找的时候，通过 for-each 或者 iterator 来进行查找。所以虽然两者查询的时间复杂度都是 $O(n)$ ，但是 **ArrayList** 的平均步长更短
- **LinkedList** 使用 **get(i)** 方法非常耗时，所以建议使用 for-each loop 以及 iterator方法来迭代

```


for(int i = 0; i < list.size(); i++) {
    // process list.get(i) 不要选用
}

for (listElementType s: list) {
    // process s
}

```


java.util.ArrayList

Java 中 **ArrayList** 的结构

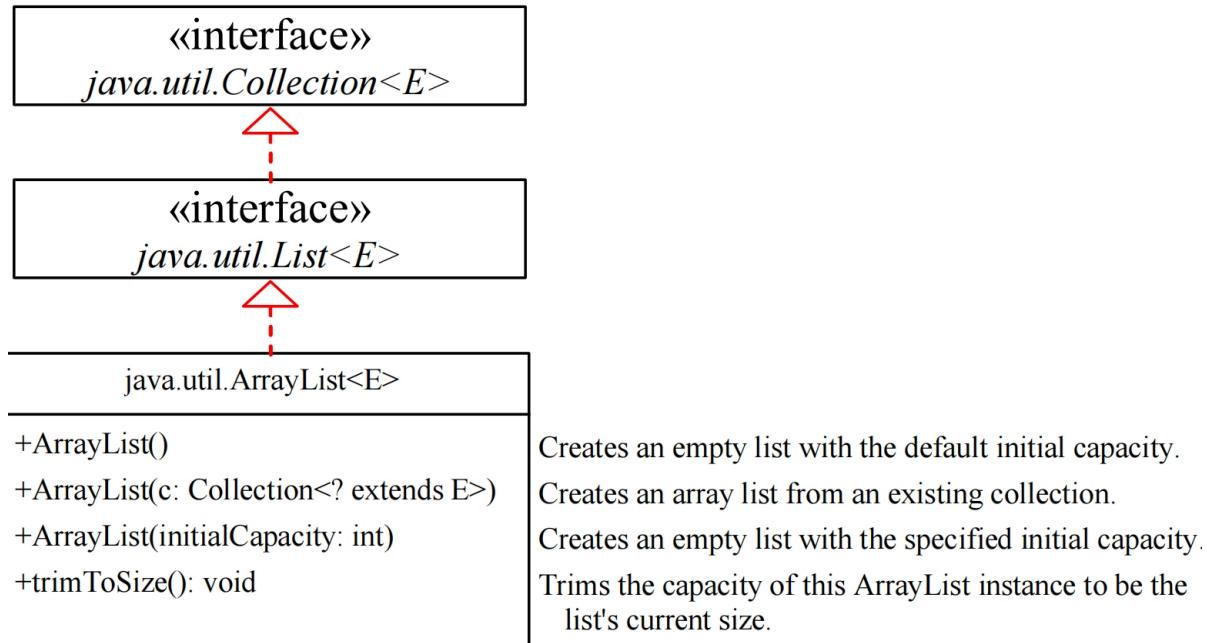


Implemented with **arrays**, e.g., before inserting a new element at a specified index, shift all the elements after the index to the right and increase the ArrayList size by 1

使用 **数组** 实现，例如，在指定索引处插入新元素之前，将索引后的所有元素向右移动，并将 ArrayList 大小增加 1(size方法可以得到列表中元素的总数，列表的容量只能通过反射来获取)

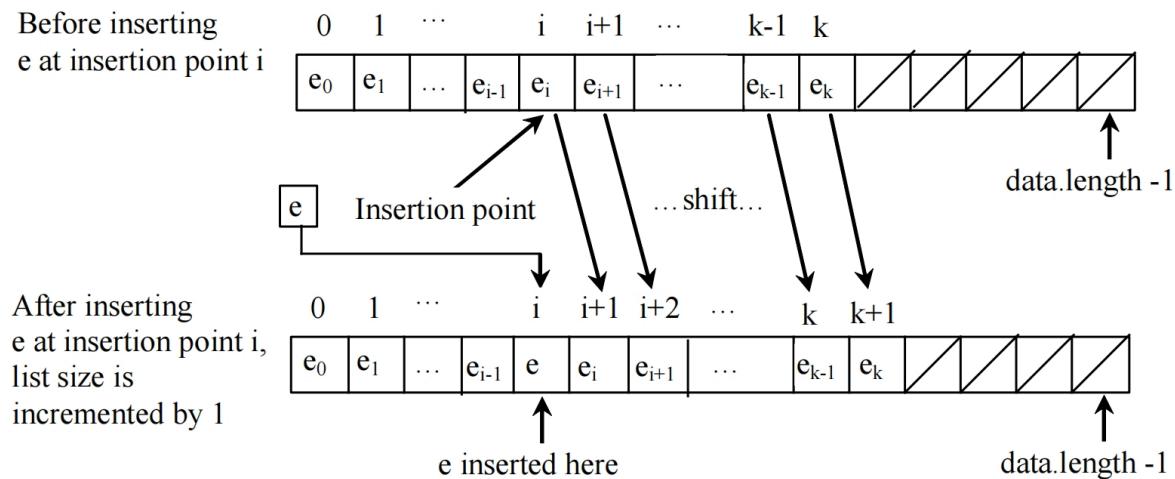


java.util.LinkedList

Java 中 LinkedList 的结构

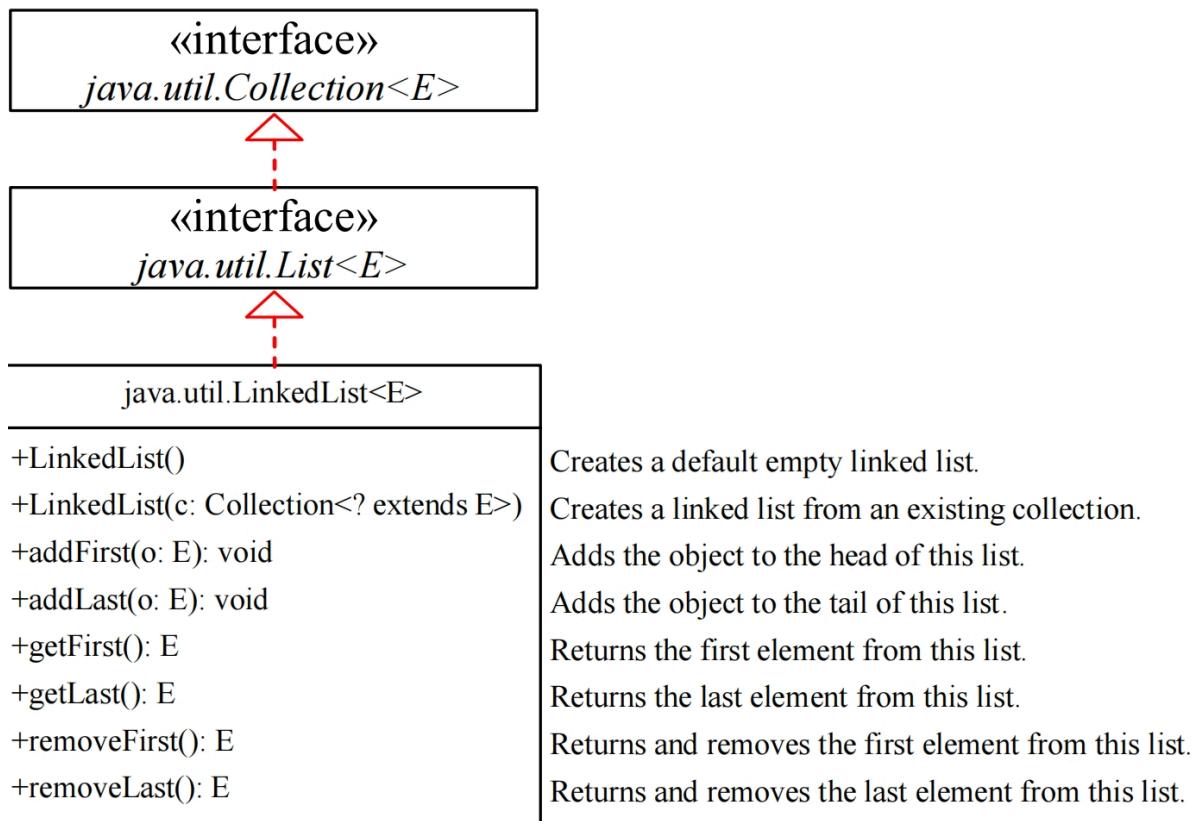

LinkedList 是通过链表实现的，主要是通过运用指针，从当前节点指向下一个或者上一个节点。

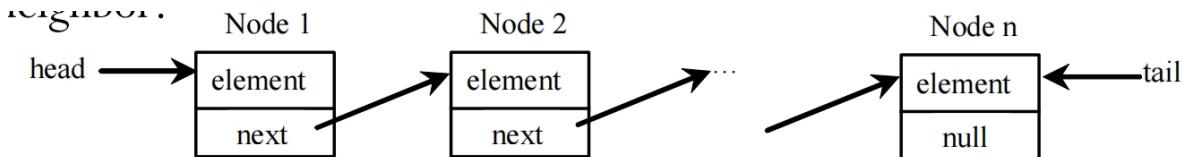

一个节点通常包含：只想上一个节点的指针，该节点存储的值，指向下一个阶段的指针

```

class Node<E> {
    E element;
    Node<E> next;
    public Node(E o) {
        element = o;
    }
}

```

Example usage of ArrayList and LinkedList

```

public class TestArrayListAndLinkedList {
    public static void main(String[] args) {
        // 创建一个 ArrayList 实例，然后填入数字，并在指定位置插入新的元素
        List<Integer> arrayList = new ArrayList<>();
        arrayList.add(1); // 1 is autoboxed to new Integer(1)
        arrayList.add(2);
        arrayList.add(3);
        arrayList.add(1);
        arrayList.add(4);
        arrayList.add(0, 10);
        arrayList.add(3, 30);
        System.out.println("A list of integers in the array list:");
        System.out.println(arrayList);
    }
}

```

```

// 创建一个 LinkedList 实例，然后从一个指定的位置remove一个元素
LinkedList<Object> linkedList = new LinkedList<>(arrayList);
linkedList.add(1, "red");
linkedList.removeLast();
linkedList.addFirst("green");
// 倒序打印 LinkedList，通过索引
System.out.println("Display the linked list backward with index:");
for (int i = linkedList.size() - 1; i >= 0; i--) {
    System.out.print(linkedList.get(i) + " ");
}

// 正序打印 LinkedList
System.out.println();
System.out.println("Display the linked list forward:");
ListIterator<Object> listIterator =
linkedList.listIterator();

while (listIterator.hasNext()) {
    System.out.print(listIterator.next() + " ");
}

// 倒序打印 LinkedList
System.out.println();
System.out.println("Display the linked list backward:");
listIterator = linkedList.listIterator(linkedList.size());

while (listIterator.hasPrevious()) {
    System.out.print(listIterator.previous() + " ");
}
}

}

A list of integers in the array list:
[10, 1, 2, 30, 3, 1, 4]

Display the linked list backward with index:
1 3 30 2 1 red 10 green

Display the linked list forward:
green 10 red 1 2 30 3 1

Display the linked list backward:
1 3 30 2 1 red 10 green

```

Comparator 接口

- Sometimes you want to compare the elements that are not instances of **Comparable** or by a **different criteria** than **Comparable**
有时，想要比较不是 Comparable 实例的元素，或者根据与 Comparable 不同的标准的比较元素
- You can define a **Comparator** to compare these elements
可以定义一个 **Comparator** 来比较这些元素
 - Define a class that implements the **java.util.Comparator** interface

定义一个实现 `java.util.Comparator` 接口的类

- The `Comparator` interface has two methods: `compare` and `equals`

Comparator 接口有两种方法： `compare` 和 `equals`

```
public int compare(T element1, T element2)
```

- Returns a negative value if `element1` is less than `element2` a positive value if `element1` is greater than `element2`, and zero if they are equal

如果 `element1` 小于 `element2`, 则返回负值, 如果 `element1` 大于 `element2`, 则返回正值, 如果它们相等, 则返回零

```
import java.util.Comparator;
public class GeometricObjectComparator implements Comparator<GeometricObject>,
java.io.Serializable {
    // It is generally a good idea for comparators to implement
    // Serializable, as they may be used as ordering methods in
    // serializable data structures.
    public int compare(GeometricObject o1, GeometricObject o2) {
        double area1 = o1.getArea();
        double area2 = o2.getArea();
        if (area1 < area2)
            return -1;
        else if (area1 == area2)
            return 0;
        else
            return 1;
    }
}

public class TestComparator {
    public static void main(String[] args) {
        GeometricObject g1 = new Rectangle(5, 5);
        GeometricObject g2 = new Circle(5);
        // 输入两个要对比的对象, 以及定义好的对比方法
        GeometricObject g = max(g1, g2, new GeometricObjectComparator());
        System.out.println("The area of the larger object is " + g.getArea());
    }
    public static GeometricObject max(GeometricObject g1, GeometricObject g2,
        Comparator<GeometricObject> c) {
        if (c.compare(g1, g2) > 0)
            return g1;
        else
            return g2;
    }
}
```

Static Methods for Lists and Collections 列表和集合的静态方法

- The `java.util.Collections` class contains static methods to perform common operations in a collection or a list
 - `max, min, disjoint, and frequency` methods for collections

- **sort**, **binarySearch**, **reverse**, **shuffle**, **copy**, and **fill** methods for lists

```
static <T extends Comparable<? super T>> void sort(List<T> list)
```

uses the **compareTo** method in the **Comparable** interface'

```
static <T extends Comparator<? super T>> void sort(List<T> list,
Comparator<T> c)
```

uses the **compare** method in the **Comparator** interface

Collections

java.util.Collections	
List	+sort(list: List): void +sort(list: List, c: Comparator): void +binarySearch(list: List, key: Object): int +binarySearch(list: List, key: Object, c: Comparator): int +reverse(list: List): void +reverseOrder(): Comparator +shuffle(list: List): void +shuffle(list: List, rmd: Random): void +copy(des: List, src: List): void +nCopies(n: int, o: Object): List +fill(list: List, o: Object): void
Collection	+max(c: Collection): Object +max(c: Collection, c: Comparator): Object +min(c: Collection): Object +min(c: Collection, c: Comparator): Object +disjoint(c1: Collection, c2: Collection): boolean +frequency(c: Collection, o: Object): int
	Sorts the specified list. Sorts the specified list with the comparator. Searches the key in the sorted list using binary search. Searches the key in the sorted list using binary search with the comparator. Reverses the specified list. Returns a comparator with the reverse ordering. Shuffles the specified list randomly. Shuffles the specified list with a random object. Copies from the source list to the destination list. Returns a list consisting of <i>n</i> copies of the object. Fills the list with the object. Returns the max object in the collection. Returns the max object using the comparator. Returns the min object in the collection. Returns the min object using the comparator. Returns true if <i>c1</i> and <i>c2</i> have no elements in common. Returns the number of occurrences of the specified element in the collection.

Other Collections class useful static methods Collections类中其他一些实用方法

- **rotate(List list, int distance)** - Rotates all of the elements in the list by the specified distance.
将列表中的所有元素旋转指定的距离。
- **replaceAll(List list, Object oldVal, Object newVal)** - Replaces all occurrences of one specified value with another.
将一个指定值的所有匹配项替换为另一个指定值。
- **indexOfSubList(List source, List target)** - Returns the index of the first sublist of source that is equal to target.
返回 source 中第一个等于 target 的子列表的索引。
- **lastIndexOfSubList(List source, List target)** - Returns the index of the last sublist of source that is equal to target.
返回等于 target 的 source 的最后一个子列表的索引。
- **swap(List, int, int)** - Swaps the elements at the specified positions in the specified list.
在指定列表中的指定位置交换元素。

- **addAll(Collection<? super T>, T...)** - Adds all of the elements in the specified array to the specified collection.

将指定数组中的所有元素添加到指定的集合中。

Static Method for List

Sorting 排序

```
List<String> list = Arrays.asList("red", "green", "blue");
Collections.sort(list);
System.out.println(list);

// The output is: [blue, green, red]
```

- To sort it in descending order, you can simply use the **Collections.reverseOrder()** method to return a **Comparator** object that orders the elements in reverse of their natural order

要按降序排序，您可以简单地使用 **Collections.reverseOrder()** 方法返回一个 Comparator 对象，该对象按元素的自然顺序倒序排序

```
Collections.sort(list, Collections.reverseOrder());
System.out.println(list);

// The output is [yellow, red, green, blue]
```

Binary Search 二分搜索

- You can use the **binarySearch** method to search for a key in a sorted list

您可以使用 **binarySearch()** 方法在排序列表中搜索键

- To use this method, the list must be sorted in **increasing** order

要使用此方法，必须按升序对列表进行排序

- If the **key** is not in the list, the method returns -(**insertion point + 1**)

如果 key 不在列表中，该方法返回 -(**该内容的插入位置 + 1**)

```
List<Integer> list1 = Arrays.asList(2, 4, 7, 10, 11, 45, 50, 59, 60, 66);
System.out.println("(1) Index: " + Collections.binarySearch(list1, 7)); //2
// 这里没有9，如果有9的话应该插入在7,10之间，所以位置应该是-(3 + 1)
System.out.println("(2) Index: " + Collections.binarySearch(list1, 9)); //-4

List<String> list2 = Arrays.asList("blue", "green", "red");
System.out.println("(3) Index: " + Collections.binarySearch(list2, "red")); //2
// 这里没有 cyan，如果有应该在 blue 和 green 之间，所以位置应该是 -(1 + 1)
System.out.println("(4) Index: " + Collections.binarySearch(list2, "cyan")); //-2
```

Reverse 反转

```
List<String> list = Arrays.asList("yellow", "red", "green", "blue");
Collections.reverse(list);

System.out.println(list);

// [blue, green, red, yellow]
```

Shuffle

```
List<String> list = Arrays.asList("yellow", "red", "green", "blue");
Collections.shuffle(list);

System.out.println(list);
```

- You can also use the **shuffle(List, Random)** method to randomly reorder the elements in a list with a specified **Random** object.

您还可以使用 **shuffle(List, Random)** 方法对具有指定 Random 对象的列表中的元素进行随机重新排序。

- Using a specified **Random** object is useful to shuffle another list with an identical sequences of elements

使用指定的 **Random** 对象可用于 shuffle 另一个具有相同元素顺序的列表

```
import java.util.Arrays;
import java.util.Collections;
import java.util.List;
import java.util.Random;
public class SameShuffle {
    public static void main(String[] args) {
        List<String> list1 = Arrays.asList("yellow", "red", "green",
        "blue");
        List<String> list2 = Arrays.asList("Y", "R", "G", "B");
        Collections.shuffle(list1, new Random(20));
        Collections.shuffle(list2, new Random(20));
        System.out.println(list1);
        System.out.println(list2);
    }
}

// [blue, yellow, red, green]
// [B, Y, R, G]
```

Copy(dest, src)

copy all the elements from a source list to a destination list on the same index

将源列表中的所有元素复制到同一索引上的目标列表

```
List<String> list1 = Arrays.asList("yellow", "red", "green", "blue");
List<String> list2 = Arrays.asList("white", "black");
Collections.copy(list1, list2);

System.out.println(list1);

// [white, black, green, blue]
```

- The **copy** method performs a **shallow** copy: only the references of the elements from the source list are copied

copy 方法执行 **浅层** 复制：仅复制源列表中元素的引用

- If the destination list is smaller than the source list then we get a **runtime error**

如果复制的目标列表数量小于复制源列表，那么就会产生**运行时异常**

```
List<String> list2 = Arrays.asList("yellow", "red", "green", "blue");
List<String> list1 = Arrays.asList("white", "black");
Collections.copy(list1, list2);

Runtime error:
java.lang.IndexOutOfBoundsException: Source does not fit in destination
```

Arrays工具类 和 ArrayList类

Java provides the static **asList** method for creating a list from a variable-length list of arguments

Java 提供了静态 **asList** 方法，**用于从可变长度的参数列表创建列表**

```
List<String> list1 = Arrays.asList("red", "green", "blue");
List<Integer> list2 = Arrays.asList(10, 20, 30, 40, 50);
```

returns a **List** reference of inner class object defined within **Arrays** :

返回在数组中定义的内部类对象的List引用

java.util.Arrays\$ArrayList, which is also called **ArrayList** but it is just a wrapper for an array

java.util.Arrays\$ArrayList, 也称为 **ArrayList**, 但它只是一个数组的包装器

nCopies(int n, Object o)

This method is used to create an **immutable list** that consists of **n copies of the specified object**

此方法用于创建由**指定对象的n个副本**组成的**不可变列表**

```
List<GregorianCalendar> list1 = Collections.nCopies(3, new
GregorianCalendar(2022, 0, 1));
```

- **list1** is a list with three **Calendar** objects.

在上面的例子中，有三个 **Calendar** 类

- The list created from the **nCopies** method is immutable, so you cannot **add/remove** elements in the list ---All the elements have the same reference!

从 `nCopies` 方法创建的列表是不可变的，因此你 不能添加/删除 列表中的元素 ---所有元素都有相同的引用！

```
import java.util.*;
public class Test {
    public static void main(String[] args) {
        List<GregorianCalendar> list1 = collections.nCopies(3,new
        GregorianCalendar(2022,0,1));
        // 只能修改在堆中存放的被引用对象的值，而不能直接对列表中存放的地址引用进行增删修改
        list1.get(0).set(Calendar.YEAR, 2024);

        for(GregorianCalendar g:list1)
            System.out.println(g.get(Calendar.YEAR));
    }
}

// Output
// 由于列表中的引用的对象相同，所以通过一个元素更改之后的结果其他的元素也都可见
2024
2024
2024
```

list1 是一个集合类的实例：类 `java.util.Collections$CopiesList`：

```
List<GregorianCalendar> list1 = collections.nCopies(3,new
        GregorianCalendar(2020,0,1));
```

fill(List list, Object o)

This method replaces all the elements in the list with the specified element

此方法将列表中的所有元素替换为指定的元素

```
List<String> list = Arrays.asList("red","green","blue");collections.fill(list,
        "black");
System.out.println(list);

// [black, black, black]
```

max, min

The `max` and `min` methods find the maximum and minimum elements in a collection

`max` 和 `min` 方法查找集合中的最大和最小元素

```
Collection<String> collection = Arrays.asList("red", "green", "blue");
System.out.println(collections.max(collection));
System.out.println(collections.min(collection));
```

disjoint(collection1, collection2)

This method returns **true** if the two collections have no elements in common

如果两个集合没有共同的元素，则此方法返回 **true**

```
Collection<String> collection1 = Arrays.asList("red", "cyan");
Collection<String> collection2 = Arrays.asList("red", "blue");
Collection<String> collection3 = Arrays.asList("pink", "tan");

System.out.println(collections.disjoint(collection1, collection2)); // false
System.out.println(collections.disjoint(collection1, collection3)); // true
```

frequency(collection, element)

This method finds the number of occurrences of the **element** in the **collection**

此方法查找 **element** 在 **collection** 中出现的次数

```
Collection<String> collection = Arrays.asList("red", "cyan", "red");
System.out.println(collections.frequency(collection, "red"));

// return 2

Collection<String> collection = Arrays.asList(new String("red"), "cyan", new
String("red"), "red");
System.out.println(collections.frequency(collection, "red"));

// return 3
```

Vector and Stack

- The Java Collections Framework was introduced with Java 2 (JDK1.2)

是在 Java 2 (JDK1.2) 中引入的


- Several data structures were supported prior to Java 2

其实很多数据结构都是在 Java 2 之前就已经支持的

- Among them are the **Vector** class and the **Stack** class

- These classes were redesigned to fit into the Java Collections Framework, but their old-style methods are retained for compatibility

这些类经过重新设计以适应 Java Collections Framework，但为了兼容，保留了它们的旧式方法

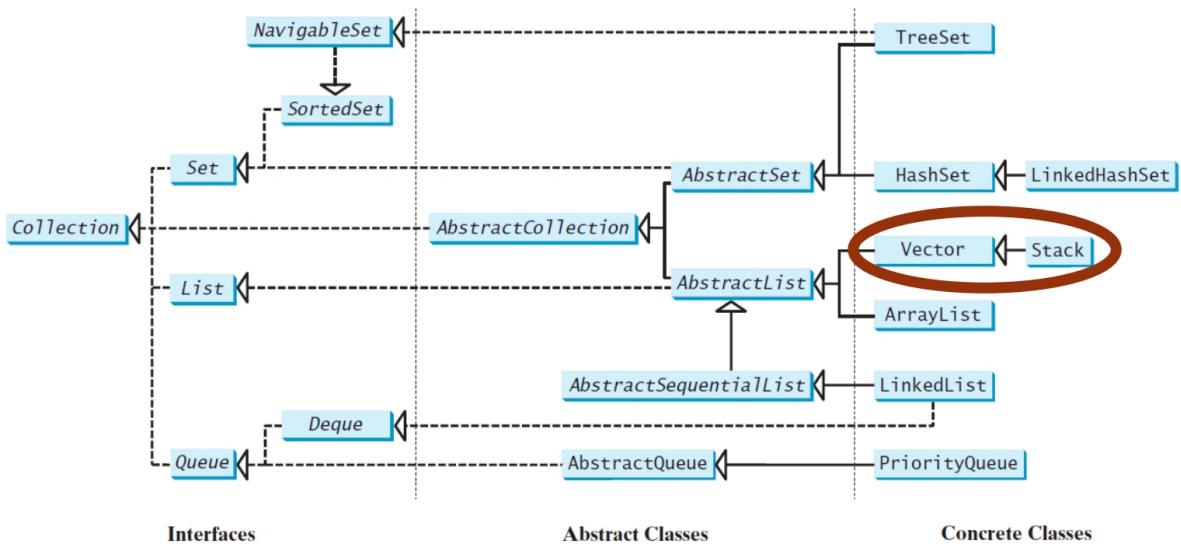

Vector

- **Vector** is the same as **ArrayList**, except that it contains **synchronized** methods for accessing and modifying the vector

Vector 本身和 ArrayList 很类似，但是 Vector 额外使用了 synchronized 关键字，从而能狗实现现成安全，满足多线程操作

- **Synchronized methods** can prevent data corruption when a vector is accessed and modified by two or more threads concurrently

同步方法可以防止两个或多个线程同时访问和修改向量时数据损坏

- None of the classes discussed until now are synchronized

到目前为止讨论的所有类都没有synchronized；主要的synchronized 类包含 Vector 和 HashTable

- For many applications that do not require synchronization, using **ArrayList** is more efficient than using **Vector**

对于许多不需要同步的应用程序，使用 **ArrayList** 比使用 **Vector** 更有效


- Method retained from Java 2:

Java 2 中保留的方法：

- **addElement(Object element)** is the same as the **add(Object element)** method, except that the **addElement** method is synchronized

addElement (Object element) 与 add (Object element) 方法相同，只是 **addElement** 方法是同步的

Java 中 Vector 的数据结构

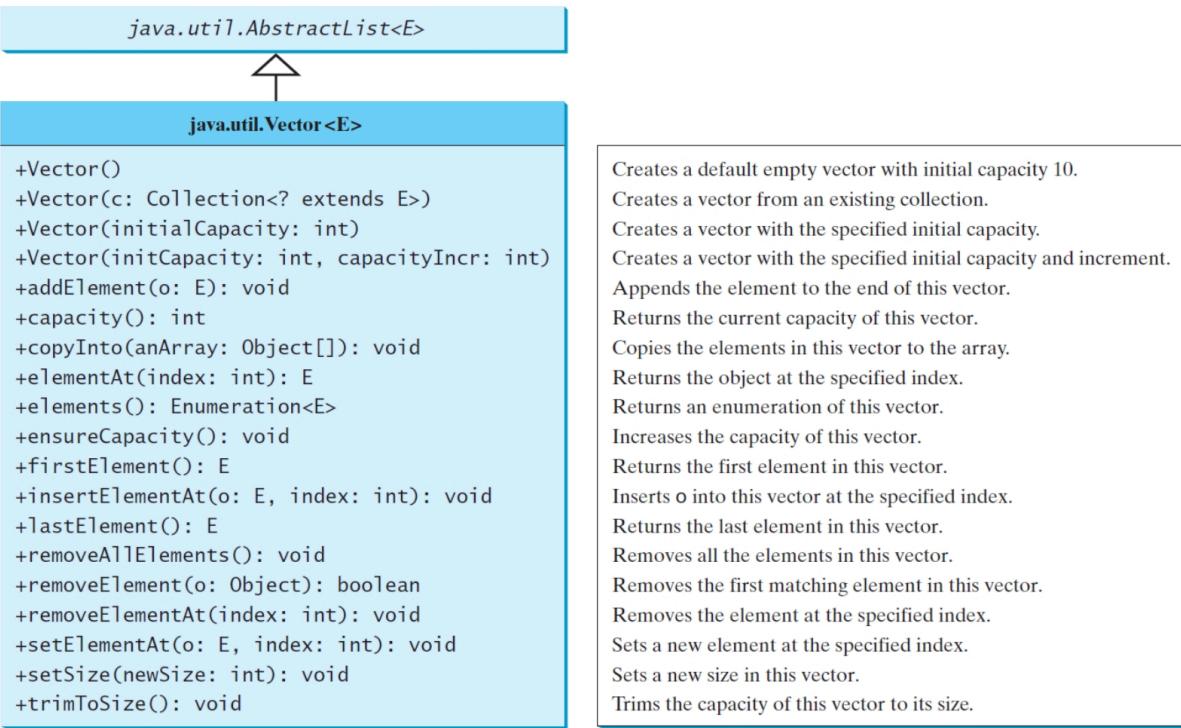

Stack

- The **Stack** class represents a **last-in-first-out** stack of objects

Stack 类表示对象的 后进先出 堆栈

- The elements are accessed only from the top of the stack

这些元素只能从堆栈的顶部访问

- You can insert with **push(o:E)**, retrieve with **peek()** and remove with **pop()** (all from the top of the stack)

您可以使用 **push (o: E)** 插入，使用 **peek ()** 进行检索，使用 **pop ()** 删除（全部从堆栈顶部开始）

- **Stack** is implemented as an extension of **Vector**

Stack 作为 Vector 的扩展实现

- Method retained from Java 2:


Java 2 中保留的方法

- **empty()** method is the same as **isEmpty()**

empty () 方法与 **isEmpty ()** 相同

Java 中 Stack 的数据结构

java.util.Vector<E>	
java.util.Stack<E>	
+Stack() +empty(): boolean +peek(): E +pop(): E +push(o: E) : E +search(o: Object) : int	Creates an empty stack. Returns true if this stack is empty. Returns the top element in this stack. Returns and removes the top element in this stack. Adds a new element to the top of this stack. Returns the position of the specified element in this stack.

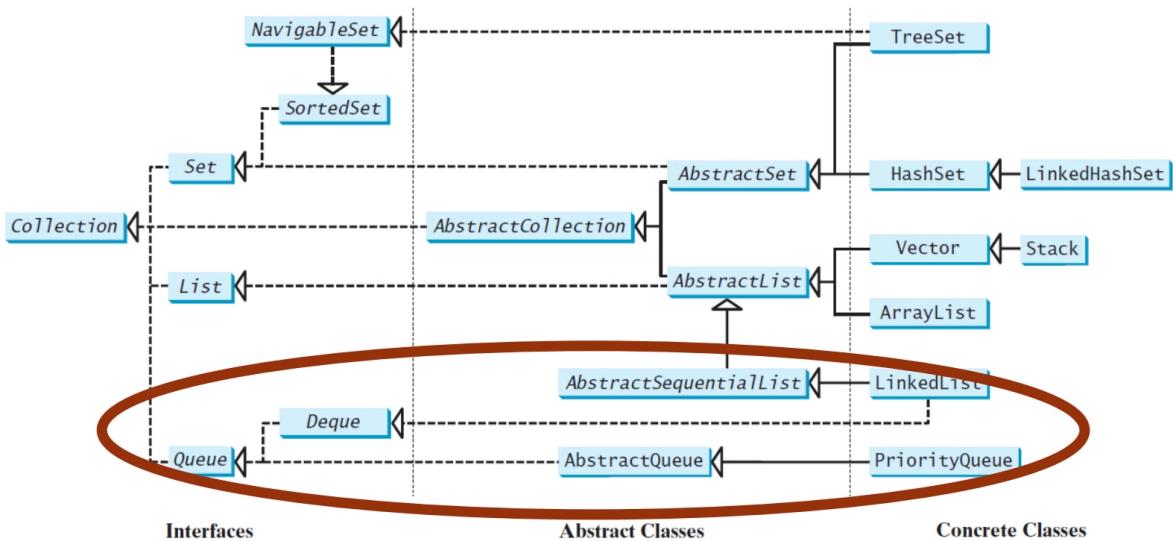

Queue and Priority Queue

- A **queue** is a **first-in/first-out** data structure:

队列是一种 **先进先出** 数据结构：

- Elements are appended to the end of the queue and are removed from the beginning of the queue

元素将附加到队列的末尾，并从队列的开头删除

- The **offer(o:E)** method is used to add an element to the queue

该方法 **offer (o: E)** 用于将元素添加到队列中

- This method is similar to the **add** method in the **Collection** interface, but the **offer** method is preferred for queues

此方法类似于 Collection 接口中的 add 方法，但 offer 方法更适合队列

- The **poll** and **remove** methods are similar, except that **poll()** returns **null** if the queue is empty, whereas **remove()** throws an exception

poll 和 remove 方法类似，不同之处在于 poll() 如果队列为空，则返回 null，而 remove() 会引发异常

- The **peek** and **element** methods are similar, except that **peek()** returns **null** if the queue is empty, whereas **element()** throws an exception

peek 和 **element** 方法类似，不同之处在于 **peek()** 如果队列为空，则返回 **null**，而 **element()** 会引发异常


- In a **priority queue**, elements are assigned priorities

在 priority queue 中，元素被分配优先级

- When accessing elements, the element with the highest priority is removed first
访问元素时，首先删除优先级最高的元素


Queue interface extends **java.util.Collection** with additional insertion, extraction, and inspection operations

队列接口通过额外的插入、提取和检查作扩展了 **java.util.Collection**

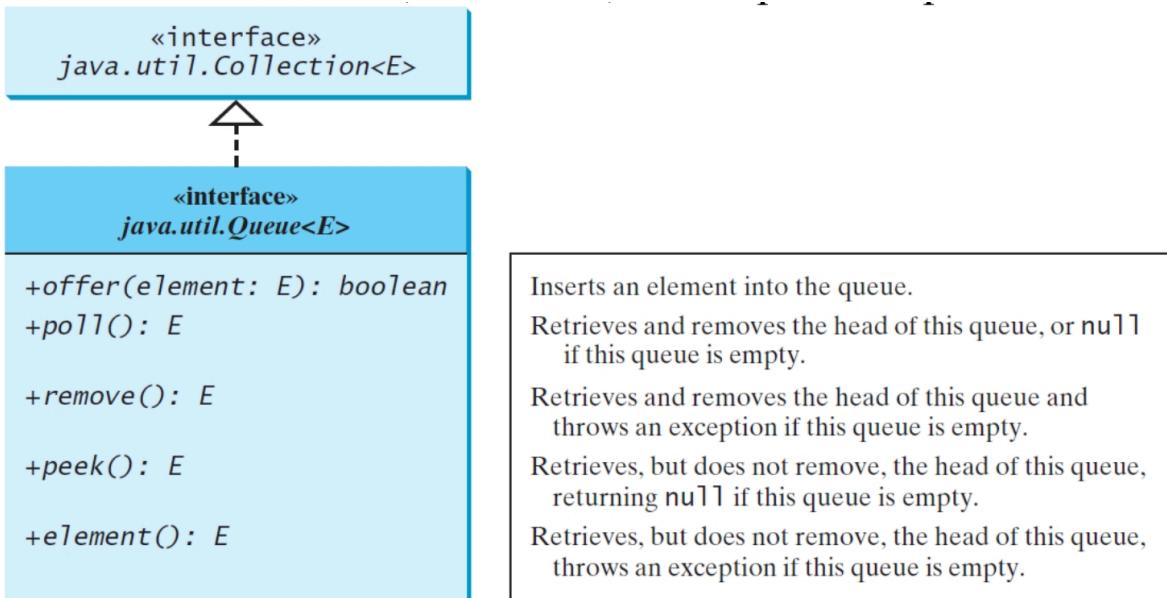

The **LinkedList** class implements the **Deque** interface, which extends the **Queue** interface

LinkedList 类实现了 **Deque** 接口，该接口扩展了 **Queue** 接口

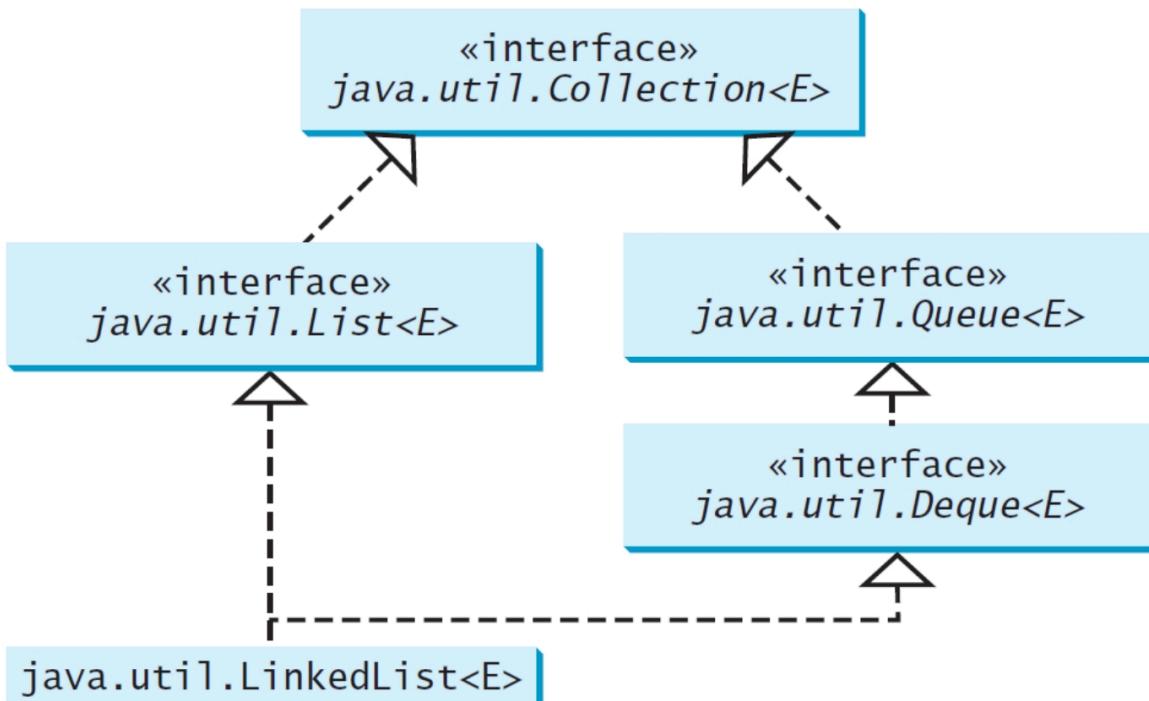

Queue

- **Deque** interface supports element insertion and removal at both ends
Deque 接口支持两端的元素插入和移除
 - The name deque is short for “double-ended queue”
名称 deque 是 “double-ended queue”的缩写
- The **Deque** interface extends **Queue** with additional methods for inserting and removing elements from both ends of the queue

Deque 接口扩展了 **Queue**, 增加了从队列两端插入和删除元素的方法

- The methods include:
 - **addFirst(e)**
 - **removeFirst()**
 - **addLast(e)**
 - **removeLast()**
 - **getFirst()**
 - **getLast()**

```
java.util.Queue<String> queue = new java.util.LinkedList<>();
queue.offer("Oklahoma");
queue.offer("Indiana");
queue.offer("Georgia");
queue.offer("Texas");
while (queue.size() > 0)
    System.out.print(queue.remove() + " ");
// Oklahoma Indiana Georgia Texas
```


LinkedList is the concrete class for queue and it supports inserting and removing elements from both ends of a list

LinkedList 是 **queue** 的具体类, 它支持在 list 的两端插入和删除元素

Priority Queue 优先级队列

- **java.util.PriorityQueue**
 - By default, the priority queue orders its elements according to their natural ordering using **Comparable**
默认情况下, 优先级队列使用 **Comparable** 根据其自然顺序对其元素进行排序
 - The element with the **least value** is assigned the **highest priority** and thus is removed from the queue first
具有 **最小值** 的元素被分配 **最高优先级**, 因此首先从队列中删除
 - If there are several elements with the same highest priority, the tie is broken arbitrarily
如果有多个元素具有相同的最高优先级, 则断开任意的连接
 - You can also specify an ordering using **Comparator** in the constructor
您还可以在构造函数中使用 **Comparator** 指定顺序

PriorityQueue(initialCapacity,comparator)

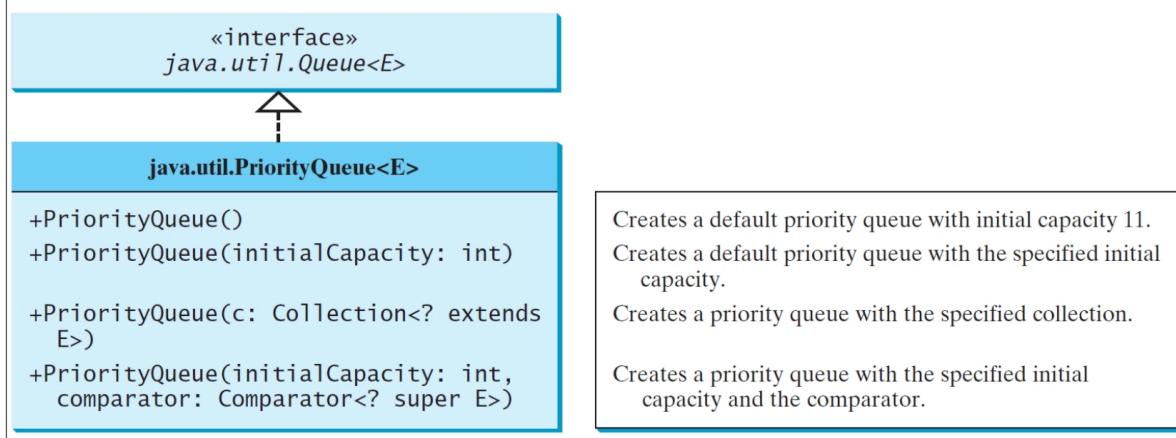

如果对比的对象是字符串的话，那么默认就是对比开头字母的顺序

```
import java.util.*;
public class PriorityQueueDemo {
    public static void main(String[] args) {
        PriorityQueue<String> queue1 = new PriorityQueue<>();
        queue1.offer("oklahoma");
        queue1.offer("Indiana");
        queue1.offer("Georgia");
        queue1.offer("Texas");
        System.out.println("Priority queue using Comparable:");

        while (queue1.size() > 0) {
            System.out.print(queue1.remove() + " ");
        } // Georgia Indiana Oklahoma Texas

        PriorityQueue<String> queue2 = new PriorityQueue<>(4,
        Collections.reverseOrder());
        queue2.offer("oklahoma");
        queue2.offer("Indiana");
        queue2.offer("Georgia");
        queue2.offer("Texas");
        System.out.println("\nPriority queue using Comparator:");
        while (queue2.size() > 0) {
            System.out.print(queue2.remove() + " ");
        } // Texas Oklahoma Indiana Georgia
    }
}
```