

1 · JavaScript

 OneCompiler

 Upgrade

 JS index.js × +	 Console  I/O  AI Agent
<pre>1 console.log(0.1 * 3 === 0.3); 2 3 console.log(9007199254740993);</pre>	<pre>false 9007199254740992</pre>

2 · Python

 OneCompiler

 Upgrade

 main.py × +	 Console  I/O  AI Agent
<pre>1 p = "maçã" 2 3 print(len(p), len(p.encode()))</pre>	<pre>4 6</pre>

3 · Go

 OneCompiler


 Upgrade

 main.go ×	 Console
<pre>1 package main 2 import "fmt" 3 4 func main() { 5 var b byte = 255 6 7 b++ 8 9 fmt.Println(b) 10 }</pre>	<pre>0</pre>

4 · Java

O problema é detectado na compilação, pois os comandos `System.out.println` estão fora de um método. Porém, depois de corrigir isso, `v[3]` causaria um erro na execução, pois o vetor só possui os índices 0, 1 e 2.

Resposta: na compilação.

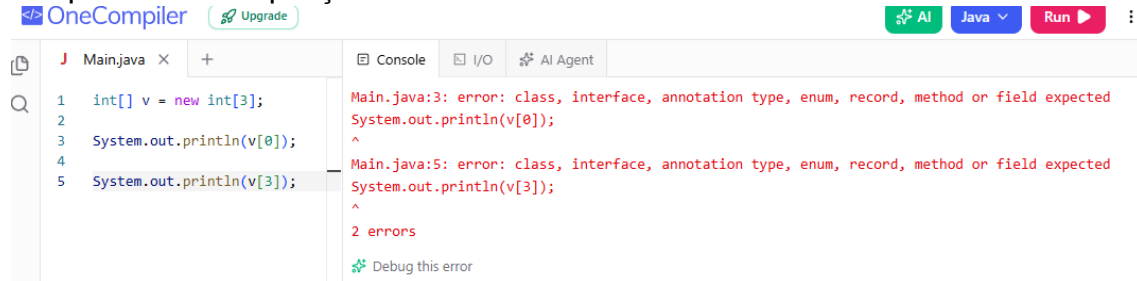

The screenshot shows the OneCompiler Java IDE. The code in `Main.java` is:

```
1 int[] v = new int[3];
2
3 System.out.println(v[0]);
4
5 System.out.println(v[3]);
```

The console shows two compilation errors:


```
Main.java:3: error: class, interface, annotation type, enum, record, method or field expected
System.out.println(v[0]);
^
Main.java:5: error: class, interface, annotation type, enum, record, method or field expected
System.out.println(v[3]);
^
2 errors
Debug this error
```

5 · Rust

O problema é detectado na compilação.

Isso acontece porque, na linha `let t = s;`, o valor de `s` é movido para `t`. Como `String` não implementa `Copy`, a variável `s` deixa de ser válida depois do movimento. Quando o programa tenta usar `s` novamente no `println!`, o compilador identifica o erro.

Resposta: na compilação.

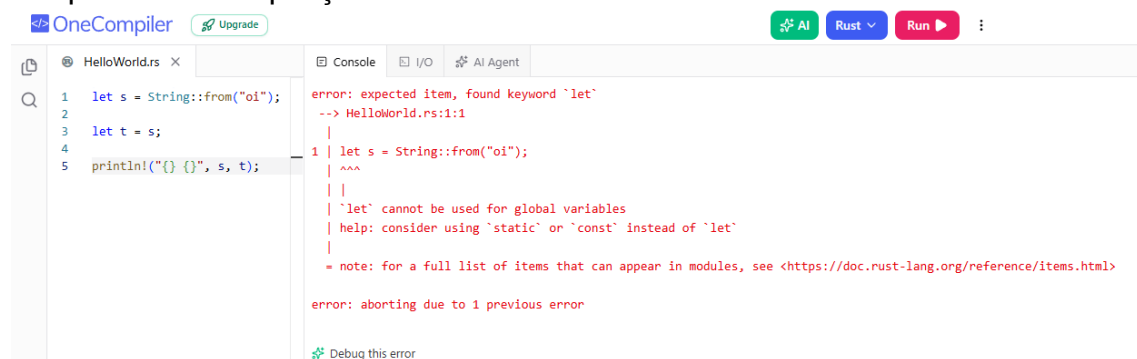


The screenshot shows the OneCompiler Rust IDE. The code in `HelloWorld.rs` is:

```
1 let s = String::from("oi");
2
3 let t = s;
4
5 println!("{}", s, t);
```

The console shows a compilation error:

```
error: expected item, found keyword `let`
--> HelloWorld.rs:1:1
|
1 | let s = String::from("oi");
|   ^^^
|   |
|   | `let` cannot be used for global variables
|   | help: consider using `static` or `const` instead of `let`
|   |
|   = note: for a full list of items that can appear in modules, see <https://doc.rust-lang.org/reference/items.html>
error: aborting due to 1 previous error
Debug this error
```

6 · C

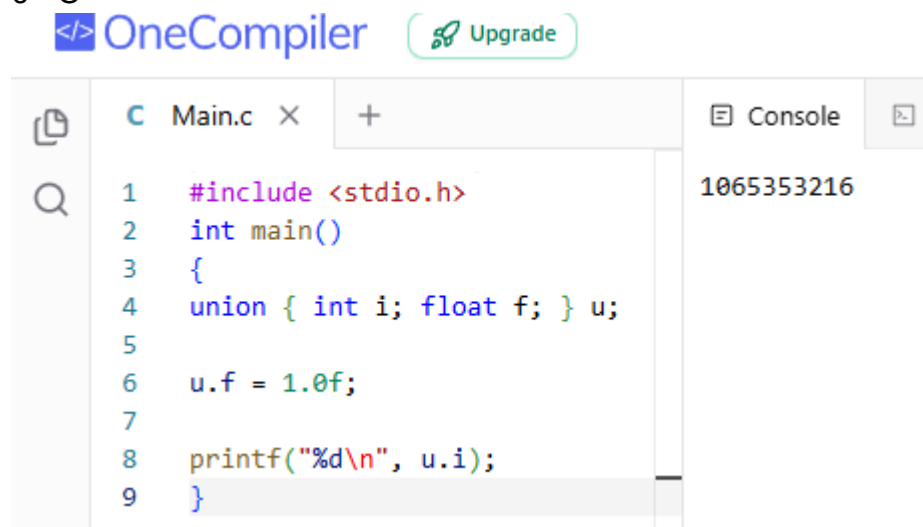

The screenshot shows the OneCompiler C IDE. The code in `Main.c` is:

```
1 #include <stdio.h>
2 int main()
3 {
4     union { int i; float f; } u;
5
6     u.f = 1.0f;
7
8     printf("%d\n", u.i);
9 }
```

The console shows the output:

```
1065353216
```