

LMU Munich  
Frauenlobstraße 7a  
D-80337 München  
Institut für Informatik

Master Thesis

# Intent Prediction with Vectorized Sequential Android UI Tree Data

August Oberhauser

august.oberhauser@campus.lmu.de

**Course of Study:** Medieninformatik

**Examiner:** Prof. Dr. Sven Mayer

**Supervisor:** Florian Bemann, M.Sc.

**Commenced:** June 20, 2023

**Completed:** January 8, 2024

## Abstract

[TODO]: THIS IS THE EXPOSÉ, no need to correct!!

The interaction of a user with an end device such as a smartphone or a computer is very diverse and difficult to predict. Nevertheless, user-specific (personalized) as well as global (collaborative) patterns can possibly be worked out with the help of preceding user interactions. These could be used to predict the intention of a user or a group of users. It is interesting to know to what level of detail these predictions can be made reliably. By making use of the continuous on-device data an attempt can be made to gain more insights in the user behavior or even forecast their next actions.

It suggests itself to implement this with the help of user interactions in sessions on Android devices. For this purpose, the Sequential UI Tree data of the device could be tracked, filtered and labeled and then trained with a machine learning model to find similar interaction sequences and then make predictions. These can then be very coarse, such as predicting the next app. Or they can be very detailed, e.g., determining the next user action, such as filling out a form field.

A concept will be developed on how a model for predicting user intent could be built and how it could be applied to the user session. To this end, possibilities for collecting and vectorizing sequential UI trees (e.g., from the Android Accessibility Service) will be discussed (e.g., via Recurrent Neural Network (*RNN*) [33] [4] [15], *Seq2Seq* Model [6], *Screen2Vec* Model [26], *Intention2Text* [38], *Html2Vec* [37]), which are designed to predict the user intent. Here, privacy and feature pre-filtering in UI data plays an important role. After that, personalized as well as collaborative data can be used in a hybrid approach. This model should then be made available to the user in an Android app service and, depending on the level of detail, suggest upcoming apps or actions to the user at a suitable time. It should also be considered whether the user can contribute to the learning process and improve suggested actions through feedback (labeling). The performance of the model can be measured, for example, by indicators such as the amount of training data and time spent on the learning process. The effectiveness can be evaluated by accuracy metrics in predicting, for example, app categories [28] or complete test sequences via Rico [7] or ERICA [8].

Furthermore, the machine learning model could provide the following benefits in addition to intent prediction:

- reduction of the complexity and size of the UI tree
- creation of user groups that have similar behavior when using digital UI systems [20]
- elimination of technical expertise on individual features that would be required to manually compare user sessions [18]
- consideration of a user's history over time (sequential)
- comparison of user interactions without providing privacy invasive information
- supporting app developers to improve their app design and usability
- application in psychology and market research
- pre-loading of processes on devices (energy savings) [34]



**Figure 1:** Possible procedure using a Machine-Learning algorithm to predict the next intent from a beginning user session: The input (1) can be a sequence of Android tree data. With help of a Machine-Learning-Model (2) (e.g. RNN) a vector representation can be trained and then predict the most probable action or screen (3) from a given starting sequence, but also can be improve through the users feedback.

As listed above, many fields of application can profit by elaborating such a system. It would be exciting to know, how the concrete concept would look like and if it can be implemented successfully e.g. to improve the user experience on end-user devices.



# Contents

|          |   |           |
|----------|---|-----------|
| <b>1</b> | <b>Introduction</b>                               | <b>15</b> |
| 1.1      | The role of Intent Prediction . . . . .           | 15        |
| 1.2      | Necessity of Vectors for Android UI . . . . .     | 15        |
| <b>2</b> | <b>Theoretical Framework</b>                      | <b>17</b> |
| 2.1      | Android UI . . . . .                              | 17        |
| 2.1.1    | Data tree structure . . . . .                     | 17        |
| 2.1.2    | Android Accessibility Service . . . . .           | 19        |
| 2.2      | Machine Learning . . . . .                        | 20        |
| 2.2.1    | Preprocessing . . . . .                           | 20        |
| 2.2.1.1  | Feature selection . . . . .                       | 20        |
| 2.2.1.2  | Missing data . . . . .                            | 21        |
| 2.2.1.3  | Normalization and Standardization . . . . .       | 21        |
| 2.2.1.4  | Padding . . . . .                                 | 22        |
| 2.2.1.5  | One-Hot-Encoding for Categorical Values . . . . . | 22        |
| 2.2.2    | Types of Machine Learning . . . . .               | 22        |
| 2.3      | Classes of Artificial Neural Nets . . . . .       | 23        |
| 2.3.1    | Convolutional Neural Nets . . . . .               | 24        |
| 2.3.2    | Recurrent Neural Networks . . . . .               | 24        |
| 2.3.3    | subsec:rnn . . . . .                              | 24        |
| 2.3.4    | Dense Layer . . . . .                             | 24        |
| 2.3.5    | Embedding Layer . . . . .                         | 24        |
| 2.3.6    | Autoencoders . . . . .                            | 25        |
| 2.4      | Tensorflow and Keras . . . . .                    | 25        |
| 2.5      | Evaluation and Metrics . . . . .                  | 25        |
| <b>3</b> | <b>Related Work</b>                               | <b>27</b> |
| 3.1      | Datasets of UI Trees . . . . .                    | 27        |
| 3.1.1    | ERICA . . . . .                                   | 27        |
| 3.1.2    | Rico / RicoSCA . . . . .                          | 28        |
| 3.1.3    | Mobile UI CLAY Dataset . . . . .                  | 28        |
| 3.2      | Vector models . . . . .                           | 28        |
| 3.2.1    | Doc2Vec and Word2Vec . . . . .                    | 30        |
| 3.2.2    | Screen2Vec . . . . .                              | 30        |
| 3.2.3    | Screen2Words . . . . .                            | 30        |
| 3.2.4    | Intention2Text . . . . .                          | 31        |
| 3.2.5    | Html2Vec . . . . .                                | 31        |
| 3.2.6    | Tree2Vec . . . . .                                | 31        |
| 3.2.7    | Activity2Vec . . . . .                            | 31        |

|          |  |           |
|----------|--|-----------|
| 3.3      | Time Series / Sequence models . . . . .  | 31        |
| 3.3.1    | Seq2Seq Model . . . . .  | 31        |
| 3.3.2    | Click Sequence Prediction / PathFinder . . . . .                                 | 32        |
| 3.3.3    | Large-Scale Modeling of Mobile User Click Behaviors Using Deep Learning          | 32        |
| <b>4</b> | <b>Methodology</b>   | <b>35</b> |
| <b>5</b> | <b>Results</b>   | <b>37</b> |
| 5.1      | Datasets . . . . .   | 37        |
| 5.1.1    | Rico . . . . .   | 37        |
| 5.2      | Preprocessing Android UI tree data . . . . .                                     | 37        |
| 5.2.1    | Filtering privacy invasive details . . . . .                                     | 37        |
| 5.2.2    | Normalization, Feature selection . . . . .                                       | 37        |
| 5.3      | Model . . . . .  | 38        |
| 5.4      | Evaluation . . . . .   | 38        |
| 5.4.1    | Mean Squared Error . . . . .   | 39        |
| 5.5      | Limitations . . . . .  | 39        |
| <b>6</b> | <b>Application of Android UI tree vectors</b>                                    | <b>41</b> |
| 6.1      | Automation and testing of Android apps . . . . .                                 | 41        |
| 6.2      | UI design similarities . . . . .   | 41        |
| 6.3      | Action prediction models, User behavior modeling . . . . .                       | 41        |
| 6.4      | Behavioral analyses for smartphone usage patterns . . . . .                      | 41        |
| 6.5      | What is a suitable model for the prediction of user intent? . . . . .            | 41        |
| 6.6      | At what level of detail the predictions can be made? . . . . .                   | 42        |
| 6.7      | How the user can be supported with their tasks on didigal end devices? . . . . . | 42        |
| <b>7</b> | <b>Conclusion and Future Work</b>  | <b>43</b> |

# List of Figures

|     |   |    |
|-----|---|----|
| 1   | Possible procedure using a Machine-Learning algorithm to predict the next intent from a beginning user session: The input (1) can be a sequence of Android tree data. With help of a Machine-Learning-Model (2) (e.g. RNN) a vector representation can be trained and then predict the most probable action or screen (3) from a given starting sequence, but also can be improve through the users feedback. . . . . | 3  |
| 2.1 | Structure of the Android User Interface (UI) . . . . .  | 18 |
| 2.2 | The Android Layout Inspector tool using the example of “App ins Grüne” [1] by the Media Informatics Group of the LMU in Munich. . . . .   | 18 |
| 3.1 | View element insights [39] . . . . .  | 33 |
| 5.1 | Model loss vs validation loss . . . . .   | 38 |





# List of Tables

|     |  |    |
|-----|--|----|
| 2.1 | One-hot-encoding of categories, $I_d$ is the index of the data entry . . . . .                             | 22 |
| 2.2 | Embedding of categories, $I_d$ is the index of the data entry, $I_s$ is the index of the species . . . . . | 25 |
| 3.1 | Attributes of a view hierarchy record . . . . .  | 29 |



# Glossary

## accuracy

[TODO]: Accuracy explained in Udemy

. 30, 32

**Big Data** Extremely large and complex data sets which can only be processed with modern computing soft- and hardware. 20

**one-hot** A combination of multiple binary values, where one of them is 1 and the others are 0. 9, 21, 22, 24

**Protocol Buffers** A language-neutral, platform-neutral extensible mechanisms for serializing structured data, developed by Google, see <https://protobuf.dev>. 30

**rooting** Method to gain privileged access to the operating system Android. 32

**Transformer** Uses a multi-head attention mechanism, which enables parallel processing for faster computing times. 41



# Acronyms

**Application Programming Interface (API)** . 17

**Artificial Neural Network (ANN)** . 22, 23, 26

**Continuous Bag-of-Words (CBOW)** . 30

**Convolutional Neural Network (CNN)** . 28, 30

**Gated Recurrent Unit (GRU)** . 41

**Graphical User Interface (GUI)** . 30

**Graphics Processing Unit (GPU)** . 36

**Graph Neural Network (GNN)** . 28

**Integrated Development Environment (IDE)** . 36

**Long Short-Term Memory (LSTM)** . 32, 33, 41

**Machine Learning (ML)** Scientific approach to form statistical models without the need to explicitly program it. 20, 21, 22, 23, 35, 36, 41

**Mean Squared Error (MSE)** . 25

**Mean Absolute Error (MAE)** . 25

**Neural Network (NN)** . 23, 30, 36

**Operating System (OS)** . 17, 19, 32, 35

**Recurrent Neural Network (RNN)** . 22, 23, 30, 41

**Residual Neural Network (ResNet)** . 28

**Root Mean Squared Error (RMSE)** . 23, 25, 35

**Social Networking Service (SNS)** . 32

**Unidirectional Data Flow (UDF)** . 17, 18

**User Interface (UI)** . 7, 17, 18, 19, 22, 30, 41



# 1 Introduction

This is a typical human-computer interaction thesis structure for an introduction which is structured in four paragraphs as follows:

## 1.1 The role of Intent Prediction

The term *intent* can have ambiguous meanings and can be used in different context. In the dictionary it is described as the fact of intending something, so it is planned to do [**dictionaryIntent**]. Generally we can assume that intent is a stronger desire to accomplish ones intension. Kofler and Hanjalic et al. [21] also describe the intent as “immediate reason, purpose, or goal [. . .] that motivates a user to” act.

The aim or purpose must be differentiated from the actual user input, also known as interaction. So the intent can be seen as the preliminary stage of interaction. Gestures and click sequences then are the concrete actions, and might fulfill a (small) part of the users intent. Therefore, in this work it is not the goal to obtain the users full intent, but to work out factors, such as user inputs or gestures, which hint to the intent of the user. Further, *prediction* describes that the intent or factors of intent should be available (calculated) before they have actually happened or were measured.

[TODO]: Explain screen, view, flow, click

But it can be easily replaced by more semantic data, which might even be easier to predict. Descriptive User intent embedding as preliminary stage, which can be applied with Screen2Words[**screen2words**] in a similar fashion. difference intent / interaction / screen / flow / click

## 1.2 Necessity of Vectors for Android UI

[TODO]: Explain how many time a user spends on a mobile device, facilitate steps, make it more productive, qualitative user experience

Motivation for transforming Android UI tree data to vectors

- open source code for predicting next user click / action - evaluate and compare existing approaches
- provide tools to reduce screen sequences to vectors - how to work with multidimensional (multi-modal) data in RNNs
- Low Button depth: number of clicks until one gets to the action [23]

- Explain intent, and the other words in the title

Contributions: [39] • An analysis of a large-scale dataset of mobile user click sequences that reveals rich factors and complexity in modeling click behaviors, which contributes new knowledge to understand mobile interaction behaviors. • A Transformer-based deep model that predicts next element to click based on the user click history and the current screen and time. The model does not rely on a vocabulary of predefined UI elements and provides a general solution for modeling arbitrary UI elements for click prediction. • A thorough experiment that compares our deep model with multiple alternative designs and baseline models, and an analysis of model behaviors and benefits that the model can bring to improve mobile interaction.

Contributions: [26] Screen2Vec: a new self-supervised technique for generating more comprehensive semantic embeddings of GUI screens and components using their textual content, visual design and layout patterns, and app meta-data. (2) An open-sourced GUI embedding model trained using the Screen2Vec technique on the Rico [9] dataset that can be used off-the-shelf. (3) Several sample downstream tasks that showcase the model's usefulness.

In computer science there often coexists multiple (correct) solutions to the same problem. Many technologies have the capabilities of achieving a similar result, but are specialized in the one or the other way. That led to the first question

“What is a suitable model for the prediction of user intent?”.

“At what level of detail the predictions can be made?”

[TODO]: P1.1. What is the large scope of the problem?

[TODO]: P1.2. What is the specific problem?

[TODO]: P2.1. The second paragraph should be about what have others been doing

[TODO]: P2.2. Why is the problem important? Why was this work carried out?

[TODO]: P3.1. What have you done?

[TODO]: P3.2. What is new about your work?

[TODO]: P4.1. What did you find out? What are the concrete results?

[TODO]: P4.2. What are the implications? What does this mean for the bigger picture?



## 2 Theoretical Framework

Before starting with rehabilitate the main topic, some basic concepts, technical terms and underlying theory has to be explained. This is important to faster read through the thesis without the need to interrupt the flow of thought. In the following, a set of established theories and terms is explained which are not directly related to the thesis formulation, but essential to comprehend numerous contexts.

### 2.1 Android UI

To be able to use any of the things displayed on the mobile device, some concepts of UI programming must be shown. A UI enables the user to view the applications data on the screen but also to interact with the device especially on mobile devices [13].

The main challenge is to bring the application data in the right format, so that the display can interpret the instructions to draw the elements. Each mobile phone with the Android Operating System (OS) has a basic set of native functions through which the UI can be drawn and updated, a so-called Application Programming Interface (API). These functions can be very general to instruct drawing a whole component such as an alert box, or they can be very specific as drawing single rectangles in a canvas.

The rough transition from the application data (data layer) to the display data (ui layer) is depicted in figure 2.1a. The application data is transformed, concatenated or filtered to be saved in a view model, which represents the state for each view. The view model is then layed out to multiple UI elements. E.g. they are loaded in the Android activity via view layouts [10] or composed in a declarative approach [12]. It is generally advised to use a Unidirectional Data Flow (UDF). This ensures that the data is only changed in one place and doesn't get out of sync between UI elements, the view model and the data layer. The UI can also register user inputs (like a button press) and report them back to the view model. The view model then updates the application data, if needed, and then also reports the current UI state back to the UI elements to be rerendered.

#### 2.1.1 Data tree structure

The UI elements (i.e. the composition) themselves are hierarchically structured in a tree. This allows the renderer to calculate relative distances, floatings and skip processing hidden or overlapped elements.



**Figure 2.1:** Structure of the Android UI

With the Android Layout Inspector (figure 2.2) a view hierarchy tree can be visually inspected while displaying its position and layout on the Android screen. Also, the layout attributes can be validated. This tool allows to debug complex UIs especially when using nested components and display them in a simplistic way. Note that this tool is only available if one has access to the app's source code.



**Figure 2.2:** The Android Layout Inspector tool using the example of “App ins Grüne” [1] by the Media Informatics Group of the LMU in Munich.

```

<?xml version='1.0' encoding='UTF-8' standalone='yes' ?>
<hierarchy>
  <node index="0" text="" resource-id="" class="android.view.ViewGroup"
    package="de.lmu.treeapp" content-desc="" checkable="false"
    checked="false" clickable="false" enabled="true" focusable="false"
    focused="false" scrollable="false" long-clickable="false"
    password="false" selected="false" visible-to-user="true"
    bounds="[0,137][1440,2923]">
    <node index="0" text="" resource-id=""
      class="androidx.viewpager.widget.ViewPager" package="de.lmu.treeapp"
      content-desc="" checkable="false" checked="false" clickable="false"
      enabled="true" focusable="true" focused="false" scrollable="true"
      long-clickable="false" password="false" selected="false"
      visible-to-user="true" bounds="[4,141][1436,2707]">
      <node index="22" text="Eiche" resource-id=""
        class="android.widget.TextView" package="de.lmu.treeapp" ... />
      </node>
      <node index="1" text="" resource-id="" class="android.view.ViewGroup" ... >
        <node NAF="true" index="0" text="" resource-id=""
          class="android.widget.FrameLayout" package="de.lmu.treeapp" ... />
        </node>
      </node>
    </node>
  </hierarchy>

```

**Listing 2.1:** Android Accessibility Node in XML.

### 2.1.2 Android Accessibility Service

If an app is running in production on a users device, meaning that the app is compiled and publicly available, the ways of accessing the Android UI tree are limited. This behavior is of course wanted for safety and privacy reasons. Nonetheless, if desired, a user can explicitly allow certain apps to gain access to the semantics tree of your Android OS. This is especially useful for providing accessibility services for impaired users (like done with the TalkBack app). Or – as in our case – the setting can be used to enable services which collect data for user studies or scientific experiments.

This semantics tree is deviated from the existing UI tree. It can be fed via special semantic properties while composing the UI, e.g. by specifying the `contentDescription` property of an icon [11]. Providing semantics is not limited to native platforms as shown by Flutter [3] and React Native [14]. In figure 2.1b a schema is presented, which shows how the elements of the semantics tree are spanned compared to the components on the UI layer.

To take advantage of the semantics tree, a custom accessibility service can be built, which can run in the background. This service tracks all UI changes and has access to the current view hierarchy of the screen, which also inherits the semantic tree. By altering the code of the *AccessibilityNodeInfoDumper* one can extract the view hierarchy to a locale or remote database [32]. In the code section 2.1 a small fraction of a view hierarchy is shown. It contains nested nodes with various attributes which represent the components of the combined UI and semantics hierarchy.

### 2.2 Machine Learning

Machine Learning (ML), a term spread by Arthur Lee Samuel, is a method of data analysis, more precisely a scientific approach to form statistical models without the need to explicitly program it [29]. It uses algorithms to iteratively learn how data is structured. In contrast to statistical inference or manually crafted statistical models respectively, ML can solve tasks by automation of model building. Its advantages lie in finding hidden relations and patterns from the context, without having any or only a small pre knowledge of the data, thus it is a strong tool for generalization or abstraction of large datasets, also known as Big Data. ML can be applied to the following fields among others: email and spam filtering, fraud detection, cybersecurity, web search engines, recommender systems (like known from Netflix or Amazon), advertising, translators and text generation, pattern and image recognition. The data driven approach also comes with some drawbacks: the outcome heavily depends on the provided data. It can include biases and therefore may acquire forms of discrimination or unfair treatment. Nonetheless ML has a lot of potential to uncover hidden connections in large datasets. The most important concepts are explained to be able to follow certain decisions in this thesis.

[TODO]: explain Tensors, Datasets

#### 2.2.1 Preprocessing

Preprocessing describes the step after one acquired their data, but before training the ML model. This step is not to be underestimated. A ML model can perform significantly better when certain preprocessing steps are applied [2].

To be able to preprocess, we have to know with what kind of data we handle with. Data entries can occur in different forms, but we can break them down in three main types:

- **Categorical values:** a value is always assigned to a class with a fixed pool of predetermined classes. E.g. letters, words, brands, animals, chemical elements
- **Continuous values:** the value can be fractional and may lie in between a lower and an upper bound. E.g. temperature, velocity, geographic position
- **Integer values:** the value is a whole number and may also lie in between a lower and an upper bound. E.g. revolutions per minute, product number, annual sales

For all types – discrete, continuous, and categorical values – we have a wide variety of options for preparing them in order to be subsequently processed by a ML model [16]. These are listed in the following, while not all can be applied to all types of values.

##### 2.2.1.1 Feature selection

Feature selection is a crucial step to successfully develop a model with the desired results. It can improve learning performance, thus reduces time, increases computational efficiency, decreases memory storage, and helps build better generalization models [25]. Also, it may be a valid approach to get around missing data and can help structure the data by removing unnecessary clutter.

On the technical sight, feature selection can be differentiated for two goals: supervised and unsupervised learning [25]. However, principles from the supervised feature selection can be applied in the unsupervised domain, resulting in a semi-supervised ?? filter selection. For classifiers and regression problems (unsupervised) following methods can be applied. Multiple features can be compared by calculating their correlation. If one feature is uncorrelated to all other features, this may be an indicator that this feature can be dropped, as it doesn't contribute to the resulting model (*filter method*). However, this can only be stated for linear correlations, thus it can contribute to the result in an unpredicted way. Also, if two features correlate too much to each other, one feature probably is redundant and can be dropped. A good approach is also to reduce the dimensionality of the input data, e.g. by replacing one-hot encoded features of the same domain with embeddings (*embedded method*). This is also called *feature extraction*. Feature extraction can also be used in unsupervised feature selection. Clustering is a common approach to reduce the number of input dimensions by gaining insights of which classes can be merged and which need to stay. A more computational but promising solution is to filter the features by optimizing the model result, also called a *wrapper method*. By gradually removing and adding features and calculating the models performance, one can determine which inputs are important and which are at risk to increase computing time without noticeable effect.

[TODO]: formulate or remove

semantic or legal feature selection Such as Filtering privacy invasive details Remove sensitive data

Parameterizing the vectorization process a) Vector length b) Weighting of features c) Manipulating individual parameters of model

### 2.2.1.2 Missing data

Some data entries may are missing. Therefore, you have two approaches to get around these missing values. One can drop these values by removing the column or row. This is only recommended if you are not relying on this data entry, or this the whole feature is not expected to be important enough to bring any value to the model's performance. Further you can fill the data with a default value like zero or calculate a reasonable value from the surrounding data entries by taking their "mean, median, or interpolation" [16].

### 2.2.1.3 Normalization and Standardization

Many ML models work better or exclusively with normalized data. This means that the values have to be in a certain range, most commonly are from **0** to **1** or from **-1** to **1**. This can be achieved by dividing all values with the difference of the minimum and maximum value and shift the output accordingly [16].

Sometimes this is not enough, e.g. if having a few extreme values, and an approach is desired which better reflects the average data. Here the standardization, also called z-score normalization, comes into play. This method scales the values so that the mean value is placed at **0** and the standard deviation is placed at **1**.

#### 2.2.1.4 Padding

Padding is a technique to adapt input sequences or matrices of different dimensions to the same size. For example if one screen only has five UI elements, and the next one has twenty, the input size varies significantly. Therefore, there exists three approaches to overcome this problem [30]. The first one is to extend all inputs of a specific feature to the longest available input dimension of this feature. Then every sequence has to be filled with additional values, almost always **0** is used for that, until it matches the longest dimension (*same padding*). Another technique called *valid padding* cuts all data values after reaching the smallest dimension of all inputs of the feature. One can also use a combination to e.g. pad all inputs with zero to the mean dimension, but throw away all exceeding values as they aren't expected to contribute to a better result. *Causal padding* is a form of *same padding*, but it prepends the fill values in front of the sequence. This is helpful if having Recurrent Neural Network (RNN)s, which rely on a lengthier inputs in order to predict their next value, without need of filtering out short sequences.

#### 2.2.1.5 One-Hot-Encoding for Categorical Values

A categorical value must be treated differently than numerical ordinal values. This is demonstrated best on a concrete example. Imagine a dataset with pictures of animals, and we want to categorize their species. Then the values of all possible species like `dog` and `cat` is called *vocabulary*. To write it in a table, one could add a column called `species` and write their species as a *string* (cf. table 2.1a). Unfortunately a Artificial Neural Network (ANN) cannot work with *strings*, but only with numerical values. So one could think that mapping each species to a number can solve this issue. Indeed, this is possible for ordinal categories, which have a strict linear order, such as ratings or gradings. They are then treated the same as **integer values**. But animals aren't structured ordinal, thus each species must be treated equally. To reflect that we split the species column in multiple sub-columns, so that each new one represents one species, see table 2.1b. If the animal belongs to that species, one inserts a **1** or **True** and if not, a **0** or **False** is filled. This is also called one-hot-encoding [5].

| $I_d$ | Img         | Species |
|-------|-------------|---------|
| 0     | <i>blob</i> | cat     |
| 1     | <i>blob</i> | dog     |
| 2     | <i>blob</i> | cat     |
| 3     | <i>blob</i> | horse   |

(a) Raw data table

| $I_d$ | Img         | Cat | Dog | Horse |
|-------|-------------|-----|-----|-------|
| 0     | <i>blob</i> | 1   | 0   | 0     |
| 1     | <i>blob</i> | 0   | 1   | 0     |
| 2     | <i>blob</i> | 1   | 0   | 0     |
| 3     | <i>blob</i> | 0   | 0   | 1     |

(b) One-hot encoded species

**Table 2.1:** One-hot-encoding of categories,  $I_d$  is the index of the data entry

### 2.2.2 Types of Machine Learning

To get be able to evaluate which subfield of ML is the best choice, we need an overview of the existing approaches listed in [17].

**Supervised Learning** is used for *Classification* and *Regression* tasks. It uses *labeled* samples, which means the input  $x$  and output  $y$  is known beforehand. Essentially it learns through comparing the actual output (labels), which is provided, with the output the model *predicts*.

Unlike in Supervised Learning, **Unsupervised Learning** isn't provided any labels  $y$ . It is used for clustering, dimensionality reduction or anomaly detection. E.g. in clustering the ML model detects similar objects and groups them together. What is seen as similar is up to the model, so it is not known before, with what groups or clusters the model comes up with.

The algorithms using **Semi-supervised Learning** seek to adopt from unlabeled and labeled data [36]. E.g. for a classification problem, the model is either trained first with unlabeled data resulting in clusters, which are then provided a class with a few labeled samples. Or classes are trained based on labeled data, but their class boundaries are extended through unlabeled data, which follows the approach of clustering.

[TODO]: may explain Self-supervised learning

**Reinforcement Learning** is closely related to decision theory [17]. A model is given the input and produces an output, which is exposed to the environment. The environment then provides a reward or a punishment to the next learning iteration of the model. This then tries to maximise the rewards and minimize the punishments. This learning type can also be helpful in fine-tuning RNNs.

## 2.3 Classes of Artificial Neural Nets

[TODO]: activation functions, Gradient decent, backpropagation and may include graphic of perceptron

Unfortunately the concepts of neural networks, cannot be explained in detail, as it is beyond the scope of this thesis. A good choice to make familiar with Neural nets is the book “Neural Networks and Deep Learning” of Nielsen [31], which is consulted throughout this section.

An ANN uses biological neuron systems as paradigm to generate mathematical models. The biological neuron model was transferred to computer science and is called *perceptron model*.

A perceptron – or also named neuron in our context – is fed by one or multiple inputs  $x_i$  and performs a function  $f$  on them resulting in an output  $\hat{y}$ , where  $i$  is an index of the  $n$  input values. Also, a weight  $w_i$  and a bias  $b_i$  can be applied to each of these inputs.

$$\hat{y} = \sum_{i=0}^n x_i w_i + b_i$$

Multiple of these neurons can be used together producing one or multiple outputs, thus forming a neural layer, which can act as Neural Network (NN) together with the input and the output layer. If multiple neural layers (also called *hidden layers*) are connected to each other, it is called a *deep neural net*. The output(s)  $\hat{y}$  of one or multiple neurons then serve as the input(s)  $x$  of one or multiple neurons in the next layer. The last layer – the output layer – then serves the values, which have to be predicted. These values can be compared to the real data (labels) using an error function like Root Mean Squared Error (RMSE). The whole model can be seen as a cost function, which has to

be minimized during training. In the training process weights  $w$  and biases  $b$  for each neuron are adapted, in order to produce outputs, which matches best the labels. This is done iteratively using (Adaptive) Gradient Decent and *backpropagation*, by searching the minimum cost in multiple steps, called *epochs*.

### 2.3.1 Recurrent Neural Networks

LSTMs / GRU -> supervised

### 2.3.2 Dense Layer

### 2.3.3 Embedding Layer

As mentioned in section 2.2.1.5 categories can be represented using one-hot encoding. The conversion can result in innumerable amount of columns, which is equivalent each having its own feature dimension. To reduce the dimensionality of such encoding, so-called categorical *embeddings* can be introduced [5]. This means that each single species is represented by a vector. The length of the vector can be selected freely, it is called the *embedding dimension*. A lookup-table is created which encodes each category with randomly initialized weights of size of the embedding dimension (cf. table 2.2b). Now the embedding vector for each species is looked up and replaced in the data table resulting in an embedded representation (cf. table 2.2a). During training of the model the weights of the look-up table are successively updated (like for the dense layer 2.3.4) to reduce the loss of the overall model. An embedding would result in an one-hot-encoding, if the embedding dimension and the vocabulary size are equal and the conversion matrix (lookup-table) is the identity matrix.

| $I_d$ | Img         | SP_1 | SP_2 |
|-------|-------------|------|------|
| 0     | <i>blob</i> | 0.1  | 0.6  |
| 1     | <i>blob</i> | 0.4  | 0.8  |
| 2     | <i>blob</i> | 0.1  | 0.6  |
| 3     | <i>blob</i> | 0.5  | 0.5  |

(a) Species encoded with embedding

| Species | $I_s$ | SP_1 | SP_2 |
|---------|-------|------|------|
| 0       | cat   | 0.1  | 0.6  |
| 1       | dog   | 0.4  | 0.8  |
| 2       | horse | 0.5  | 0.5  |

(b) Lookup table for the 2-dimensional embedding of species

**Table 2.2:** Embedding of categories,  $I_d$  is the index of the data entry,  $I_s$  is the index of the species

According to [2] these steps can be removal of emoticons, elimination of stopwords and stemming for text based models.

Category Embedding before LSTM

Embedding dimension is about the actual voc\_size, but not too large. Dimension near the actual average length of features (?)



### 2.3.4 Autoencoders

Encoder, Decoder

## 2.4 Tensorflow and Keras

Layers FlattenLayer

Positive Integer to Dense Vectors of fixed size

## 2.5 Evaluation and Metrics

Accuracy, precision and recall, as well as the combined F<sub>1</sub>-Score is only applicable for categorical labels, thus classification.

For regression tasks, what we are aiming for, the Mean Absolute Error (MAE), the Mean Squared Error (MSE) and the RMSE are suited much better.

$$\text{RMSE}(y, \hat{y}) = \sqrt{\sum_{i=0}^{N-1} (y_i - \hat{y}_i)^2 / N}$$

with the number of samples  $n$ , the actual value  $y$ , and the predicted value  $\hat{y}$  [19].

The MAE is the mean value when summing all absolute errors  $y_i - \hat{y}_i$  and divide them by  $n$ . The MSE squares the single absolute errors in the MAE to punish single outliers. The RMSE is the root of the MSE to avoid squaring units, but also provide a realistic error values over all samples.

—

[TODO]: explain Validation loss

Loss = cost function —

As explained in ?? ANNs can be trained in epochs.

If a model was trained too few epochs, it probably is not able to grab the general trend or learn enough about the data to built context. This is called **Underfitting**. The opposite **Overfitting** is the case, if model was trained too many epochs. This results in knowing the train dataset very well and being able to predict every sample in the training set. But as soon as it is confronted with new data samples, it results in a larger errors than in earlier epochs. This can be solved by adding an *early stop* function, which automatically interrupts the training, when the validation loss ?? increases.



## 3 Related Work

[TODO]: introduce in related work, differentiate the importance of datasets

Describe relevant scientific literature related to your work.

### 3.1 Datasets of UI Trees

Requirements on a good data set - Google and Samsung - need to have correct data - needs enough data to train a NN - need enough features to be able to recognize patterns - up to date - Publicly available - Variable length of app sessions, define one session of activating the screen until it is turned off.

Missing - System to feed in in real time - Dataset which is across multiple apps, also tracks the system -

#### 3.1.1 ERICA

ERICA is a design and interaction mining application, which allows gathering *interaction traces* by capturing the users activity on Android apps [8]. This is accomplished through a web-based interaction layer in contrast to the other common approach of using *accessibility services* directly. They justify that approach by the lack of need to install additional applications, as only a browser is required. A further reason is the response latency of the commonly used *UiAutomator*, which cannot collect the data in time. Also they argue that capturing and simultaneously interacting with the apps may overload the user device and challenges the user experience. Therefore the much more powerful servers take the task of capturing the UI trees. The apps are hosted on multiple physical devices with a modified Android OS directly connected with the server. ERICA captures UI screens and user flows by tracking UI changes. They then used this data to form k-mean clusters from the UI elements (visual and textual features) and the interactive elements (icons and buttons). Based on the clusters they then build classifiers and trained an AutoEncoder (2.3.6) to determine the flows from the test dataset. The authors worked out 23 common user flows (from over a thousand popular Android apps) which aim to provide complementary, promising or new design patterns and trends.

### 3.1.2 Rico / RicoSCA

Rico [7] (spanish for “rich”) is the successor of ERICA. It aims to help perform better at designing and support the creation of adaptive UIs. As far as known to date this is the largest collection of mobile app designs and traces with covering 72k UI screens in 9.7k Android apps. Like its predecessor Rico uses a web-based approach to collect user traces. It enables the applications like searching for designs, generation of UI layouts and code, modeling of user interactions, and prediction of user perception. It exposes visual, textual, structural, and interactive design properties of more than 72k unique UI screens. Unfortunately the dataset doesn’t include interaction traces for app to app transitions or interactions with the Android OS itself. In table 3.1 a collection of all view hierarchy attributes is shown with their meaning. These were extracted by iterating over all view hierarchy files contained in the traces of the dataset. This gives insights in what attributes were recorded in the Rico dataset and what relevance they may have during training the model. The authors of Rico used their dataset to train a 64-dimensional UI layout vector ?? with an AutoEncoder 2.3.6. For their input they converted the UI layout hierarchy to an image with colored bounding boxes differentiating images and text. This has the advantage to be able to deal with the high dimensions inside the UI tree. But the conversion also most likely discards lots of meaningful information hidden in the UI tree semantics.

The RicoSCA dataset has been formed out of the research topic of mapping language instructions to mobile UI action sequences [27]. They removed screens whose bounding boxes in the view hierarchies are inconsistent with the screenshots with the help of annotators. The process of filtering reduced the Rico dataset to 25k more concise and meaningful screens.

### 3.1.3 Mobile UI CLAY Dataset

The Google researchers Gang Li et al. [24] present a so-called *CLAY* pipeline which is able to denoise mobile UI layouts from incorrect nodes or adding further semantics to it. As basis they used the Rico ?? dataset for a subject of improvement. They state that recording results are dynamic and can get out of sync with the actual screen of the user. That leads to 37.4% of screens which contain invalid objects. This induces invisible or misaligned objects, or objects which are not clickable (greyed out). The researchers filtered invalid objects by training a Residual Neural Network (ResNet) model with the screenshots to classify nodes as invalid if their bounding boxes don’t match. Also they introduced two models: a Graph Neural Network (GNN) and a Transformer model to each determine the view type (also related to the view class). For that they considered the view hierarchy attributes as well as the screenshots via a Convolutional Neural Network (CNN). They claim they outperform heuristic approaches for detecting layout objects without a visual valid counterpart and also can recognize their types in more than 85%. This pipeline could help to improve intent prediction algorithms as less inconsistent data is applied to the model.

## 3.2 Vector models

- Compress a huge data set to a concise model - Vector Representation enables

Advantages: - “small” or smaller than the data set itself - No need to have pre knowledge about the topic, just need input an output (labels) for unsupervised NN -

| Key                   | Type      | Shape  | Description   |
|-----------------------|-----------|--------|---|
| Per View              |           |        |   |
| activity_name         | string    | (1)    | Name of the activity: e.g. “com.my_app.AppName.MainActivity”  |
| is_keyboard_deployed  | bool      | (1)    | Indicates if the keyboard is shown  |
| request_id            | int       | (1)    | Id used by the crawler to request the view  |
| Per Node              |           |        |   |
| abs-pos               | bool      | (1)    | Indicates if position in <i>bounds</i> is relative or absolute; if <i>true</i> , <i>rel-bounds</i> is set |
| adapter-view          | bool      | (1)    | Indicates that children are loaded via an adapter, see [9]  |
| ancestors             | [string]  | (None) | Ancestors of current node, e.g. “android.view.View”   |
| bounds                | [integer] | (4)    | Absolute or relative boundaries, dependent on <i>abs-pos</i>  |
| children              | [node]    | (None) | Child nodes   |
| class                 | string    | (1)    | “com.my_app.lib.ui.views.DropDownSpinner”   |
| clickable             | bool      | (1)    | User can interact by press / click  |
| content-desc          | string    | (1)    | (Accessibility) description of the node “Interstitial close button”                                       |
| draw                  | bool      | (1)    | Indicates if this node is drawn on the canvas   |
| enabled               | bool      | (1)    | Indicates if this node is in the enabled state  |
| focusable             | bool      | (1)    | Indicates if this node can be focused   |
| focused               | bool      | (1)    | Indicates if this node can is currently in focus  |
| font-family           | string    | (1)    | States the font family, e.g. “sans-serif”   |
| long-clickable        | bool      | (1)    | Indicates if this node has a long press action  |
| package               | string    | (1)    | States which packages the node belongs to “com.my_app.mypackage”  |
| pressed               | bool      | (1)    | Indicates if this node can is currently pressed   |
| rel-bounds            | [integer] | (4)    | Relative boundaries, if <i>abs-pos</i> is set to <i>true</i>  |
| resource-id           | string    | (1)    | The unique resource identifier for this view “android:id/navigationBarBackground”                         |
| scrollable-horizontal | bool      | (1)    | Indicates if this node can be scrolled horizontally   |
| scrollable-vertical   | bool      | (1)    | Indicates if this node can be scrolled vertically   |
| selected              | bool      | (1)    | Indicates if this node can is currently selected  |
| text                  | string    | (1)    | Text value if this node is a textual element  |
| text-hint             | bool      | (1)    | Explanation text for text boxes or icons  |
| visibility            | string    | (1)    | Indicates if this node is hidden, e.g. “visible”, “gone”  |
| visible-to-user       | bool      | (1)    | Indicates if this node can be seen in the viewport by the user  |

**Table 3.1:** Collection of attributes of a *view hierarchy* record, extracted from all interaction traces of the Rico [7] dataset.

### 3.2.1 Doc2Vec and Word2Vec

[22]

### 3.2.2 Screen2Vec

Toby Jia-Jun Li, Lindsay Popowski et al. [26] wrote a NN called Screen2Vec which embeds the UI components while preserving the semantics. It is claimed that they are among the first to develop a NN for mobile screens which takes textual, visual design, and layout patterns and app context meta-data into account. As inspiration they used the Word2Vec ?? to predict result by considering the context and map them to a Continuous Bag-of-Words (CBOW). The self-supervised ?? model consists of two pipeline levels. The outer level (Graphical User Interface (GUI) screen level) combines embeddings of GUI components, layout hierarchy and app descriptions. The inner level is only present for the GUI components as they contain nested embeddings for the screen text and the class type. The screen text (in the inner level) as well as the app description (in the outer level) is processed using a pretrained Sentence-BERT model. The layout hierarchy is converted to a colored image encoding the text and image boundaries with colors (like in 3.1.2). With such model, a vector can be calculated for each screen which then can be compared to each other, e.g. by the euclidean distance between the pixel representations, or comparing the distance in the view hierarchy representation. When taking all features into account, both, the euclidean and the hierarchical approach, get an accuracy of around 0.85 that the correct screen is among the first 1% of the models predictions. In around half of the cases the predicted screen (“Top-1 Accuracy”) is the correct one.

Such an approach of representing an Android layout and context in a vector can be used as pretrained embedding for feeding a RNN predicting upcoming screens.

### 3.2.3 Screen2Words

Similar to [26] Screen2words considers the screen context from the view hierarchy to create a screen embedding. The goal is to provide a summarization for an unseen screen by usage of it’s app and UI context. They describe such a technique as multi-modal, as it “leverages input from multiple data sources”, like screenshot images, textual labels and UI tree structures. As basis for their training data the Rico-SCA 3.1.2 dataset is used, to remove inaccurate view hierarchies. Although the public code did not provide a direct way to parse the Protocol Buffers of Rico-SCA. In addition they hired 85 labelers to manually annotate each of the 22k existing screens with multiple summarizations, resulting in more than 100k phrases.

As input for their summarizing NN they used a flattened view hierarchy which contained padded embeddings for categorical values, like the view class. Also the textual components of the screen were extracted and encoded with a pre-trained GloVe Word embedding. The GloVe encoding was also applied to the app description. The description was combined with the textual components and the other screen attributes to serve as input of a Transformer Encoder ?. Simultaneously each screenshot was embedded though a CNN, which was then concatenated with the Transformer Encoder to form the overall encoder of the Screen2words model. The screen summaries were used as labels for the model and were also embedded with the GloVe encoding.

As human validation they made a study consisting of more than a thousand participants. These had to give a star rating from one to five to assess the quality of the screen summarization. They also trained different graduations of their model by removing some of their modalities. That showed that using all modalities brought the best results (3.4 stars mean) in their rating. Using only the screenshots (pixel) modality the ratings were lower by almost one star indicating that adding more modalities contribute to improve the screen to word vectorization.

[TODO]: why this paper is important for this work

- can give insights in evaluation methods - uses good embedding for various input modalities - has a solution to embed words

#### 3.2.4 Intention2Text

[38]

#### 3.2.5 Html2Vec

[37]

#### 3.2.6 Tree2Vec

#### 3.2.7 Activity2Vec

### 3.3 Time Series / Sequence models

- one more dimension - allows predicting unseen states - back propagation -> see technical part -

RNNs: 9\_Personalizing session based recommendations with RNNs [33] 10\_Bansal\_Hybrid RNN Recommender system [4] [15]

#### 3.3.1 Seq2Seq Model

[6]

### 3.3.2 Click Sequence Prediction / PathFinder

Seokjun Lee et al. [23] propose a technique called *PathFinder* which aims to predict the sequence of user clicks in Android mobile apps. The user input and the contextual data is collected via the Android Accessibility Services ??, so the users OS does not need to be modified or rooted. They collected the data from 55 students of their university with a sequence tracing tool and collected near 2 million button clicks from over a thousand apps. They follow a collaborative and content-based approach which takes both all the users data as well as the individual preferences into account. The *button depth* describes the number of clicks or taps until the user gets to their target screen. In average nearly the user has 16 buttons as candidates to press as the next action. With a personalized UI a the *button depth* should decrease significantly. The next user click is dependent on very recent but also on previous clicks happened a longer time ago, e.g. taking a picture relates to uploading it later to their Social Networking Service (SNS). The authors train a Long Short-Term Memory (LSTM) model to predict the next button, which will be clicked on. PathFinder predicts the most probable three buttons with a 0.76 F-measure.

In contrast to this work, *PathFinder* does not take into account the complete view hierarchy or other spatiotemporal information. Just the previous and the current app and the click history with their button properties are considered. Also as far as known the dataset and code is not publicly accessible.

### 3.3.3 Large-Scale Modeling of Mobile User Click Behaviors Using Deep Learning

Xin Zhou and Yang Li [39] extend the work of [23]. They expect to optimize the UI experience by recommending the users next click interaction based on their findings. They gathered a dataset of 20 million clicks from 4k mobile users. The goal was to overcome the challenge of accurate but also scalable click sequence modeling. That means that apps are not limited in their composition and the screens get increasingly diverse and there's no predefined set of UI elements. Also the users click behavior is very individual and heavily dependents on situational factors.


Based on the Transformer architecture in ?? they created a deep learning model which has 48% accuracy for predicting the next user click and 71% accuracy for the three most probable *actionable* objects. The researchers differentiated three main inputs for embedding their elements visible on the screen: the text content, the type of view and the bounding box. All the elements are then passed to a Transformer Encoder representing a single screen. Together with the click event as well as the time encoding the screen embedding serves as one concatenated input step. The encoded time can be very different as it doesn't follow a regular sample interval, but is recorded as soon as the screen is changing 3.1b. Multiple input steps then form a sequence fed in a second Transformer Encoder which contains all past screens and clicks. The current screen embedding and time are then passed to a pointer (M-layer perceptron) which calculates the most probable *actionable* elements to be clicked on. They consider a UI element as *actionable*, if it is currently clickable, visible and enabled (cf. table 3.1). More complex screens can have much more actionable elements, which makes the prediction much more difficult 3.1a.

This paper solves a lot of problems previous attempts had. The dataset includes cross-app transitions which make 26% of all clicks, which are also considered in their model. The current context was taken into account such as the time of the day and day in the week 3.1c which adds a lot of



semantics. Further they used a transformer model with self-attention, which reduces the training times significantly compared to LSTM. Compared to the approach tested in this paper, they also predict the concrete element that will be clicked on instead of the absolute screen coordinates.

Unfortunately as far as the investigation permits, neither the dataset nor the code were publicly provided.

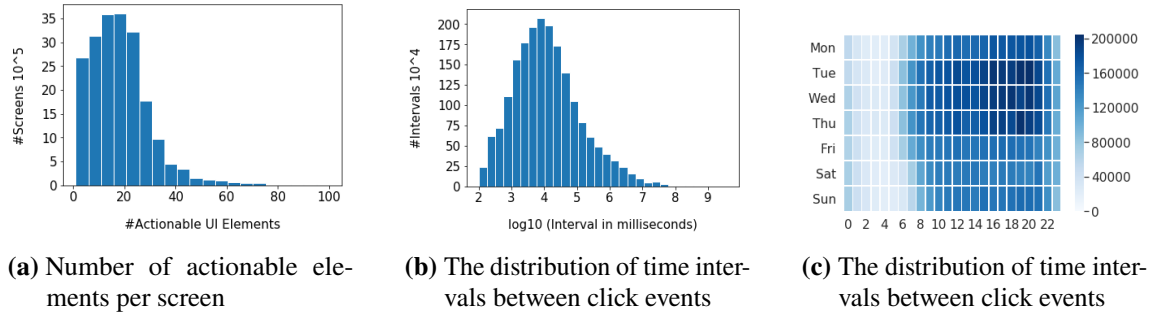

**Figure 3.1:** View element insights [39]



## 4 Methodology

In the upcoming section the methodology for this thesis is presented. This includes the type of work, the analysis process of related work, how the data was selected, what decisions were made to accomplish the research goals, and how the research questions are answered.

### Research Problem

Working with mobile OS and how the user can be supported by solving their tasks on digital end devices is the main booster to embrace to this topic. This also raises the question, how much aid a user can be given, to what detail it is capable of and where are its limitations. To this date and as far as known no open accessible prediction model was published to predict the user intent to the detail of their gesture inputs. Also, it is not apparent which technologies and methods are suitable to develop such an intent prediction system. In order to converge solving these problems, the research questions were developed.

### Type of work

The thesis follows a mixed strategy to develop the research topic. Qualitative statements were taken into account in order to explain existing approaches and describe theories. But the experimental proof of concept was evaluated using quantitative metrics. A study to evaluate the experimental findings was exceeding the scope of this master thesis, although it would be very interesting.

### Research approach

In order to have an overview of the subject, various research papers were worked through. These then were classified by its relevance to the topic and – if suitable – presented in the related work (chapter 3). Some of these papers included sample code and datasets, which were evaluated in parts, such as Rico (3.1.2), Screen2vec (3.2.2) or Screen2words (3.2.3). Also, tools were looked for, which can help accomplish the research. To acquire the basics of ML, a workshop has been passed, which teaches the handling with Tensorflow and Keras using the programming language Python. The structure of the thesis was chosen by knowledge of working on previous thesis, the given template, and proposals from other scientists. A proof of concept has been developed in order to provide a working example for intent prediction. This was evaluated with well-established metrics, such as the RMSE. The importance of the result was discussed and the research questions were answered.

### Data Aquisition

Several factors affected the decision for the dataset, that is used to train the ML model, which are explained in the following.

A prototype app has been developed which could inspect the accessibility tree, and therefore a potential candidate to create a self-made dataset. Unfortunately, gathering data on its own could not be realized, as of a few reasons. Firstly, the group of expected participants would be too small

to fulfill the requirements for the model. Secondly, the infrastructure has to be built up and the app service has to be maintained, which is not manageable in the given time frame. Last, legal and technological barriers may raise during realization, like privacy regulations or overstressed servers.

The dataset of ERICA (3.1.1) is more suited, as it is quite extensive and contains human interaction traces. The successor dataset, Rico (3.1.2), is even bigger, which matches the requirements for ML. Unfortunately both, ERICA and Rico, don't provide cross-app interaction traces, restricting it to possible intent predictions only during using an app. They also weren't reflecting a real world application as they used a web-service approach, rather than the android accessibility services to gather their data. Because of the lack of large appropriate datasets the Rico dataset was chosen for training the model.

### Technologies

As of technologies, Keras – an abstraction interface of Tensorflow – was chosen to implement the proof of concept. The popularity and public knowledge, but also the usage in other related projects, convinced to use Keras, which is built up on Python. Regrettably Python is not *type safe*, which made debugging unnecessarily hard and raised major problems during development of the proof of concept. For example, the input shape and the types of embedding layers is not inherent in the parameters. Therefore, the required structure of the input data for various layers cannot be determined beforehand, unless having major expertise, which results in unpredictable states or errors. As Integrated Development Environment (IDE) IntelliJ was used in combination with Jupyter Notebook platform. First for calculations of NN a Windows-laptop was used, which has limitations to run Tensorflow with a Graphics Processing Unit (GPU) and CUDA [35]. Then a Linux-machine with an Intel Core i5-6600 processor and a NVIDIA GeForce GTX 970 graphics card were used.

[TODO]: Check Methodological choices

## 5 Results

Proof of concept, as an example gesture or click traces were used as labels. More general approaches can be used such as a description of the intent [**screen2words**], which needs another data set.

Make the algorithm as independent of the data as possible. Find general rules to feed the data. Applicable to other research fields, not just UI traces. Use LSTM, so predict something unseen, in contrast to RICO or ERICA, which only categorize the current context

### 5.1 Datasets

- Problem with sequential data sets

#### 5.1.1 Rico

- Too less frames.
- No transition between apps.

### 5.2 Preprocessing Android UI tree data

#### 5.2.1 Filtering privacy invasive details

- rico doesn't use logins or any privat data - gestures can tell more about the user -

#### 5.2.2 Normalization, Feature selection

Dealing with variable length data `tf.io.VarLenFeature()`

## 5.3 Model

Multiple approaches


[TODO]: create graphic for each approach

AutoEncoder:

- Encoder -> Decoder -> LSTM -> Decoder
- Encoder -> LSTM -> Decoder
- LSTM -> Encoder -> Decoder (AutoEncoder)

Decoder can either only decode to x and y or to whole UI tree.

## 5.4 Evaluation

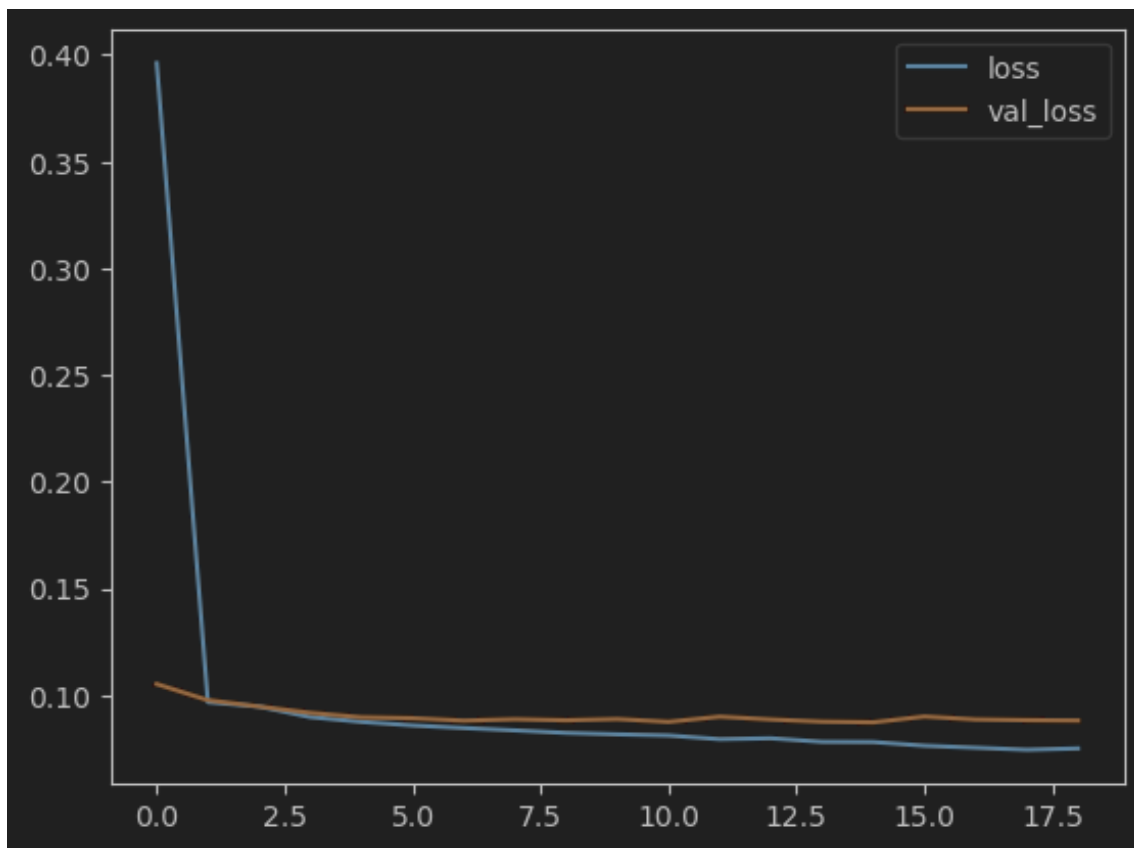

**Figure 5.1:** Model loss vs validation loss

#### 5.4.1 Mean Squared Error

### 5.5 Limitations

Dataset Dataset is not through different apps, only in one app. Dataset is not detailed enough in the time steps, or not containing all data Dataset is not long enough Dataset has no paid apps or apps with login, which most services require Dataset has wrong data see [24]

Preprocessing Need more time to validate what are the core parameters to predict the next user intent

Model needs more investigation on what data is needed How many neurons are required to achieve this Play around with different layers, also Convolutional and pretrained embeddings





## 6 Application of Android UI tree vectors

### 6.1 Automation and testing of Android apps

### 6.2 UI design similarities

### 6.3 Action prediction models, User behavior modeling

### 6.4 Behavioral analyses for smartphone usage patterns

### 6.5 What is a suitable model for the prediction of user intent?

To answer this question, LSTM has to be compared against other methods of predicting user intents. As shown in

[TODO]: add ref

classic stochastic approaches may can predict larger scope of the user such as the next app or a general user workflow. But they are not sufficient for predicting views, screens, or even precise gesture inputs. To overcome this limitation the ML-models have established in large datasets. As the described problem is to be contextualized in the prediction of time series, the following options are offered:

- Simple RNN
- Gated Recurrent Unit (GRU)
- LSTM
- Transformer

Simple RNN is limited in the capacity of establishing long-term semantics. GRU is missing the forget gate compared to the LSTM making it simpler and faster, but may perform weaker on complex datasets. The Transformer model has many advantages, such as fast and efficient training, parallelism of input sequences and recognizing long-term patterns through multi-head attention. On the other hand few prior work was done in the mobile sector which covers prediction of UI trees. Therefore, no publicly available coding approach was found which could be extended. Also, as described in [39] the structure of the model is quite complex – with two transformers – and needs more processing steps in general. LSTM is well documented and the common choice to predict

time dependent series. It is well-supported by Keras (??) and easy to use. Also, similar approaches have been made in the area of app prediction or app summarization ??, which can be used as basis for this work, such as Screen2Words 3.2.3.

### 6.6 At what level of detail the predictions can be made?

As noted in the introduction the term *intent* has a very wide scope. It's prediction can only be made in fractions, or serve as indicator. The semantically closest way and also the most detailed would be to describe the users intent in words, thus a description of what the user wants to do next. Unfortunately, the users intent description cannot be determined yet, as no according dataset is provided. An important step, the screen summarization as shown in Screen2words 3.2.3, already was made, which could also be fed with the users intention descriptions. But this would then only reflect the already passed fulfilled intent and not the upcoming next purpose. Also, the users flows can be predicted as shown in the works of ERICA 3.1.1. Next app prediction already works quite well ??, which also reflects the larger intent of the user, but is not very detailed.

In order to approximate that goal the assumption was made that the next user interaction also give hints on what the user is intending to achieve. The interaction is resulting in another screen, which then the user (hopefully) intends to see. So not only the interaction, but also the next contents, such as screen or single views can give a hint to the intent. As it turns out, this is possible, if replacing the labels in the proposed model, but presumably it will not be very precise.

1. Predict Gestures, prediction of current screen, not next screen, is possible and can easily calculate distances between this and the next point 2. Predict Screen or parts of screens, labels not gestures, box positions, text prediction, decoded and compared to current output, more a qualitative evaluation, 3. Predict App -> Not possible with RICO, no cross app traces

### 6.7 How the user can be supported with their tasks on didigal end devices?

## 7 Conclusion and Future Work

### Summary

### Outlook

Future directions for research in this area

ChatGPT – Image Recognition – Limitations and Ausblick

Generate Dataset which overcomes the limitations

Make a study with actual feedback on a prediction system, visualization -> Learn faster and directly, Reinforced learning

Work out user flows, like in ERICA, but without the need to separate it from the interaction tree

Take in visual and textual context (semantics).

Make dataset with app overlapping traces. Use dataset with preprocessing such as RicoSCA or Clay. Also use accessibility service, as phones are much more powerful. No need for web interface. -> Reinforced directly on the phone, more privacy.

Make a user study which can apply this model.

[TODO]: check if references are still on their own page

## References

- [1] Contributors of 'App ins Grüne'. *App Ins Grüne*. 2020. URL: <https://github.com/mimuc/app-ins-gruene> (visited on 01/01/2024).
- [2] Saqib Alam, Nianmin Yao. "The impact of preprocessing steps on the accuracy of machine learning algorithms in sentiment analysis". In: *Computational and Mathematical Organization Theory* 25 (2019), pp. 319–335.
- [3] Flutter Authors. *Semantics class*. 2023. URL: <https://api.flutter.dev/flutter/widgets/Semantics-class.html> (visited on 01/01/2024).
- [4] Saumya Bansal, Niyati Baliyan. "Remembering past and predicting future: a hybrid recurrent neural network based recommender system". In: *Journal of Ambient Intelligence and Humanized Computing* (2022), pp. 1–12.
- [5] Jason Brownlee. *How to Use Word Embedding Layers for Deep Learning with Keras*. 2021. URL: <https://machinelearningmastery.com/use-word-embedding-layers-deep-learning-keras/> (visited on 01/04/2024).
- [6] François Chollet. *A ten-minute introduction to sequence-to-sequence learning in Keras*. 2017. URL: <https://blog.keras.io/a-ten-minute-introduction-to-sequence-to-sequence-learning-in-keras.html> (visited on 02/15/2023).
- [7] Biplab Deka, Zifeng Huang, Chad Franzen, Joshua Hibschan, Daniel Afegan, Yang Li, Jeffrey Nichols, Ranjitha Kumar. "Rico: A mobile app dataset for building data-driven design applications". In: *Proceedings of the 30th annual ACM symposium on user interface software and technology*. 2017, pp. 845–854.
- [8] Biplab Deka, Zifeng Huang, Ranjitha Kumar. "ERICA: Interaction mining mobile apps". In: *Proceedings of the 29th annual symposium on user interface software and technology*. 2016, pp. 767–776.
- [9] Android Developers. *AdapterView*. 2023. URL: <https://developer.android.com/reference/android/widget/AdapterView> (visited on 01/01/2024).
- [10] Android Developers. *How Android draws Views*. 2023. URL: <https://developer.android.com/guide/topics/ui/how-android-draws> (visited on 01/01/2024).
- [11] Android Developers. *Semantics in Compose*. 2023. URL: <https://developer.android.com/jetpack/compose/semantics> (visited on 01/01/2024).
- [12] Android Developers. *Thinking in Compose*. 2023. URL: <https://developer.android.com/jetpack/compose/mental-model> (visited on 01/01/2024).
- [13] Android Developers. *UI layer*. 2023. URL: <https://developer.android.com/topic/architecture/ui-layer> (visited on 01/01/2024).
- [14] React Native developers. *Accessibility*. 2023. URL: <https://reactnative.dev/docs/accessibility> (visited on 01/01/2024).
- [15] Mauro Di Pietro. *Modern Recommendation Systems with Neural Networks*. 2022. URL: <https://towardsdatascience.com/modern-recommendation-systems-with-neural-networks-3cc06a6ded2c> (visited on 03/08/2023).

- [16] Bao Tram Duong. *Fine-Tuning Inputs: Data Preprocessing Techniques for Neural Networks*. 2023. URL: <https://baotramduong.medium.com/data-preprocessing-for-neural-network-0b398b43d309> (visited on 12/30/2023).
- [17] Zoubin Ghahramani. “Unsupervised learning”. In: *Summer school on machine learning*. Springer, 2003, pp. 72–112.
- [18] Alireza Ghods, Diane J Cook. “Activity2vec: Learning adl embeddings from sensor data with a sequence-to-sequence model”. In: *arXiv preprint arXiv:1907.05597* (2019).
- [19] Rob J. Hyndman, Anne B. Koehler. “Another look at measures of forecast accuracy”. In: *International Journal of Forecasting* 22.4 (2006), pp. 679–688. ISSN: 0169-2070. DOI: <https://doi.org/10.1016/j.ijforecast.2006.03.001>. URL: <https://www.sciencedirect.com/science/article/pii/S0169207006000239>.
- [20] Kasthuri Jayarajah, Youngki Lee, Archan Misra, Rajesh Krishna Balan. “Need accurate user behaviour? pay attention to groups!” In: *Proceedings of the 2015 ACM international joint conference on pervasive and ubiquitous computing*. 2015, pp. 855–866.
- [21] Christoph Kofler, Martha Larson, Alan Hanjalic. “User intent in multimedia search: a survey of the state of the art and future challenges”. In: *ACM Computing Surveys (CSUR)* 49.2 (2016), pp. 1–37.
- [22] Quoc Le, Tomas Mikolov. “Distributed Representations of Sentences and Documents”. In: *Proceedings of the 31st International Conference on Machine Learning*. Ed. by Eric P. Xing, Tony Jebara. Vol. 32. Proceedings of Machine Learning Research 2. Beijing, China: PMLR, June 2014, pp. 1188–1196. URL: <https://proceedings.mlr.press/v32/le14.html>.
- [23] Seokjun Lee, Rhan Ha, Hojung Cha. “Click Sequence Prediction in Android Mobile Applications”. In: *IEEE Transactions on Human-Machine Systems* 49.3 (2019), pp. 278–289. DOI: 10.1109/THMS.2018.2868806.
- [24] Gang Li, Gilles Baechler, Manuel Tragut, Yang Li. “Learning to Denoise Raw Mobile UI Layouts for Improving Datasets at Scale”. In: *Proceedings of the 2022 CHI Conference on Human Factors in Computing Systems*. <https://github.com/google-research/google-research/tree/master/clay>. New Orleans, LA, USA: Association for Computing Machinery, May 2022, pp. 1–13. URL: <https://doi.org/10.1145/3491102.3502042>.
- [25] Jundong Li, Kewei Cheng, Suhang Wang, Fred Morstatter, Robert P. Trevino, Jiliang Tang, Huan Liu. “Feature Selection: A Data Perspective”. In: *ACM Comput. Surv.* 50.6 (Dec. 2017). ISSN: 0360-0300. DOI: 10.1145/3136625. URL: <https://doi.org/10.1145/3136625>.
- [26] Toby Jia-Jun Li, Lindsay Popowski, Tom Mitchell, Brad A Myers. “Screen2vec: Semantic embedding of gui screens and gui components”. In: *Proceedings of the 2021 CHI Conference on Human Factors in Computing Systems*. 2021, pp. 1–15.
- [27] Yang Li, Jiacong He, Xin Zhou, Yuan Zhang, Jason Baldridge. “Mapping natural language instructions to mobile UI action sequences”. In: *arXiv preprint arXiv:2005.03776* (2020).
- [28] Google LLC. *Choose a category and tags for your app or game*. 2023. URL: <https://support.google.com/googleplay/android-developer/answer/9859673> (visited on 02/15/2023).
- [29] Batta Mahesh. “Machine learning algorithms-a review”. In: *International Journal of Science and Research (IJSR).[Internet]* 9.1 (2020), pp. 381–386.

- [30] Georgios Nanos. *Deep Neural Networks: Padding*. June 2023. URL: <https://www.baeldung.com/cs/deep-neural-networks-padding> (visited on 01/01/2024).
- [31] Michael A Nielsen. *Neural networks and deep learning*. Vol. 25. Determination press San Francisco, CA, USA, 2015. URL: <http://neuralnetworksanddeeplearning.com/>.
- [32] Android Open Source Project. *AccessibilityNodeInfoDumper*. 2012. URL: <https://android.googlesource.com/platform/frameworks/testing/+/-/jb-dev/uiautomator/library/src/com/android/uiautomator/core/AccessibilityNodeInfoDumper.java> (visited on 01/01/2024).
- [33] Massimo Quadrana, Alexandros Karatzoglou, Balázs Hidasi, Paolo Cremonesi. “Personalizing session-based recommendations with hierarchical recurrent neural networks”. In: *proceedings of the Eleventh ACM Conference on Recommender Systems*. 2017, pp. 130–137.
- [34] Zhihao Shen, Kang Yang, Wan Du, Xi Zhao, Jianhua Zou. “Deepapp: a deep reinforcement learning framework for mobile application usage prediction”. In: *Proceedings of the 17th Conference on Embedded Networked Sensor Systems*. 2019, pp. 153–165.
- [35] TensorFlow Team. *Install TensorFlow with pip*. 2023. URL: <https://www.tensorflow.org/install/pip#windows-native> (visited on 01/06/2024).
- [36] Jesper E Van Engelen, Holger H Hoos. “A survey on semi-supervised learning”. In: *Machine learning* 109.2 (2020), pp. 373–440.
- [37] Peihuang Wu, Jiakun Zhao. “Distributed representations of html page”. In: *2022 IEEE 2nd International Conference on Power, Electronics and Computer Applications (ICPECA)*. IEEE. 2022, pp. 160–164.
- [38] Che-Hsuan Yu, Hung-Yuan Chen, Fang-Yie Leu, Yao-Chung Fan. “Understanding mobile user intent using attentive sequence-to-sequence RNNs”. In: *Wireless Internet: 12th EAI International Conference, WiCON 2019, TaiChung, Taiwan, November 26–27, 2019, Proceedings 12*. Springer. 2020, pp. 51–61.
- [39] Xin Zhou, Yang Li. “Large-Scale Modeling of Mobile User Click Behaviors Using Deep Learning”. In: *Proceedings of the 15th ACM Conference on Recommender Systems*. RecSys ’21. Amsterdam, Netherlands: Association for Computing Machinery, 2021, pp. 473–483. ISBN: 9781450384582. DOI: 10.1145/3460231.3474264. URL: <https://doi.org/10.1145/3460231.3474264>.





### **Declaration**

I hereby declare that the work presented in this thesis is entirely my own and that I did not use any other sources and references than the listed ones. I have marked all direct or indirect statements from other sources contained therein as quotations. Neither this work nor significant parts of it were part of another examination procedure. I have not published this work in whole or in part before. The electronic copy is consistent with all submitted copies.

---

place, date, signature