

LMU Munich
Frauenlobstraße 7a
D-80337 München
Institut für Informatik

Master Thesis

Intent Prediction with Vectorized Sequential UI Tree Data

August Oberhauser

august.oberhauser@campus.lmu.de

Course of Study: Medieninformatik

Examiner: Prof. Dr. Sven Mayer

Supervisor: Florian Bemann, M.Sc.

Commenced: June 20, 2023

Completed: January 8, 2024

Kurzfassung

<Short summary of the thesis>

Abstract

The interaction of a user with an end device such as a smartphone or a computer is very diverse and difficult to predict. Nevertheless, user-specific (personalized) as well as global (collaborative) patterns can possibly be worked out with the help of preceding user interactions. These could be used to predict the intention of a user or a group of users. It is interesting to know to what level of detail these predictions can be made reliably. By making use of the continuous on-device data an attempt can be made to gain more insights in the user behavior or even forecast their next actions.

It suggests itself to implement this with the help of user interactions in sessions on Android devices. For this purpose, the Sequential UI Tree data of the device could be tracked, filtered and labeled and then trained with a machine learning model to find similar interaction sequences and then make predictions. These can then be very coarse, such as predicting the next app. Or they can be very detailed, e.g., determining the next user action, such as filling out a form field.

A concept will be developed on how a model for predicting user intent could be built and how it could be applied to the user session. To this end, possibilities for collecting and vectorizing sequential UI trees (e.g., from the Android Accessibility Service) will be discussed (e.g., via Recurrent Neural Network (*RNN*) [12] [1] [5], *Seq2Seq* Model [2], *Screen2Vec* Model [9], *Intention2Text* [15], *Html2Vec* [14]), which are designed to predict the user intent. Here, privacy and feature pre-filtering in UI data plays an important role. After that, personalized as well as collaborative data can be used in a hybrid approach. This model should then be made available to the user in an Android app service and, depending on the level of detail, suggest upcoming apps or actions to the user at a suitable time. It should also be considered whether the user can contribute to the learning process and improve suggested actions through feedback (labeling). The performance of the model can be measured, for example, by indicators such as the amount of training data and time spent on the learning process. The effectiveness can be evaluated by accuracy metrics in predicting, for example, app categories [10] or complete test sequences via Rico [3] or ERICA [4].

Furthermore, the machine learning model could provide the following benefits in addition to intent prediction:

- reduction of the complexity and size of the UI tree
- creation of user groups that have similar behavior when using digital UI systems [7]
- elimination of technical expertise on individual features that would be required to manually compare user sessions [6]
- consideration of a user's history over time (sequential)
- comparison of user interactions without providing privacy invasive information
- supporting app developers to improve their app design and usability
- application in psychology and market research
- pre-loading of processes on devices (energy savings) [13]

As listed above, many fields of application can profit by elaborating such a system. It would be exciting to know, how the concrete concept would look like and if it can be implemented successfully e.g. to improve the user experience on end-user devices.



Figure 1: Possible procedure using a Machine-Learning algorithm to predict the next intent from a beginning user session: The input (1) can be a sequence of Android tree data. With help of a Machine-Learning-Model (2) (e.g. RNN) a vector representation can be trained and then predict the most probable action or screen (3) from a given starting sequence, but also can be improve through the users feedback.



Figure 2: Schedule as a Gantt Chart

Contents

Acronyms	13
1 Introduction	15
1.1 Necessarity of Vectors for Android UI	15
2 Related Work	17
2.1 UI Tree and Datasets	17
2.1.1 ERICA	17
2.1.2 RICO / RicoSCA	17
2.1.3 Mobile UI CLAY Dataset	17
2.2 Vector models	19
2.2.1 Doc2Vec and Word2Vec	19
2.2.2 Screen2Vec	19
2.2.3 Screen2Words	19
2.2.4 Intention2Text	19
2.2.5 Html2Vec	19
2.2.6 Tree2Vec	19
2.2.7 Activity2Vec	19
2.3 Time Series / Sequence models	19
2.3.1 Seq2Seq Model	19
3 Methodology	21
3.1 Android UI Data	21
3.1.1 Data tree structure	21
3.1.2 Retrieval of UI data via Android Accessibility Service	21
3.2 Machine Learning	21
3.2.1 Preprocessing	22
3.2.1.1 Feature selection	22
3.2.1.2 Normalization	22
3.2.1.3 Padding	22
3.2.1.4 Embedding	22
3.2.2 Supervised vs Unsupervised vs Semisupervised	23
3.2.2.1 Supervised Learning	23
3.2.2.2 Unsupervised Learning	23
3.2.3 Under and Overfitting	24
3.2.4 Evaluation Metrics	24
3.3 Artificial Neural Nets	24
3.3.1 Classes of Neural Nets	24
3.3.1.1 Deep Neural Nets	24

3.3.1.2	Convolutional Neural Nets	24
3.3.1.3	Recurrent Neural Networks and LSTMs / GRU	24
3.3.1.4	Autoencoders	24
3.3.2	Tensorflow and Keras	24
3.4	Evaluation and Metrics	25
3.4.1	Mean Squared Error	25
3.4.2	F1 Score	25
4	Results	27
4.1	Datasets	27
4.1.1	Rico	27
4.2	Preprocessing Android UI tree data	27
4.2.1	Filtering privacy invasive details	27
4.2.2	Normalization, Feature selection	27
4.3	Model	27
4.4	Evaluation	28
4.4.1	Mean Squared Error	28
4.4.2	F1 Score	28
4.5	Limitations	28
5	Application of Android UI tree vectors	29
5.1	Automation and testing of Android apps	29
5.2	UI design similarities	29
5.3	Action prediction models, User behavior modeling	29
5.4	Behavioral analyses for smartphone usage patterns	29
6	Conclusion and Future Work	31

List of Figures

- 1 Possible procedure using a Machine-Learning algorithm to predict the next intent from a beginning user session: The input (1) can be a sequence of Android tree data. With help of a Machine-Learning-Model (2) (e.g. RNN) a vector representation can be trained and then predict the most probable action or screen (3) from a given starting sequence, but also can be improvde through the users feedback. 4
- 2 Schedule as a Gantt Chart 5
- 3.1 <https://developer.android.com/studio/debug/layout-inspector>, <https://github.com/mimuc/app-ins-gruene> 22
- 4.1 Model loss vs validation loss 28

List of Tables

2.1 Values of Rico Node 18

Acronyms

Big Data Extremely large and complex data sets which can only be processed with modern computing soft- and hardware. 21

ML Machine Learning. 21

1 Introduction

This is a typical human-computer interaction thesis structure for an introduction which is structured in four paragraphs as follows:

1.1 Necessarity of Vectors for Android UI

Motivation for transforming Android UI tree data to vectors

[TODO]: P1.1. What is the large scope of the problem?

[TODO]: P1.2. What is the specific problem?

[TODO]: P2.1. The second paragraph should be about what have others been doing

[TODO]: P2.2. Why is the problem important? Why was this work carried out?

[TODO]: P3.1. What have you done?

[TODO]: P3.2. What is new about your work?

[TODO]: P4.1. What did you find out? What are the concrete results?

[TODO]: P4.2. What are the implications? What does this mean for the bigger picture?

2 Related Work

Describe relevant scientific literature related to your work.

2.1 UI Tree and Datasets

2.1.1 ERICA

See: [4]

2.1.2 RICO / RicoSCA

"Rico is a public UI corpus with 72K Android UI screens mined from 9.7K Android apps. [...] We manually removed screens whose view hierarchies do not match their screenshots by asking annotators to visually verify whether the bounding boxes of view hierarchy leaves match each UI object on the corresponding screenshot image. This filtering results in 25K unique screens."

Use web interface to gain tree and interaction traces

See [3]

2.1.3 Mobile UI CLAY Dataset

Learning to Denoise Raw Mobile UI Layouts for Improving Datasets at Scale

- Provides a so-called *CLAY* pipeline which denoises mobile UI layouts from incorrect nodes or adding semantics to it.
- better than heuristic approach
- results are dynamic and out of sync, invisible objects, misaligned, in the background (greyed out)
- aim: "large scale high quality layout dataset"
- 37.4 % of the screens contain invalid objects

See [8] <https://github.com/google-research/google-research/tree/master/clay>

Key	Type	Shape	Description
Per Trace			
activity_name	string	(1, None)	Name of the activity: “com.my_app.AppName.MainActivity”
is_keyboard_deployed	bool	(1)	Indicates if the keyboard is shown
request_id	int	(1)	<div>[TODO]: TODO</div>

Per Node			
abs-pos	bool	(1)	Indicates if position in bounds is relative to the parent or absolute to the screen boundaries
adapter-view	bool	(1)	Indicates that children are loaded via an adapter, see https://developer.android.com/reference/android/widget/AdapterV
ancestors	bool	(1)	<div>[TODO]: TODO</div>
bounds	bool	(1)	<div>[TODO]: TODO</div>
children	[node]	(1)	<div>[TODO]: TODO</div>
class	bool	(1)	<div>[TODO]: TODO</div>
clickable	bool	(1)	User can interact by press / click
content-desc	bool	(1)	<div>[TODO]: TODO</div>
draw	bool	(1)	<div>[TODO]: TODO</div>
enabled	bool	(1)	<div>[TODO]: TODO</div>
focusable	bool	(1)	<div>[TODO]: TODO</div>
focused	bool	(1)	<div>[TODO]: TODO</div>
font-family	bool	(1)	<div>[TODO]: TODO</div>
long-clickable	bool	(1)	<div>[TODO]: TODO</div>

2.2 Vector models

2.2.1 Doc2Vec and Word2Vec

2.2.2 Screen2Vec

2.2.3 Screen2Words

2.2.4 Intention2Text

2.2.5 Html2Vec

2.2.6 Tree2Vec

2.2.7 Activity2Vec

2.3 Time Series / Sequence models

2.3.1 Seq2Seq Model

3 Methodology

Start with your overall approach to the research. What research problem or question did you investigate? What type of data did you need to answer it? Quantitative, qualitative, or mixed? Primary or secondary? Experimental or descriptive? Describe the specific methods you used for data collection and analysis. How did you collect and analyze your data? What tools or materials did you use? How did you ensure the quality and accuracy of your data? Explain why you chose these methods over others. How do they relate to your research question and literature review? How do they address the limitations or gaps in existing research? How do they suit your research design and objectives? Evaluate and justify your methodological choices. How did they affect the outcome of your research? What challenges or difficulties did you encounter and how did you overcome them? How can you ensure the credibility and generalizability of your findings?

How this thesis is working? Apparatus, Procedure, Utilities

3.1 Android UI Data

3.1.1 Data tree structure

3.1.2 Retrieval of UI data via Android Accessibility Service

Semantics tree: <https://developer.android.com/jetpack/compose/semantics> <https://android.googlesource.com/platform/frameworks/development/uiautomator/library/src/com/android/uiautomator/core/AccessibilityNodeInfoDumper.java>
<https://github.com/Gustl22/android-accessibility/blob/c158808533d6fc017455184a7317555d3e6946f6/GlobalActionBa>

3.2 Machine Learning

Machine Learning (ML), a term spread by Arthur Lee Samuel, is a method of data analysis, more precisely a scientific approach to form statistical models without the need to explicitly program it. It uses algorithms to iteratively learn how data is structured. In contrast to statistical inference or manually crafted statistical models respectively, ML can solve tasks by automation of model building. Its advantages lie in finding hidden relations and patterns from the context, without having any or only a small pre knowledge of the data, thus it is a strong tool for generalization or abstraction of large datasets, also known as Big Data. ML can be applied to the following fields among others: email and spam filtering, fraud detection, cybersecurity, web search engines, recommender systems (like known from Netflix or Amazon), advertising, translators and text generation, pattern and image recognition [11]. The data driven approach also comes with some drawbacks: the outcome heavily depends on the provided data. It can include biases and therefore may acquire forms of discrimination or unfair treatment.

3 Methodology

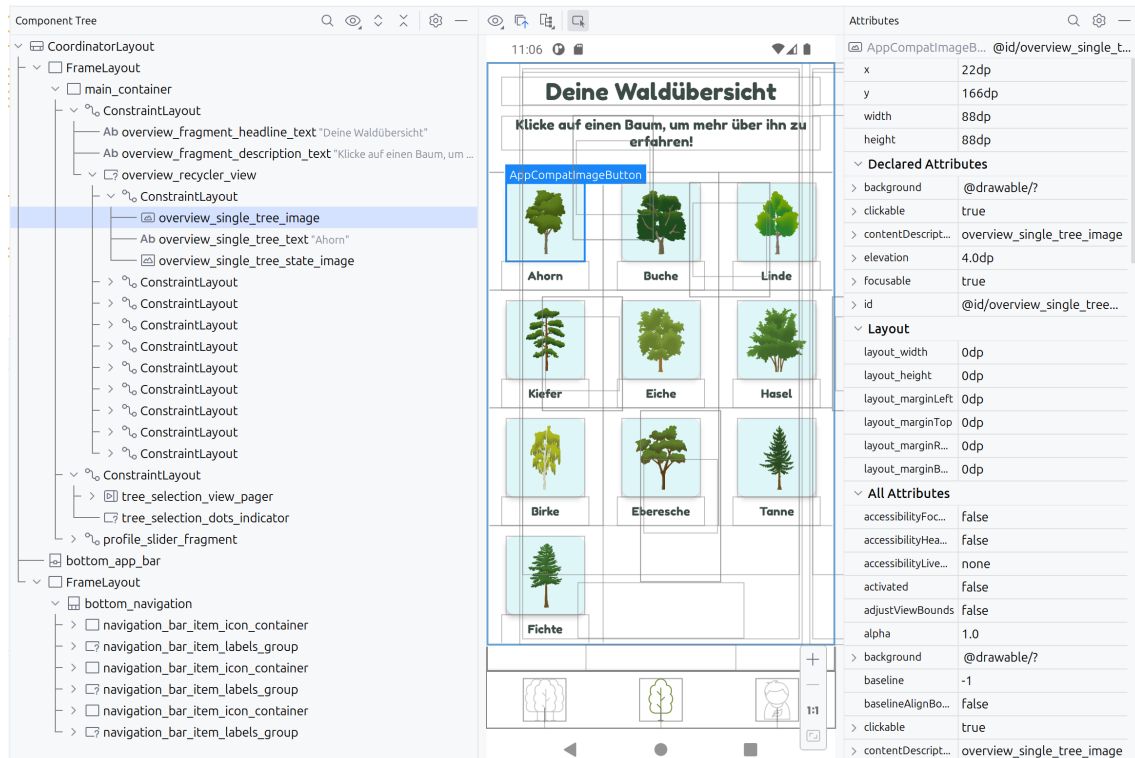


Figure 3.1: <https://developer.android.com/studio/debug/layout-inspector>,
<https://github.com/mimuc/app-ins-gruene>

3.2.1 Preprocessing

Tensors, Datasets

3.2.1.1 Feature selection

Such as Filtering privacy invasive details

Parameterizing the vectorization process a) Vector length b) Weighting of features c) Manipulating individual parameters of model

3.2.1.2 Normalization

3.2.1.3 Padding

3.2.1.4 Embedding

Category Embedding before LSTM

- Embedding layer Dimension near the actual average length of features (?)

```

<?xml version='1.0' encoding='UTF-8' standalone='yes' ?>
<hierarchy>
  <node index="0" text="" resource-id="" class="android.view.ViewGroup"
    package="de.lmu.treeapp" content-desc="" checkable="false"
    checked="false" clickable="false" enabled="true" focusable="false"
    focused="false" scrollable="false" long-clickable="false"
    password="false" selected="false" visible-to-user="true"
    bounds="[0,137][1440,2923]">
    <node index="0" text="" resource-id=""
      class="androidx.viewpager.widget.ViewPager" package="de.lmu.treeapp"
      content-desc="" checkable="false" checked="false" clickable="false"
      enabled="true" focusable="true" focused="false" scrollable="true"
      long-clickable="false" password="false" selected="false"
      visible-to-user="true" bounds="[4,141][1436,2707]">
      <node index="22" text="Eiche" resource-id=""
        class="android.widget.TextView" package="de.lmu.treeapp"
        content-desc="" checkable="false" checked="false"
        clickable="false" enabled="true" focusable="false"
        focused="false" scrollable="false" long-clickable="false"
        password="false" selected="false" visible-to-user="true"
        bounds="[116,182][1324,315]" />
      </node>
      <node index="1" text="" resource-id="" class="android.view.ViewGroup" ...>
        <node NAF="true" index="0" text="" resource-id=""
          class="android.widget.FrameLayout" package="de.lmu.treeapp" ... />
      </node>
    </node>
  </hierarchy>

```

Listing 3.1: Android Accessibility Node in XML.

3.2.2 Supervised vs Unsupervised vs Semisupervised

3.2.2.1 Supervised Learning

Supervised: Classification and regression Uses **labeled** examples: Input and output is known

Learns by comparison of the output it is provided with the output the model *predicts*.

Steps: - Data acquisition - Data cleaning / Preprocessing (Panadas) - Split into Training Data, Validation data, and Test data (cannot adapt the model after using the test data) - Train the model with the train data - Evaluate the model with the test data, then can adapt the model by the developer - Last deploy the model to production

3.2.2.2 Unsupervised Learning

Reinforcement learning

3.2.3 Under and Overfitting

3.2.4 Evaluation Metrics

3.3 Artificial Neural Nets

- Uses biological neuron systems as paradigm to generate mathematical models - can solve tasks by abstraction or generalization of data relations

Activation Functions Cost function Gradient - Regression: Continuous Values - Classification: Multiple class - One Class

3.3.1 Classes of Neural Nets

3.3.1.1 Deep Neural Nets

Neural Net with more than one layer - Dense Layer

3.3.1.2 Convolutional Neural Nets

3.3.1.3 Recurrent Neural Networks and LSTMs / GRU

LSTM 4 dimensional

Limitations to only 3 dimensions, needs flattening

Sample dimension (X -> y) Time (Step) Dimension Feature Dimension Data, Quantity dimension, such as Image dimensions, or multiple nodes

TimeDistributedLayer

3.3.1.4 Autoencoders

Encoder, Decoder

3.3.2 Tensorflow and Keras

Layers FlattenLayer

Positive Integer to Dense Vectors of fixed size

3.4 Evaluation and Metrics

3.4.1 Mean Squared Error

3.4.2 F1 Score

4 Results

4.1 Datasets

- Problem with sequential data sets

4.1.1 Rico

- Too less frames.
- No transition between apps.

4.2 Preprocessing Android UI tree data

4.2.1 Filtering privacy invasive details

4.2.2 Normalization, Feature selection

Dealing with variable length data `tf.io.VarLenFeature()`

4.3 Model

Multiple approaches

AutoEncoder:

- Encoder -> Decoder -> LSTM -> Decoder
- Encoder -> LSTM -> Decoder
- LSTM -> Encoder -> Decoder (AutoEncoder)

Decoder can either only decode to x and y or to whole UI tree.

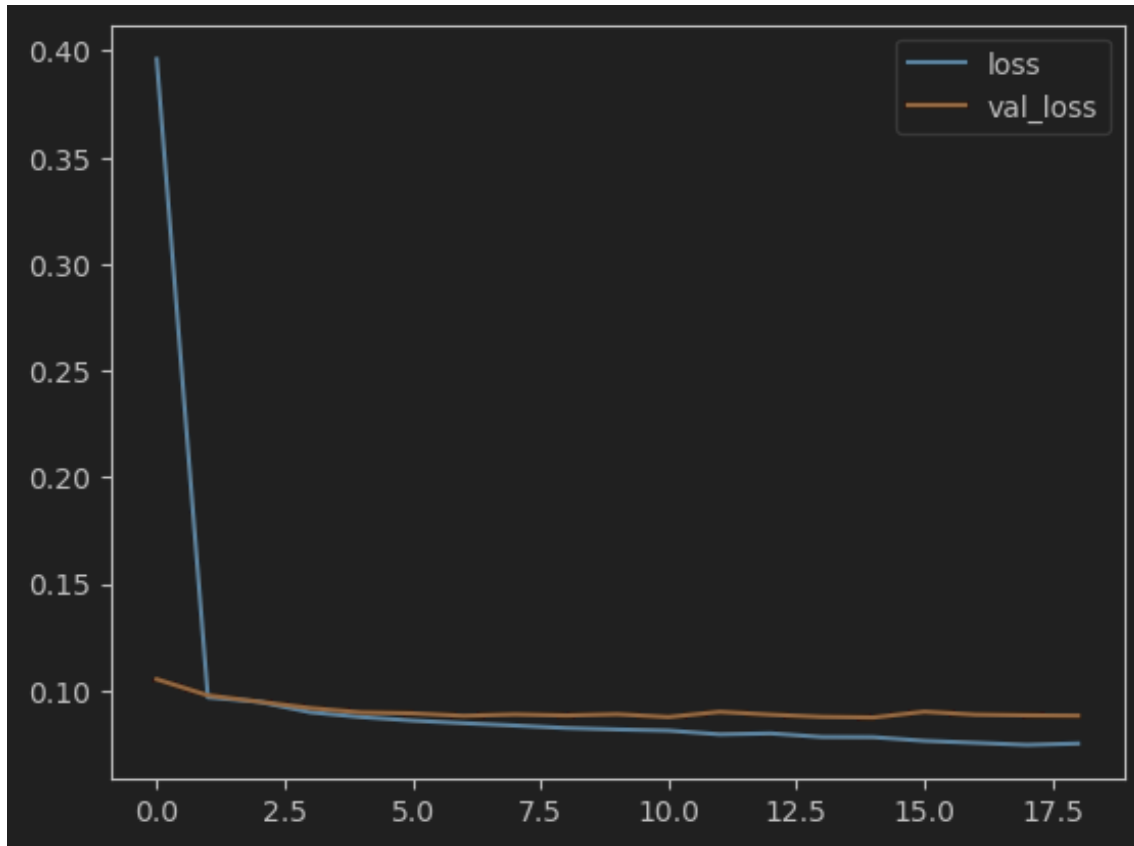


Figure 4.1: Model loss vs validation loss

4.4 Evaluation

4.4.1 Mean Squared Error

4.4.2 F1 Score

4.5 Limitations

Dataset Dataset is not through different apps, only in one app. Dataset is not detailed enough in the time steps, or not containing all data Dataset is not long enough Dataset has no paid apps or apps with login, which most services require Dataset has wrong data see [8]

Preprocessing Need more time to validate what are the core parameters to predict the next user intent

Model needs more investigation on what data is needed How many neurons are required to achieve this Play around with different layers, also Convolutional and pretrained embeddings

5 Application of Android UI tree vectors

5.1 Automation and testing of Android apps

5.2 UI design similarities

5.3 Action prediction models, User behavior modeling

5.4 Behavioral analyses for smartphone usage patterns

6 Conclusion and Future Work

Summary

Outlook

Future directions for research in this area

ChatGPT – Image Recognition – Limitations and Outlook

Generate Dataset which overcomes the limitations

Make a study with actual feedback on a prediction system, visualization

References

- [1] Saumya Bansal, Niyati Baliyan. “Remembering past and predicting future: a hybrid recurrent neural network based recommender system”. In: *Journal of Ambient Intelligence and Humanized Computing* (2022), pp. 1–12.
- [2] François Chollet. *A ten-minute introduction to sequence-to-sequence learning in Keras*. 2017. URL: <https://blog.keras.io/a-ten-minute-introduction-to-sequence-to-sequence-learning-in-keras.html> (visited on 02/15/2023).
- [3] Biplab Deka, Zifeng Huang, Chad Franzen, Joshua Hibsichman, Daniel Afergan, Yang Li, Jeffrey Nichols, Ranjitha Kumar. “Rico: A mobile app dataset for building data-driven design applications”. In: *Proceedings of the 30th annual ACM symposium on user interface software and technology*. 2017, pp. 845–854.
- [4] Biplab Deka, Zifeng Huang, Ranjitha Kumar. “ERICA: Interaction mining mobile apps”. In: *Proceedings of the 29th annual symposium on user interface software and technology*. 2016, pp. 767–776.
- [5] Mauro Di Pietro. *Modern Recommendation Systems with Neural Networks*. 2022. URL: <https://towardsdatascience.com/modern-recommendation-systems-with-neural-networks-3cc06a6ded2c> (visited on 03/08/2023).
- [6] Alireza Ghods, Diane J Cook. “Activity2vec: Learning adl embeddings from sensor data with a sequence-to-sequence model”. In: *arXiv preprint arXiv:1907.05597* (2019).
- [7] Kasthuri Jayarajah, Youngki Lee, Archan Misra, Rajesh Krishna Balan. “Need accurate user behaviour? pay attention to groups!” In: *Proceedings of the 2015 ACM international joint conference on pervasive and ubiquitous computing*. 2015, pp. 855–866.
- [8] Gang Li, Gilles Baechler, Manuel Tragut, Yang Li. “Learning to Denoise Raw Mobile UI Layouts for Improving Datasets at Scale”. In: *Proceedings of the 2022 CHI Conference on Human Factors in Computing Systems*. New Orleans, LA, USA: Association for Computing Machinery, May 2022, pp. 1–13. URL: <https://doi.org/10.1145/3491102.3502042>.
- [9] Toby Jia-Jun Li, Lindsay Popowski, Tom Mitchell, Brad A Myers. “Screen2vec: Semantic embedding of gui screens and gui components”. In: *Proceedings of the 2021 CHI Conference on Human Factors in Computing Systems*. 2021, pp. 1–15.
- [10] Google LLC. *Choose a category and tags for your app or game*. 2023. URL: <https://support.google.com/googleplay/android-developer/answer/9859673> (visited on 02/15/2023).
- [11] Batta Mahesh. “Machine learning algorithms-a review”. In: *International Journal of Science and Research (IJSR)*. [Internet] 9.1 (2020), pp. 381–386.
- [12] Massimo Quadrana, Alexandros Karatzoglou, Balázs Hidasi, Paolo Cremonesi. “Personalizing session-based recommendations with hierarchical recurrent neural networks”. In: *proceedings of the Eleventh ACM Conference on Recommender Systems*. 2017, pp. 130–137.
- [13] Zhihao Shen, Kang Yang, Wan Du, Xi Zhao, Jianhua Zou. “Deepapp: a deep reinforcement learning framework for mobile application usage prediction”. In: *Proceedings of the 17th Conference on Embedded Networked Sensor Systems*. 2019, pp. 153–165.

- [14] Peihuang Wu, Jiakun Zhao. “Distributed representations of html page”. In: *2022 IEEE 2nd International Conference on Power, Electronics and Computer Applications (ICPECA)*. IEEE. 2022, pp. 160–164.
- [15] Che-Hsuan Yu, Hung-Yuan Chen, Fang-Yie Leu, Yao-Chung Fan. “Understanding mobile user intent using attentive sequence-to-sequence RNNs”. In: *Wireless Internet: 12th EAI International Conference, WiCON 2019, TaiChung, Taiwan, November 26–27, 2019, Proceedings 12*. Springer. 2020, pp. 51–61.

Declaration

I hereby declare that the work presented in this thesis is entirely my own and that I did not use any other sources and references than the listed ones. I have marked all direct or indirect statements from other sources contained therein as quotations. Neither this work nor significant parts of it were part of another examination procedure. I have not published this work in whole or in part before. The electronic copy is consistent with all submitted copies.

place, date, signature