

LMU Munich  
Frauenlobstraße 7a  
D-80337 München  
Institut für Informatik

Master Thesis

# Intent Prediction with Vectorized Sequential UI Tree Data

August Oberhauser

august.oberhauser@campus.lmu.de

**Course of Study:** Medieninformatik

**Examiner:** Prof. Dr. Sven Mayer

**Supervisor:** Florian Bemann, M.Sc.

**Commenced:** June 20, 2023

**Completed:** January 8, 2024

## **Kurzfassung**

<Short summary of the thesis>

## Abstract

The interaction of a user with an end device such as a smartphone or a computer is very diverse and difficult to predict. Nevertheless, user-specific (personalized) as well as global (collaborative) patterns can possibly be worked out with the help of preceding user interactions. These could be used to predict the intention of a user or a group of users. It is interesting to know to what level of detail these predictions can be made reliably. By making use of the continuous on-device data an attempt can be made to gain more insights in the user behavior or even forecast their next actions.

It suggests itself to implement this with the help of user interactions in sessions on Android devices. For this purpose, the Sequential UI Tree data of the device could be tracked, filtered and labeled and then trained with a machine learning model to find similar interaction sequences and then make predictions. These can then be very coarse, such as predicting the next app. Or they can be very detailed, e.g., determining the next user action, such as filling out a form field.

A concept will be developed on how a model for predicting user intent could be built and how it could be applied to the user session. To this end, possibilities for collecting and vectorizing sequential UI trees (e.g., from the Android Accessibility Service) will be discussed (e.g., via Recurrent Neural Network (*RNN*) [16] [2] [6], *Seq2Seq* Model [3], *Screen2Vec* Model [12], *Intention2Text* [19], *Html2Vec* [18]), which are designed to predict the user intent. Here, privacy and feature pre-filtering in UI data plays an important role. After that, personalized as well as collaborative data can be used in a hybrid approach. This model should then be made available to the user in an Android app service and, depending on the level of detail, suggest upcoming apps or actions to the user at a suitable time. It should also be considered whether the user can contribute to the learning process and improve suggested actions through feedback (labeling). The performance of the model can be measured, for example, by indicators such as the amount of training data and time spent on the learning process. The effectiveness can be evaluated by accuracy metrics in predicting, for example, app categories [14] or complete test sequences via Rico [4] or ERICA [5].

Furthermore, the machine learning model could provide the following benefits in addition to intent prediction:

- reduction of the complexity and size of the UI tree
- creation of user groups that have similar behavior when using digital UI systems [9]
- elimination of technical expertise on individual features that would be required to manually compare user sessions [8]
- consideration of a user's history over time (sequential)
- comparison of user interactions without providing privacy invasive information
- supporting app developers to improve their app design and usability
- application in psychology and market research
- pre-loading of processes on devices (energy savings) [17]

As listed above, many fields of application can profit by elaborating such a system. It would be exciting to know, how the concrete concept would look like and if it can be implemented successfully e.g. to improve the user experience on end-user devices.



**Figure 1:** Possible procedure using a Machine-Learning algorithm to predict the next intent from a beginning user session: The input (1) can be a sequence of Android tree data. With help of a Machine-Learning-Model (2) (e.g. RNN) a vector representation can be trained and then predict the most probable action or screen (3) from a given starting sequence, but also can be improve through the users feedback.



**Figure 2:** Schedule as a Gantt Chart



# Contents

<b>1</b>	<b>Introduction</b>	<b>17</b>
1.1	Necessarity of Vectors for Android UI . . . . .	17
<b>2</b>	<b>Related Work</b>	<b>19</b>
2.1	UI Tree and Datasets . . . . .	19
2.1.1	ERICA . . . . .	19
2.1.2	Rico / RicoSCA . . . . .	19
2.1.3	Mobile UI CLAY Dataset . . . . .	21
2.2	Vector models . . . . .	21
2.2.1	Doc2Vec and Word2Vec . . . . .	21
2.2.2	Screen2Vec . . . . .	21
2.2.3	Screen2Words . . . . .	21
2.2.4	Intention2Text . . . . .	21
2.2.5	Html2Vec . . . . .	21
2.2.6	Tree2Vec . . . . .	21
2.2.7	Activity2Vec . . . . .	21
2.3	Time Series / Sequence models . . . . .	21
2.3.1	Seq2Seq Model . . . . .	21
2.3.2	Click Sequence Prediction in Android Mobile Applications . . . . .	21
2.3.3	Large-Scale Modeling of Mobile User Click Behaviors Using Deep Learning	22
<b>3</b>	<b>Theoretical Framework</b>	<b>23</b>
3.1	Android UI Data . . . . .	23
3.1.1	Data tree structure . . . . .	23
3.1.2	Retrieval of UI data via Android Accessibility Service . . . . .	23
3.2	Machine Learning . . . . .	24
3.2.1	Preprocessing . . . . .	25
3.2.1.1	Feature selection . . . . .	25
3.2.1.2	Missing data . . . . .	25
3.2.1.3	Normalization and Standardization . . . . .	25
3.2.1.4	Padding . . . . .	26
3.2.1.5	Categorical Variables . . . . .	26
3.2.2	Supervised vs Unsupervised vs Semisupervised . . . . .	26
3.2.2.1	Supervised Learning . . . . .	26
3.2.2.2	Unsupervised Learning . . . . .	26
3.2.3	Under and Overfitting . . . . .	26
3.2.4	Evaluation Metrics . . . . .	26

3.3	Artificial Neural Nets . . . . .	26
3.3.1	Classes of Neural Nets . . . . .	27
3.3.1.1	Deep Neural Nets . . . . .	27
3.3.1.2	Convolutional Neural Nets . . . . .	27
3.3.1.3	Recurrent Neural Networks and LSTMs / GRU . . . . .	27
3.3.1.4	Autoencoders . . . . .	27
3.3.2	Tensorflow and Keras . . . . .	27
3.4	Evaluation and Metrics . . . . .	27
3.4.1	Mean Squared Error . . . . .	27
3.4.2	F1 Score . . . . .	27
<b>4</b>	<b>Methodology</b>	<b>29</b>
4.1	Data Aquisition . . . . .	29
4.2	Methodological variety . . . . .	29
4.3	Methodological choices . . . . .	30
4.4	Research Biases . . . . .	30
<b>5</b>	<b>Results</b>	<b>31</b>
5.1	Datasets . . . . .	31
5.1.1	Rico . . . . .	31
5.2	Preprocessing Android UI tree data . . . . .	31
5.2.1	Filtering privacy invasive details . . . . .	31
5.2.2	Normalization, Feature selection . . . . .	31
5.3	Model . . . . .	31
5.4	Evaluation . . . . .	32
5.4.1	Mean Squared Error . . . . .	32
5.4.2	F1 Score . . . . .	32
5.5	Limitations . . . . .	32
<b>6</b>	<b>Application of Android UI tree vectors</b>	<b>33</b>
6.1	Automation and testing of Android apps . . . . .	33
6.2	UI design similarities . . . . .	33
6.3	Action prediction models, User behavior modeling . . . . .	33
6.4	Behavioral analyses for smartphone usage patterns . . . . .	33
<b>7</b>	<b>Conclusion and Future Work</b>	<b>35</b>



# List of Figures

- 1    Possible procedure using a Machine-Learning algorithm to predict the next intent from a beginning user session: The input (1) can be a sequence of Android tree data. With help of a Machine-Learning-Model (2) (e.g. RNN) a vector representation can be trained and then predict the most probable action or screen (3) from a given starting sequence, but also can be improvde through the users feedback. . . . . 4
- 2    Schedule as a Gantt Chart . . . . . 5
- 3.1   <https://developer.android.com/studio/debug/layout-inspector>, <https://github.com/mimuc/app-ins-gruene> . . . . . 23
- 5.1   Model loss vs validation loss . . . . . 32



**List of Tables**

2.1 Values of Rico Node . . . . . 20



# Glossary

**Big Data** Extremely large and complex data sets which can only be processed with modern computing soft- and hardware. 24



# Acronyms

**Machine Learning (ML)** Scientific approach to form statistical models without the need to explicitly program it. 24, 25





# 1 Introduction

This is a typical human-computer interaction thesis structure for an introduction which is structured in four paragraphs as follows:

## 1.1 Necessarity of Vectors for Android UI

Motivation for transforming Android UI tree data to vectors

[TODO]: P1.1. What is the large scope of the problem?

[TODO]: P1.2. What is the specific problem?

[TODO]: P2.1. The second paragraph should be about what have others been doing

[TODO]: P2.2. Why is the problem important? Why was this work carried out?

[TODO]: P3.1. What have you done?

[TODO]: P3.2. What is new about your work?

[TODO]: P4.1. What did you find out? What are the concrete results?

[TODO]: P4.2. What are the implications? What does this mean for the bigger picture?



## 2 Related Work

Describe relevant scientific literature related to your work.

### 2.1 UI Tree and Datasets

#### 2.1.1 ERICA

ERICA is a design and interaction mining application, which allows gathering *interaction traces* by capturing the users activity on Android apps [5]. This is accomplished through a web-based interaction layer in contrast to the other common approach of using *accessibility services* directly. They justify that approach by the lack of need to install additional applications, as only a browser is required. A further reason is the response latency of the commonly used *UiAutomator*, which cannot collect the data in time. Also they argue that capturing and simultaneously interacting with the apps may overload the user device and challenges the user experience. Therefore the much more powerful servers take the task of capturing the UI trees. The apps are hosted on multiple physical devices with a modified Android OS directly connected with the server. ERICA captures UI screens and user flows by tracking UI changes. They then used this data to form k-mean clusters from the UI elements (visual and textual features) and the interactive elements (icons and buttons). Based on the clusters they then build classifiers and trained an ?? to determine the flows from the test dataset. The authors worked out 23 common user flows (from over a thousand popular Android apps) which aim to provide complementary, promising or new design patterns and trends.

#### 2.1.2 Rico / RicoSCA

Rico (spanish for “rich”) is the successor of ERICA [4]. It aims to help perform better at designing and support the creation of adaptive UIs As far as known to date this is the largest collection of mobile app designs and traces with covering 72k UI screens in 9.7k Android apps. Like its predecessor Rico uses a web-based approach to collect user traces. It enables the applications like searching for designs, generation of UI layouts and code, modeling of user interactions, and prediction of user perception. It exposes visual, textual, structural, and interactive design properties of more than 72k unique UI screens.

[TODO]: Explain AutoEncoder of RICO and difference to current approach

The RicoSCA dataset has been formed out of the research topic of mapping language instructions to mobile UI action sequences [13]. They removed screens whose bounding boxes in the view hierarchies are inconsistent with the screenshots with the help of annotators. The process of filtering resulted reduced the Rico dataset to 25k screens.

## 2 Related Work

---

Use web interface to gain tree and interaction traces

See [4]

### 2.1.3 Mobile UI CLAY Dataset

Learning to Denoise Raw Mobile UI Layouts for Improving Datasets at Scale

- Provides a so-called *CLAY* pipeline which denoises mobile UI layouts from incorrect nodes or adding semantics to it.
- better than heuristic approach
- results are dynamic and out of sync, invisible objects, misaligned, in the background (greyed out)
- aim: “large scale high quality layout dataset”
- 37.4 % of the screens contain invalid objects

See [11] <https://github.com/google-research/google-research/tree/master/clay>

## 2.2 Vector models

### 2.2.1 Doc2Vec and Word2Vec

### 2.2.2 Screen2Vec

### 2.2.3 Screen2Words

### 2.2.4 Intention2Text

### 2.2.5 Html2Vec

### 2.2.6 Tree2Vec

### 2.2.7 Activity2Vec

## 2.3 Time Series / Sequence models

### 2.3.1 Seq2Seq Model

### 2.3.2 Click Sequence Prediction in Android Mobile Applications

[10] -> No code or dataset

Key	Type	Shape	Description
Per Trace			
activity_name	string	(1, None)	Name of the activity: “com.my_app.AppName.MainActivity”
is_keyboard_deployed	bool	(1)	Indicates if the keyboard is shown
request_id	int	(1)	[TODO]: TODO

Per Node			
abs-pos	bool	(1)	Indicates if position in bounds is relative to the parent or absolute to the screen boundaries
adapter-view	bool	(1)	Indicates that children are loaded via an adapter, see <a href="https://developer.android.com/reference/android/widget/AdapterView">https://developer.android.com/reference/android/widget/AdapterView</a>
ancestors	bool	(1)	[TODO]: TODO
bounds	bool	(1)	[TODO]: TODO
children	[node]	(1)	[TODO]: TODO
class	bool	(1)	[TODO]: TODO
clickable	bool	(1)	User can interact by press / click
content-desc	bool	(1)	[TODO]: TODO
draw	bool	(1)	[TODO]: TODO
enabled	bool	(1)	[TODO]: TODO
focusable	bool	(1)	[TODO]: TODO
focused	bool	(1)	[TODO]: TODO
font-family	bool	(1)	[TODO]: TODO
long-clickable	bool	(1)	[TODO]: TODO

### **2.3.3 Large-Scale Modeling of Mobile User Click Behaviors Using Deep Learning**

[20] -> No code or dataset


### 3 Theoretical Framework

### 3.1 Android UI Data

### 3.1.1 Data tree structure

### 3.1.2 Retrieval of UI data via Android Accessibility Service

Semantics tree: <https://developer.android.com/jetpack/compose/semantics> <https://android.googlesource.com/platform/frameworks/support/+/androidx-main:compose/ui/uiautomator/library/src/com/android/uiautomator/core/AccessibilityNodeInfoDumper.java>  
<https://github.com/Gustl22/android-accessibility/blob/c158808533d6fc017455184a7317555d3e6946f6/GlobalActionBar>

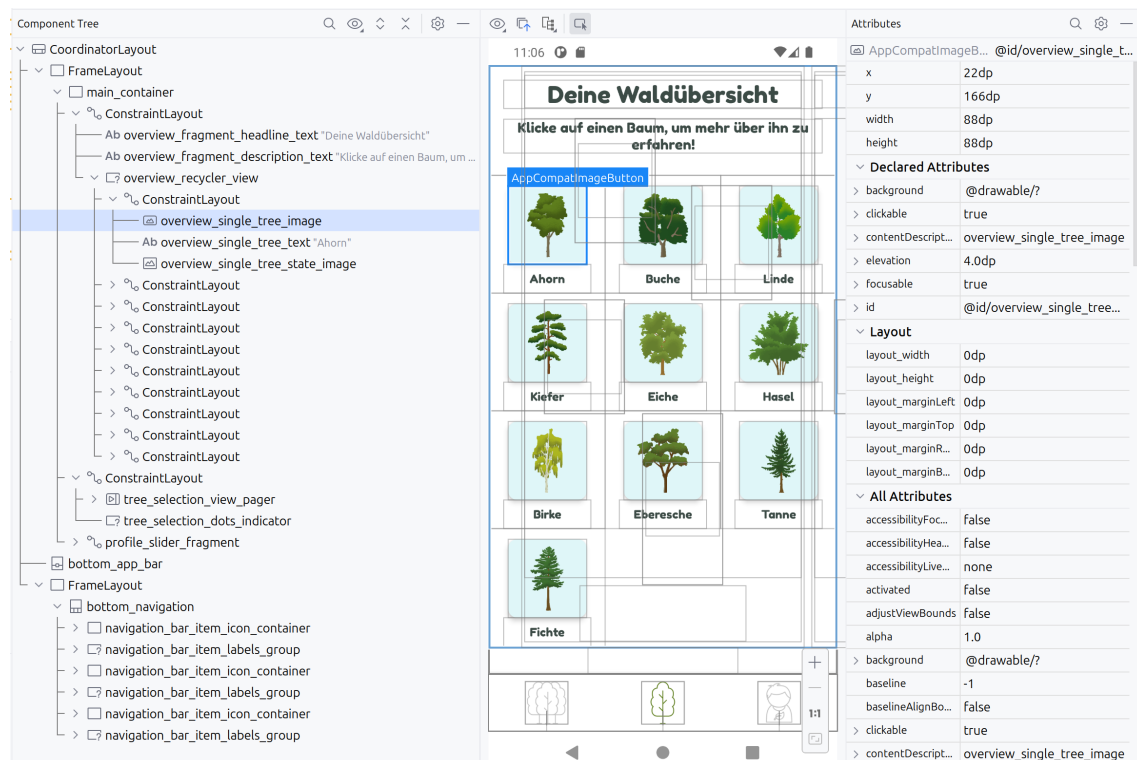

**Figure 3.1:** <https://developer.android.com/studio/debug/layout-inspector>,  
<https://github.com/mimuc/app-ins-gruene>

### 3 Theoretical Framework

---

```
<?xml version='1.0' encoding='UTF-8' standalone='yes' ?>
<hierarchy>
  <node index="0" text="" resource-id="" class="android.view.ViewGroup"
    package="de.lmu.treeapp" content-desc="" checkable="false"
    checked="false" clickable="false" enabled="true" focusable="false"
    focused="false" scrollable="false" long-clickable="false"
    password="false" selected="false" visible-to-user="true"
    bounds="[0,137][1440,2923]">
    <node index="0" text="" resource-id=""
      class="androidx.viewpager.widget.ViewPager" package="de.lmu.treeapp"
      content-desc="" checkable="false" checked="false" clickable="false"
      enabled="true" focusable="true" focused="false" scrollable="true"
      long-clickable="false" password="false" selected="false"
      visible-to-user="true" bounds="[4,141][1436,2707]">
      <node index="22" text="Eiche" resource-id=""
        class="android.widget.TextView" package="de.lmu.treeapp"
        content-desc="" checkable="false" checked="false"
        clickable="false" enabled="true" focusable="false"
        focused="false" scrollable="false" long-clickable="false"
        password="false" selected="false" visible-to-user="true"
        bounds="[116,182][1324,315]" />
      </node>
      <node index="1" text="" resource-id="" class="android.view.ViewGroup" ...>
        <node NAF="true" index="0" text="" resource-id=""
          class="android.widget.FrameLayout" package="de.lmu.treeapp" ... />
      </node>
    </node>
  </hierarchy>
```

**Listing 3.1:** Android Accessibility Node in XML.

## 3.2 Machine Learning

Machine Learning (ML), a term spread by Arthur Lee Samuel, is a method of data analysis, more precisely a scientific approach to form statistical models without the need to explicitly program it [15]. It uses algorithms to iteratively learn how data is structured. In contrast to statistical inference or manually crafted statistical models respectively, ML can solve tasks by automation of model building. Its advantages lie in finding hidden relations and patterns from the context, without having any or only a small pre knowledge of the data, thus it is a strong tool for generalization or abstraction of large datasets, also known as Big Data. ML can be applied to the following fields among others: email and spam filtering, fraud detection, cybersecurity, web search engines, recommender systems (like known from Netflix or Amazon), advertising, translators and text generation, pattern and image recognition. The data driven approach also comes with some drawbacks: the outcome heavily depends on the provided data. It can include biases and therefore may acquire forms of discrimination or unfair treatment. Nonetheless ML has a lot of potential to uncover hidden connections in large datasets.



### 3.2.1 Preprocessing

Preprocessing describes the step after one acquired their data, but before training the ML model. This step is not to be underestimated. A ML model can perform significantly better when certain preprocessing steps are applied [1].

To be able to preprocess the data, we have to know with what kind of data we handle with. Data can occur in different forms, but we can break them down in three main types:

- **Categorical values:** a value is always assigned to a class with fixed pool of predetermined classes. E.g. letters, words, brands, animals, chemical elements
- **Continuous values:** the value can be fractional and may lie in between a lower and an upper bound. E.g. temperature, velocity, geographic position
- **Integer values:** the value is a whole number and may also lie in between a lower and an upper bound. E.g. revolutions per minute, product number, annual sales

For discrete and continuous values, we have a wide variety of options to prepare them to be able to be processed by a ML model [7].

[TODO]: Tensors, Datasets

#### 3.2.1.1 Feature selection

Such as Filtering privacy invasive details

Parameterizing the vectorization process a) Vector length b) Weighting of features c) Manipulating individual parameters of model

#### 3.2.1.2 Missing data

Some data entries may be missing. Therefore, you have two approaches to get around these missing values. One can drop these values by removing the column or row. This is only recommended if you are not relying on this data entry, or this the whole feature is not expected to be important enough to bring any value to the model's performance. Further you can fill the data with a default value like zero or calculate a reasonable value from the surrounding data entries by taking their "mean, median, or interpolation" [7]. The second approach can only be applied to numerical data.

#### 3.2.1.3 Normalization and Standardization

This is only applicable for numerical data. Many ML models work better or exclusively with normalized data. This means that the values have to be in a certain range, most commonly are from 0 to 1 or from -1 to 1. This can be achieved by dividing all values with the difference of the minimum and maximum value and shift the output accordingly [7].

### 3 Theoretical Framework

---

Sometimes this is not enough, e.g. if having a few extreme values, and an approach is desired which better reflects the average data. Here the standardization, also called z-score normalization, comes into play. This method scales the values so that the mean value is placed at **0** and the standard deviation is placed at **1**.

#### 3.2.1.4 Padding

#### 3.2.1.5 Categorical Variables

[TODO]: categorical

According to [1] these steps can be removal of emoticons, elimination of stopwords and stemming for text based models.

Category Embedding before LSTM

- Embedding layer Dimension near the actual average length of features (?)

### 3.2.2 Supervised vs Unsupervised vs Semisupervised

#### 3.2.2.1 Supervised Learning

Supervised: Classification and regression Uses **labeled** examples: Input and output is known

Learns by comparison of the output it is provided with the output the model *predicts*.

Steps: - Data acquisition - Data cleaning / Preprocessing (Panadas) - Split into Training Data, Validation data, and Test data (cannot adapt the model after using the test data) - Train the model with the train data - Evaluate the model with the test data, then can adapt the model by the developer - Last deploy the model to production

#### 3.2.2.2 Unsupervised Learning

Clustering Reinforcement learning

### 3.2.3 Under and Overfitting

### 3.2.4 Evaluation Metrics

## 3.3 Artificial Neural Nets

- Uses biological neuron systems as paradigm to generate mathematical models - can solve tasks by abstraction or generalization of data relations

Activation Functions Cost function Gradient - Regression: Continuous Values - Classification: Multiple class - One Class

### **3.3.1 Classes of Neural Nets**

#### **3.3.1.1 Deep Neural Nets**

Neural Net with more than one layer - Dense Layer

#### **3.3.1.2 Convolutional Neural Nets**

#### **3.3.1.3 Recurrent Neural Networks and LSTMs / GRU**

LSTM 4 dimensional

Limitations to only 3 dimensions, needs flattening

Sample dimension (X -> y) Time (Step) Dimension Feature Dimension Data, Quantity dimension, such as Image dimensions, or multiple nodes

TimeDistributedLayer

#### **3.3.1.4 Autoencoders**

Encoder, Decoder

### **3.3.2 Tensorflow and Keras**

Layers FlattenLayer

Positive Integer to Dense Vectors of fixed size

## **3.4 Evaluation and Metrics**

### **3.4.1 Mean Squared Error**

### **3.4.2 F1 Score**



## 4 Methodology

[TODO]: Describe methodology

Start with your overall approach to the research. What research problem or question did you investigate? What type of data did you need to answer it? Quantitative, qualitative, or mixed? Primary or secondary? Experimental or descriptive?

### 4.1 Data Aquisition

How you collected and analyzed your data Describe the specific methods you used for data collection and analysis. How did you collect and analyze your data? What tools or materials did you use? How did you ensure the quality and accuracy of your data?

- Why RICO, rather use a dataset with accessibility service. - ERICA employs a human-powered approach over an automated one: - More realistic results - required user input, which cannot emulated, Google Captcha, real data - humans detect the completion of UI updates [5] - erica is quite outdated

Any tools or materials you used in the research. The type of research you conducted

E.g. Google Scholar, Google Research, Tensorflow, Keras, Udemy, Open Source, Reproducible

### 4.2 Methodological variety

Explain why you chose these methods over others. How do they relate to your research question and literature review? How do they address the limitations or gaps in existing research? How do they suit your research design and objectives?

- No similar approach - No dataset present with consecutive sequential app usages - Many different approaches to solve this problem: - Encoder, Decoder, etc... - A Study can follow

### 4.3 Methodological choices

Evaluate and justify your methodological choices. Why you chose these methods How did they affect the outcome of your research? What challenges or difficulties did you encounter and how did you overcome them? How can you ensure the credibility and generalizability of your findings?

[TODO]: overall goal is more than just interaction traces

Goal: Make the algorithm as independent of the data as possible. Find general rules to feed the data. Applicable to other research fields, not just UI traces. Use LSTM, so predict something unseen, in contrast to RICO or ERICA, which only categorize the current context

### 4.4 Research Biases

How you mitigated or avoided research biases

How this thesis is working? Apparatus, Procedure, Utilities

# 5 Results

## 5.1 Datasets

- Problem with sequential data sets

### 5.1.1 Rico

- Too less frames.
- No transition between apps.

## 5.2 Preprocessing Android UI tree data

### 5.2.1 Filtering privacy invasive details

### 5.2.2 Normalization, Feature selection

Dealing with variable length data `tf.io.VarLenFeature()`


## 5.3 Model

Multiple approaches

AutoEncoder:

- Encoder -> Decoder -> LSTM -> Decoder
- Encoder -> LSTM -> Decoder
- LSTM -> Encoder -> Decoder (AutoEncoder)

Decoder can either only decode to x and y or to whole UI tree.

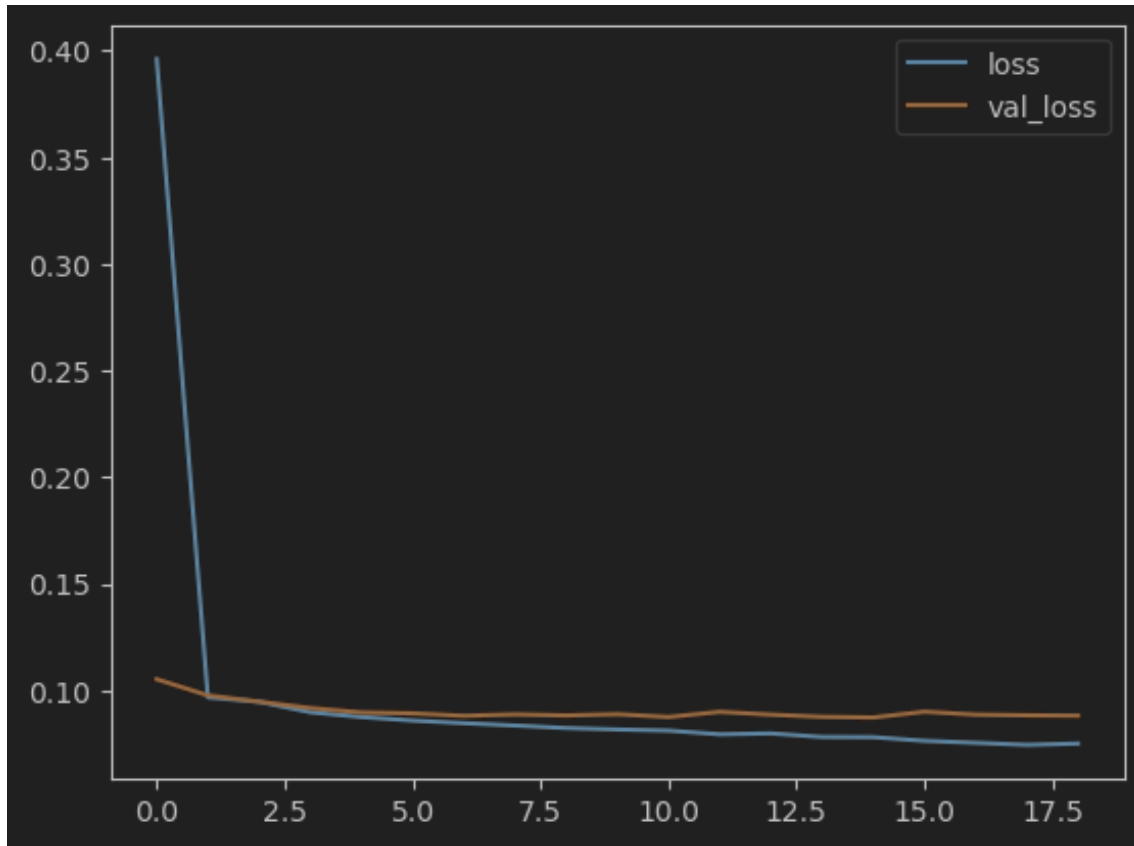

**Figure 5.1:** Model loss vs validation loss

## 5.4 Evaluation

### 5.4.1 Mean Squared Error

### 5.4.2 F1 Score

## 5.5 Limitations

Dataset Dataset is not through different apps, only in one app. Dataset is not detailed enough in the time steps, or not containing all data Dataset is not long enough Dataset has no paid apps or apps with login, which most services require Dataset has wrong data see [11]

Preprocessing Need more time to validate what are the core parameters to predict the next user intent

Model needs more investigation on what data is needed How many neurons are required to achieve this Play around with different layers, also Convolutional and pretrained embeddings



## **6 Application of Android UI tree vectors**

**6.1 Automation and testing of Android apps**

**6.2 UI design similarities**

**6.3 Action prediction models, User behavior modeling**

**6.4 Behavioral analyses for smartphone usage patterns**



## 7 Conclusion and Future Work

### Summary

### Outlook

Future directions for research in this area

ChatGPT – Image Recognition – Limitation als Ausblick

Generate Dataset which overcomes the limitations

Make a study with actual feedback on a prediction system, visualization -> Learn faster and directly, Reinforced learning

Work out user flows, like in ERICA, but without the need to separate it from the interaction tree

Take in visual and textual context (semantics).

Make dataset with app overlapping traces. Also use accessibility service, as phones are much more powerful. No need for web interface. -> Reinforced directly on the phone, more privacy.

## References

- [1] Saqib Alam, Nianmin Yao. “The impact of preprocessing steps on the accuracy of machine learning algorithms in sentiment analysis”. In: *Computational and Mathematical Organization Theory* 25 (2019), pp. 319–335.
- [2] Saumya Bansal, Niyati Baliyan. “Remembering past and predicting future: a hybrid recurrent neural network based recommender system”. In: *Journal of Ambient Intelligence and Humanized Computing* (2022), pp. 1–12.
- [3] François Chollet. *A ten-minute introduction to sequence-to-sequence learning in Keras*. 2017. URL: <https://blog.keras.io/a-ten-minute-introduction-to-sequence-to-sequence-learning-in-keras.html> (visited on 02/15/2023).
- [4] Biplab Deka, Zifeng Huang, Chad Franzen, Joshua Hibschan, Daniel Afegan, Yang Li, Jeffrey Nichols, Ranjitha Kumar. “Rico: A mobile app dataset for building data-driven design applications”. In: *Proceedings of the 30th annual ACM symposium on user interface software and technology*. 2017, pp. 845–854.
- [5] Biplab Deka, Zifeng Huang, Ranjitha Kumar. “ERICA: Interaction mining mobile apps”. In: *Proceedings of the 29th annual symposium on user interface software and technology*. 2016, pp. 767–776.
- [6] Mauro Di Pietro. *Modern Recommendation Systems with Neural Networks*. 2022. URL: <https://towardsdatascience.com/modern-recommendation-systems-with-neural-networks-3cc06a6ded2c> (visited on 03/08/2023).
- [7] Bao Tram Duong. *Fine-Tuning Inputs: Data Preprocessing Techniques for Neural Networks*. 2023. URL: <https://baotramduong.medium.com/data-preprocessing-for-neural-network-0b398b43d309> (visited on 12/30/2023).
- [8] Alireza Ghods, Diane J Cook. “Activity2vec: Learning adl embeddings from sensor data with a sequence-to-sequence model”. In: *arXiv preprint arXiv:1907.05597* (2019).
- [9] Kasthuri Jayarajah, Youngki Lee, Archan Misra, Rajesh Krishna Balan. “Need accurate user behaviour? pay attention to groups!” In: *Proceedings of the 2015 ACM international joint conference on pervasive and ubiquitous computing*. 2015, pp. 855–866.
- [10] Seokjun Lee, Rhan Ha, Hojung Cha. “Click Sequence Prediction in Android Mobile Applications”. In: *IEEE Transactions on Human-Machine Systems* 49.3 (2019), pp. 278–289. DOI: 10.1109/THMS.2018.2868806.
- [11] Gang Li, Gilles Baechler, Manuel Tragut, Yang Li. “Learning to Denoise Raw Mobile UI Layouts for Improving Datasets at Scale”. In: *Proceedings of the 2022 CHI Conference on Human Factors in Computing Systems*. New Orleans, LA, USA: Association for Computing Machinery, May 2022, pp. 1–13. URL: <https://doi.org/10.1145/3491102.3502042>.
- [12] Toby Jia-Jun Li, Lindsay Popowski, Tom Mitchell, Brad A Myers. “Screen2vec: Semantic embedding of gui screens and gui components”. In: *Proceedings of the 2021 CHI Conference on Human Factors in Computing Systems*. 2021, pp. 1–15.
- [13] Yang Li, Jiacong He, Xin Zhou, Yuan Zhang, Jason Baldridge. “Mapping natural language instructions to mobile UI action sequences”. In: *arXiv preprint arXiv:2005.03776* (2020).

- [14] Google LLC. *Choose a category and tags for your app or game*. 2023. URL: <https://support.google.com/googleplay/android-developer/answer/9859673> (visited on 02/15/2023).
- [15] Batta Mahesh. "Machine learning algorithms-a review". In: *International Journal of Science and Research (IJSR)*. [Internet] 9.1 (2020), pp. 381–386.
- [16] Massimo Quadrana, Alexandros Karatzoglou, Balázs Hidasi, Paolo Cremonesi. "Personalizing session-based recommendations with hierarchical recurrent neural networks". In: *proceedings of the Eleventh ACM Conference on Recommender Systems*. 2017, pp. 130–137.
- [17] Zhihao Shen, Kang Yang, Wan Du, Xi Zhao, Jianhua Zou. "Deepapp: a deep reinforcement learning framework for mobile application usage prediction". In: *Proceedings of the 17th Conference on Embedded Networked Sensor Systems*. 2019, pp. 153–165.
- [18] Peihuang Wu, Jiakun Zhao. "Distributed representations of html page". In: *2022 IEEE 2nd International Conference on Power, Electronics and Computer Applications (ICPECA)*. IEEE. 2022, pp. 160–164.
- [19] Che-Hsuan Yu, Hung-Yuan Chen, Fang-Yie Leu, Yao-Chung Fan. "Understanding mobile user intent using attentive sequence-to-sequence RNNs". In: *Wireless Internet: 12th EAI International Conference, WiCON 2019, TaiChung, Taiwan, November 26–27, 2019, Proceedings 12*. Springer. 2020, pp. 51–61.
- [20] Xin Zhou, Yang Li. "Large-Scale Modeling of Mobile User Click Behaviors Using Deep Learning". In: *Proceedings of the 15th ACM Conference on Recommender Systems*. RecSys '21. Amsterdam, Netherlands: Association for Computing Machinery, 2021, pp. 473–483. ISBN: 9781450384582. DOI: 10.1145/3460231.3474264. URL: <https://doi.org/10.1145/3460231.3474264>.



### **Declaration**

I hereby declare that the work presented in this thesis is entirely my own and that I did not use any other sources and references than the listed ones. I have marked all direct or indirect statements from other sources contained therein as quotations. Neither this work nor significant parts of it were part of another examination procedure. I have not published this work in whole or in part before. The electronic copy is consistent with all submitted copies.

---

place, date, signature