

Basic theory of a standing wave optical cavity in vacuum

Alexei Gurchenko

February 2026

1 Reflection and transmission at an interface

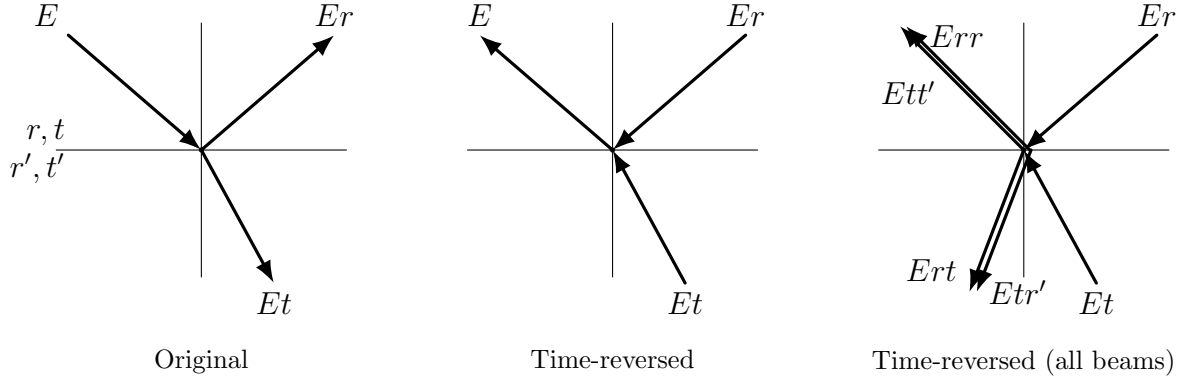


Figure 1: Original and time-reversed interaction between a beam and an interface

The first question we need to answer before moving on to calculating reflected, transmitted and intracavity fields, is the following. If light is shined to an interface from one side and the interface has reflected coefficient r and transmitted coefficient t , what would be the reflected and transmitted coefficients r' and t' if the light is shined from another side? This elegant derivation [1] of the relation between the field transmission and reflection coefficients was made by G. G. Stokes. He assumed that there was no dissipation at the interface and therefore the process obeyed time-reversal invariance. The three waves are shown on the left in the figure 1. The time-reversed case appears in the center plot. When we reverse time, we need to include three additional waves: the reflection from the bottom wave, and the transmission of both the bottom and top waves. All of the waves are shown in the plot on the right. In order for the right-hand plot to be equivalent to the time-reversed center plot, the two waves in the upper left must sum to E and the two waves in the lower left must sum to zero. Thus,

$$E = Ett' + Err \quad (1.1)$$

$$0 = Ert + Er't \quad (1.2)$$

from which we conclude that

$$t' = \frac{1 - r^2}{t} \quad (1.3)$$

$$r' = -r \quad (1.4)$$

Here we assume that $r, r', t, t' \in \mathbb{C}$. The fact, that we assumed no dissipation should mean, that

$$|t|^2 + |r|^2 = 1 \quad (1.5)$$

$$|t'|^2 + |r'|^2 = 1 \quad (1.6)$$

Let's plug 1.4 and 1.3 to 1.6. After some algebra we arrive to

$$\frac{1}{|t|^2}(|1 - r^2|^2 - (1 - |r|^2)^2) = 0 \quad (1.7)$$

Since $|r| \leq 1$, ($r = |r|e^{i\varphi_r}$) it should mean that

$$|1 - r^2| = 1 - |r|^2 = \sqrt{1 - 2|r|^2 \cos(2\varphi_r) + |r|^4} \quad (1.8)$$

Equation 1.8 is satisfied $\forall |r| \leq 1$ only if $\varphi_r = 0$ or π . That means that $r, r' \in \mathbb{R}$. Then ($t = |t|e^{i\varphi_t}$)

$$t' = \frac{|t|^2}{t} = |t|e^{-i\varphi_t} = t^* \quad (1.9)$$

So finally we have

$$r' = -r, \quad r, r' \in \mathbb{R} \quad (1.10)$$

$$t' = t^*, \quad t, t' \in \mathbb{C} \quad (1.11)$$

2 Reflected, transmitted and intracavity fields and intensities

Let us start calculating the reflected, transmitted and intracavity fields. Figure 2 depicts the schematic of the electromagnetic wave traveling inside the optical cavity. We assume that the mirrors 1 and 2 have corresponding amplitude transmission and reflection coefficients r_1, t_1 and r_2, t_2 . The intracavity medium is lossless, however there is a loss of amplitude due to scattering at the mirror surfaces: t_a at Mirror 1 and t_b at Mirror 2 ($t = t_a t_b$). This model is the closest approximation of a two-mirror cavity inside ultra-high vacuum environment.

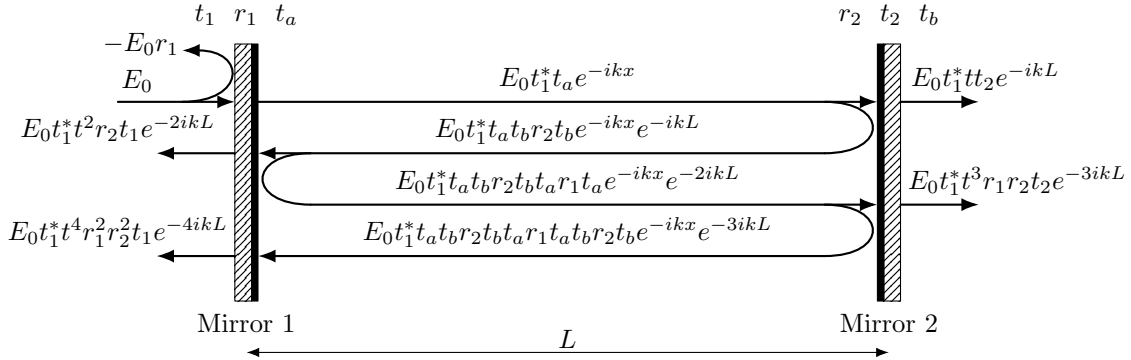


Figure 2: Optical cavity schematic

2.1 Reflected field and intensity

If the incident amplitude of the field is E_0 , by summing all the paths that contribute to the reflected field and using 1.10, 1.11 we arrive to the following series (we relabel $t = t_a t_b$)

$$\begin{aligned} E_r &= E_0(-r_1 + t_1^* t r_2 t t_1 e^{-2ikL} + t_1^* t r_2 t r_1 t r_2 t t_1 e^{-4ikL} + \dots) = \\ &= E_0(-r_1 + |t_1|^2 t^2 r_2 e^{-2ikL} (1 + t^2 r_1 r_2 e^{-2ikL} + (t^2 r_1 r_2 e^{-2ikL})^2 + \dots)) = \\ &= E_0(-r_1 + \frac{|t_1|^2 t^2 r_2 e^{-2ikL}}{1 - t^2 r_1 r_2 e^{-2ikL}}) = E_0 \frac{t^2 r_2 e^{-2ikL} - r_1}{1 - t^2 r_1 r_2 e^{-2ikL}} \end{aligned}$$

We obtain an expression for the reflected field:

$$E_r = E_0 \frac{t^2 r_2 e^{-2ikL} - r_1}{1 - t^2 r_1 r_2 e^{-2ikL}} \quad (2.1)$$

Let's remember that

$$FSR = \frac{c}{2L} \quad (2.2)$$

$$kL = \frac{2\pi Lf}{c} = \frac{\pi f}{FSR} = \pi \tilde{f} \quad (2.3)$$

where $\tilde{f} = \frac{f}{FSR}$ is a normalized frequency. After some algebra we get an expression for reflected intensity:

$$I_r = I_0 \frac{r_1^2 + t^4 r_2^2 - 2t^2 r_1 r_2 \cos(2\pi \tilde{f})}{1 + (t^2 r_1 r_2)^2 - 2t^2 r_1 r_2 \cos(2\pi \tilde{f})} \quad (2.4)$$

The minimum reflected intensity is obtained on resonance (when $\tilde{f} \in \mathbb{N}$):

$$I_r^{res} = I_0 \frac{(r_1 - t^2 r_2)^2}{(1 - t^2 r_1 r_2)^2} \quad (2.5)$$

2.2 Transmitted field

If the incident amplitude of the field is E_0 , by summing all the paths that contribute to the transmitted field and using 1.10, 1.11 we arrive to the following series (we relabel $t = t_a t_b$)

$$\begin{aligned} E_t &= E_0(t_1^* t t_2 e^{-ikL} + t_1^* t r_2 t r_1 t t_2 e^{-3ikL} + \dots) = \\ &= E_0 t_1^* t t_2 e^{-ikL} (1 + t^2 r_1 r_2 e^{-2ikL} + (t^2 r_1 r_2 e^{-2ikL})^2 + \dots) = \\ &= E_0 \frac{t_1^* t t_2 e^{-ikL}}{1 - t^2 r_1 r_2 e^{-2ikL}} \end{aligned}$$

We obtain an expression for the transmitted field:

$$E_t = E_0 \frac{t_1^* t t_2 e^{-ikL}}{1 - t^2 r_1 r_2 e^{-2ikL}} \quad (2.6)$$

After some algebra we get an expression for transmitted intensity ($\tilde{f} = \frac{f}{FSR}$):

$$I_t = I_0 \frac{|t_1|^2 |t_2|^2 t^2}{1 + (t^2 r_1 r_2)^2 - 2t^2 r_1 r_2 \cos(2\pi \tilde{f})} \quad (2.7)$$

The maximum transmitted intensity is obtained on resonance (when $\tilde{f} \in \mathbb{N}$):

$$I_t^{res} = I_0 \frac{|t_1|^2 |t_2|^2 t^2}{(1 - t^2 r_1 r_2)^2} \quad (2.8)$$

2.3 Intracavity field

We need to calculate fields propagating in the direction of incident light ($E_c^+(x)$), in the opposite direction ($E_c^-(x)$) and full intracavity field ($E_c(x)$). The process of calculation is very similar to the reflected and transmitted fields calculations, but this time we have to take care of at which point in the cavity the field is being calculated. Let's pick a point at a distance x from the first mirror and calculate forward and backward fields there. For the forward field:

$$\begin{aligned} E_c^+(x) &= E_0(t_1^* t_a e^{-ikx} + t_1^* t_a t_b r_2 t_b t_a r_1 t_a e^{-ikx} e^{-2ikL} + \dots) = \\ &= E_0 t_1^* t_a e^{-ikx} (1 + t^2 r_1 r_2 e^{-2ikL} + (t^2 r_1 r_2 e^{-2ikL})^2 + \dots) = \\ &= E_0 \frac{t_1^* t_a e^{-ikx}}{1 - t^2 r_1 r_2 e^{-2ikL}} \end{aligned}$$

We obtain:

$$E_c^+(x) = E_0 \frac{t_1^* t_a e^{-ikx}}{1 - t^2 r_1 r_2 e^{-2ikL}} \quad (2.9)$$

For the backward field:

$$\begin{aligned} E_c^-(x) &= E_0(t_1^* t_a t_b r_2 t_b e^{-ik(2L-x)} + t_1^* t_a t_b r_2 t_b t_a r_1 t_a t_b r_2 t_b e^{-ik(4L-x)} + \dots) = \\ &= E_0 t_1^* t r_2 t_b e^{-ik(2L-x)} (1 + t^2 r_1 r_2 e^{-2ikL} + (t^2 r_1 r_2 e^{-2ikL})^2 + \dots) = \\ &= E_0 \frac{t_1^* t r_2 t_b e^{-ik(2L-x)}}{1 - t^2 r_1 r_2 e^{-2ikL}} \end{aligned}$$

It's here that we have to shamefully acknowledge that the amplitude reflection coefficients are actually negative, because upon reflection from a medium with higher refractive index the light undergoes a π phase shift. So if we take this into account we obtain:

$$E_c^-(x) = E_0 \frac{-t_1^* t |r_2| t_b e^{-ik(2L-x)}}{1 - t^2 r_1 r_2 e^{-2ikL}} \quad (2.10)$$

Full intracavity field:

$$E_c(x) = E_c^+(x) + E_c^-(x) = E_0 \frac{t_1^* t_a e^{-ikx} - t_1^* t |r_2| t_b e^{-ik(2L-x)}}{1 - t^2 r_1 r_2 e^{-2ikL}}$$

We obtain:

$$E_c(x) = E_0 \frac{t_1^* (t_a e^{ik(L-x)} - t t_b |r_2| e^{-ik(L-x)}) e^{-ikL}}{1 - t^2 r_1 r_2 e^{-2ikL}} \quad (2.11)$$

After some algebra we get an expression for intracavity intensity ($\tilde{f} = \frac{f}{FSR}$, $\tilde{x} = \frac{x}{L}$):

$$I_c(\tilde{x}) = I_0 \frac{|t_1|^2 (t_a^2 + t^2 t_b^2 r_2^2 - 2t^2 |r_2| \cos(2\pi \tilde{f}(\tilde{x} - 1)))}{1 + (t^2 r_1 r_2)^2 - 2t^2 r_1 r_2 \cos(2\pi \tilde{f})} \quad (2.12)$$

The maximum internal intensity is obtained on resonance (when $\tilde{f} \in \mathbb{N}$):

$$I_c^{res} = I_0 \frac{|t_1|^2 (t_a + t t_b |r_2|)^2}{(1 - t^2 r_1 r_2)^2} \quad (2.13)$$

3 Finesse

Parameter of the cavity, characterizing the "goodness" of the cavity is called *finesse* ($\mathcal{F}$). It's defined as follows:

$$\mathcal{F} := \frac{FSR}{\Delta f_{1/2}} \quad (3.1)$$

where $\Delta f_{1/2}$ is full-width half-maximum (FWHM) of transmitted and internal intensities.

References

- [1] Warren Nagourney. *Quantum Electronics for Atomic Physics and Telecommunication*. 2014. DOI: 10.1093/acprof:oso/9780199665488.001.0001.