


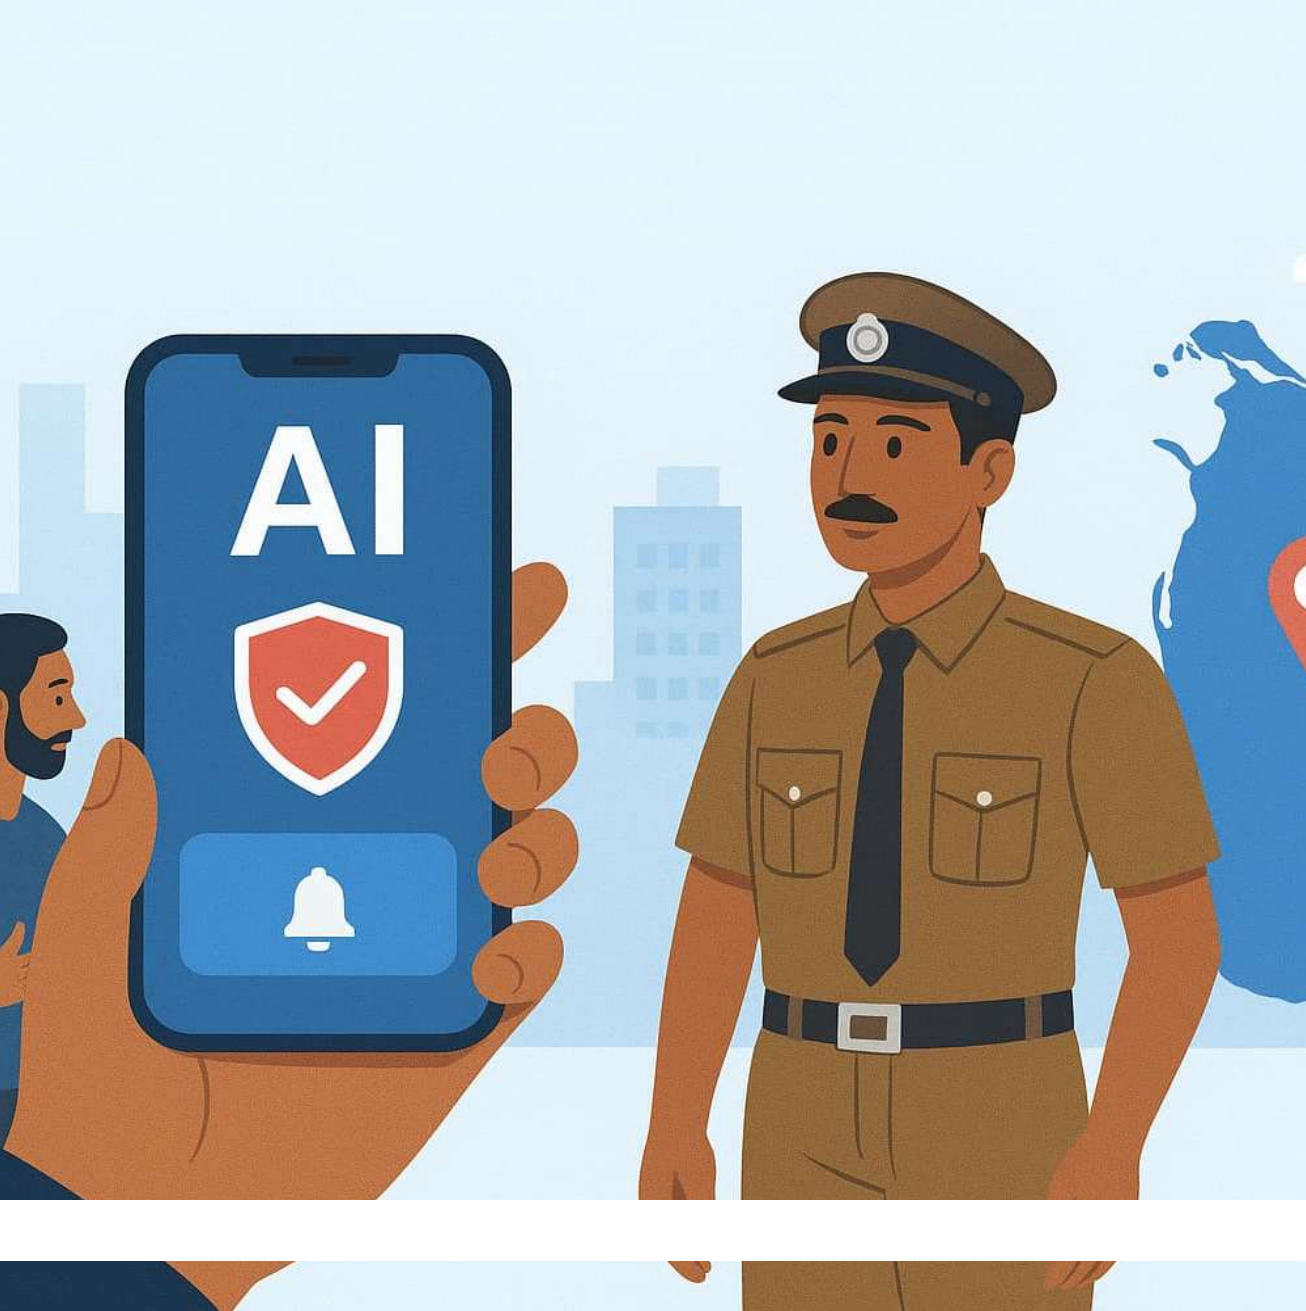

SafeLink

SafeLink : AI-Powered Mobile Platform Enhancing Public Safety and Community Policing in Sri Lanka

Project ID: 25-26J-200

Team



Supervisor
Ms. Jenny Krishara



Co-supervisor
Ms. Dinuka Wijendra



Team Leader
Indudunu I W O



Amaradasa S A A M



Fernando P K S



Jayakody J M P S B

Introduction



A Smart mobile platform for citizens
And police to improve public safety
Through alerts, emergency support,
Incident reporting, and traffic
Management.



How dose this traditionally work?



Traditional Police workflow

How dose SafeLink work?



Citizen Report Incident



AI analyzes data



Police receive incident



Police taken quick action

An AI-Powered public safety system

Main Components



Safety Prediction for Women and Children



Emergency SOS with Real-time location & live Streaming



Real-time AI system for Detecting harmful social media contents



Traffic violation Reporting and fine payment



EMERGENCY SOS WITH REAL-TIME LOCATION & LIVE STREAMING

Specialization : Information Technology





Emergency SOS with Real-Time Location & Live Streaming

Research Problem

- Emergency reporting mainly depends on voice calls (119).
- Victims may be scared, injured, or unable to speak clearly.
- Police cannot understand how serious the emergency is.
- This leads to delayed response and unsafe outcomes.





Emergency SOS with Real-Time Location & Live Streaming


Specific and sub objectives

- Specific Objective
 - To build a smart Emergency SOS system that sends live location and real-time video/audio to help responders act faster.
- Sub Objectives
 - Enable one-tap SOS during emergencies
 - Stream live video and audio
 - Use AI to identify emergency severity



Emergency SOS with Real-Time Location & Live Streaming

Overall Component Architecture

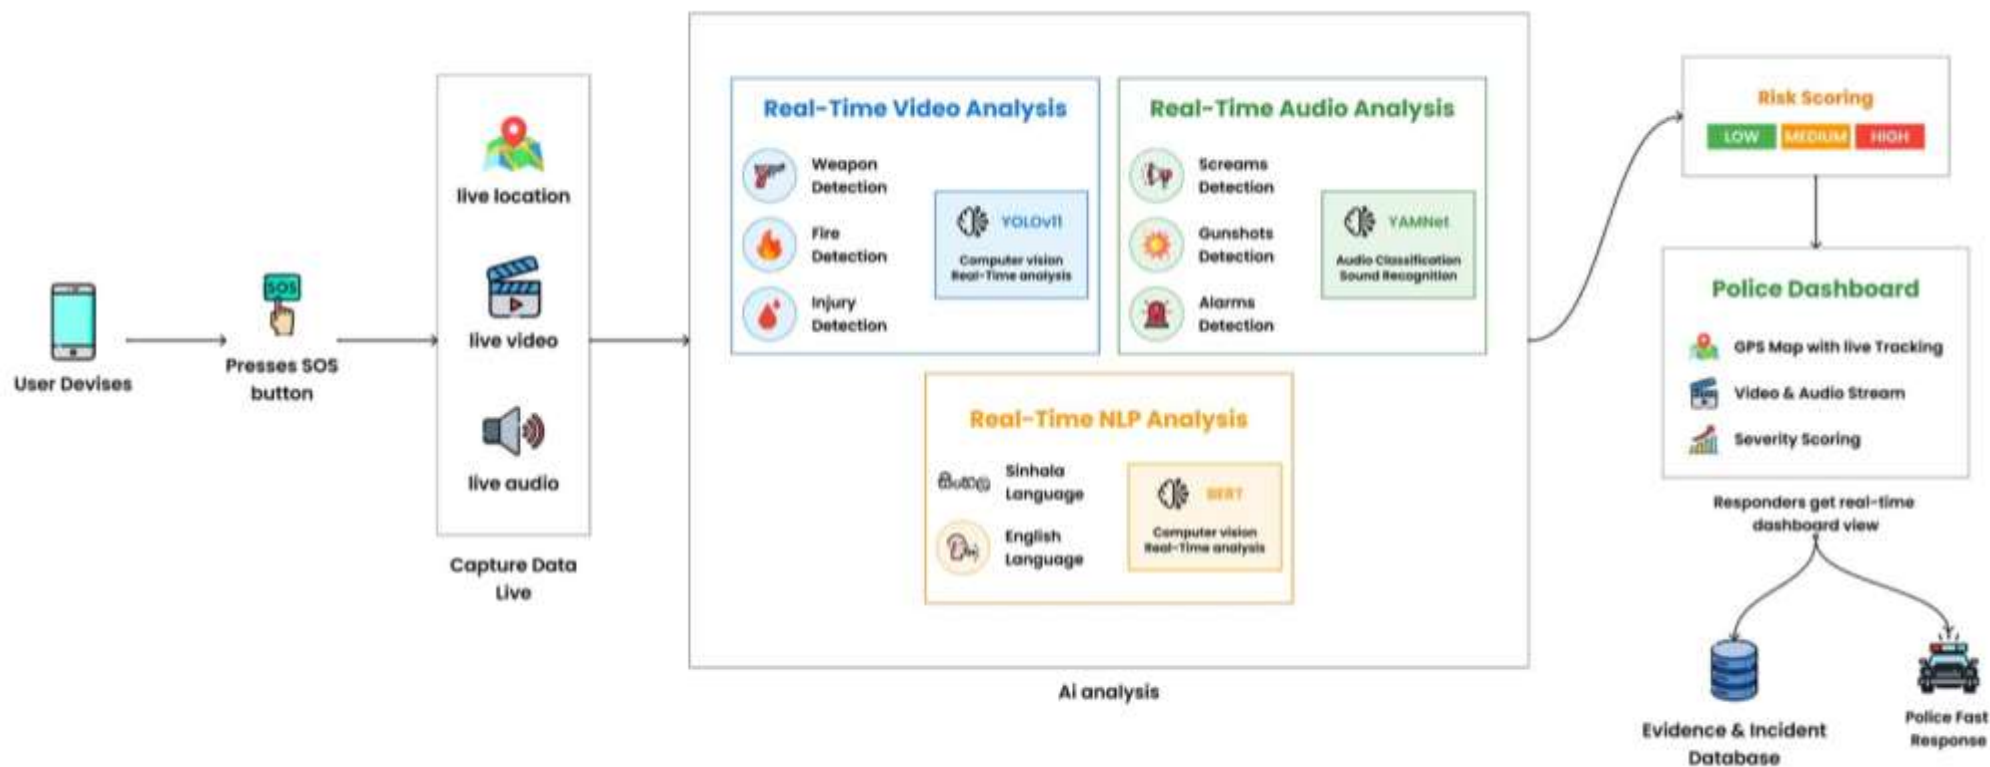




Emergency SOS with Real-Time Location & Live Streaming

Current Progress 50%

- Data Collection
- Algorithm/Technology Selection
- Model Training
- Model Testing
- Selecting Optimal model

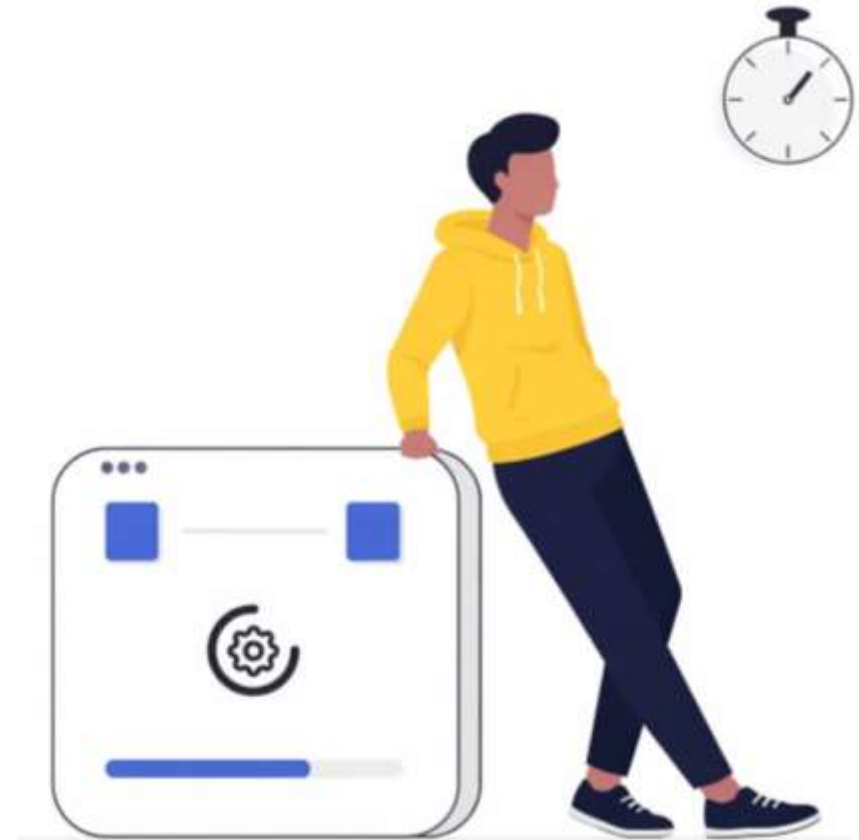



Emergency SOS with Real-Time Location & Live Streaming

Model Selection Methodology

The Optimal Model is selected by considering the following criteria.

- Accuracy
- Efficiency/Performance





Emergency SOS with Real-Time Location & Live Streaming

Model Selection Methodology

Yolov11 Object Detection Model

- Data set is labeled manually.
- Trained for 30 epochs.
- Testing Accuracy: **72.81%**



Emergency SOS with Real-Time Location & Live Streaming

Proof of work

Model Training



Epoch 1/30	GPU_mem 3.28G	box_loss 1.509	cls_loss 2.58	dfl_loss 1.59	Instances 35	Size 512: 100% ————— 397/397 1.9s/it 12:54
Epoch 2/30	GPU_mem 3.29G	box_loss 1.574	cls_loss 2.13	dfl_loss 1.648	Instances 38	Size 512: 100% ————— 397/397 1.5s/it 9:39
Epoch 3/30	GPU_mem 3.25G	box_loss 1.583	cls_loss 2.045	dfl_loss 1.656	Instances 35	Size 512: 100% ————— 397/397 3.5s/it 22:50
Epoch 4/30	GPU_mem 3.29G	box_loss 1.555	cls_loss 1.961	dfl_loss 1.638	Instances 37	Size 512: 100% ————— 397/397 2.9s/it 18:58
Epoch 5/30	GPU_mem 3.25G	box_loss 1.526	cls_loss 1.862	dfl_loss 1.606	Instances 21	Size 512: 100% ————— 397/397 3.0s/it 19:44
Epoch 6/30	GPU_mem 3.24G	box_loss 1.481	cls_loss 1.786	dfl_loss 1.58	Instances 23	Size 512: 100% ————— 397/397 3.9s/it 26:01
Epoch 7/30	GPU_mem 3.24G	box_loss 1.449	cls_loss 1.719	dfl_loss 1.561	Instances 39	Size 512: 100% ————— 397/397 8.2s/it 54:14
Epoch 8/30	GPU_mem 3.29G	box_loss 1.431	cls_loss 1.656	dfl_loss 1.53	Instances 35	Size 512: 100% ————— 397/397 12.8s/it 1:24:41
Epoch 9/30	GPU_mem 3.25G	box_loss 1.404	cls_loss 1.609	dfl_loss 1.513	Instances 21	Size 512: 100% ————— 397/397 13.1s/it 1:26:44
Epoch 10/30	GPU_mem 3.25G	box_loss 1.38	cls_loss 1.552	dfl_loss 1.489	Instances 18	Size 512: 100% ————— 397/397 13.6s/it 1:30:11
Epoch 11/30	GPU_mem 3.25G	box_loss 1.406	cls_loss 1.563	dfl_loss 1.496	Instances 58	Size 512: 37% ————— 146/397 7.3s/it 34:10<30:27



Emergency SOS with Real-Time Location & Live Streaming

Proof of work

Metrics

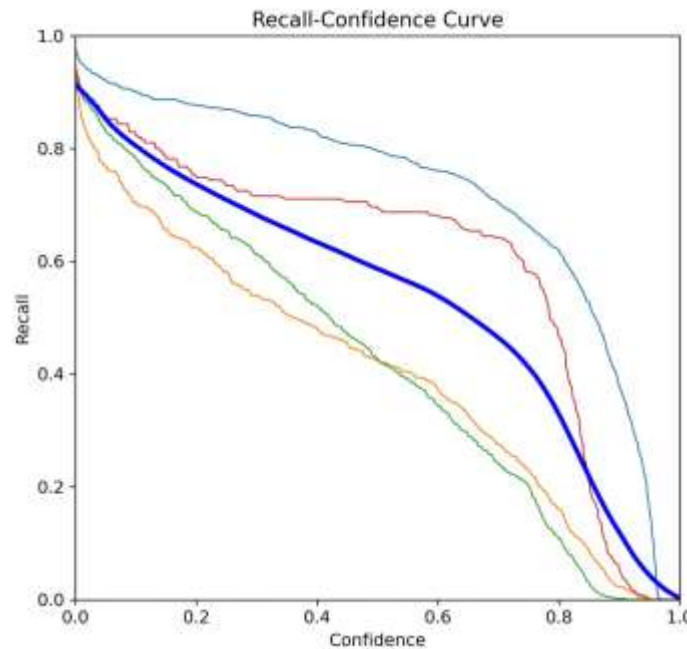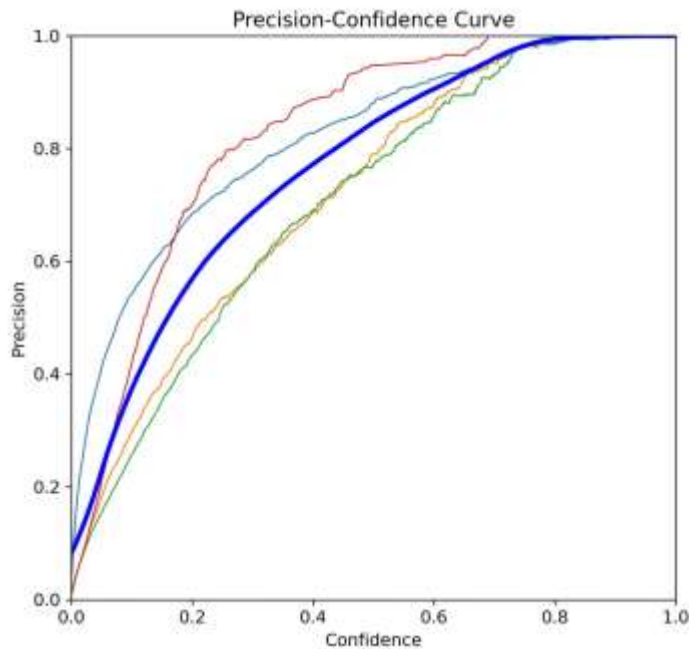




Emergency SOS with Real-Time Location & Live Streaming


Proof of work

Model Testing

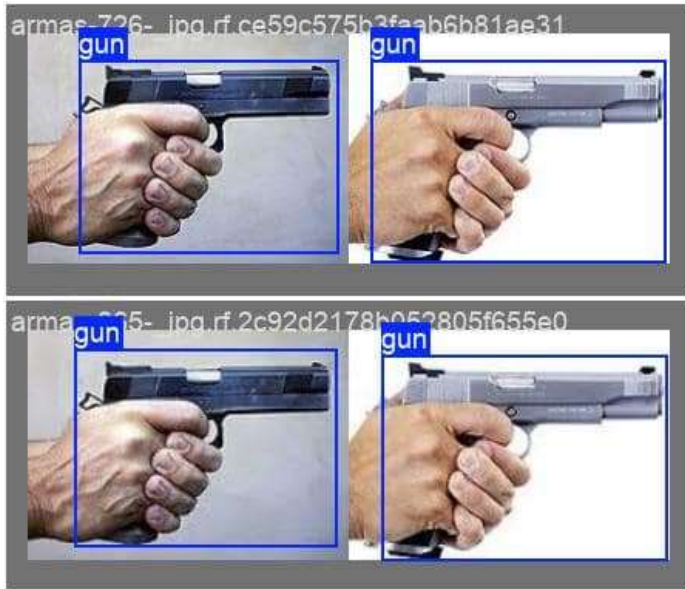

Emergency SOS with Real-Time Location & Live Streaming


Datasets

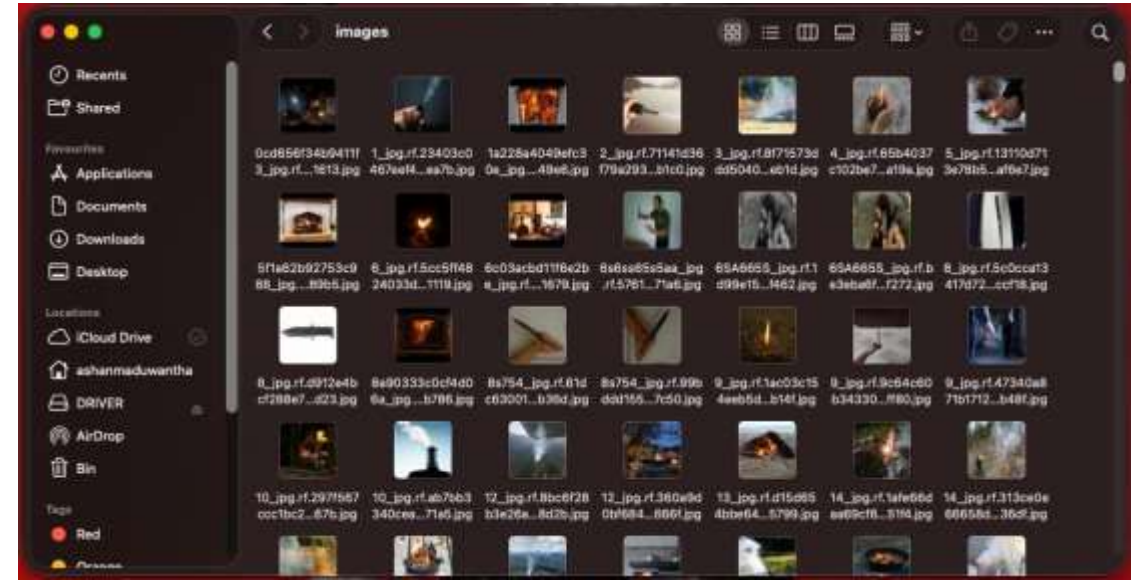



AI-POWERED WOMEN AND CHILDREN SAFETY RISK PREDICTION SYSTEM

Specialization : Information Technology

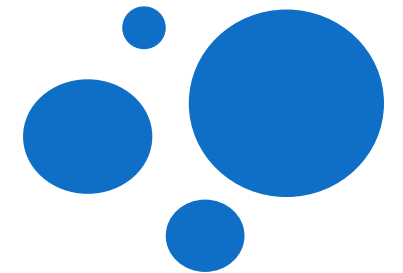



Emergency AI-Powered Women and Children Safety Risk Prediction System

Research Problem

- Women and children face daily safety threats.
- Detect emergencies but lack predictive safety insights.
- No reliable Sri Lanka-focused solution.
- Sinhala language support is missing.





Emergency AI-Powered Women and Children Safety Risk Prediction System


Specific and Sub objectives

- Specific Objective
 - Develop an AI-based safety prediction system for women and children.
- Sub Objectives
 - Analyze incident data using text, audio, and video.
 - Filter women- and child-related incidents.
 - Predict high-risk locations and time periods.
 - Deliver proactive safety alerts and insights.



Emergency AI-Powered Women and Children Safety Risk Prediction System

Overall Component Architecture

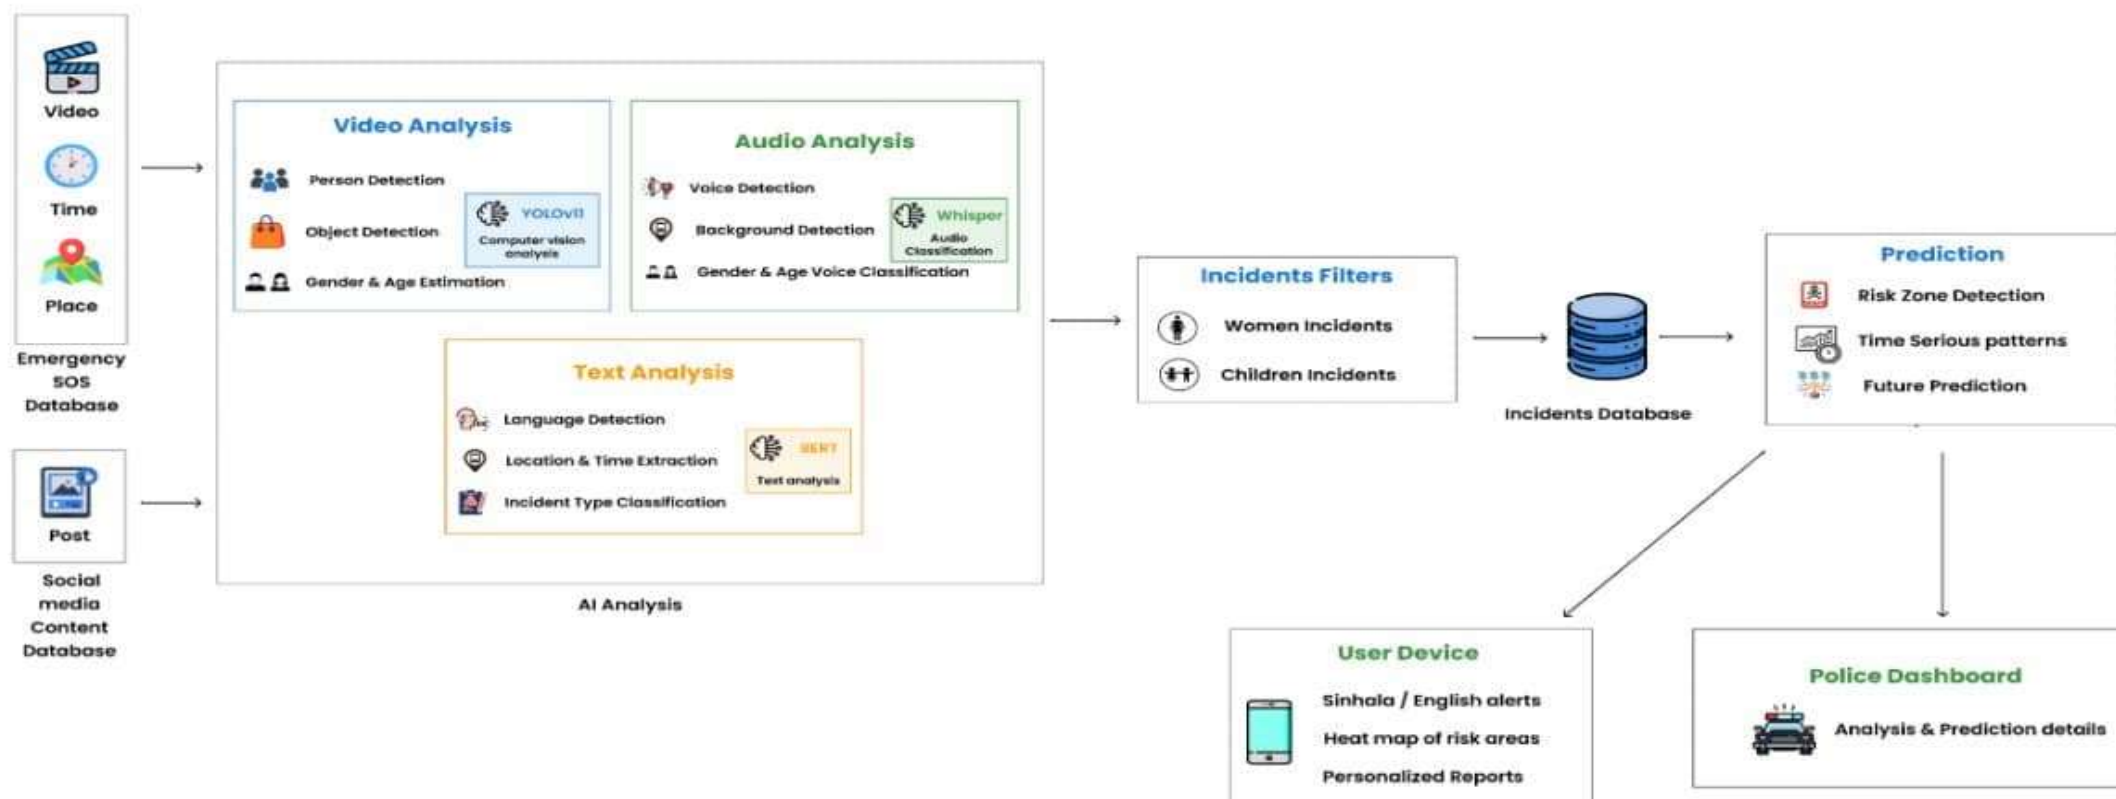



Emergency AI-Powered Women and Children Safety Risk Prediction System

Current Progress 50%

- Data Collection
- Algorithm/Technology Selection
- Model Training
- Model Testing
- Model Comparison
- Selecting Optimal model





Emergency AI-Powered Women and Children Safety Risk Prediction System

Model Selection Methodology

The Optimal Model is selected by considering the following criteria.

- Accuracy
- Efficiency/Performance





Emergency AI-Powered Women and Children Safety Risk Prediction System

Model Selection Methodology

1. Video Analysis Model

- Using YOLO pre-trained model.
- Data set is labeled manually.
- Used PyTorch.
- Trained for 30 epochs.
- Testing Accuracy: **73%**


2. Text Analysis Model

- Using XLM-R pre-trained model.
- Custom Sinhala-English dataset.
- Used Transformers.
- Trained for 10 epochs.
- Testing Accuracy: **61%**



Emergency AI-Powered Women and Children Safety Risk Prediction System





Proof of Work - Model Training

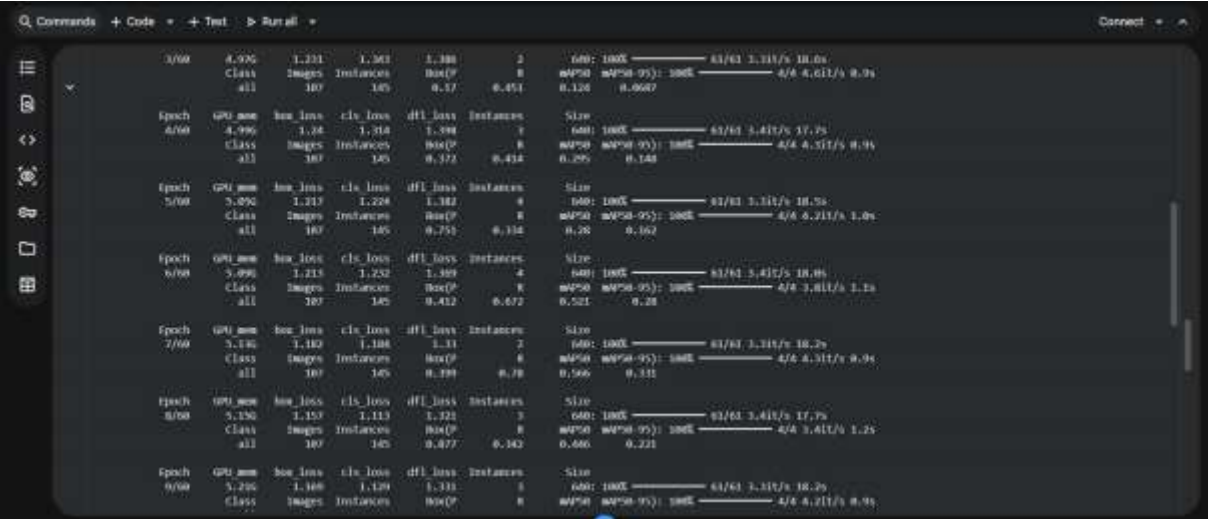



Emergency AI-Powered Women and Children Safety Risk Prediction System

Proof of Work - Metrics

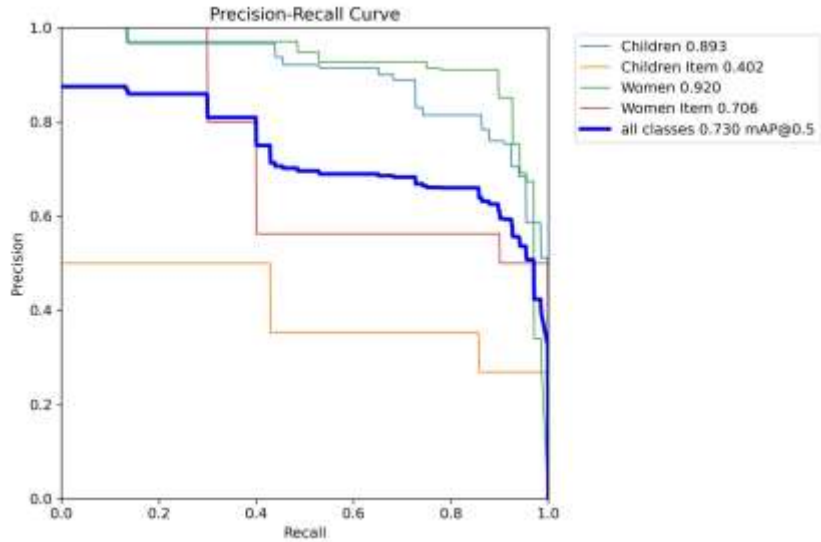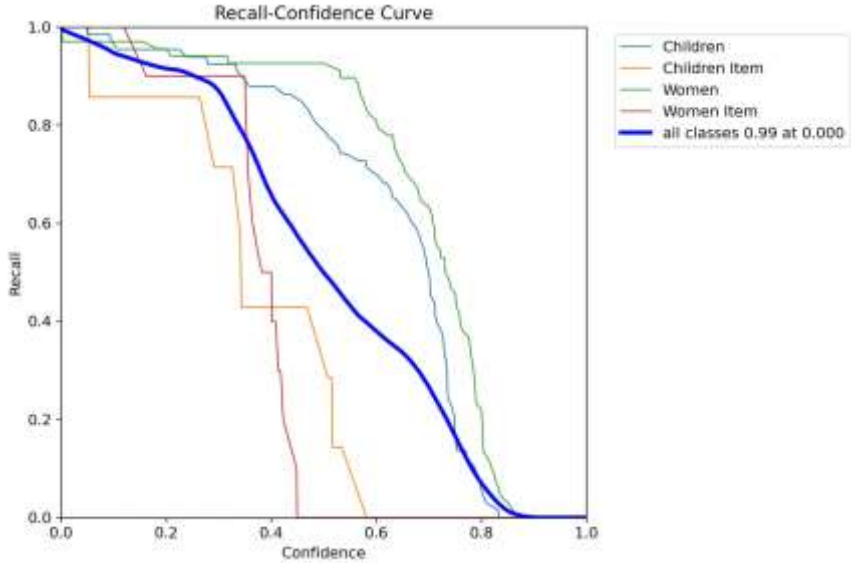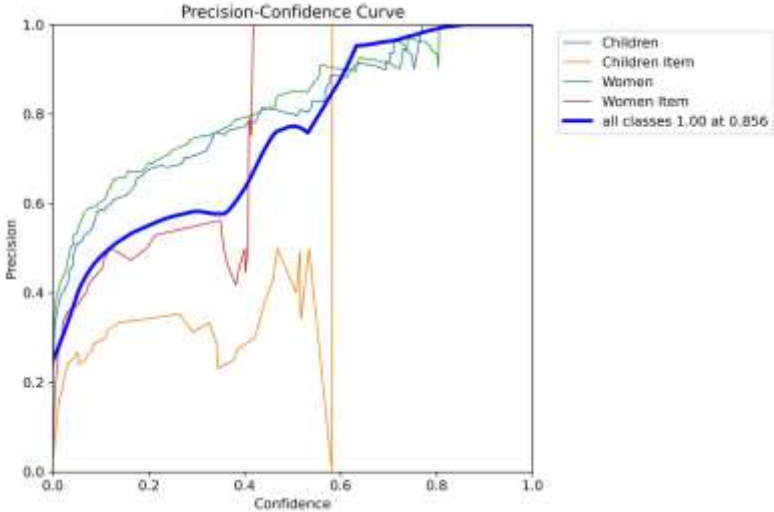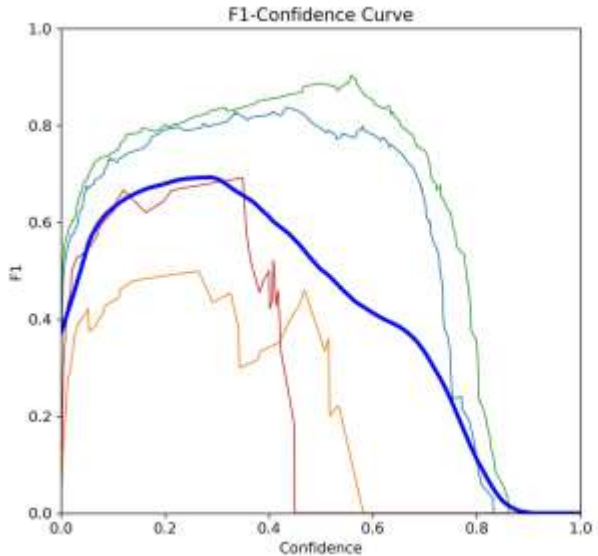



Emergency AI-Powered Women and Children Safety Risk Prediction System

Proof of Work - Model Testing




```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS POSTMAN CONSOLE
Input : Don't touch me, stop it!
Label : harassment
Conf : 0.7312
Probs: [0.0256, 0.7312, 0.016, 0.199, 0.0282]
(.venv) PS D:\MyModels\NLP-deploy> python predict.py
Input : 
PredID: 2
Label : normal_other
Conf : 0.9142
Probs: [0.0239, 0.014, 0.9142, 0.01, 0.0379]
(.venv) PS D:\MyModels\NLP-deploy>
```




Emergency AI-Powered Women and Children Safety Risk Prediction System

Proof of Work - Datasets

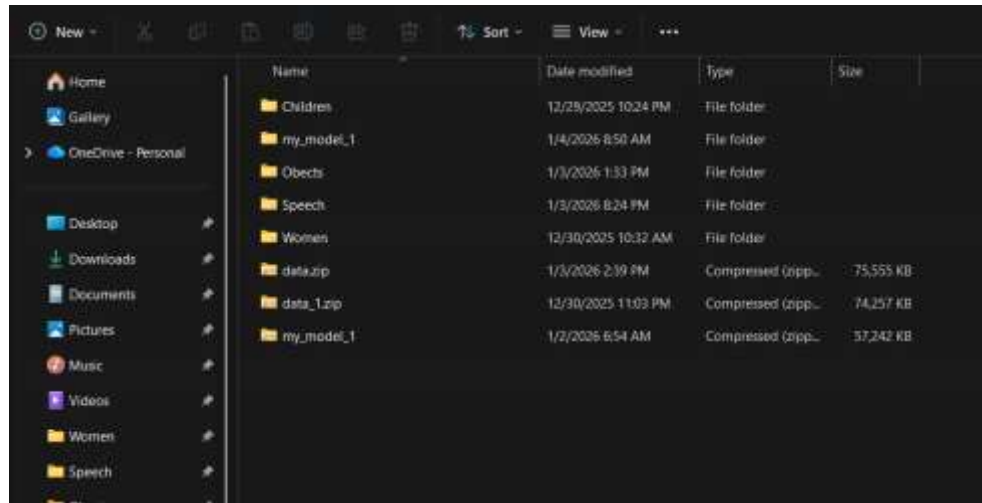


Name	Date modified	Type	Size
Children	12/29/2025 10:24 PM	File folder	
my_model_1	1/4/2026 8:50 AM	File folder	
Obects	1/3/2026 1:33 PM	File folder	
Speech	1/3/2026 8:24 PM	File folder	
Women	12/30/2025 10:32 AM	File folder	
data.zip	1/3/2026 2:39 PM	Compressed (zipp...	75,555 KB
data_1.zip	12/30/2025 11:03 PM	Compressed (zipp...	74,257 KB
my_model_1	1/2/2026 6:54 AM	Compressed (zipp...	57,242 KB

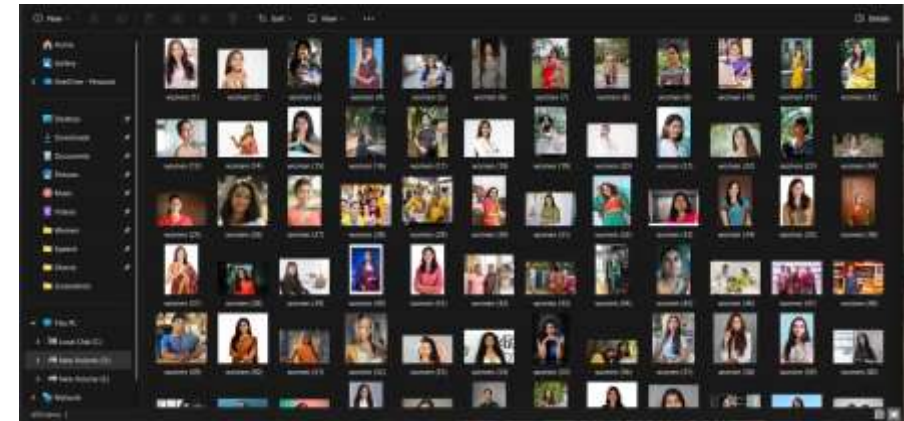



REAL-TIME AI SYSTEM FOR DETECTING HARMFUL SOCIAL MEDIA CONTENT

Specialization : Information Technology

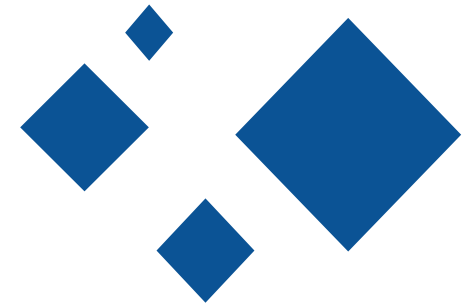



Real-Time AI System for Detecting Harmful Social Media Content

Research Problem

- Harmful content spreads rapidly on social media platforms.
- Manual monitoring by authorities is slow and inefficient.
- Sinhala–English mixed language makes content moderation difficult.
- Delayed detection can lead to real-world violence and safety risks.





Real-Time AI System for Detecting Harmful Social Media Content

Specific and sub objectives


- Specific Objective
 - To develop a real-time AI system that detects harmful content on social media platforms.
- Sub Objectives
 - Detect violent objects (knives, guns, fire, blood) using a YOLO-based model.
 - Analyse text content using a Sinhala–English NLP model.
 - Classify content into harmful and non-harmful categories.
 - Support early intervention by authorities through automated detection.





Real-Time AI System for Detecting Harmful Social Media Content

Overall Component Architecture

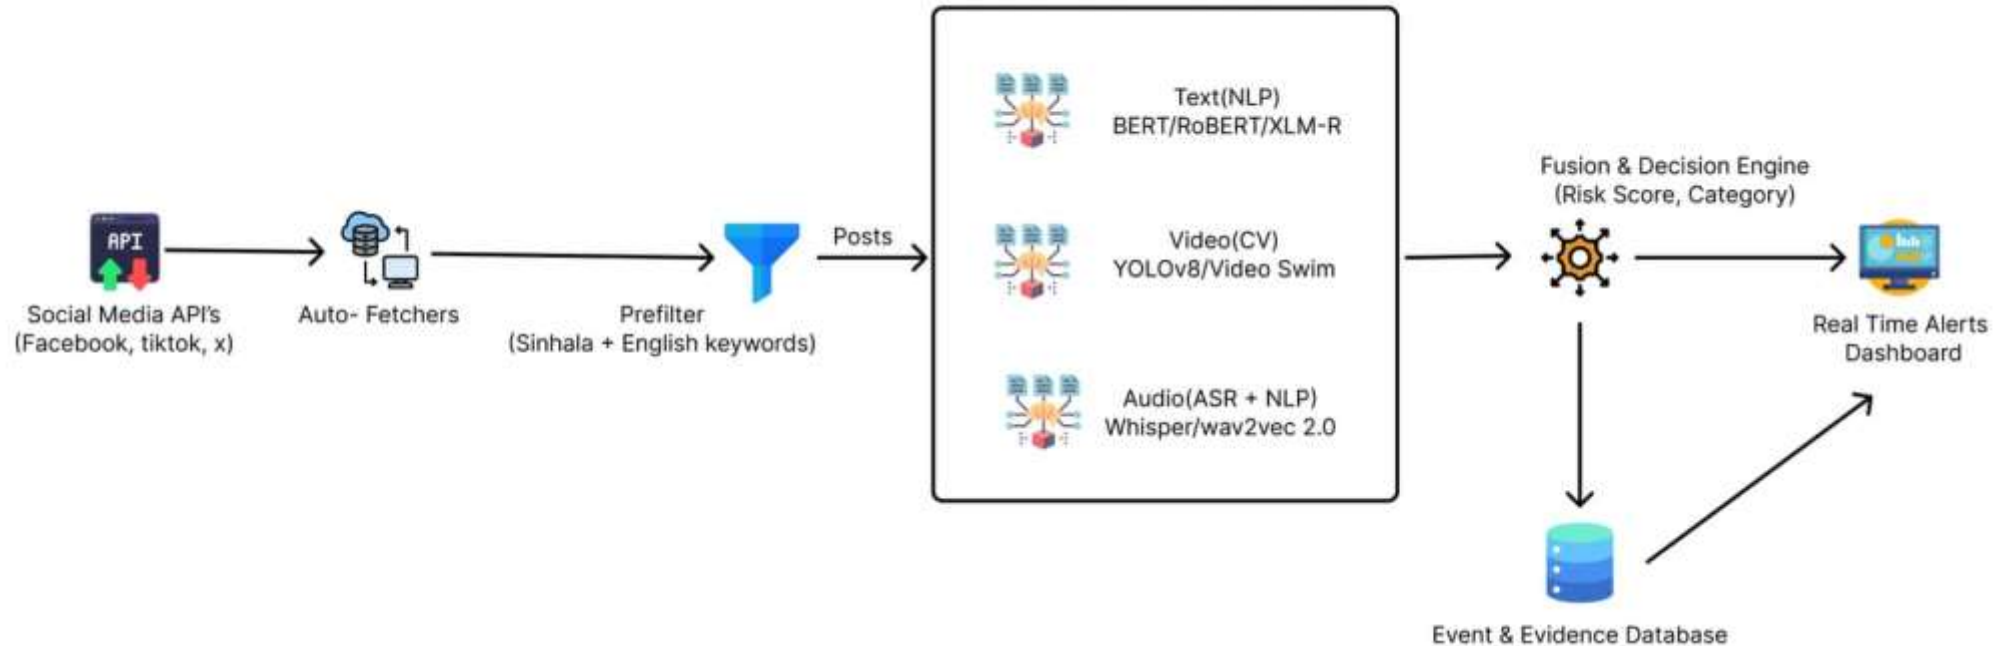




Real-Time AI System for Detecting Harmful Social Media Content

Current Progress 50%

- Data Collection
- Algorithm/Technology Selection
- Model Training
- Model Testing
- Selecting Optimal model

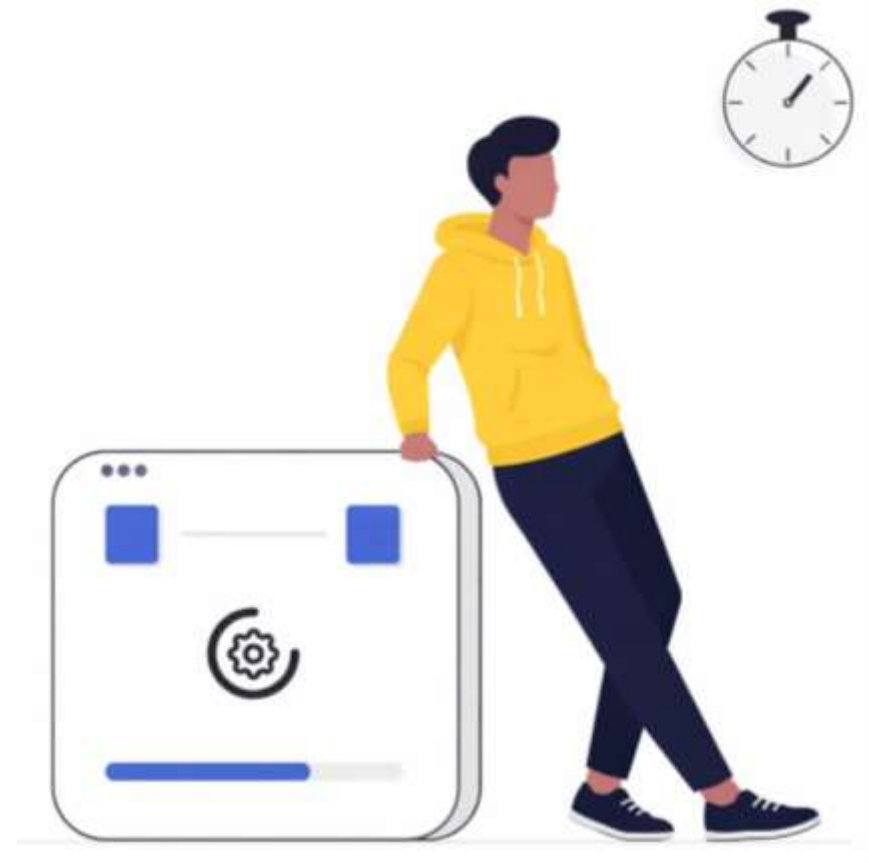



Real-Time AI System for Detecting Harmful Social Media Content

Model Selection Methodology

The Optimal Model is selected by considering the following criteria.

- Accuracy
- Efficiency/Performance





Real-Time AI System for Detecting Harmful Social Media Content

Model Selection Methodology

Yolov11 Object Detection Model

- Data set is labeled manually.
- Trained for 80 epochs.
- Testing Accuracy: **71.32%**



NLP Model

- Data set is labeled manually.
- Trained for 2 epochs.





YOLOv11n Model Training

The screenshot shows a Windows 10 desktop with a dark-themed interface. The primary application is Visual Studio Code, which has two panes open. The left pane shows the 'Explorer' view with a file tree containing 'main.cpp', 'main.h', 'main.o', 'main.exe', and 'main.log'. The right pane shows the 'Editor' view with the 'main.cpp' file open. The code is a C++ program that calculates the area of a circle and prints it. The code is as follows:

```
#include <iostream>
using namespace std;

const double PI = 3.141592653589793;

double area_of_circle(double radius)
{
    return PI * radius * radius;
}

int main()
{
    double radius;
    cout << "Enter the radius of the circle: ";
    cin >> radius;
    double area = area_of_circle(radius);
    cout << "The area of the circle is: " << area << endl;
    return 0;
}
```

The bottom pane shows the 'Terminal' view with the output of the program. The output is as follows:

```
Enter the radius of the circle: 5
The area of the circle is: 78.5398
```




The taskbar at the bottom of the screen shows several open applications, including the Start menu, File Explorer, and the Visual Studio Code application. The system tray in the bottom right corner shows the date and time as '10/10/2023 10:10 AM'.



Real-Time AI System for Detecting Harmful Social Media Content

Proof of work

Metrics

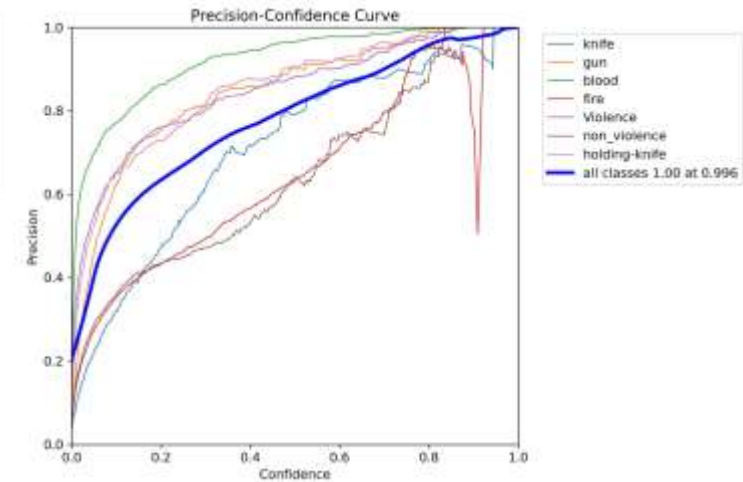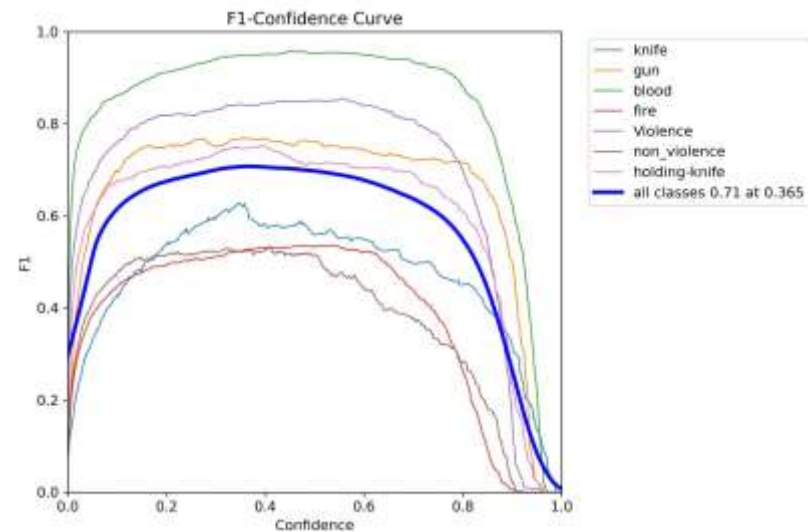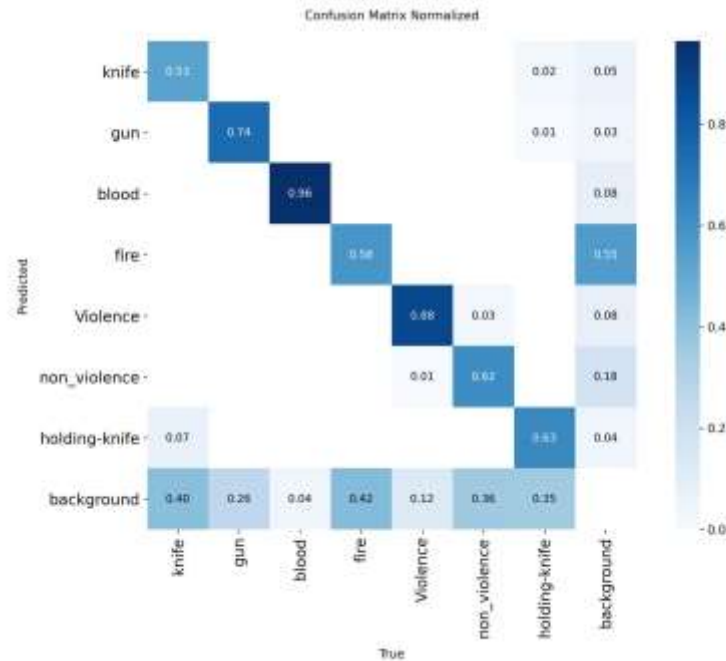




Real-Time AI System for Detecting Harmful Social Media Content

Proof of work

YOLOv11n Model Testing

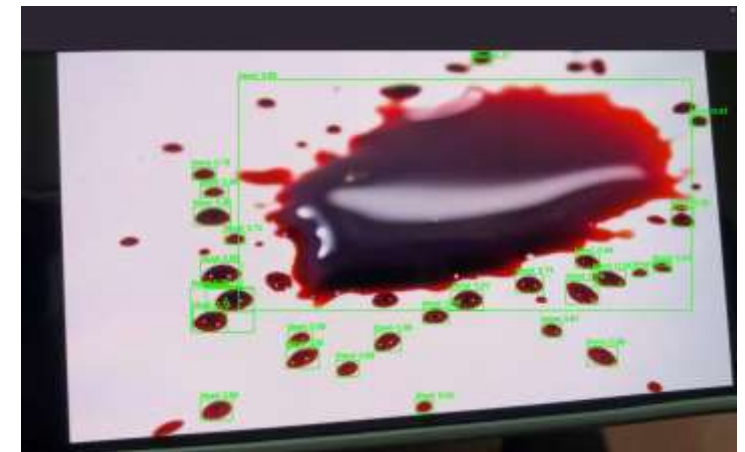



NLP RoBERTa Model Training

```
def parse_args():
    ap = argparse.ArgumentParser()
    ap.add_argument('--disable_cuda', action='store_true', help='force CPU even if GPU exists')
    ap.add_argument('--train', action='store_true', help='train the model, if not set, only inference')
    return ap.parse_args()

def main():
    args = parse_args()
    if args.disable_cuda:
        torch.backends.cudnn.enabled = False
    if args.train:
        train()
    else:
        inference()

if __name__ == '__main__':
    main()
```



Real-Time AI System for Detecting Harmful Social Media Content



NLP Model Testing

```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
(.venv) (base) kavindufernando@Kavindus-MacBook-Air-5 nlp-safe % python predict.py --model_dir models/xlmr-safe --text "i have a knife"
warnings.warn(
usage: predict.py [-h] [--model_dir MODEL_DIR] [--text TEXT] [--in_csv IN_CSV] [--out_csv OUT_CSV] [--max_len MAX_LEN]
predict.py: error: unrecognized arguments: have a knife"
(.venv) (base) kavindufernando@Kavindus-MacBook-Air-5 nlp-safe % python predict.py --model_dir models/xlmr-safe --text "I have a knife"
/Users/kavindufernando/Desktop/SLIIT LEC/Year 4/Research Project/nlp-safe/.venv/lib/python3.9/site-packages/urllib3/_init_.py:35: NotOpenSSLWarning:
urllib3 v2 only supports OpenSSL 1.1.1+, currently the 'ssl' module is compiled with 'LibreSSL 2.8.3'. See: https://github.com/urllib3/urllib3/issues/3020
warnings.warn(
probs: {'harassment': 0.5164797902107239, 'hate_speech': 0.3393084704875946, 'child_abuse': 0.4928251802921295, 'elder_abuse': 0.48651328682899475, 'violent_act': 0.2479790598154068, 'murder': 0.3939231038093567}
labels=>0.50: ['harassment']
(.venv) (base) kavindufernando@Kavindus-MacBook-Air-5 nlp-safe %
```

```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
(.venv) (base) kavindufernando@Kavindus-MacBook-Air-5 nlp-safe % python predict.py --model_dir models/xlmr-safe --text "i have a knife"
warnings.warn(
usage: predict.py [-h] [--model_dir MODEL_DIR] [--text TEXT] [--in_csv IN_CSV] [--out_csv OUT_CSV] [--max_len MAX_LEN]
predict.py: error: unrecognized arguments: have a knife"
(.venv) (base) kavindufernando@Kavindus-MacBook-Air-5 nlp-safe % python predict.py --model_dir models/xlmr-safe --text "i want to kill that child"
/Users/kavindufernando/Desktop/SLIIT LEC/Year 4/Research Project/nlp-safe/.venv/lib/python3.9/site-packages/urllib3/_init_.py:35: NotOpenSSLWarning:
urllib3 v2 only supports OpenSSL 1.1.1+, currently the 'ssl' module is compiled with 'LibreSSL 2.8.3'. See: https://github.com/urllib3/urllib3/issues/3020
warnings.warn(
probs: {'harassment': 0.37683233618736267, 'hate_speech': 0.3150780032711029, 'child_abuse': 0.5066378116607666, 'elder_abuse': 0.45911359786987305, 'violent_act': 0.3844555616378784, 'murder': 0.510450601577588}
labels=>0.50: ['child_abuse', 'murder']
```





YOLO Model Dataset

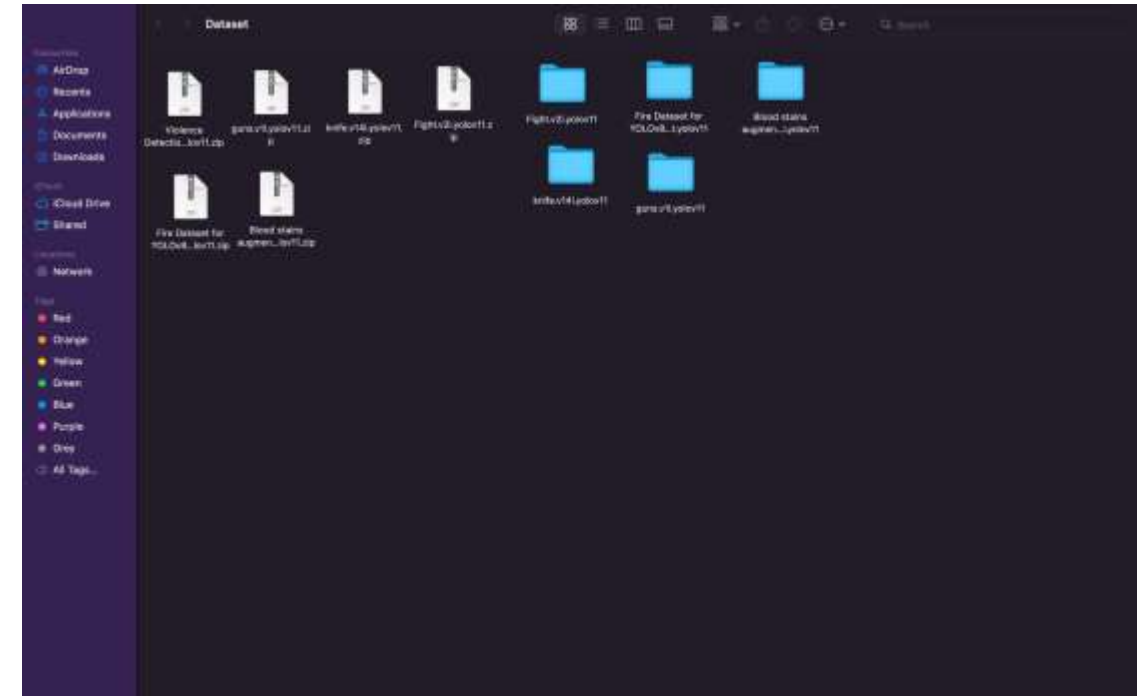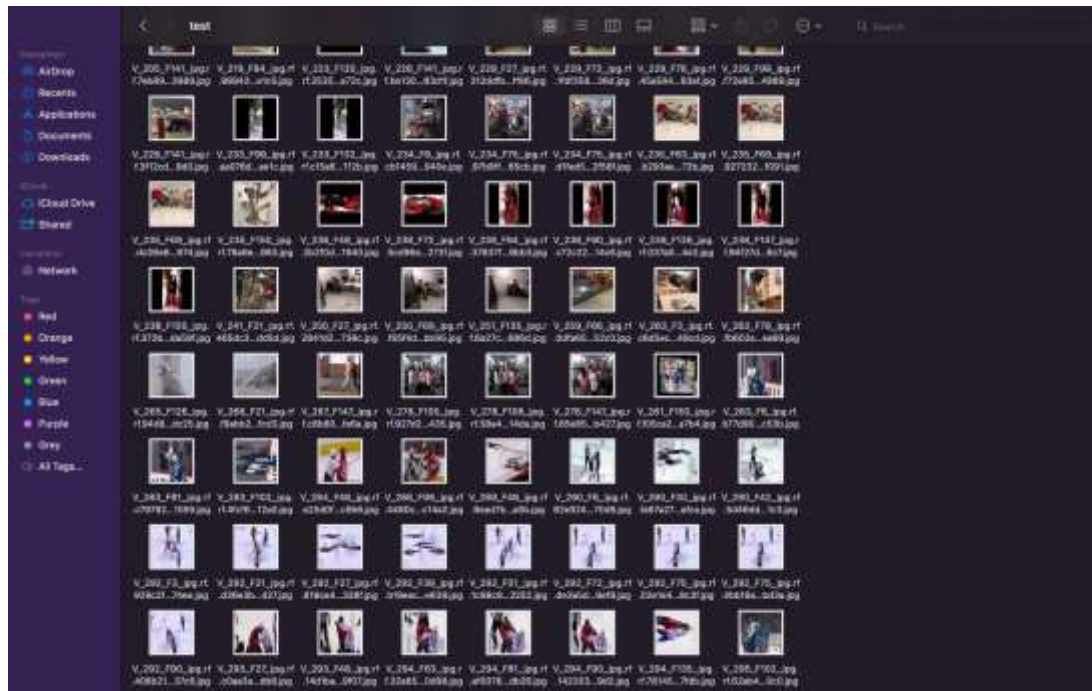



Real-Time AI System for Detecting Harmful Social Media Content


NLP Model Dataset

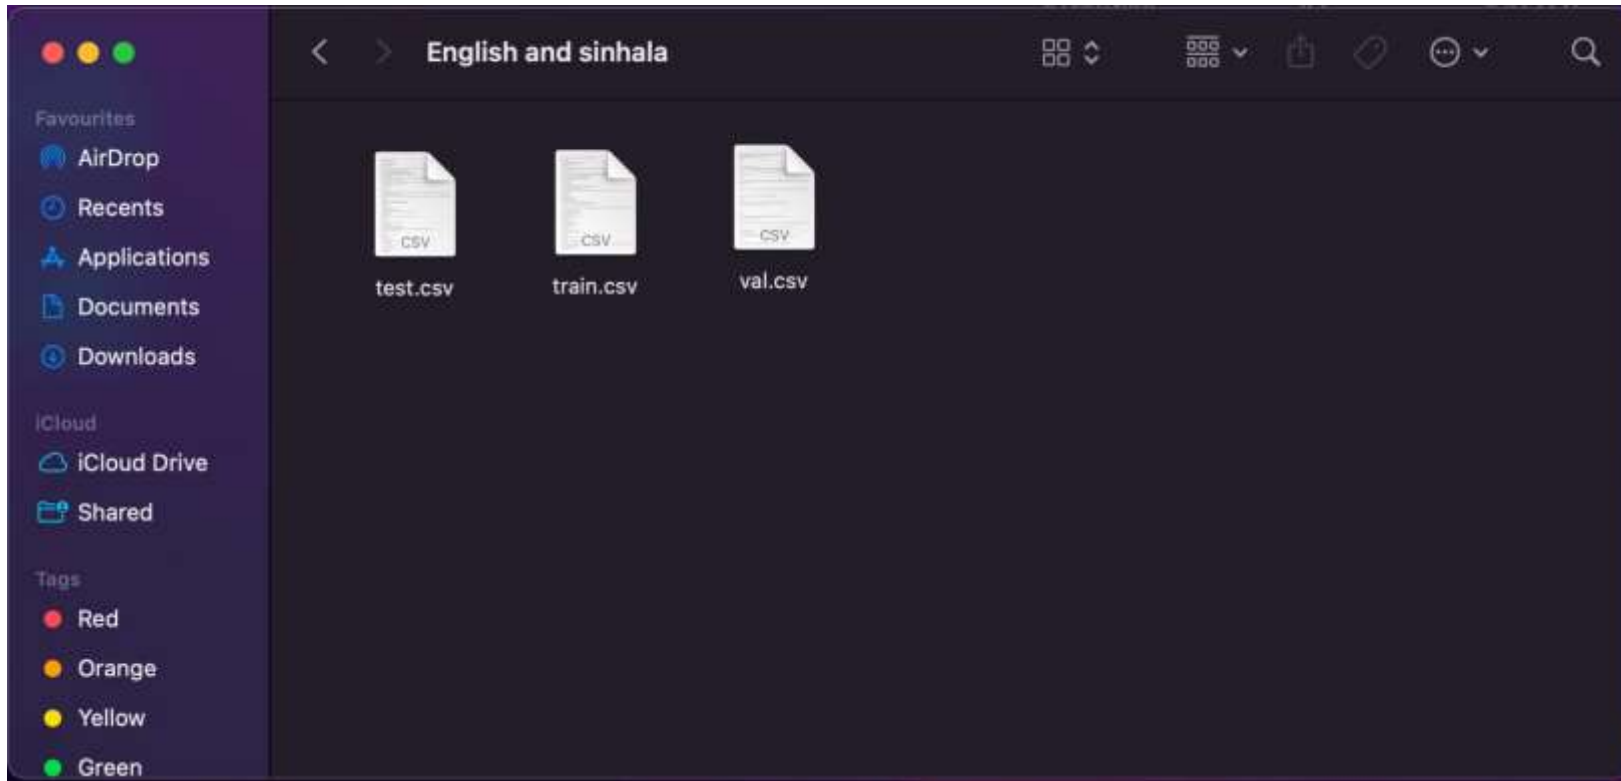



SMART TRAFFIC VIOLATION DETECTION & ACCIDENT PREDICTION SYSTEM

Specialization : Information Technology

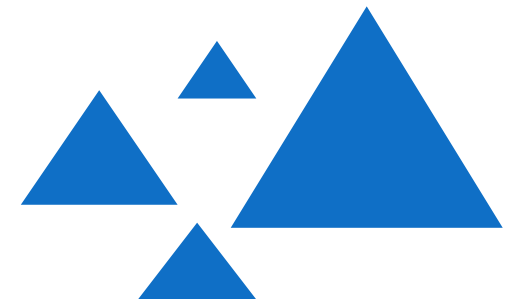



Smart Traffic Violation Detection & Accident Prediction System

Research Problem

- Road accidents remain a major cause of deaths in Sri Lanka.
- Current enforcement methods.
- Limitations of current systems.
- Existing systems focus only on single tasks.
- No integrated framework for real-time detection and prediction





Smart Traffic Violation Detection & Accident Prediction System


Specific and sub objectives

- Specific Objective
 - To build an AI-based system that detects traffic violations and predicts accident risks in real time to improve road safety.
- Sub Objectives
 - Detect traffic violations using computer vision
 - Identify vehicle number plates automatically
 - Predict accident-prone situations using AI models
 - Send real-time alerts to police authorities



Smart Traffic Violation Detection & Accident Prediction System

Overall Component Architecture

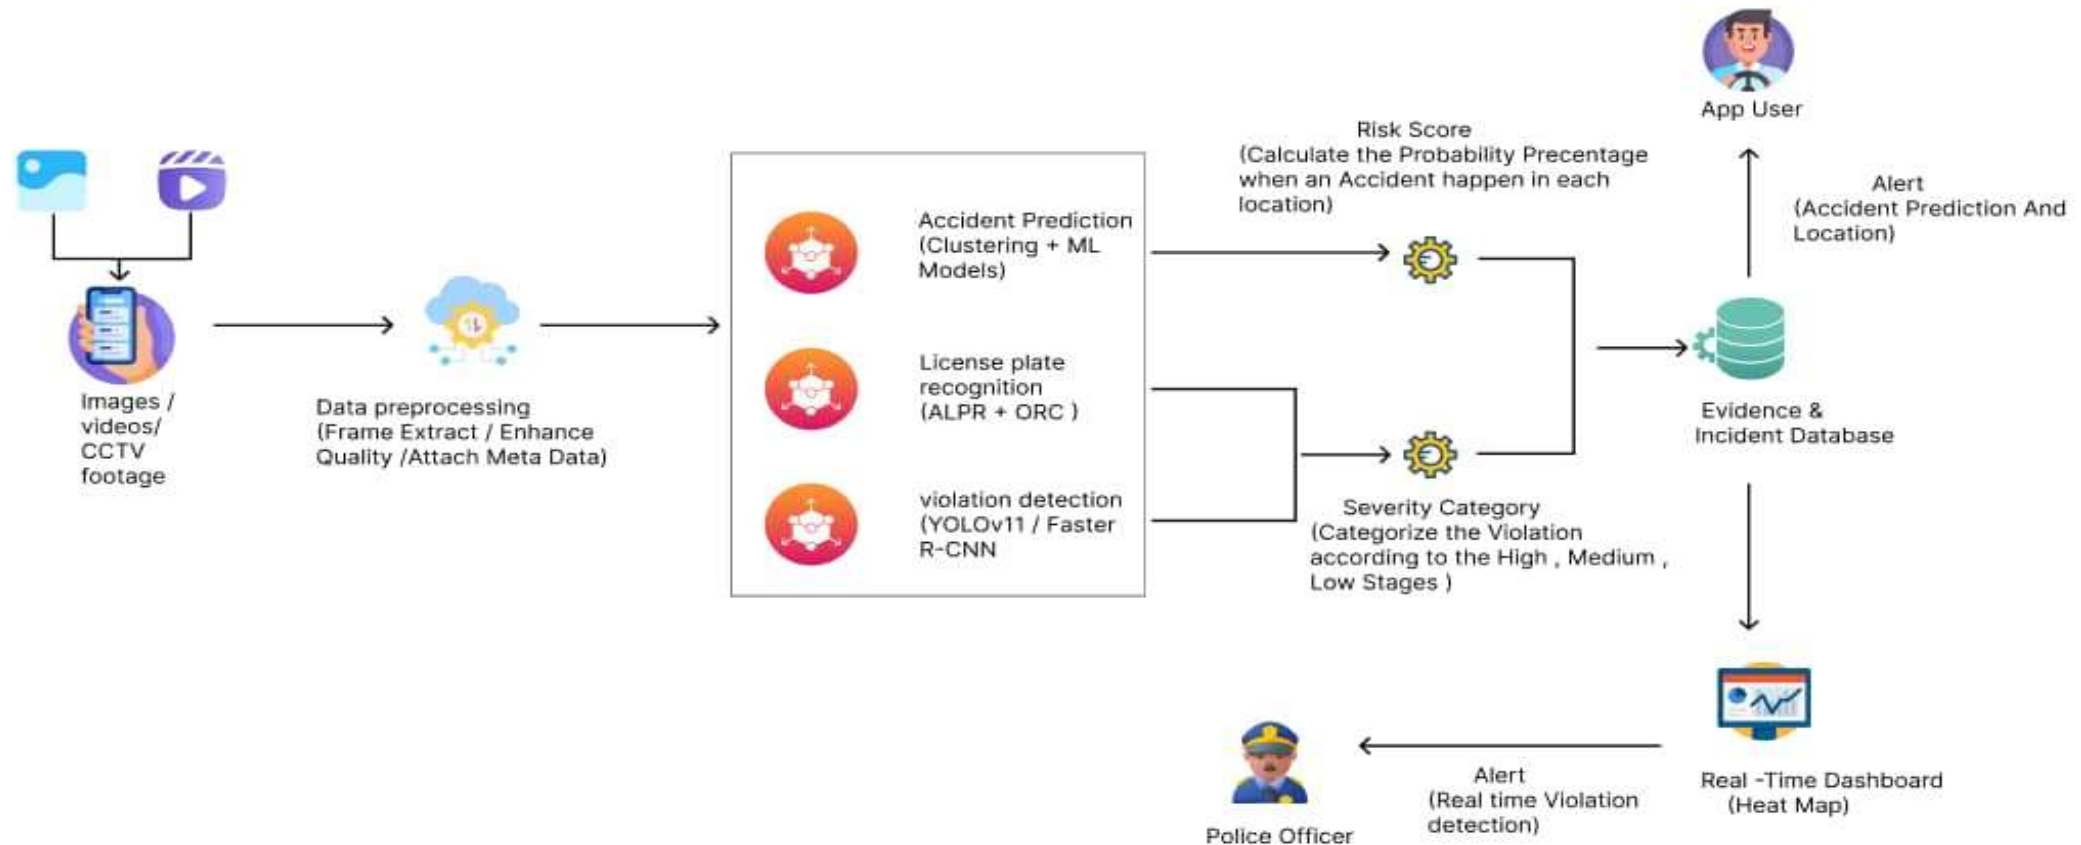




Smart Traffic Violation Detection & Accident Prediction System

Current Progress 50%

- Data Collection
- Algorithm/Technology Selection
- Model Training
- Model Testing
- Selecting Optimal model

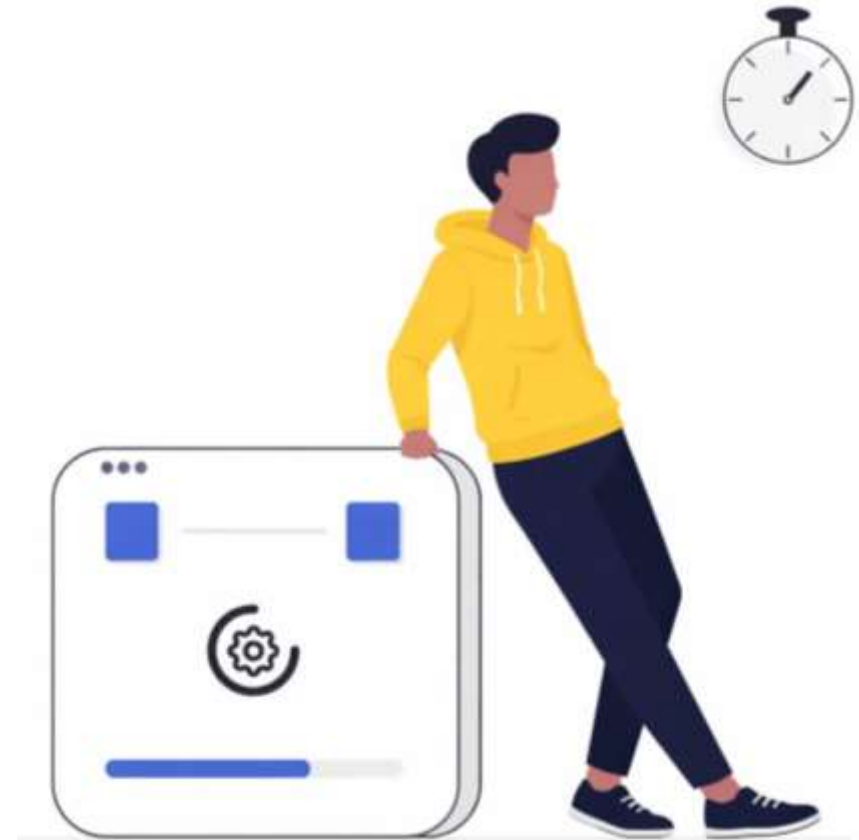



Smart Traffic Violation Detection & Accident Prediction System

Model Selection Methodology

The Optimal Model is selected by considering the following criteria.

- Accuracy
- Efficiency/Performance



» Model Selection Methodology

Yolov11 Object Detection Model

- Data set is labeled manually.
- Trained for 10 epochs.
- Testing Accuracy: **80.12%**



Smart Traffic Violation Detection & Accident Prediction System

Proof of Work



Model Training

3/10	Class	Images	Instances	Box(P	R	mAP50	mAP50-95): 100%	17/17	2.6it/s	6.6s
	all	538	5087	0.765	0.586	0.679	0.409			
Epoch	GPU_mem	box_loss	cls_loss	dfl_loss	Instances	Size				
4/10	3.13G	1.37	0.999	1.146	24	640: 100%	445/445	3.1it/s	2:24	
	Class	Images	Instances	Box(P	R	mAP50	mAP50-95): 100%	17/17	2.7it/s	6.2s
	all	538	5087	0.764	0.681	0.748	0.436			
Epoch	GPU_mem	box_loss	cls_loss	dfl_loss	Instances	Size				
5/10	3.13G	1.319	0.9255	1.123	33	640: 100%	445/445	3.1it/s	2:25	
	Class	Images	Instances	Box(P	R	mAP50	mAP50-95): 100%	17/17	3.0it/s	5.6s
	all	538	5087	0.803	0.716	0.793	0.479			
Epoch	GPU_mem	box_loss	cls_loss	dfl_loss	Instances	Size				
6/10	3.13G	1.287	0.8607	1.1	22	640: 100%	445/445	3.1it/s	2:23	
	Class	Images	Instances	Box(P	R	mAP50	mAP50-95): 100%	17/17	2.3it/s	7.5s
	all	538	5087	0.766	0.671	0.737	0.481			
Epoch	GPU_mem	box_loss	cls_loss	dfl_loss	Instances	Size				
7/10	3.15G	1.253	0.8187	1.088	34	640: 100%	445/445	3.1it/s	2:23	
	Class	Images	Instances	Box(P	R	mAP50	mAP50-95): 100%	17/17	3.0it/s	5.7s
	all	538	5087	0.779	0.729	0.789	0.507			
Epoch	GPU_mem	box_loss	cls_loss	dfl_loss	Instances	Size				
8/10	3.15G	1.217	0.7732	1.07	38	640: 100%	445/445	3.1it/s	2:24	
	Class	Images	Instances	Box(P	R	mAP50	mAP50-95): 100%	17/17	2.5it/s	6.8s
	all	538	5087	0.766	0.747	0.801	0.528			
Epoch	GPU_mem	box_loss	cls_loss	dfl_loss	Instances	Size				
9/10	3.15G	1.185	0.7377	1.057	35	640: 100%	445/445	3.0it/s	2:26	



Smart Traffic Violation Detection & Accident Prediction System

Metrics

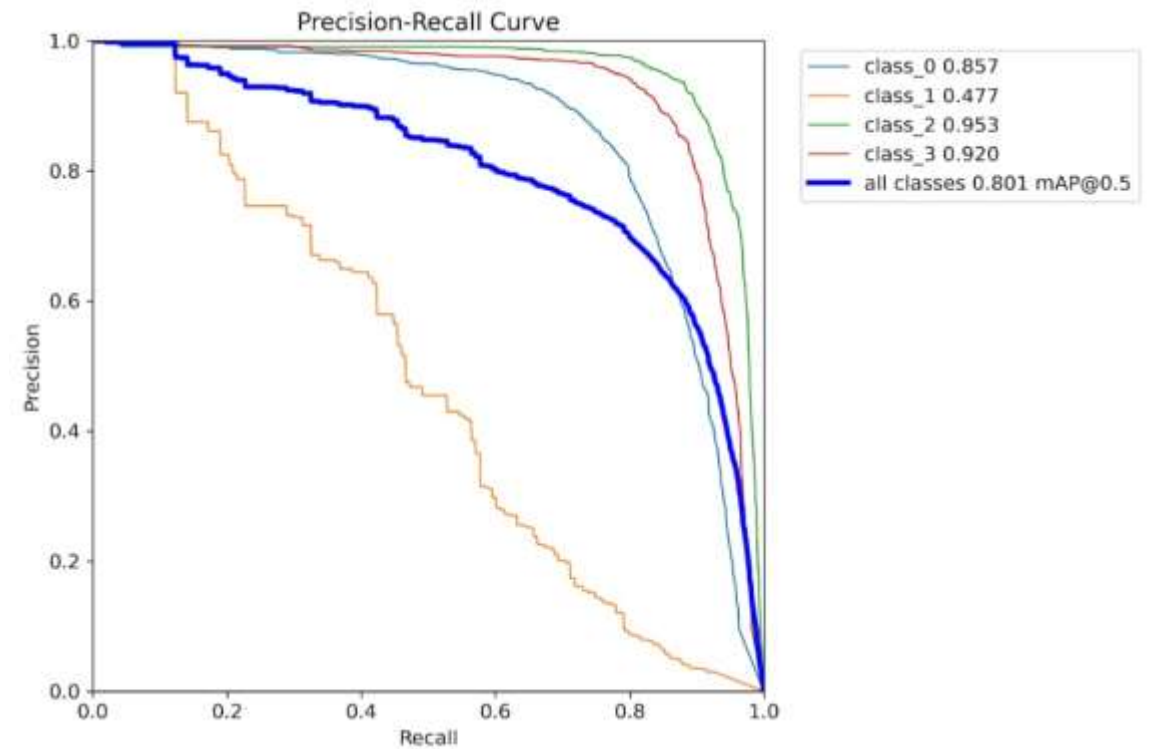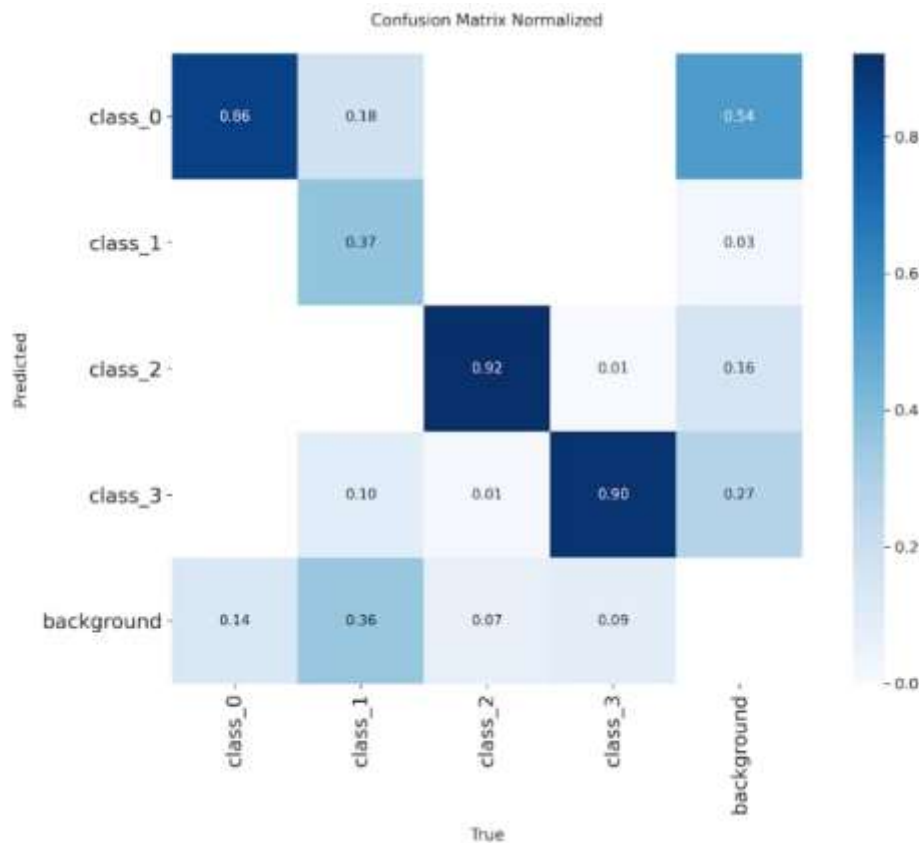



Smart Traffic Violation Detection & Accident Prediction System

Proof of Work

Model Testing

```
def save_and_display(result):  
    save_name = "traffic_violation_result.jpg"  
    cv2.imwrite(save_name, result)  
  
    display(Image.open(save_name))  
    print("Saved result as:", save_name)
```

Images [pg:image/png] - 12361 bytes, last modified: 1/6/2026 - 100% done
Saving Images [pg] to Images [pg]
In: 252848 1 class 3, 121.0ms
Speed: 5.3ms preprocess, 121.0ms inference, 8.0ms postprocess per image at shape (1, 3, 352, 640)

Saved result as: traffic_violation_result.jpg

```
def save_and_display(result):  
    save_name = "traffic_violation_result.jpg"  
    cv2.imwrite(save_name, result)  
  
    display(Image.open(save_name))  
    print("Saved result as:", save_name)
```

download (1).jpg
download (1).jpg [image/png] - 10833 bytes, last modified: 1/6/2026 - 100% done
Saving download (1).jpg to download (1) (1).jpg
In: 362640 1 class 0, 1 class 1, 1 class 2, 139.0ms
Speed: 0.0ms preprocess, 139.0ms inference, 2.0ms postprocess per image at shape (1, 3, 384, 640)

class-3-0.50 loss-0.0.6
STOP LINE



Saved result as: traffic_violation_result.jpg



Smart Traffic Violation Detection & Accident Prediction System

Proof of Work

Datasets

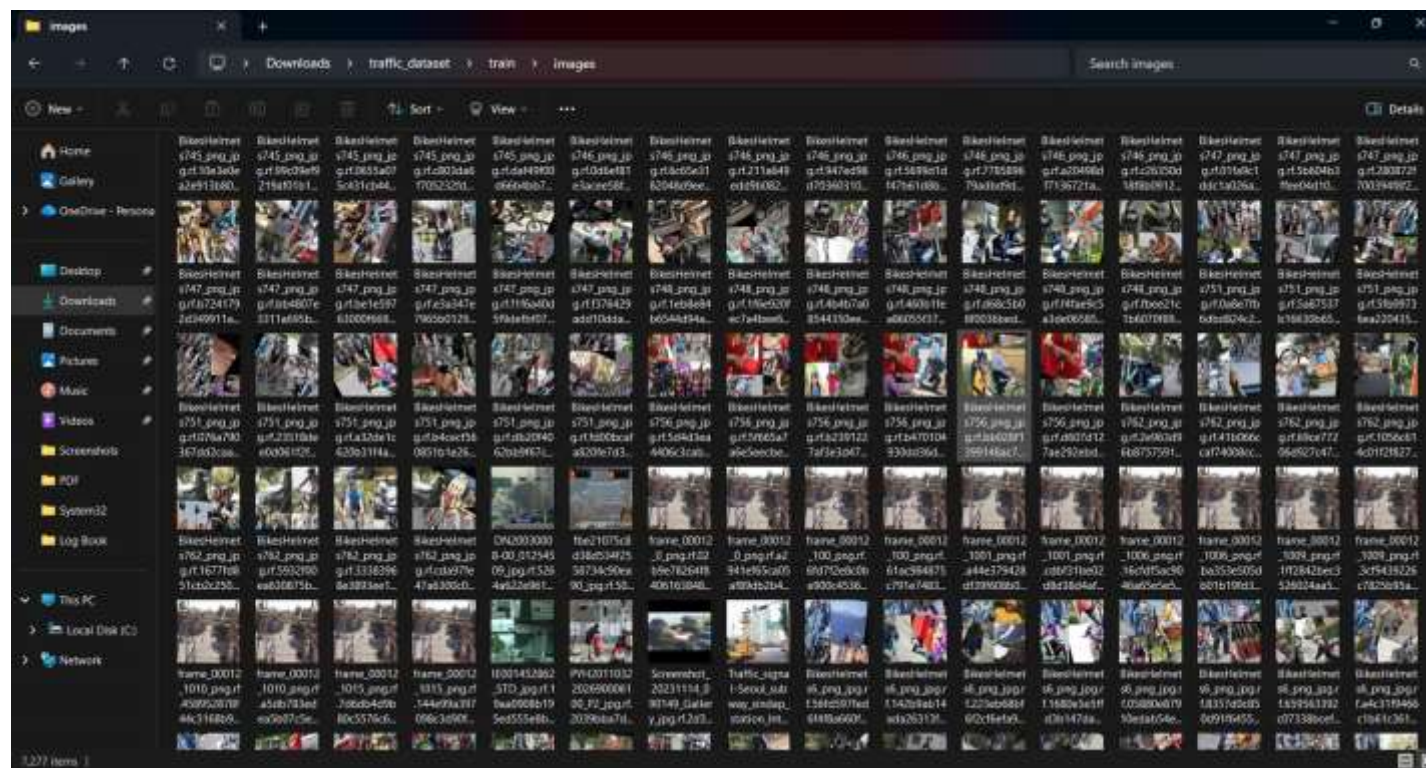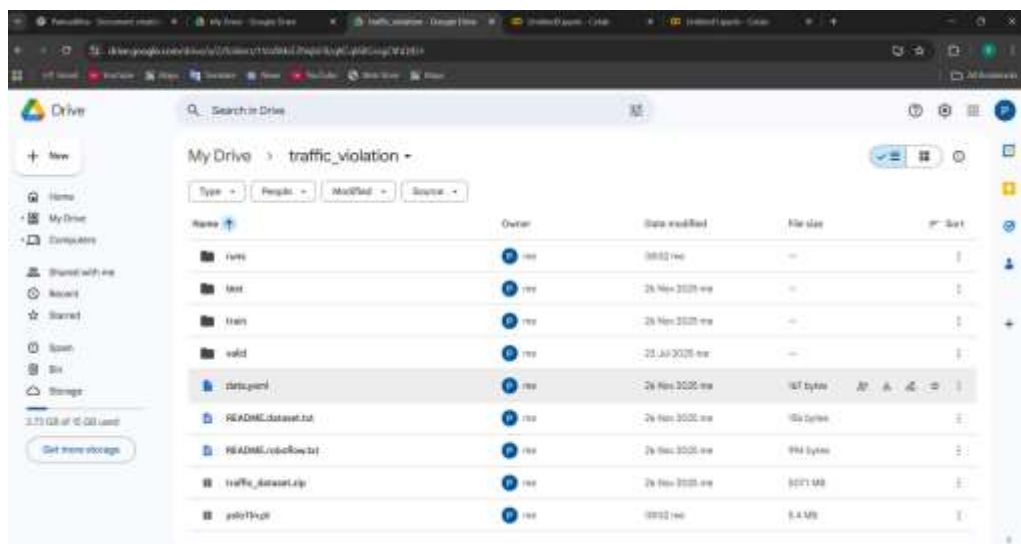



Smart Traffic Violation Detection & Accident Prediction System

Model Selection Methodology

Number Plates Detection Model

- Data set is labeled manually.
- Trained for 10 epochs.
- Testing Accuracy: **83.47%**



Smart Traffic Violation Detection & Accident Prediction System

Proof of Work

Model Training




Epoch	GPU_mem	box_loss	cls_loss	dfl_loss	Instances	Size	640:	100%	445/445	3.1it/s	2:24
3/10	3.13G	1.37	0.999	1.146	24	mAP50	0.679	mAP50-95):	100%	17/17	2.6it/s 6.6s
	Class	Images	Instances	Box(P	R						
	all	538	5087	0.765	0.586						
Epoch	GPU_mem	box_loss	cls_loss	dfl_loss	Instances	Size	640:	100%	445/445	3.1it/s	2:24
4/10	3.13G	1.37	0.999	1.146	24	mAP50	0.679	mAP50-95):	100%	17/17	2.6it/s 6.6s
	Class	Images	Instances	Box(P	R						
	all	538	5087	0.764	0.681						
Epoch	GPU_mem	box_loss	cls_loss	dfl_loss	Instances	Size	640:	100%	445/445	3.1it/s	2:25
5/10	3.13G	1.319	0.9255	1.123	33	mAP50	0.748	mAP50-95):	100%	17/17	2.7it/s 6.2s
	Class	Images	Instances	Box(P	R						
	all	538	5087	0.764	0.681						
Epoch	GPU_mem	box_loss	cls_loss	dfl_loss	Instances	Size	640:	100%	445/445	3.1it/s	2:25
6/10	3.13G	1.319	0.9255	1.123	33	mAP50	0.748	mAP50-95):	100%	17/17	2.7it/s 6.2s
	Class	Images	Instances	Box(P	R						
	all	538	5087	0.764	0.681						
Epoch	GPU_mem	box_loss	cls_loss	dfl_loss	Instances	Size	640:	100%	445/445	3.1it/s	2:23
7/10	3.15G	1.287	0.8607	1.1	22	mAP50	0.793	mAP50-95):	100%	17/17	3.0it/s 5.6s
	Class	Images	Instances	Box(P	R						
	all	538	5087	0.803	0.716						
Epoch	GPU_mem	box_loss	cls_loss	dfl_loss	Instances	Size	640:	100%	445/445	3.1it/s	2:23
8/10	3.13G	1.287	0.8607	1.1	22	mAP50	0.737	mAP50-95):	100%	17/17	2.3it/s 7.5s
	Class	Images	Instances	Box(P	R						
	all	538	5087	0.766	0.671						
Epoch	GPU_mem	box_loss	cls_loss	dfl_loss	Instances	Size	640:	100%	445/445	3.1it/s	2:23
9/10	3.15G	1.253	0.8187	1.088	34	mAP50	0.789	mAP50-95):	100%	17/17	3.0it/s 5.7s
	Class	Images	Instances	Box(P	R						
	all	538	5087	0.779	0.729						
Epoch	GPU_mem	box_loss	cls_loss	dfl_loss	Instances	Size	640:	100%	445/445	3.1it/s	2:24
10/10	3.15G	1.217	0.7732	1.07	38	mAP50	0.801	mAP50-95):	100%	17/17	2.5it/s 6.8s
	Class	Images	Instances	Box(P	R						
	all	538	5087	0.766	0.747						
Epoch	GPU_mem	box_loss	cls_loss	dfl_loss	Instances	Size	640:	100%	445/445	3.0it/s	2:26
11/10	3.15G	1.185	0.7377	1.057	35	mAP50	0.801	mAP50-95):	100%	17/17	2.5it/s 6.8s
	Class	Images	Instances	Box(P	R						
	all	538	5087	0.766	0.747						



Smart Traffic Violation Detection & Accident Prediction System

Proof of Work

Metrics

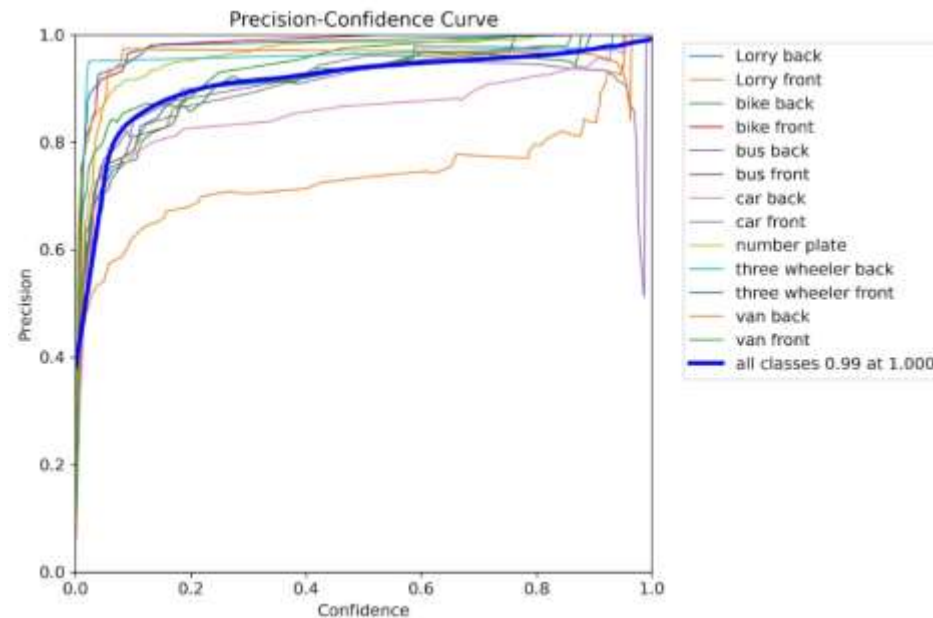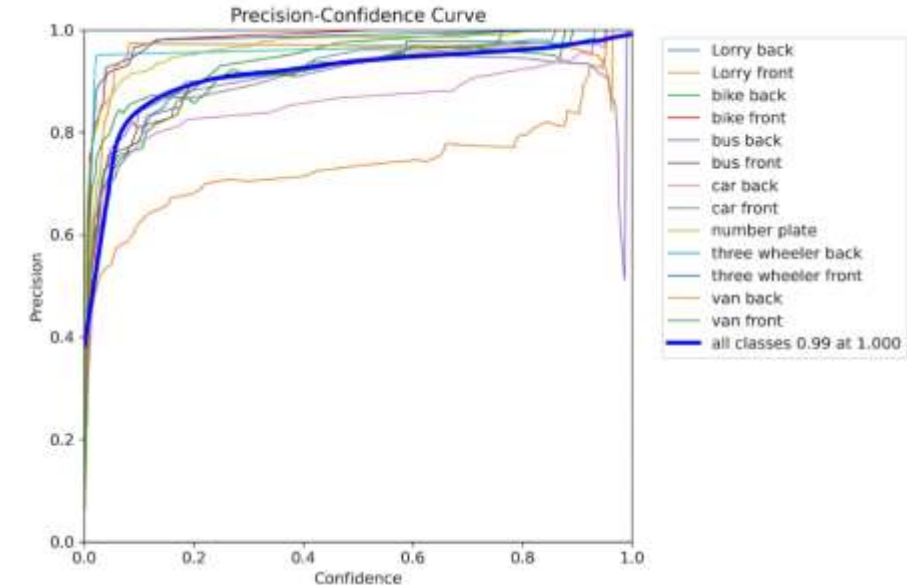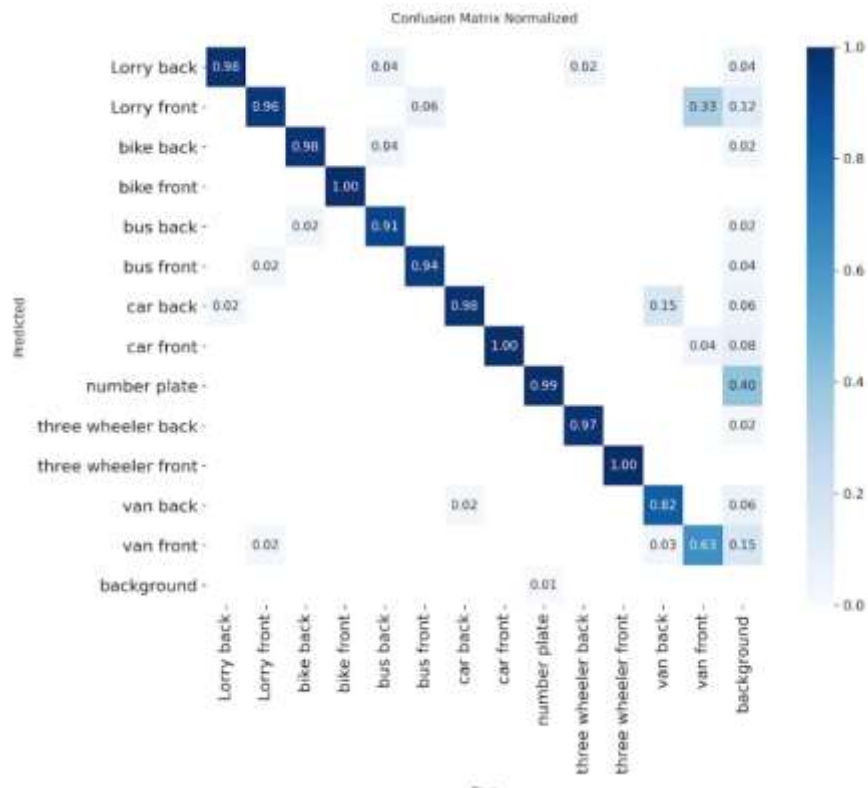



Smart Traffic Violation Detection & Accident Prediction System

Proof of Work

Model Testing

The screenshot shows a Jupyter Notebook interface with the following content:

- Code Cell:** Contains OpenCV code for text detection and display. It uses `cv2.putText` to draw the detected text "CBU 1144" on the image.
- Output:** A warning message about using CPU, followed by file saving logs and a green box around the license plate "CBU 1144" on a silver car image.

The screenshot shows a Jupyter Notebook interface with the following content:



- Code Cell:** Contains OpenCV code for text detection and display. It uses `cv2.putText` to draw the detected text "CBU 1144" on the image.
- Output:** A warning message about using CPU, followed by file saving logs and a green box around the license plate "CBU 1144" on a black car image.



Smart Traffic Violation Detection & Accident Prediction System

Proof of Work

Datasets

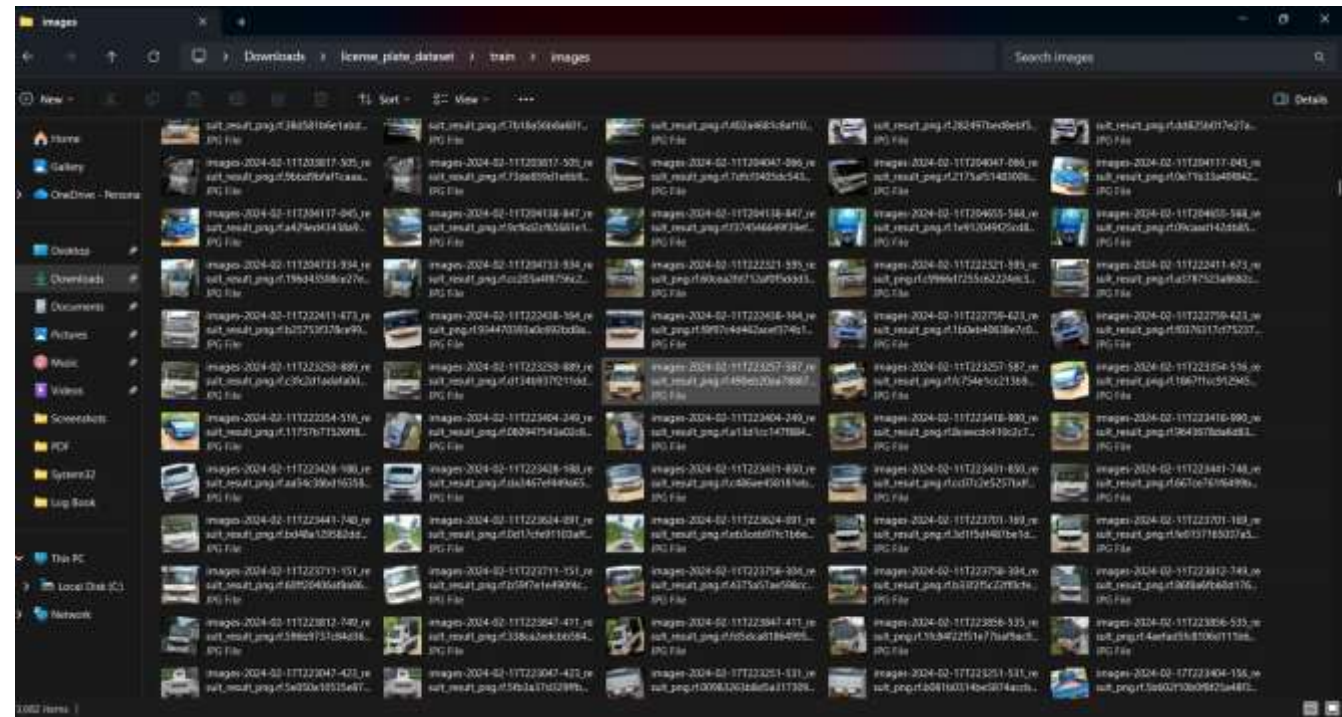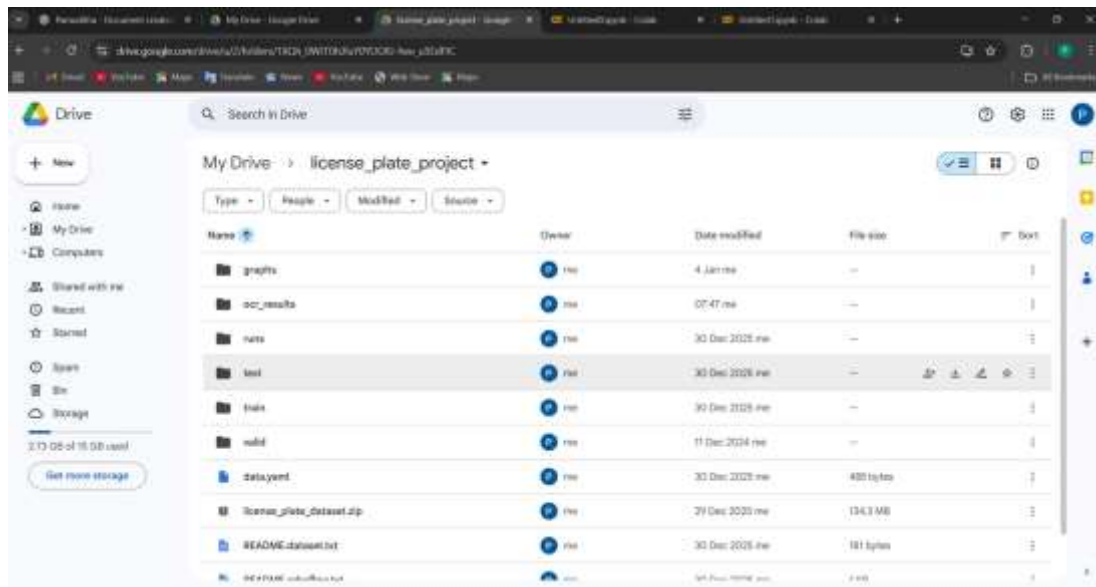

Thank You!